
AGENTS AS A SERVICE

Define once, consume anywhere


An agent is a platform resource, not a chat window.

Separate agents per tool

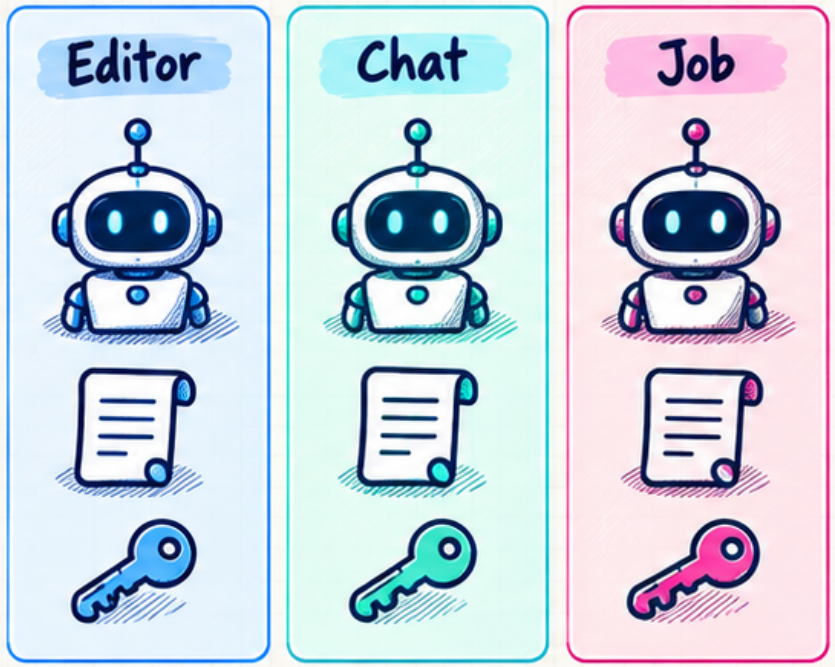

Prompts, keys and permissions drift.

One reviewed definition

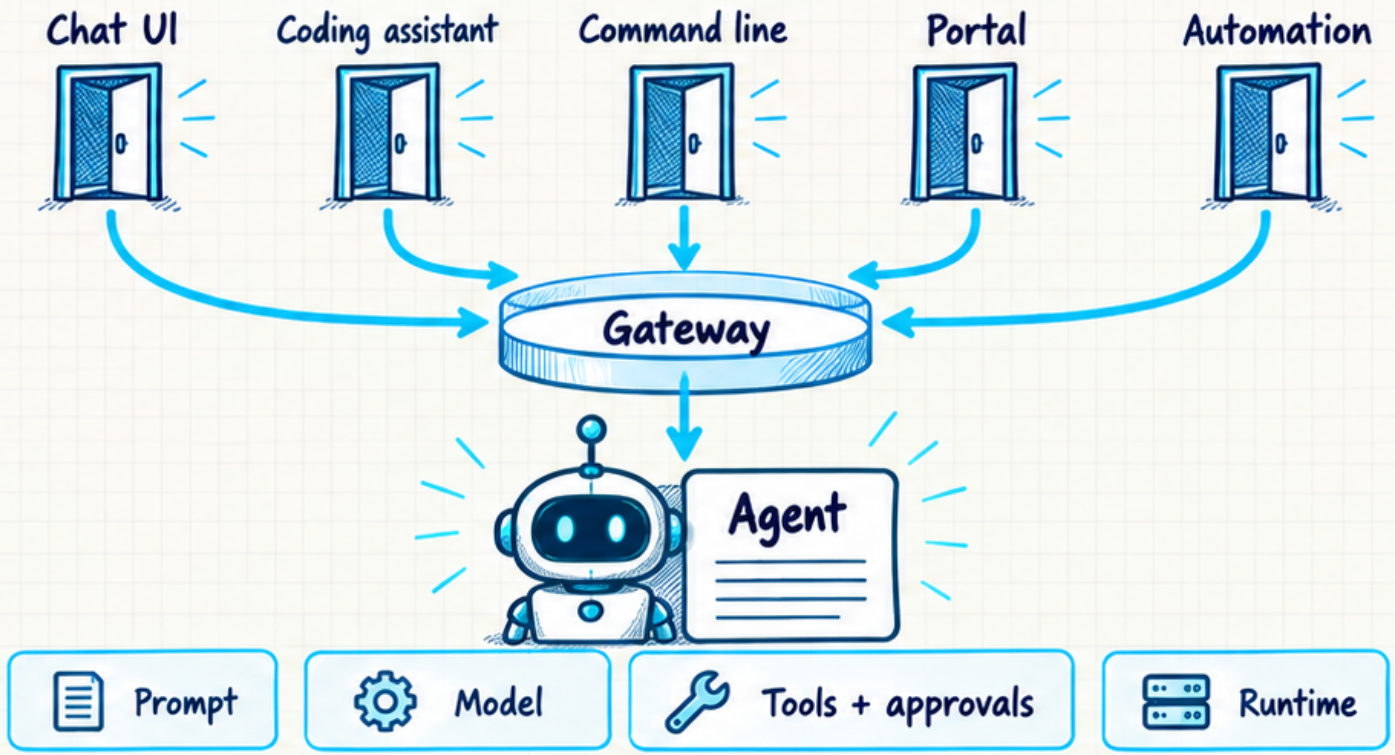

Improve the shared definition; new conversations use it.

Existing conversations keep their starting revision.

What an agent is made of

Reviewed files, shared parts, one addressable service.

Template



Prompt • model • named tools • approval flags

Harness



Runtime • worker pool • snapshots • memory

Agent



Binds the template to the harness

Conversation



Pinned to its starting revision

Shared parts



Prompt snippets
Included by reference



Tool servers
Publish named capabilities



Model configs
Model, caching, token limits




Nothing is configured only in a chat window.



Reference runtime: alpha

Tools are a catalog, not a prompt

Capability is a named list with a class.

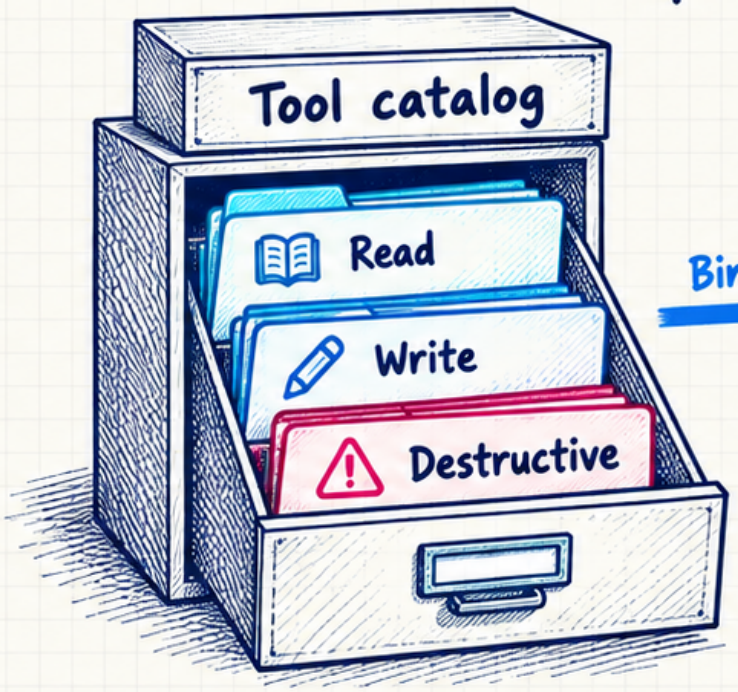

Bind by name

Agent template

Read binding
Read tools

Mutating binding
Write + destructive
requireApproval: true

Admission + CI

- ✗ Unknown tool → refused
- ✗ Ungated mutation → refused

Human decision before execution

Reference cluster operator
8 read tools + 10 gated tools


Adding a tool is a reviewed change.

Discovered tools are not automatically available to an agent.

AGENTS AS A SERVICE

One gateway, five doors

Clients differ. The agent and its controls are shared.

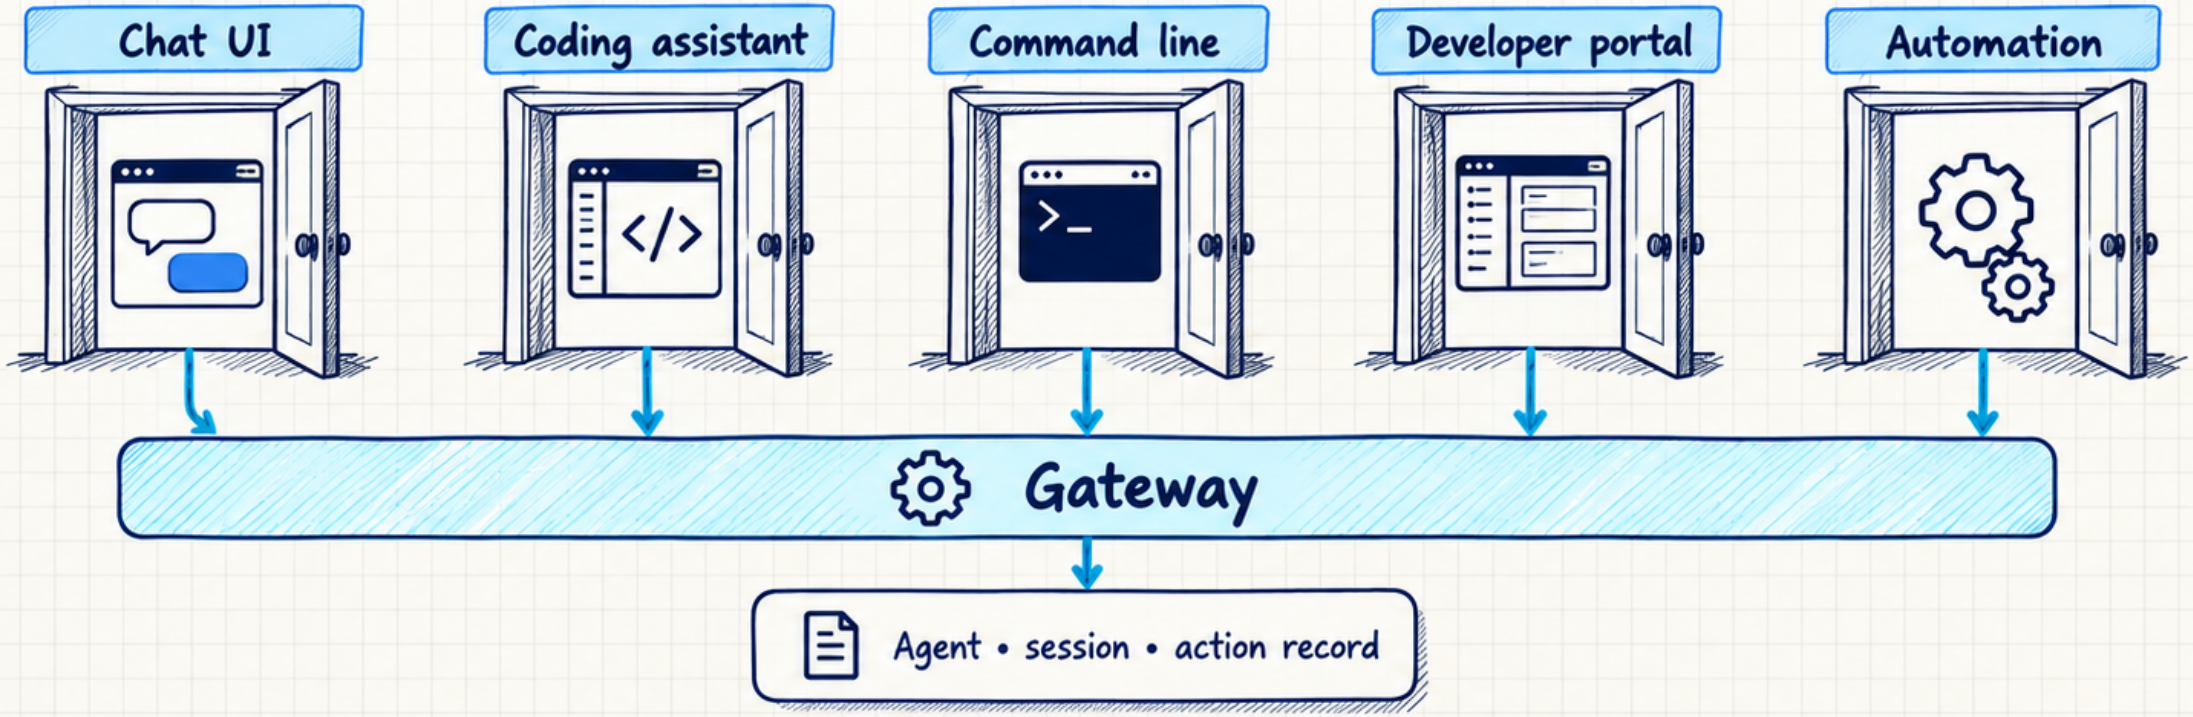

Door	Start a conversation	Decide an approval
Chat UI	Yes	Yes
Coding assistant	No — continue only	No — pair with UI or CLI
Command line	Yes	Yes
Developer portal	Yes	Read-only use
Automation	Yes	Not used in reference

Start in one client.
Continue with the same session id.

In the reference: MCP + agent protocol; no model API key on clients.

Three doors, two conversations

RECORDED • 2026-10-12

One shared identity; two separate session histories.

A Knowledge conversation



Command line
15:37 UTC
Start: ask about the search server

Same session id

Coding assistant
16:12 UTC
Continue: ask its namespace



Answer: kagent

Repository token expired, then fixed.

B Operator conversation



Command line
Request deletion; call pauses

Operator session id

Chat UI
17:20 UTC
Human approves; object deleted



approval-gate-probe

These were not different authenticated users.

Session continuity crosses clients. Separate conversations stay separate.

Recorded summary; full wording and context in speaker notes.

AGENTS AS A SERVICE

Same gate, same record

Controls behind the gateway, whichever client you use.

Platform controls

Any door

Capability

Named tools + enforced classes

Approval

Gated calls pause for a decision

Action record

Calls, arguments and decisions

Isolation + credentials

Sandboxed conversation • model keys injected at egress

Identity gap

- Caller-supplied identity header
- Shared identity in the recorded demo
- Gateway does not authenticate callers
- IP allow-list + TLS are not authentication

Approval decisions: UI or command line.
Coding assistant pairs with either.

Shared controls do not solve caller identity.


AGENTS AS A SERVICE

The agent is the service

The tools are the clients. Identity and ownership come first.


01 Reuse

- [x] Reviewed agent definitions
- [x] Shared prompts + tool catalog
- [x] One gateway, thin clients
- [x] One action record

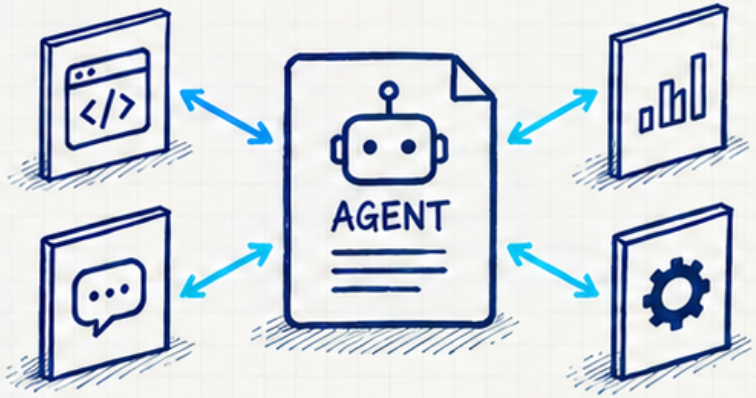

02 Decide

- [ ] SSO: person or team sessions?
- [ ] Who owns prompts and tools?
- [ ] Which two doors launch first?
- [ ] Who may approve, and where?

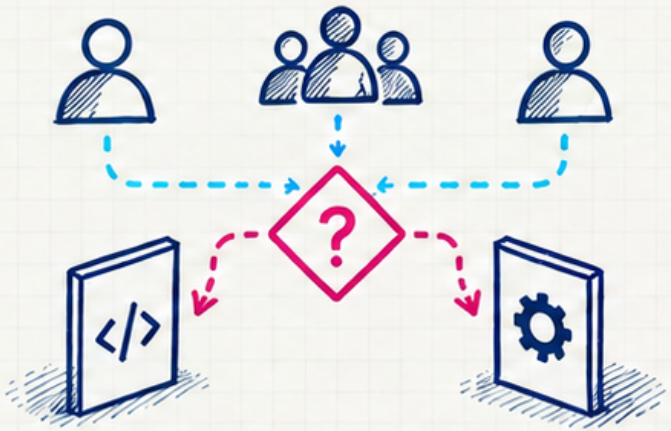

03 Close the gaps

- [ ] Authenticate caller identity
- [ ] Assistant cannot start or approve
- [ ] Runtime remains alpha
- [ ] Retention is configured, not forever



Reference: 30-day idle TTL configured.

Authenticate identity → Choose one agent → Offer two doors → Review the action record

Build the agent once, behind a gate, with a record.