SELINUX PRACTICE

CHANGE CONTEXT TYPE:

PRACTICING USING HTML PAGE:

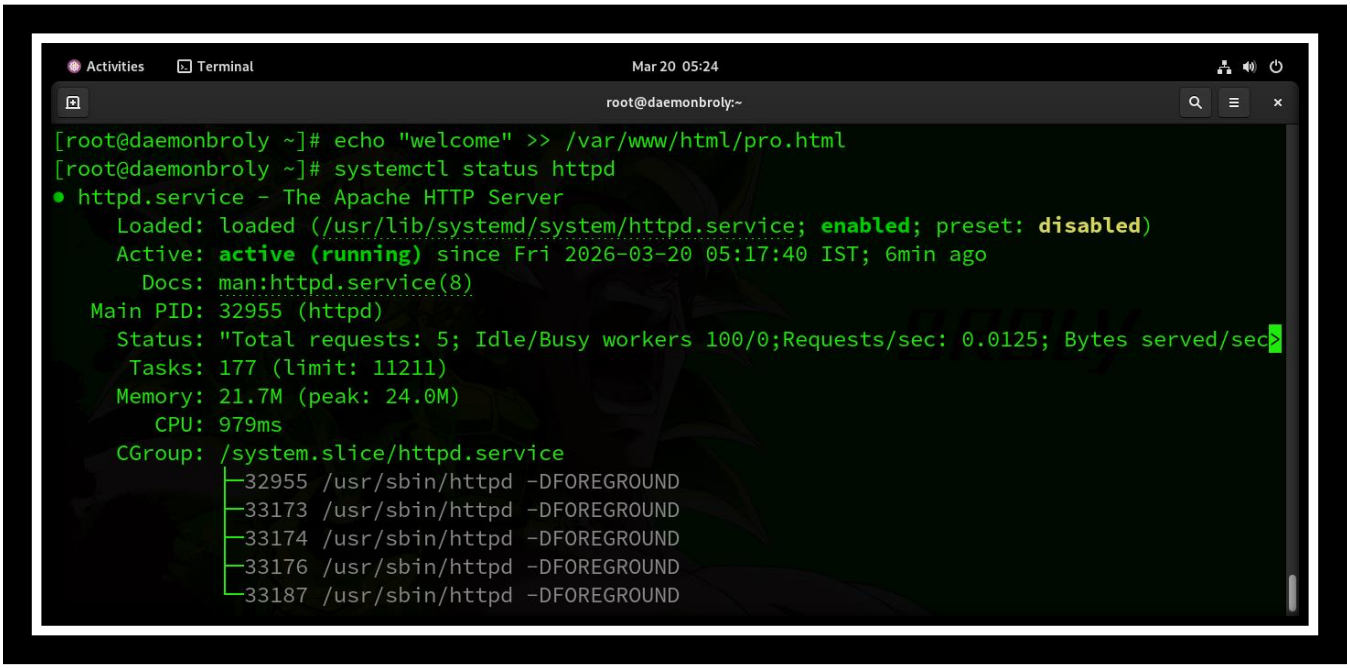

OUTPUT:

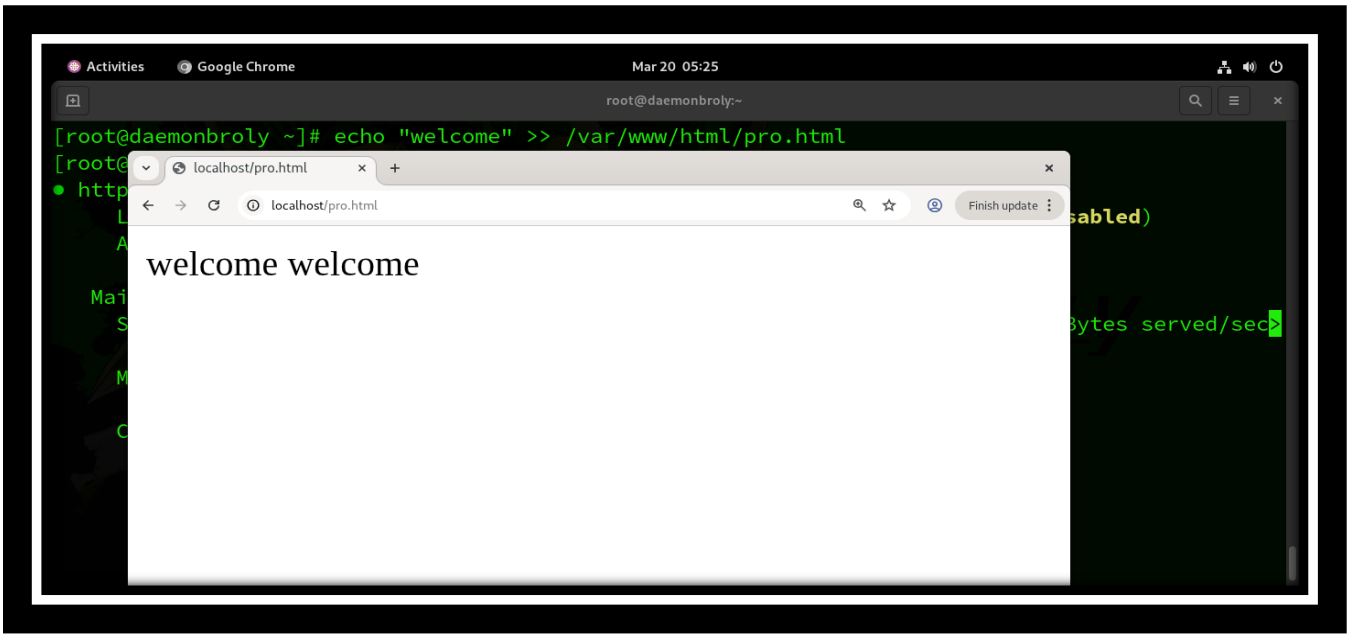

MANAGE SELINUX LABELS

STEP 1:

STEP 2:

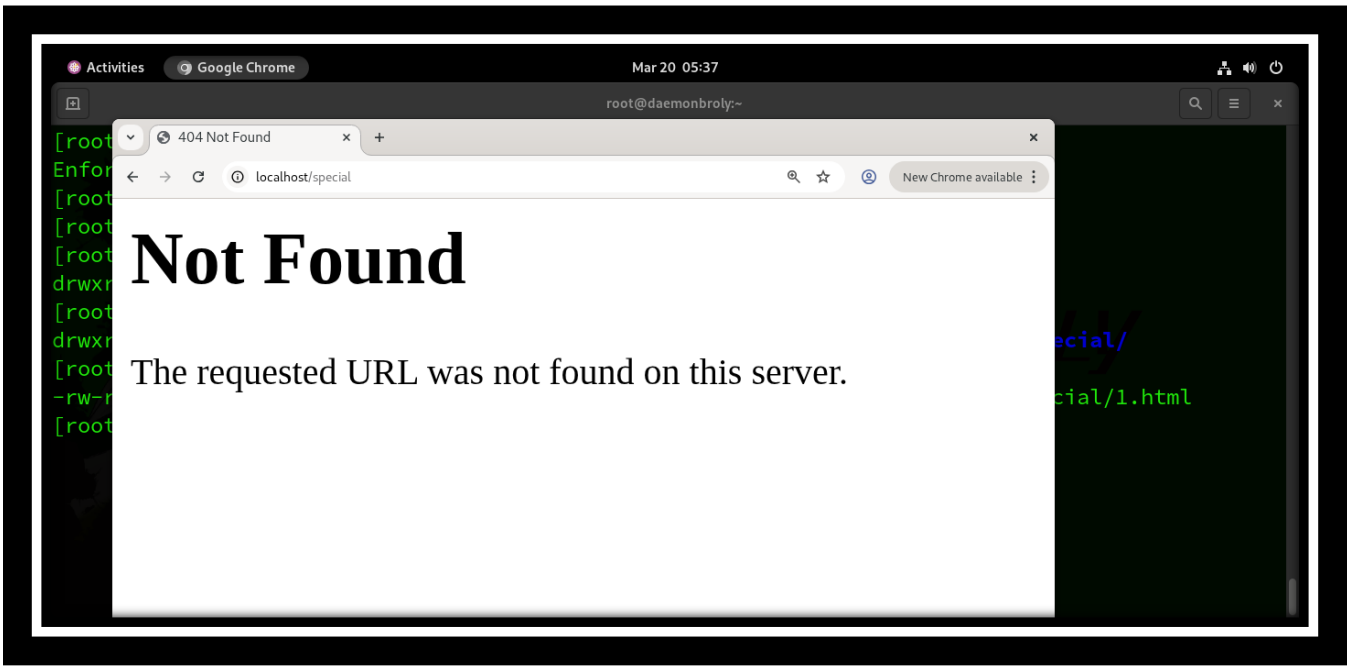

STEP 3:

Activities
Terminal
Mar 20 05:39
root@daemonbroly:/etc/httpd/conf.d
[root@daemonbroly conf.d]# ls
autoindex.conf README userdir.conf welcome.conf
[root@daemonbroly conf.d]# cp welcome.conf special.conf
[root@daemonbroly conf.d]#

STEP 4:

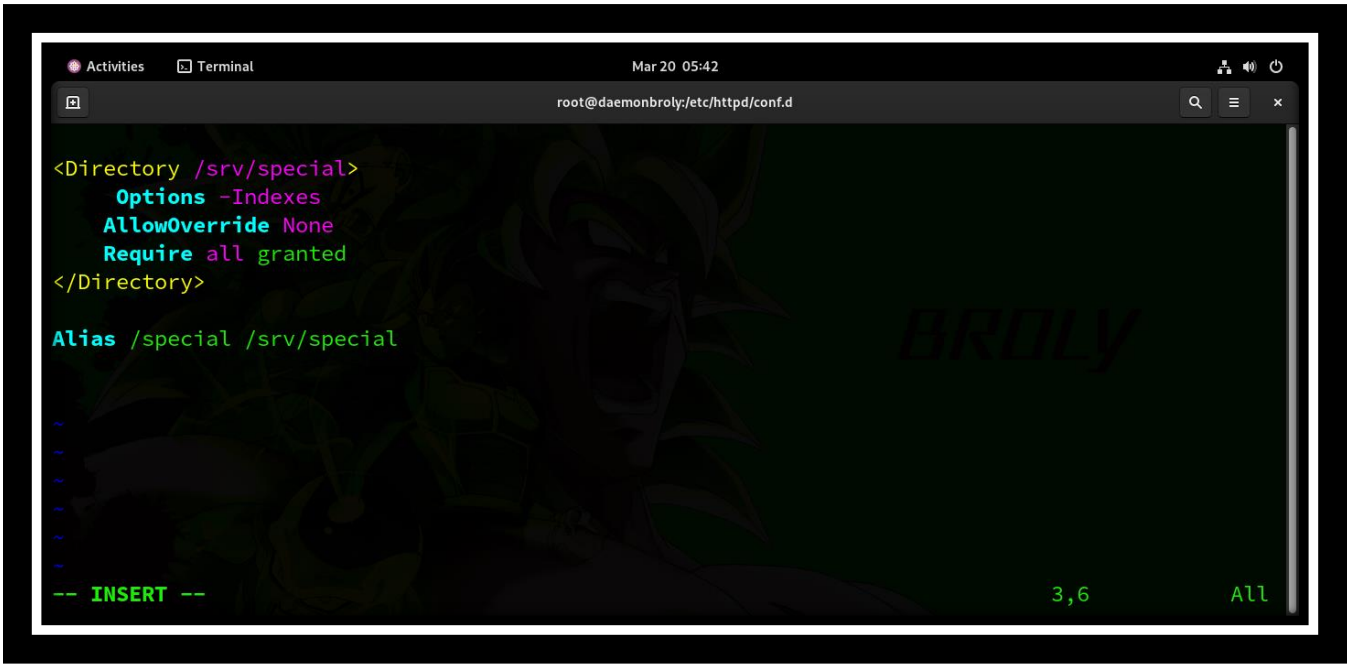
Activities
Terminal
Mar 20 05:42
root@daemonbroly:/etc/httpd/conf.d
<Directory /srv/special>
Options -Indexes
AllowOverride None
Require all granted
</Directory>
Alias /special /srv/special
~
~
~
~
~
~
-- INSERT --
3,6
All

STEP 5:

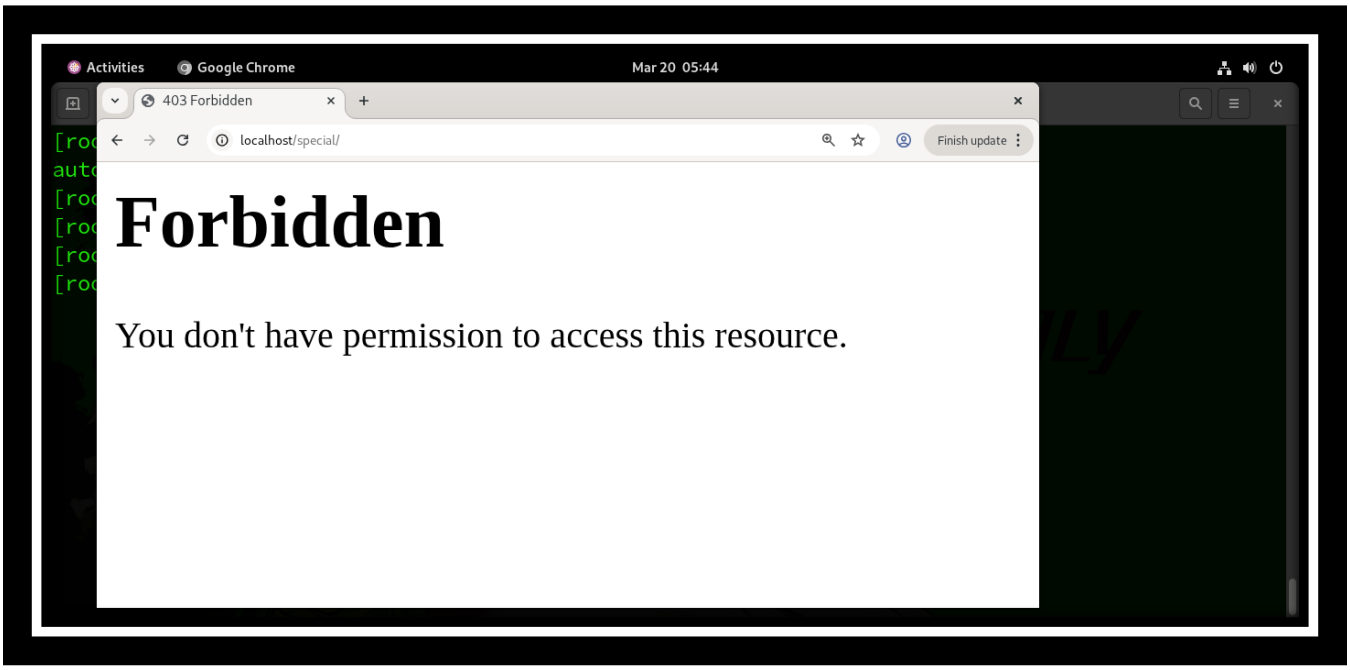
Activities
Google Chrome
Mar 20 05:44
403 Forbidden
localhost/special/
Finish update
Forbidden
You don't have permission to access this resource.

STEP 6:

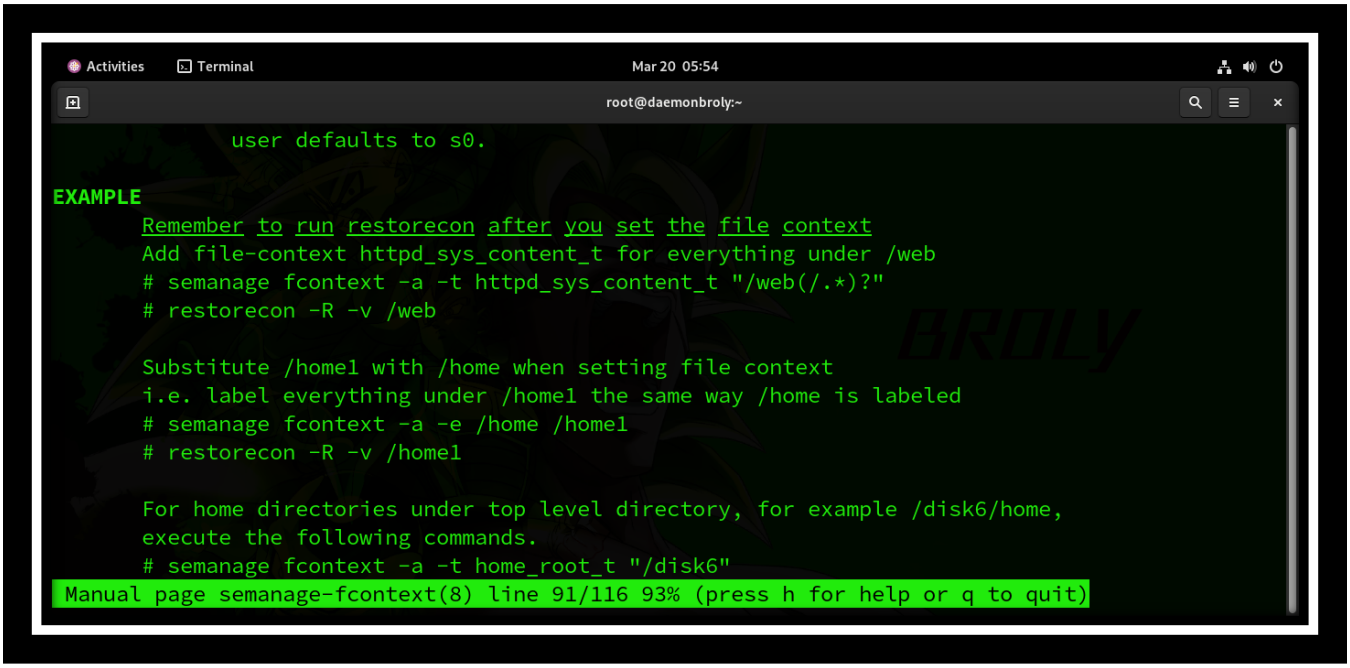
Activities
Terminal
Mar 20 05:54
root@daemonbroly:~
user defaults to s0.
EXAMPLE
Remember to run restorecon after you set the file context
Add file-context httpd_sys_content_t for everything under /web
semanage fcontext -a -t httpd_sys_content_t "/web(/.*)?"
restorecon -R -v /web
Substitute /home1 with /home when setting file context
i.e. label everything under /home1 the same way /home is labeled
semanage fcontext -a -e /home /home1
restorecon -R -v /home1
For home directories under top level directory, for example /disk6/home,
execute the following commands.
semanage fcontext -a -t home_root_t "/disk6"
Manual page semanage-fcontext(8) line 91/116 93% (press h for help or q to quit)
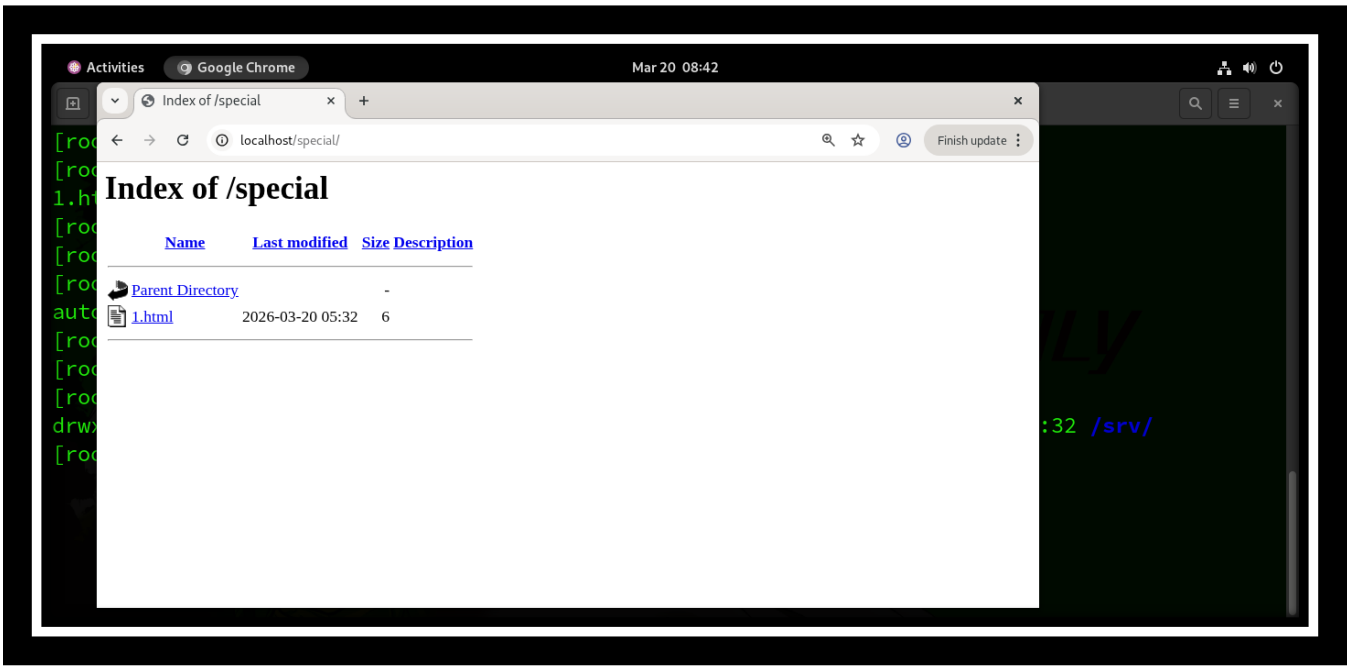
FINAL OUTPUT: