


Page: 3 / 60 Flag this page

3. The following screenshot displays a segment of the menu items in the sidebar on a Guidewire application:

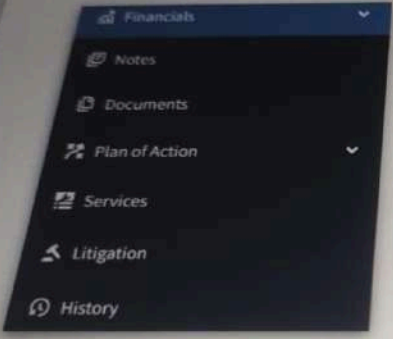

The business analysts have uncovered a requirement that the Documents, History, Litigation, and Notes pages should be grouped under a single heading, to be called Legal Records.



What is the best practice for accomplishing this?



The business analysts have uncovered a requirement that the Documents, History, Litigation, and Notes pages should be grouped under a single heading, to be called Legal Records.

What is the best practice for accomplishing this?


- ☐ Click the gear icon in the UI, select user settings, select Sidebar, set preferences for the four pages according to the desired view
- ☐ Rearrange the order of the sidebar so that the four pages are all together, set the indent property for all four pages, and insert a label above them, which reads Legal Records
- ☐ Place the views associated with those four pages onto a single screen named Legal Records, and place that screen on the sidebar, removing the individual pages from the sidebar
- ☒ Create a location group named Legal Records, containing those four items, and add it to the sidebar, removing the individual pages from the sidebar

Choose 1 option.

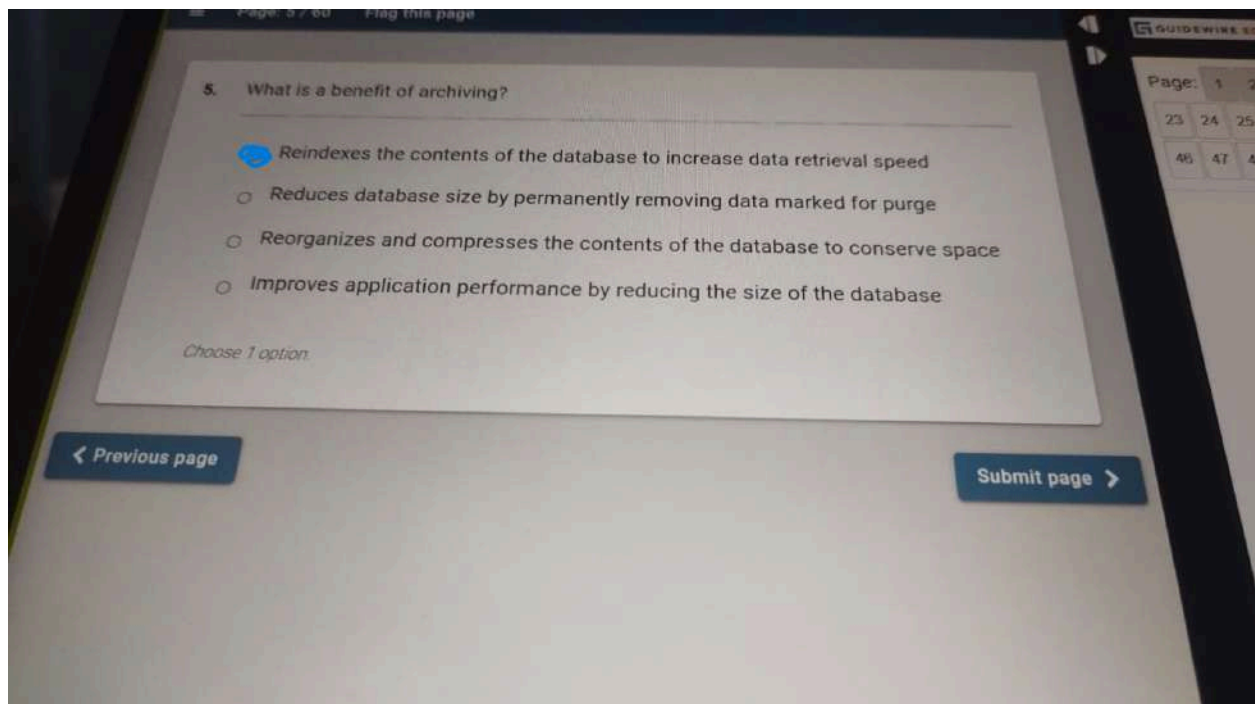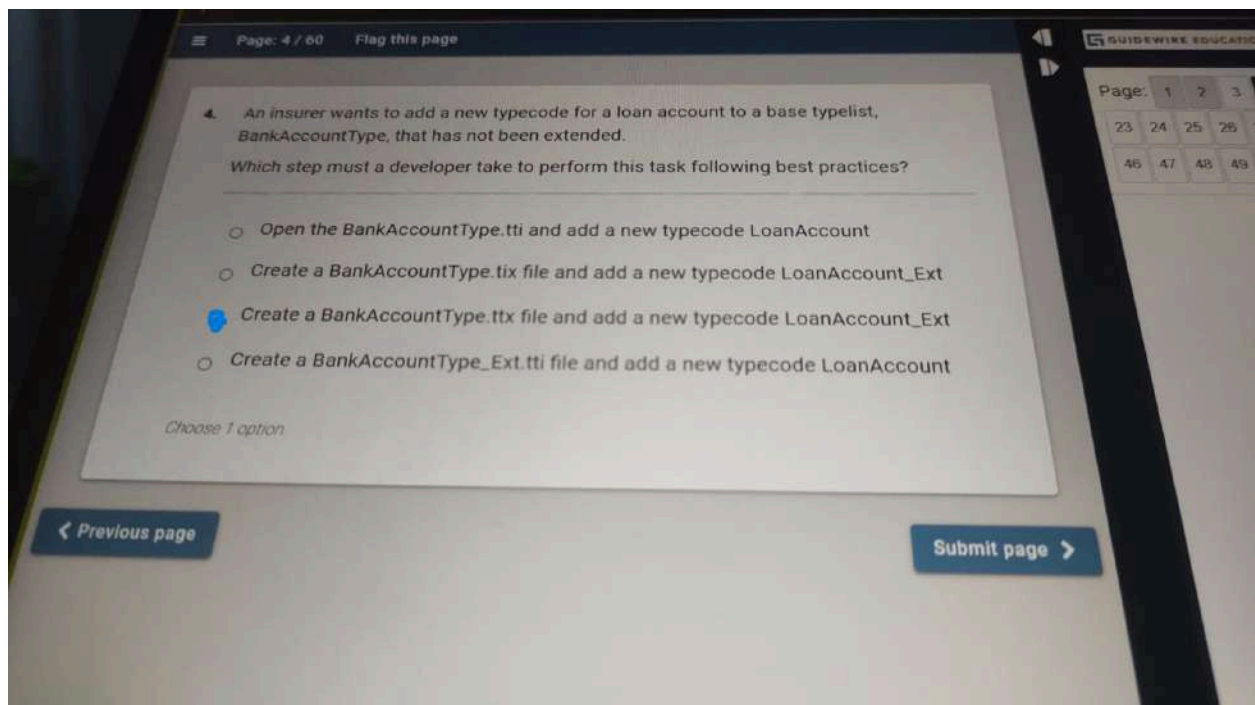

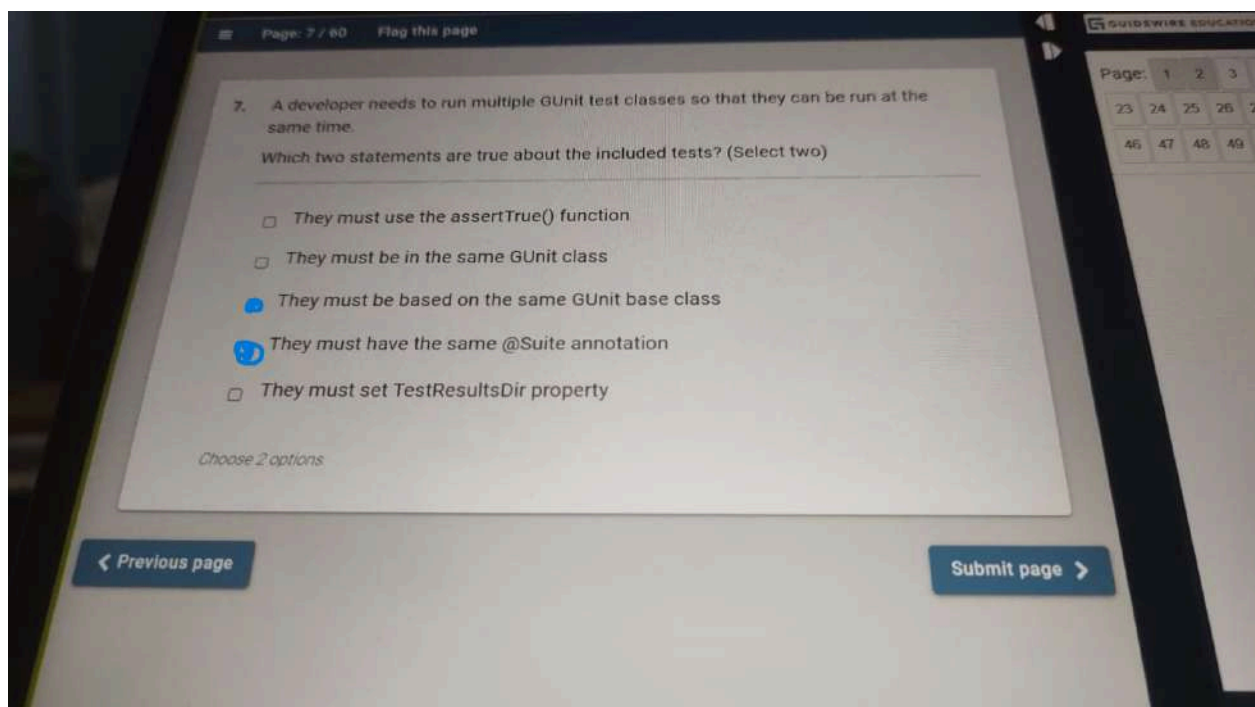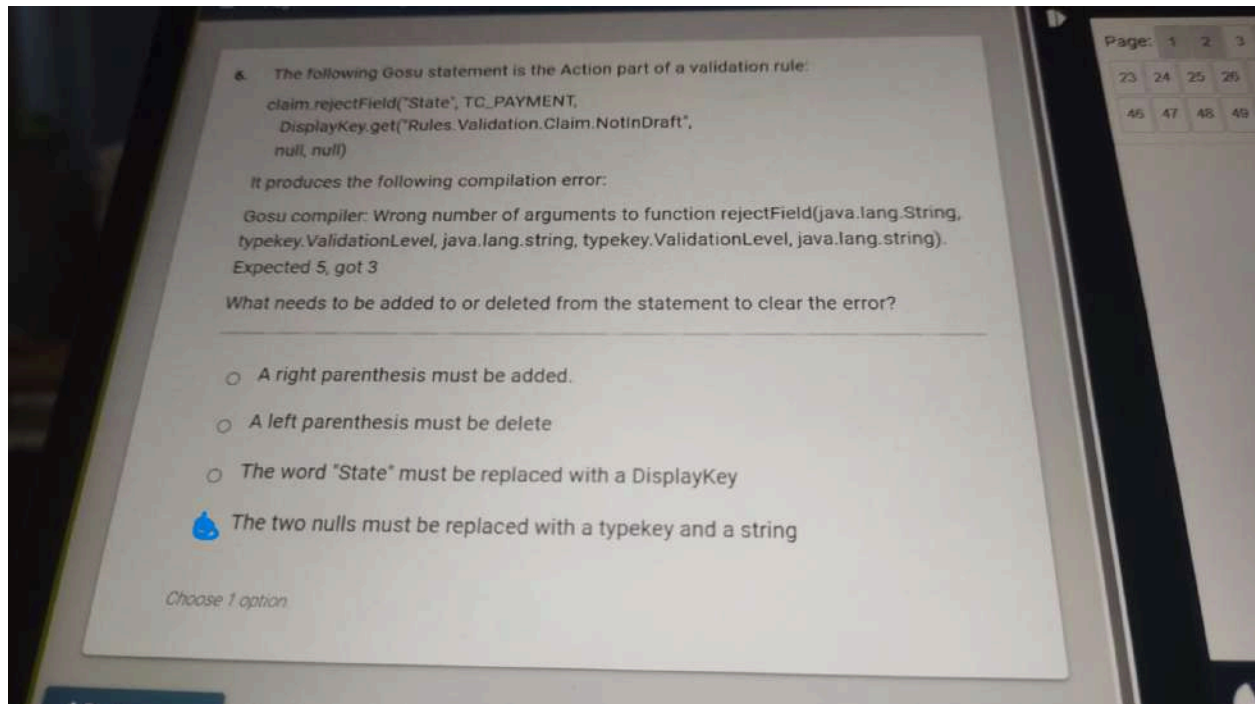

8. A developer has added Iterator (Add and Remove) buttons to the list view shown below.

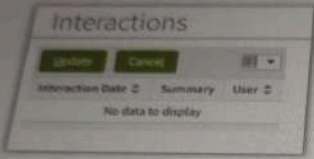

What is the reason the buttons are not displayed?

- ☐ Since no records are displayed, there is nothing to Remove.
- ☐ The user has disabled editing from their Options view.
- ☒ The buttons are not properly associated with the iterator.
- ☐ Records can be added to a list only in a list-detail view.

Choose 1 option.

[Previous page](#) [Submit page](#)

9. An insurer has a number of employees whose names are similar, but each one has a unique employee number for identification. Displaying the employee's name as a drop-down list in the user interface must include the employee's number with the employee's name to ensure uniqueness. For example:



John Smith	3455
William Andy	3978
John Smith	4041

How can a developer satisfy this requirement following best practices?

- ☐ Enable Post On Change for name fields to modify how they display when the name is referenced
- ☐ Create a setter property in a Name enhancement class
- ☒ Create a Displaykey that concatenates the name fields and employee number
- ☐ Define an entity name that concatenates the name fields and employee number

Choose 1 option.

[Previous page](#)

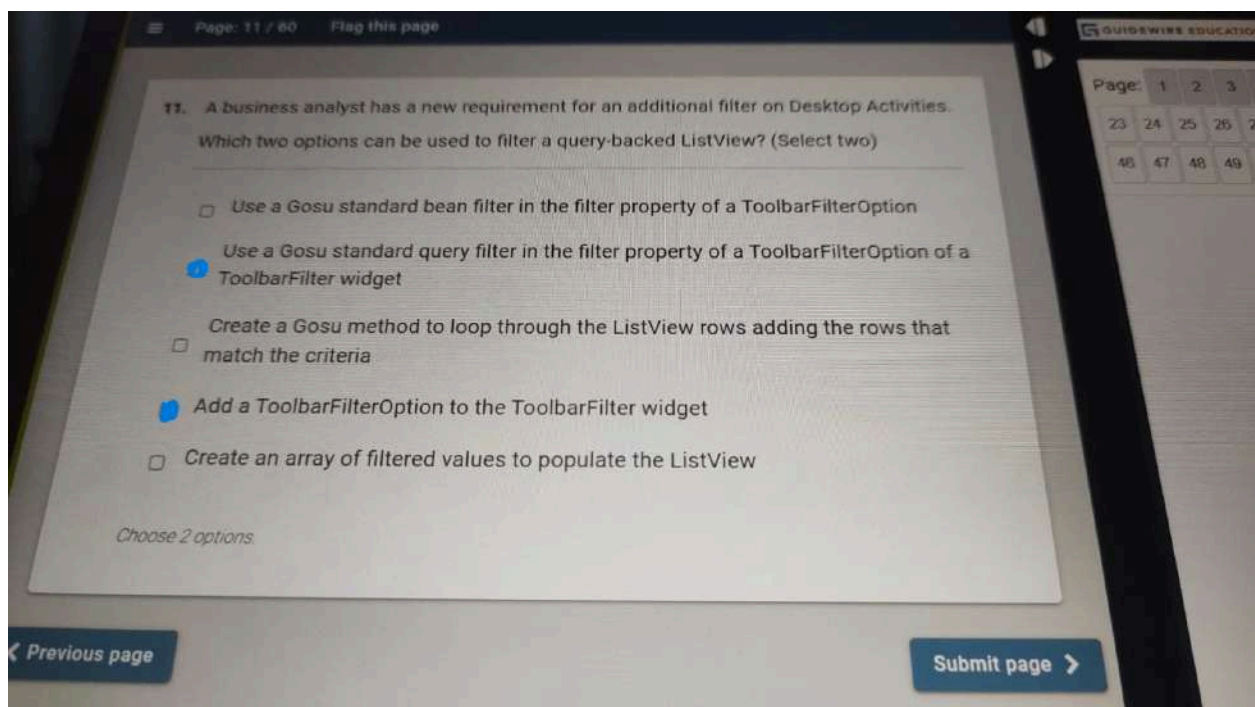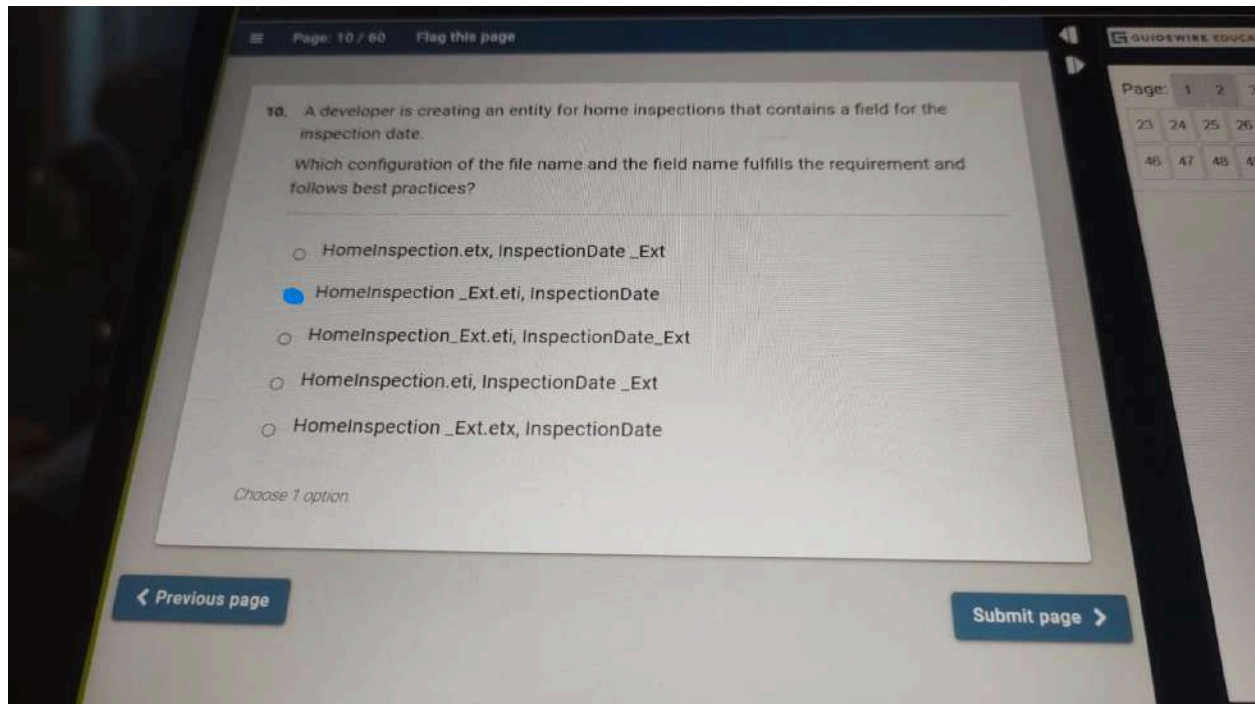

12. Which logging statement follows best practice?

- ☐ `_logger.error(DisplayKey.get("Web.ContactManager.Error.GeneralException", e.Message))`
- ☐ `_logger.info(logPrefix +
" [Address#AddressLine1=" + address.AddressLine1 +
"] [Address#City" + address.City +
"] [Address#State" + address.State + "]")`
- ☐ `if(!_logger.InfoEnabled) {
_logger.debug("Adding '{contact.PublicID}' to ContactManager")
}`
- ☒ `if(!_logger.DebugEnabled) {
_logger.debug(logPrefix + someReallyExpensiveOperation())
}`

Choose 1 option.

13. Which scenarios should database consistency checks be run in? (Select two)

- ☐ A customer created a subtype of an entity that has a required column and imported data through the user interface.
- ☐ A customer created a new LocationRef, a folder that contains a new PCF file, Detail View, and List View.
- ☒ A customer created their own SQL script to populate empty columns in their production database.
- ☒ A customer extended an entity with a column that is not required and imported data for the column through the user interface.
- ☐ A customer created a new typelist and added several new typecodes to an existing typelist.

Choose 2 options.

14. For ABPerson contacts only, the marketing team has requested to store the name of the individual's favorite sports team.

What data model extension follows best practices to fulfill this requirement?

- ☐ Add a varchar field to ABContact named FavoriteTeam_Ext
- ☐ Create a typelist of sports team names, and add a typekey to ABContact based on that typelist
- ☒ Add a varchar field to ABPerson named FavoriteTeam_Ext
- ☐ Create an ABSportsTeam entity and add a foreign key from ABContact to ABSportsTeam

Choose 1 option.

Previous page

Submit page

15. An insurer has extended the ABContact entity in ContactManager with an array of Notes to capture information of interest about the contact over time. A developer has been asked to write a function to process all the notes for a given contact.

Which code satisfies the requirement and follows best practices?

- ☒

```
for ( note in anABContact.Notes ) {  
    //do something  
}
```
- ☐

```
var aNote = anABContact.Notes.firstWhere( \ note -> note.Author != null)  
//do something
```
- ☐

```
for ( i = 1..anABContact.Notes.length ) {  
    //do something  
}
```
- ☐

```
while ( exists ( note in anABContact.Notes ) ) {  
    //do something  
}
```


16. Given the following query:

```
uses gw.api.Database.Query

var query = Query.make(Claim)
query.compare(Claim#ClaimNumber, Equals, "123-45-6789")

var claim = query.select().AtMostOneRow
```

Which follows the best practice to find the urgent open activities of the claim, considering the memory usage and bundle size?

☒

```
var activityQuery = gw.api.database.Query.make(Activity)
activityQuery.compare(Activity#Priority, Equals, Priority.TC_URGENT)
activityQuery.compare(Activity#Status, Equals, TC_OPEN)
activityQuery.compare(Activity#Claim, Equals, claim)

var urgentActivities = activityQuery.select()
```

☐



```
var activityQuery = gw.api.database.Query.make(Activity)
activityQuery.compare(Activity#Status, Equals, TC_OPEN)
activityQuery.compare(Activity#Claim, Equals, claim)



var urgentActivities = activityQuery.select().where{\ activity -> activity.Priority == TC_URGENT}
```

17. Which two statements are true regarding the Guidewire Cloud Assurance process? (Select two)

- ☐ The Optimization Backlog includes Guidewire suggestions for improvement
- ☒ Cloud Assurance applies to both new Guidewire Cloud implementations and customer projects migrating self-managed implementations into Guidewire Cloud Platform
- ☐ Cloud Assurance does not apply to customer projects migrating self-managed implementations into Guidewire Cloud Platform
- ☒ Items in the Optimization Backlog must be resolved before deployment to the Cloud
- ☐ Cloud Assurance applies to new Guidewire Self-managed implementations

Choose 2 options.

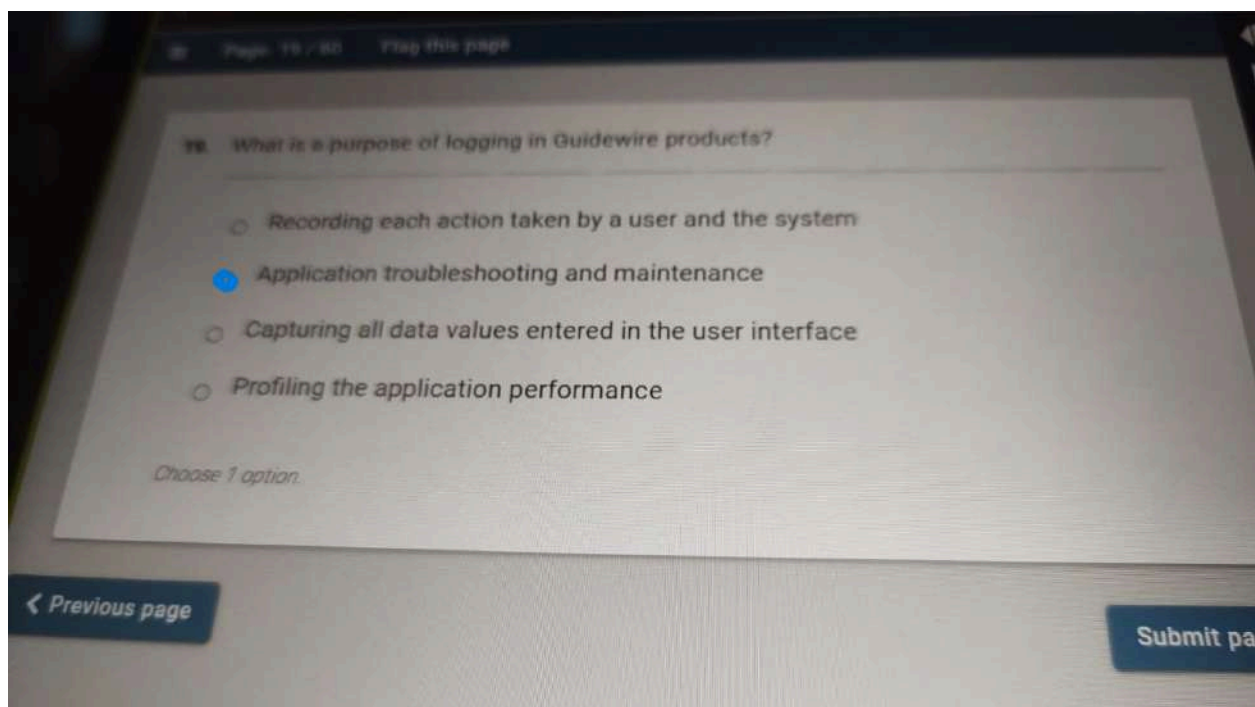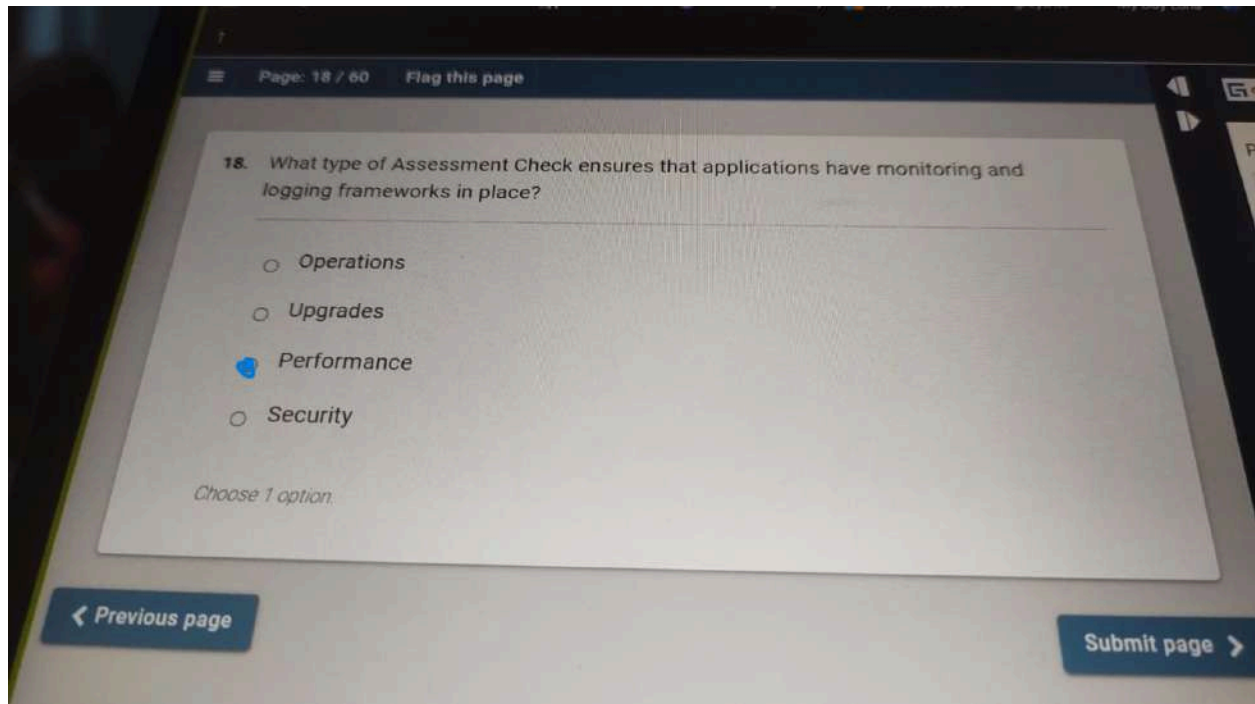

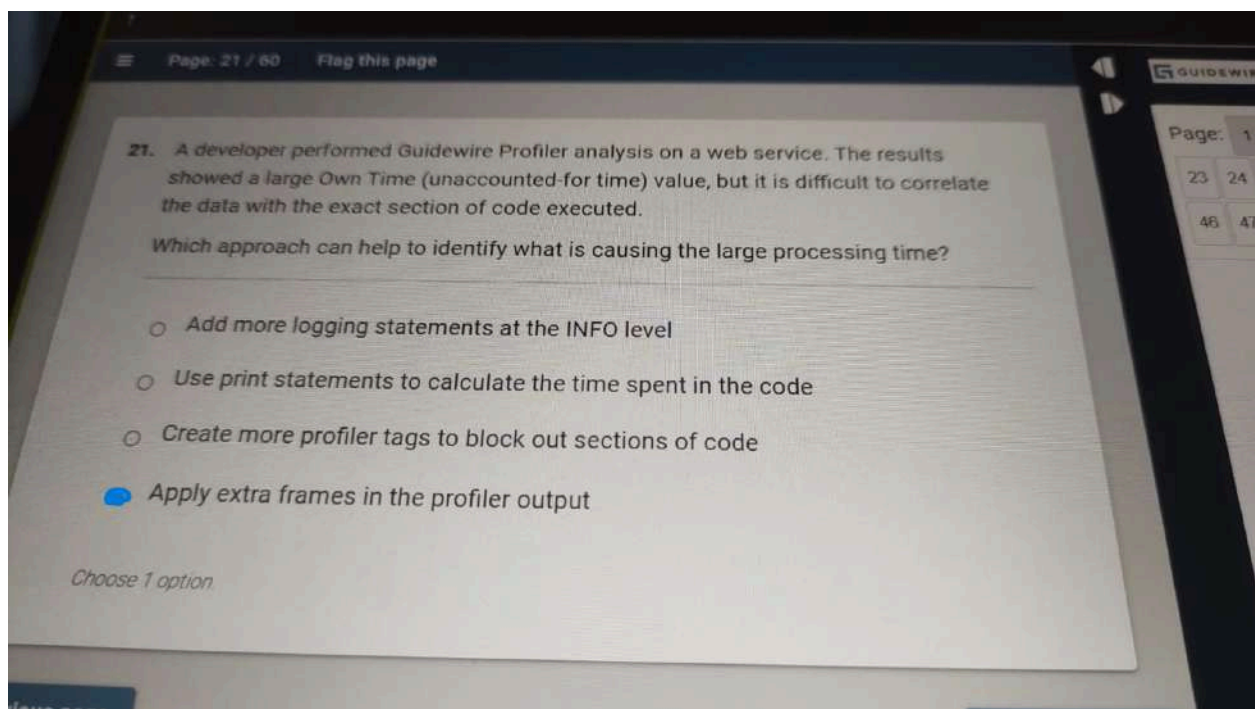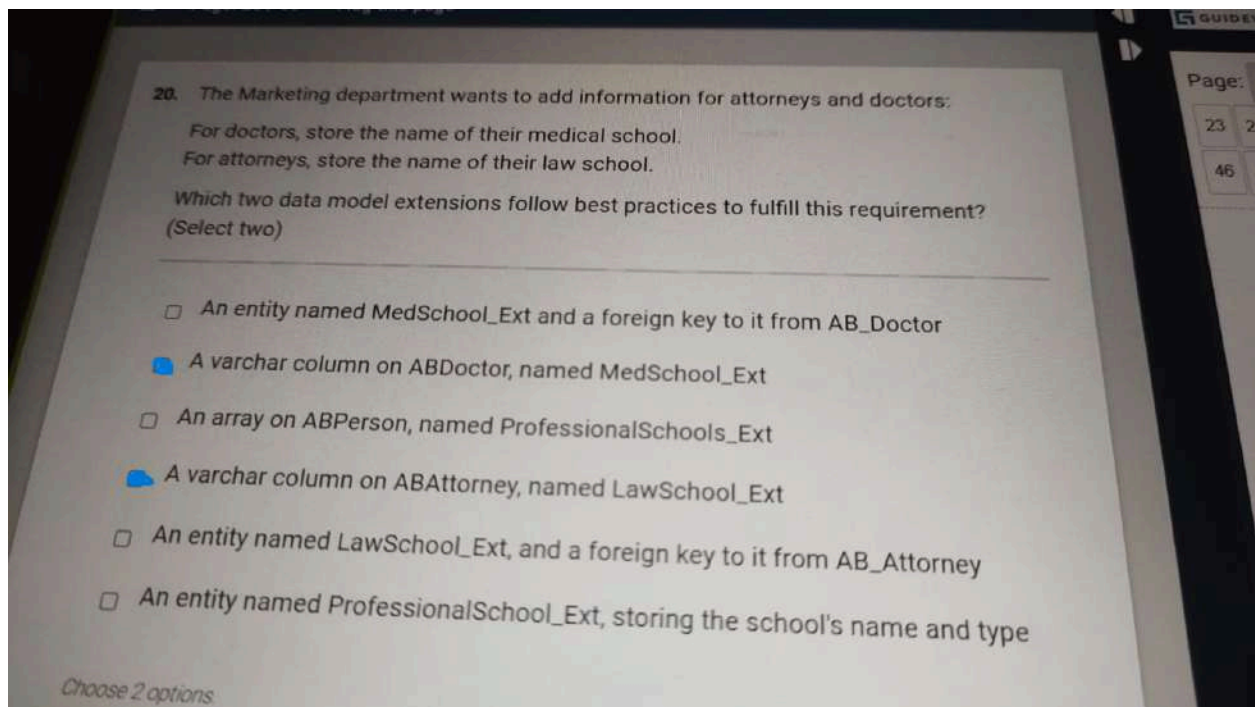

22. The Cost entity contains the fields TotalPremium and Tax. The application needs to calculate the total cost as a sum of those two fields dynamically and wants to create a reusable solution.

Which configuration is appropriate and efficient to achieve this task?

Create an entity enhancement and add:

☐ `property set TotalCost_Ext(totalCost : BigDecimal){
totalCost = this.TotalPremium + this.Tax
}`

☐ Calculate the total cost in the value property in the PCF file.

☐ Create an entity extension and add a new field to store the total cost.

Add a getter in CostEnhancement:

☒ `property get TotalCost_Ext() : BigDecimal {
return this.TotalPremium + this.Tax
}`

23. An insurer ran the DBCC checks against a copy of their PolicyCenter production database in a non-production environment to check for errors before promoting the code to production. Three errors with high counts were found in the category Data update and reconciliation.

What are two best practices for resolving the errors? (Select two)

☒ Analyze the errors to determine the root cause and correct the code responsible for the errors

☐ Wait to see if error counts increase; if they increase by more than 10%, fix the errors

☐ Search the Knowledge Base on the Guidewire Community for solutions to the problems found

☒ Identify any bad data and write a SQL script to correct the data; run the script immediately

☐ Promote the code to production and run the DBCCs again to see if the same errors are found

Choose 2 options

24. A developer is creating a modal PCF where the display will be based on the subtype as shown in the hierarchy below:



Which three statements are true about the configuration? (Select three)

- ☐ Each modal PCF must have the same identical set of required variables
- ☐ The default modal PCF will be displayed if there is no modal PCF for the entity being displayed
- ☐ A modal PCF is required for each subtype in the hierarchy
- ☒ The mode property on each PCF must match an Entity Name
- ☒ The Entry Point Signatures for each modal PCF must use the same variables
- ☒ Each modal PCF can be associated with only one subtype

25. A developer needs to create an interface in a customer package to handle banking services. An implementation has been identified for online credit union services.

Which interface and implementation classes adhere to the naming conventions?

- ☐ IBankService.gs, CreditUnionBankService.gs
- ☒ BankService_Ext.gs, CreditUnionBankServiceImpl.gs
- ☐ BankService_Ext.gs, CreditUnionBankService.gs
- ☐ BankService.gs, CreditUnionBankService.gs

Choose 1 option.

< Previous page

Submit page >

26. Given the image of GroupParentView:

Primary Value	Secondary Value	Name	Value
GroupParentView	GroupParentView	GroupParentView	GroupParentView
Group	Group	Group	GroupParentView

What configuration is needed to add Group.GroupType to a list view using GroupParentView following best practices?



- ☐ Set the value on the input widget to GroupParentView.Group.GroupType
- ☐ Add a viewEntityType for GroupType to GroupParentView.eti
- ☐ Create a new viewEntity that includes GroupType
- ☒ Add a viewEntityType for GroupType to GroupParentView.etx

Choose 1 option.

27. An insurer with a self-managed InsuranceSuite implementation is preparing to transition to Guidewire Cloud Platform.
Which two Cloud Delivery Standards must be met before deployment? (Select two)

- ☒ Database Consistency Check data issues that prevent upgrades must be fixed
- ☒ Performance tests must be developed and run for all functionality before an upgrade to the Cloud
- ☐ Log files are written as plain text to simplify the process of troubleshooting and debugging
- ☐ Customers must be on the most current General Availability version of the product being deployed to the Cloud
- ☐ All new typelist and entity extension names include a three-character customer-specific suffix

Choose 2 options.

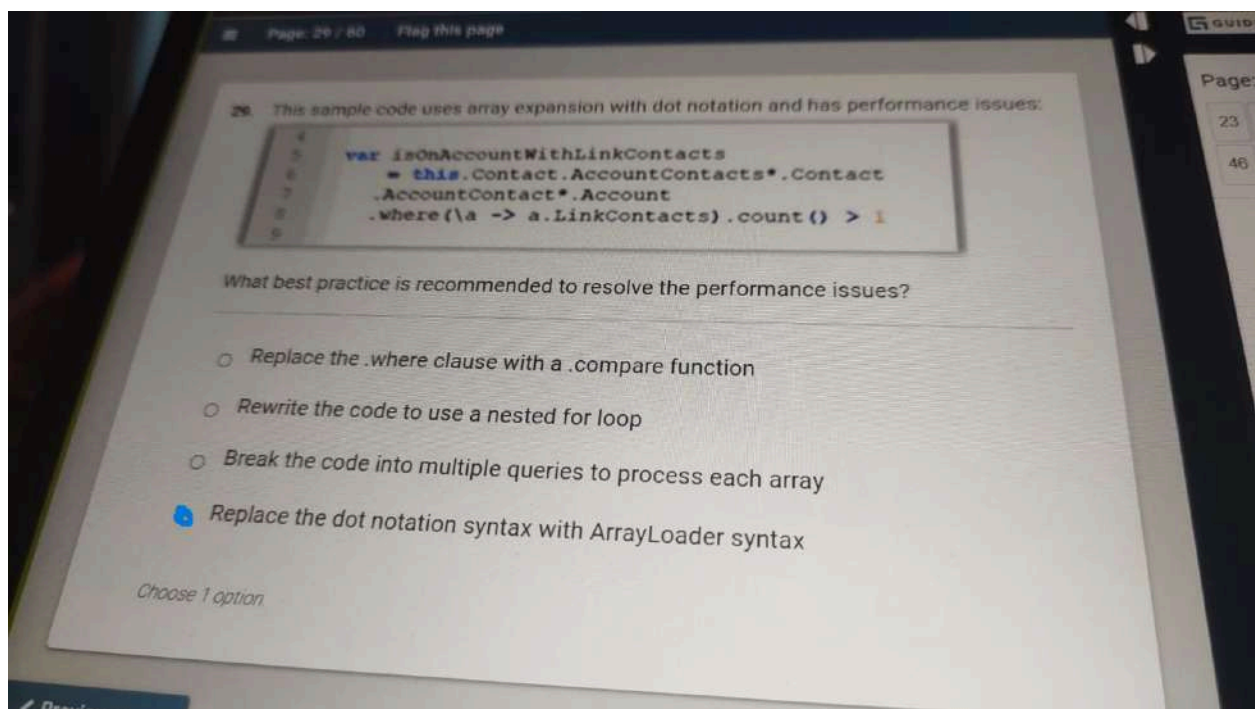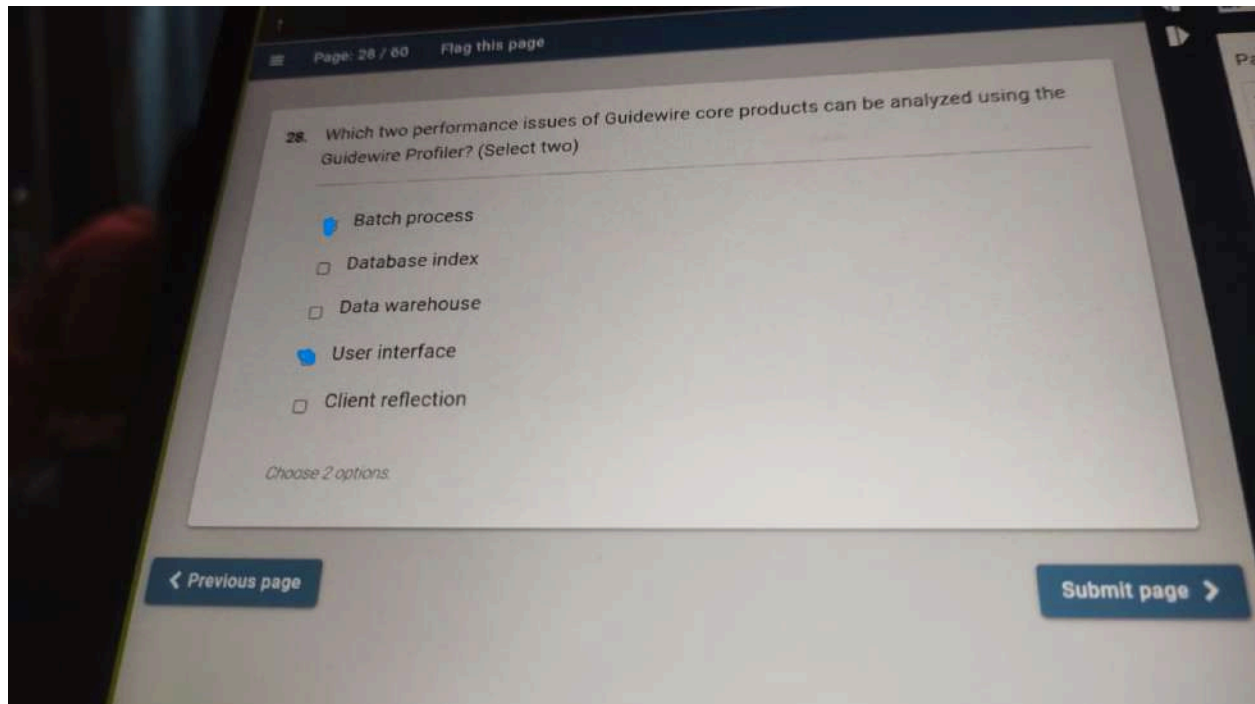

30. An insurer stores the date a company was established in the company records. A business analyst identified a new requirement to calculate a company's years in business at the time a loss occurred. The years in business will be determined using the date established field and the claim date of loss.

The image below shows the Contact structure in the data model:

Contact (cc_contact) (delegates to)	
Subtypes	
Code	Name
Company	Company
Person	Person
Place	Place

Which configuration steps will satisfy the requirement? (Select two)

- ☐ Create a function to calculate the years in business in a UI Helper class under the gw package
- ☐ Create a new enhancement class for the Company entity under the insurer package

Which configuration steps will satisfy the requirement? (Select two)

- ☐ Create a function to calculate the years in business in a UI Helper class under the gw package
- ☐ Create a new enhancement class for the Company entity under the insurer package
- ☐ Create a new enhancement class for the Contact entity under the gw package
- ☒ Create a getter property to calculate the years in business in a Company enhancement
- ☐ Create a setter property to calculate the years in business in the Contact enhancement
- ☒ Create a function to calculate the years in business in a Company enhancement

Choose 2 options

31. Business analysts have discovered a requirement to store a homeowner's home mortgage and HELOC (Home Equity Line of Credit) account, if they have them. Contact already has an array, "BankAccounts," which refers to the BankAccount entity. BankAccount has a typekey "AccountType" which is based on a typelist called "BankAccountType."

What is best practice for resolving this requirement?

- ☐ Extend the BankAccount entity with fields "Mortgage" and "HELOC"
- ☐ Extend the Contact entity with fields "Mortgage" and "HELOC"
- ☐ Extend the Contact entity with foreign keys to BankAccount, named "Mortgage" and "HELOC"
- ☒ Extend the BankAccountType typelist with typecodes for "Mortgage" and "HELOC"

Choose 1 option.



32. In TrainingApp, the Person Info card of the Details screen for a contact has a section where basic employment information is stored:



Employment Info	
Occupation	Chief dextroboper
Employer	Albertson's



The insurer requires this information to be displayed, in this format, on every card of both the Summary and Details screens, for every individual person contact. This information will be stored in a container to be reused on all these cards.



Which object will most efficiently meet this requirement, according to best practices?

- ☒ Detail View Panel
- ☐ Input set widget
- ☐ Input Set PCF file
- ☐ Worksheet PCF file

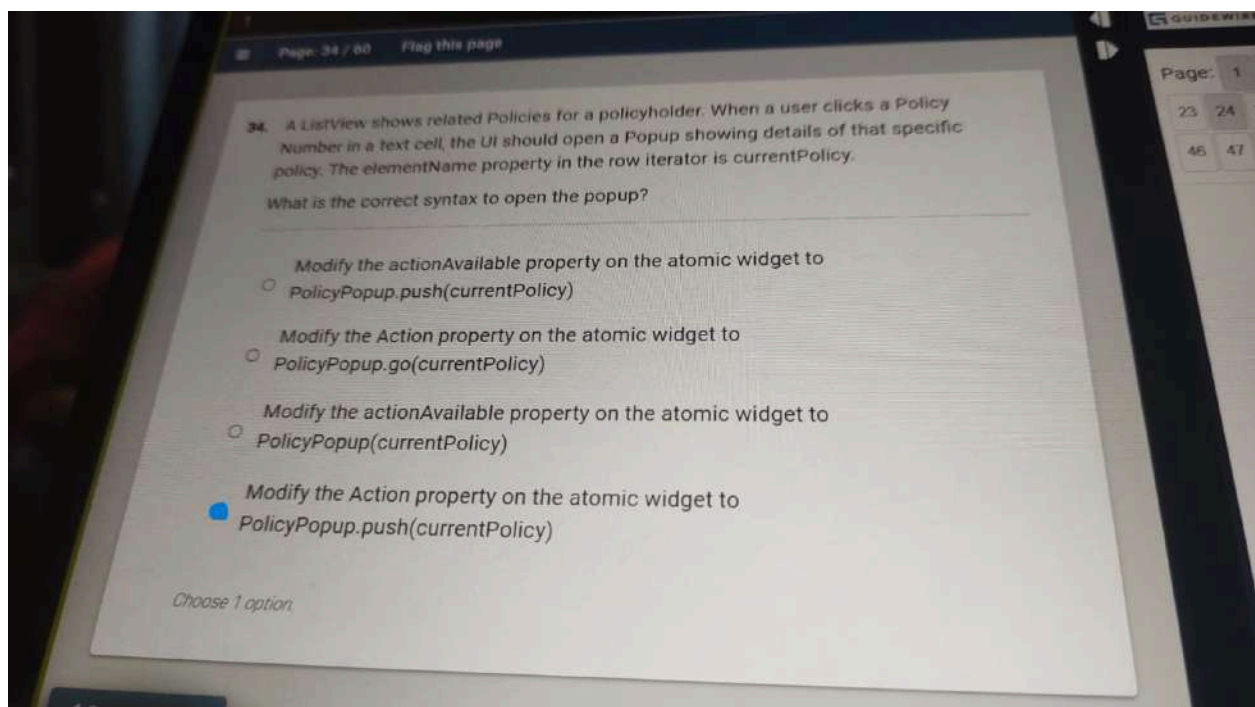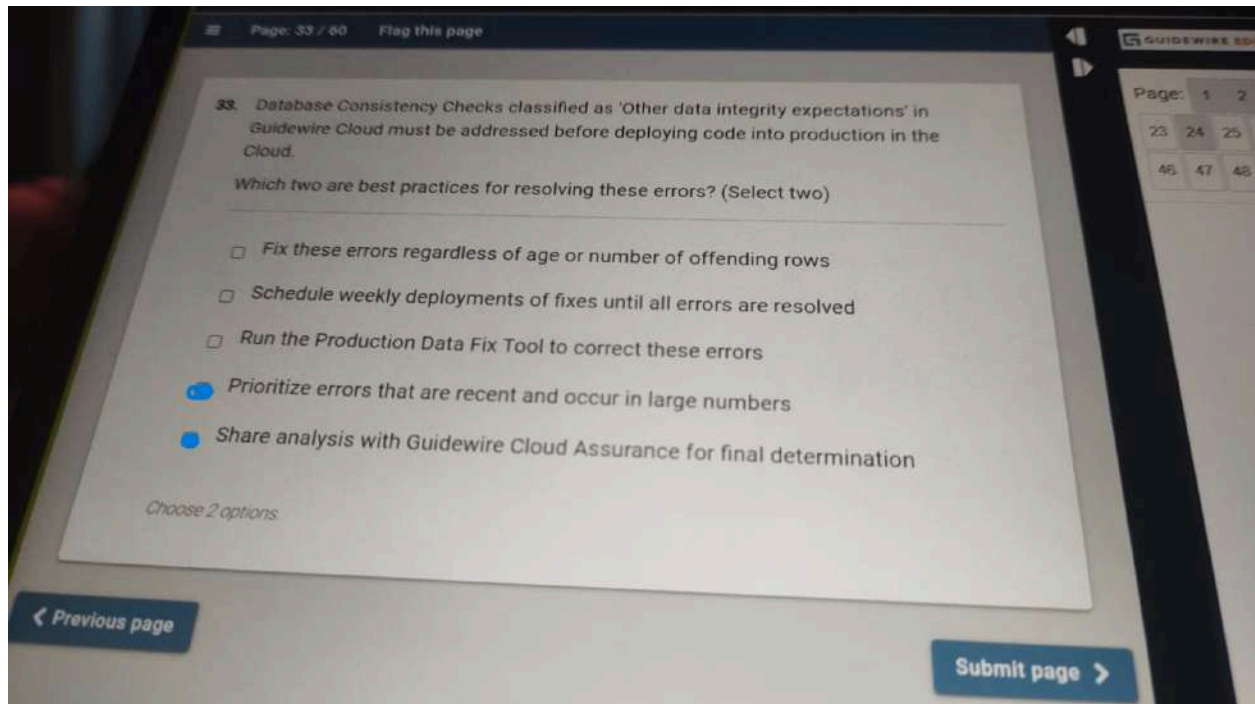

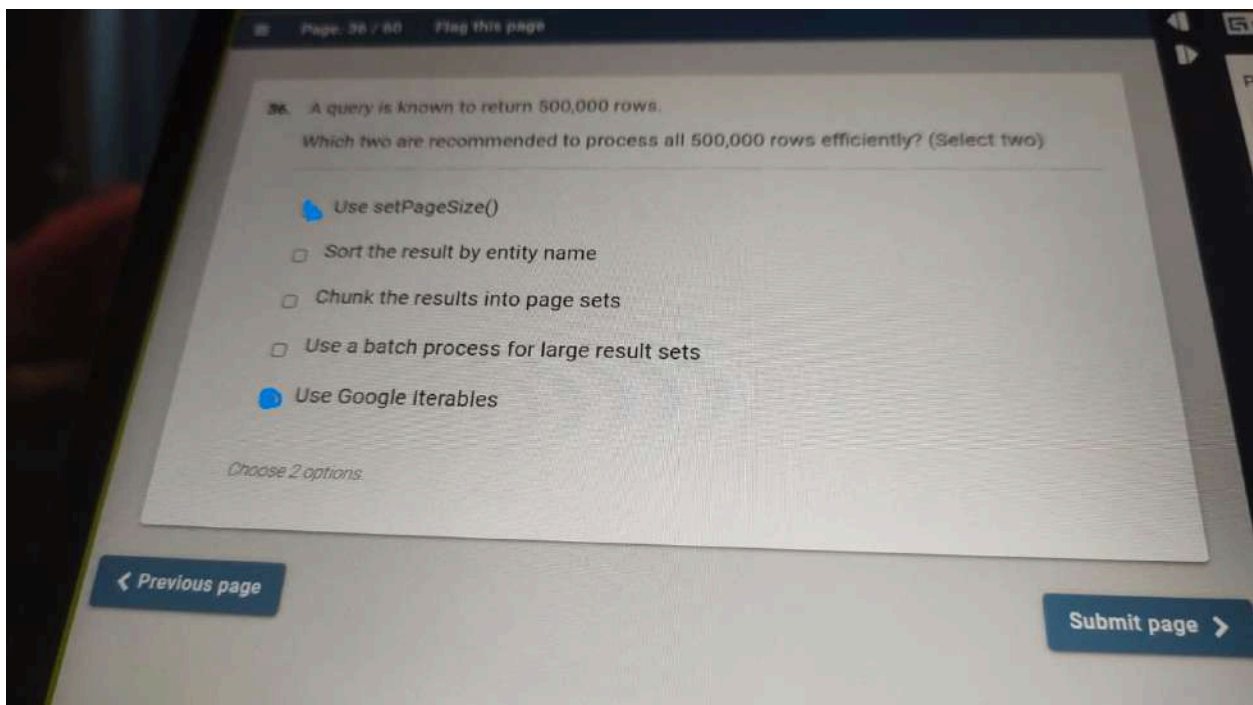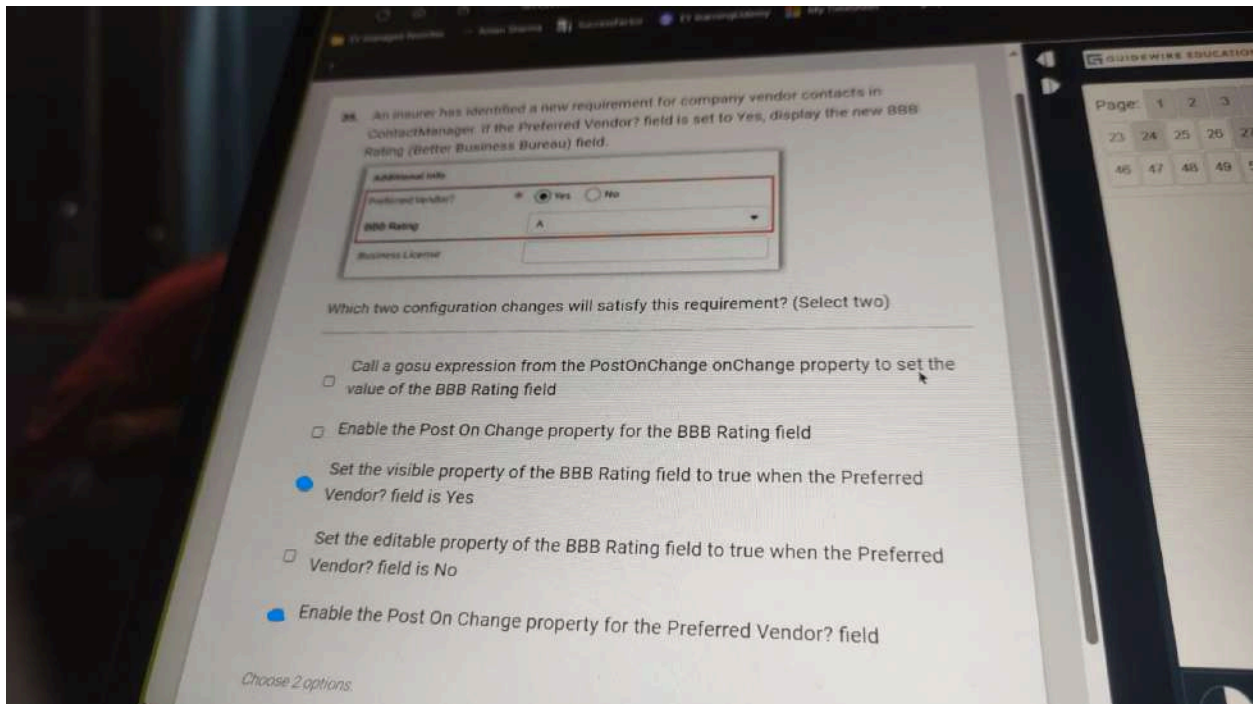

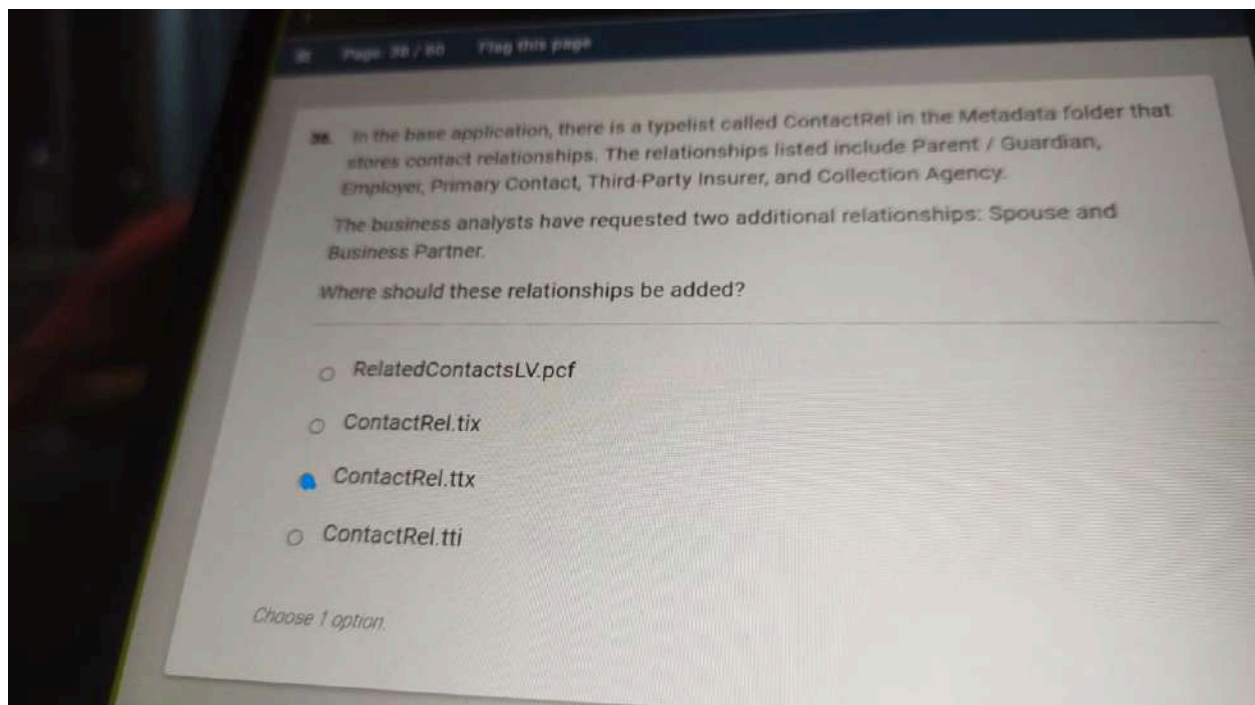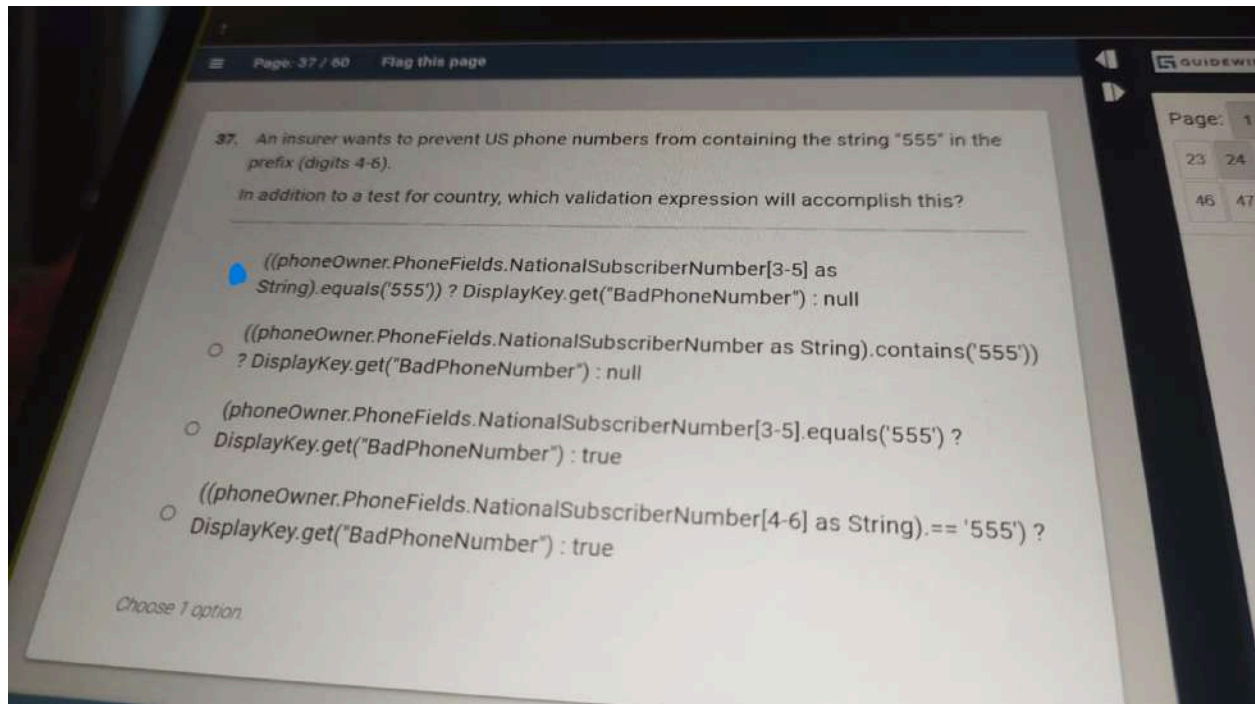

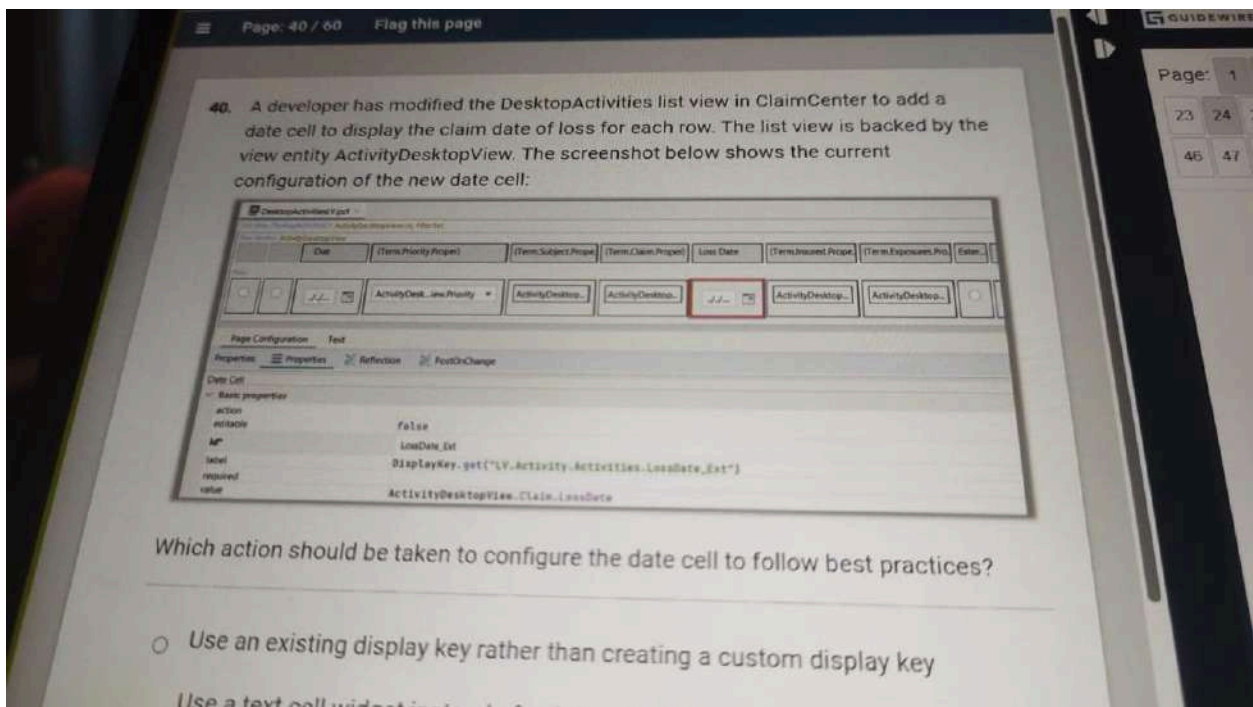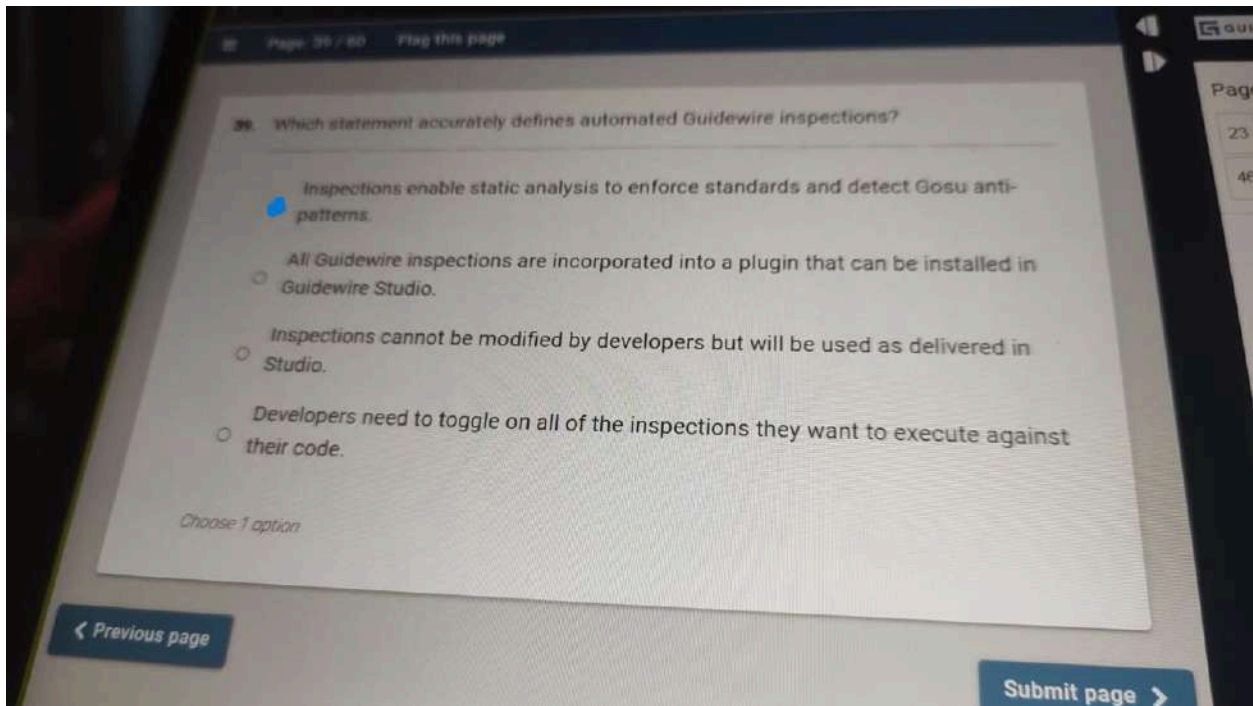

Property	Value
activity	LossDate
displayKey	DisplayKey.get("LV.Activity.Activities.LossDate.Ext")
value	ActivityDesktopView.Claim.LossDate

Which action should be taken to configure the date cell to follow best practices?

- ☐ Use an existing display key rather than creating a custom display key
- ☐ Use a text cell widget instead of a date cell widget and format the value as a string
- ☐ Configure the dateFormat property of the widget to display the date in a short format
- ☒ Extend the view entity to include the claim loss date rather than access it from Claim

Choose 1 option.

47. An insurer wants to determine how many activities have been generated to review a denial decision with an Account Manager. A developer has written this query:

```

1  uses ge.api.database.Query
2
3  var queryResults = Query.make(Activity).select().toCollection().where(
4    \ act -> act.ActivityPattern.Code == "account_denial" )



```

This query does not perform as well as it should.

Where should the results be filtered to follow best practices?

- ☒ In the database
- ☐ On the application server
- ☐ In a block statement
- ☐ In the application cache

Choose 1 option.

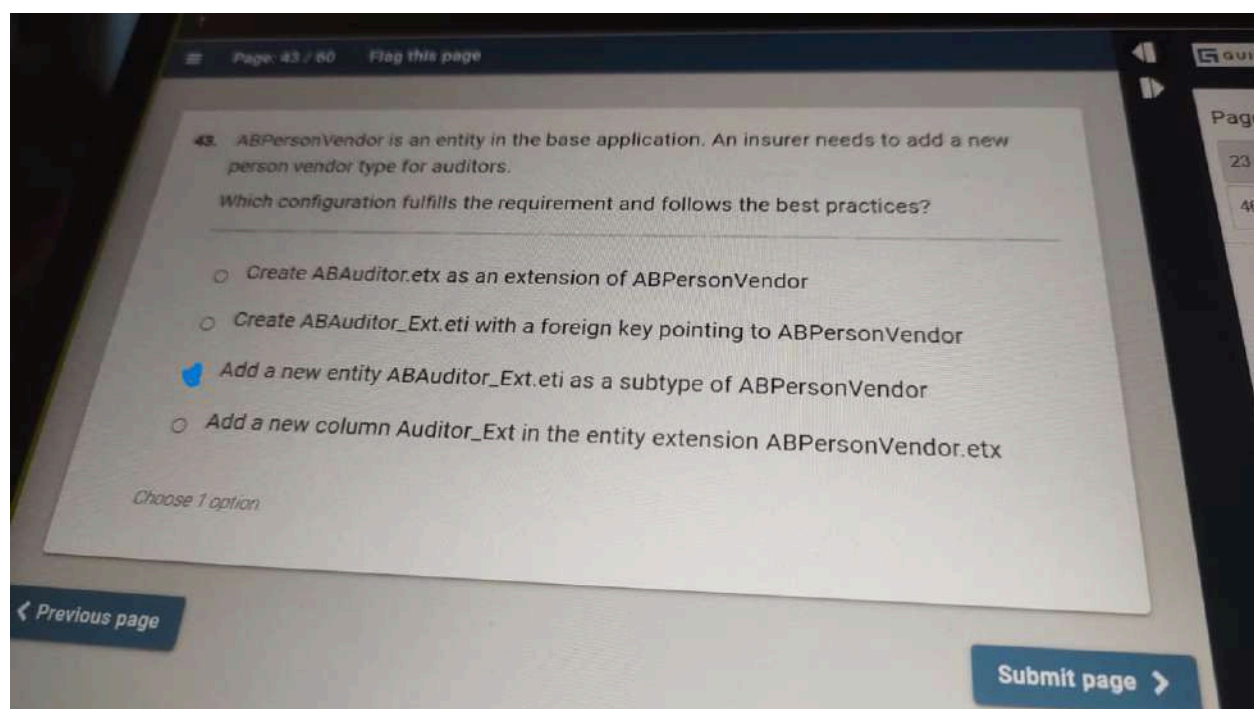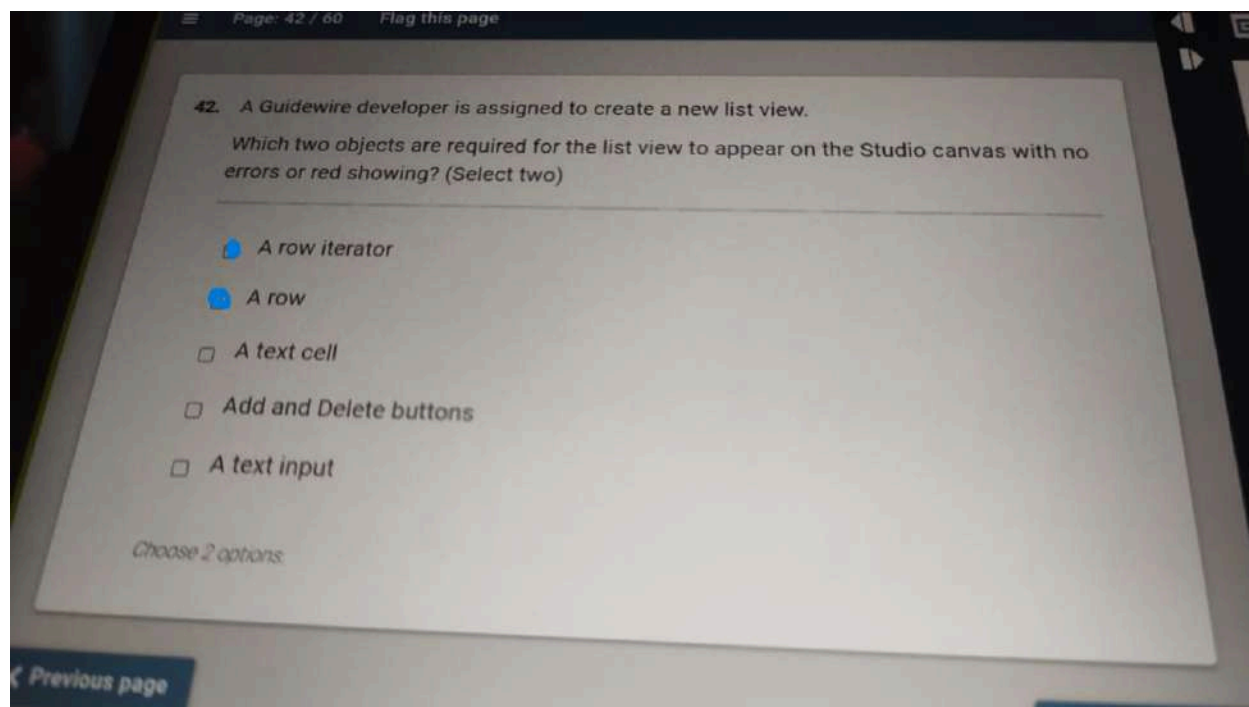

Page: 1

23 24 25 26

46 47 48 49

44. Given the following code sample:

```

gw.transaction.Transaction.runWithNewBundle(viewBundle ->{
  var targetCo = gw.api.database.Query.make(ABCompany)
  targetCo.compare(ABCompany#Name, Equals, "Acme Brick Co.")
  var company = targetCo.select().AtMostOneRow
  company.Notes = "some value"
}, "su")

```

What two items should be added or changed to follow best practices? (Select two)

- ☐ Replace Equals with Includes in the comparison
- ☒ `company = newBundle.add(company)` before setting `company.Notes`
- ☒ Pass a value for the user
- ☐ `bundle.commit()` after setting `company.Notes`
- ☐ `targetCo = newBundle.add(targetCo)` after the compare statement

Choose 2 options.

Page: 1 2 3

23 24 25 26

46 47 48 49

45. Given the image:

```

graph TD
    A["ABCContactSummaryScreen.pcf  
anABCContact: ABCContact"] --> B["Card"]
    B --> C["Input Column"]
    C --> D["Atomic Widgets"]

```

Which container type must be added between Card and Input Column?

- ☒ Input Set
- ☐ List View
- ☐ Detail View PCF File
- ☐ Detail View

Choose 1 option.

46. Which rule is written in the correct form for a rule which sets the claim segment and leaves the ruleset?

CONDITION (claim : entity.Claim)
return true

☐ ACTION (claim : entity.Claim, actions : gw.rules.ACTION)
If (claim.Segment == null)
{claim.Segment = TC_AUTO_LOW}
actions.exit()

CONDITION (claim : entity.Claim)
return claim.Segment == null

☐ ACTION (claim : entity.Claim, actions : gw.rules.ACTION)
claim.Segment == TC_AUTO_LOW
actions.exitRuleset()

actions.exitRuleset()



CONDITION (claim : entity.Claim)
return claim.Segment == null



☒ ACTION (claim : entity.Claim, actions : gw.rules.ACTION)
claim.Segment = TC_AUTO_LOW
actions.exit()



CONDITION (claim : entity.Claim)
return claim.Segment = TC_AUTO_LOW



☐ ACTION (claim : entity.Claim, actions : gw.rules.ACTION)
actions.exit()

Choose 1 option.

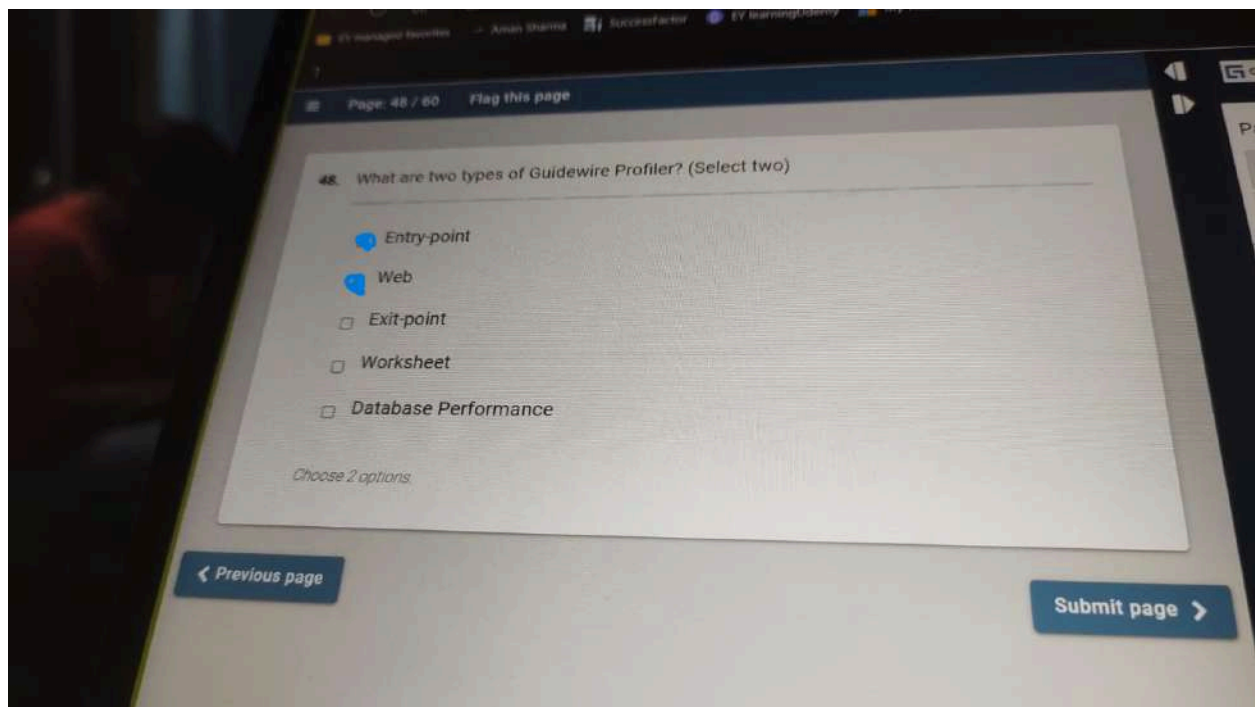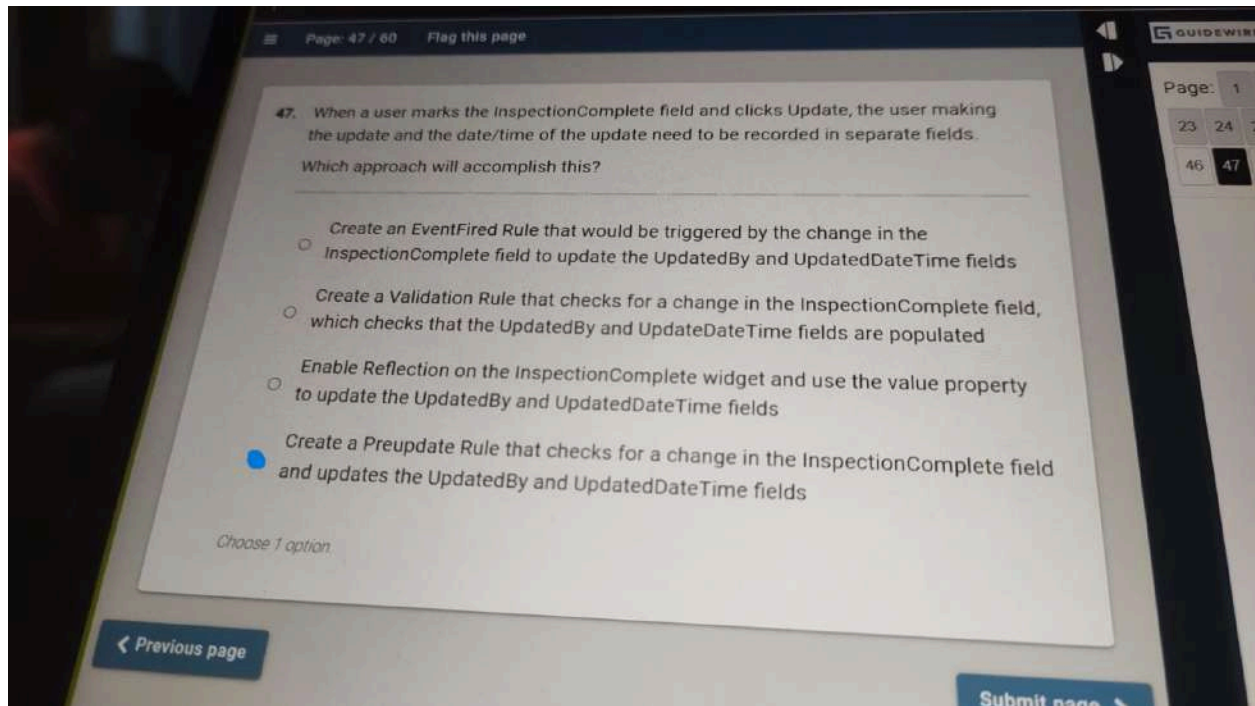

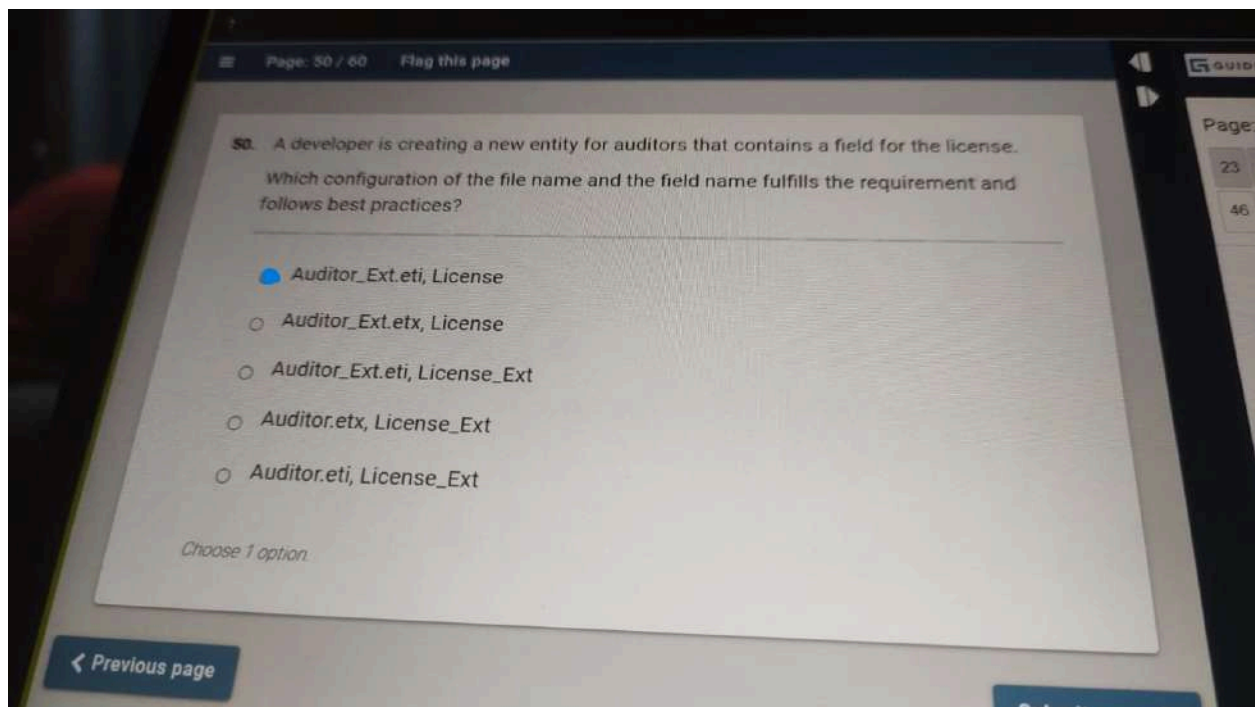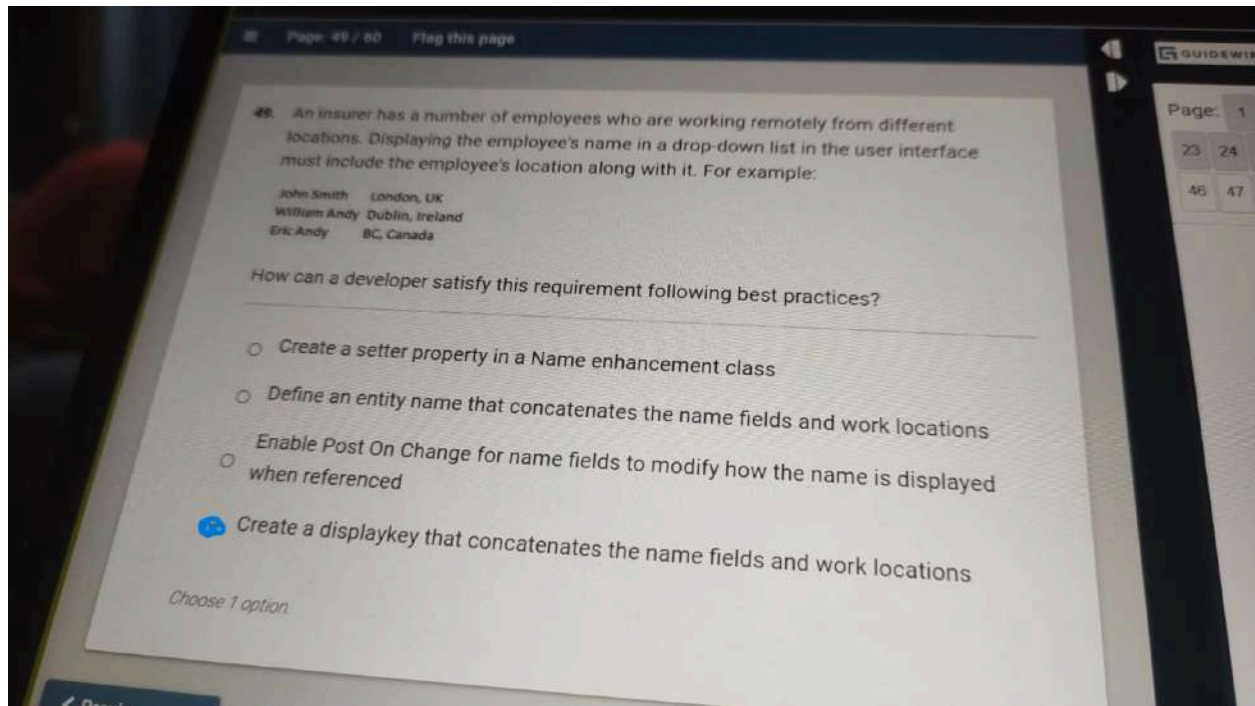

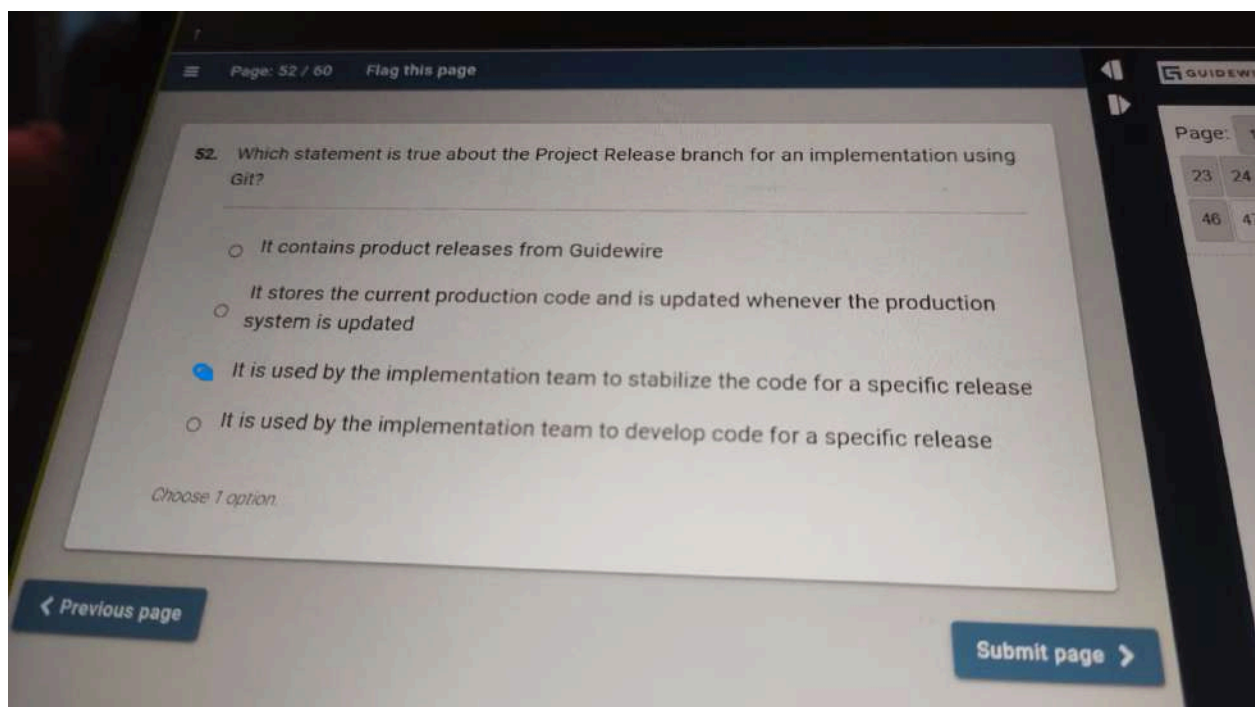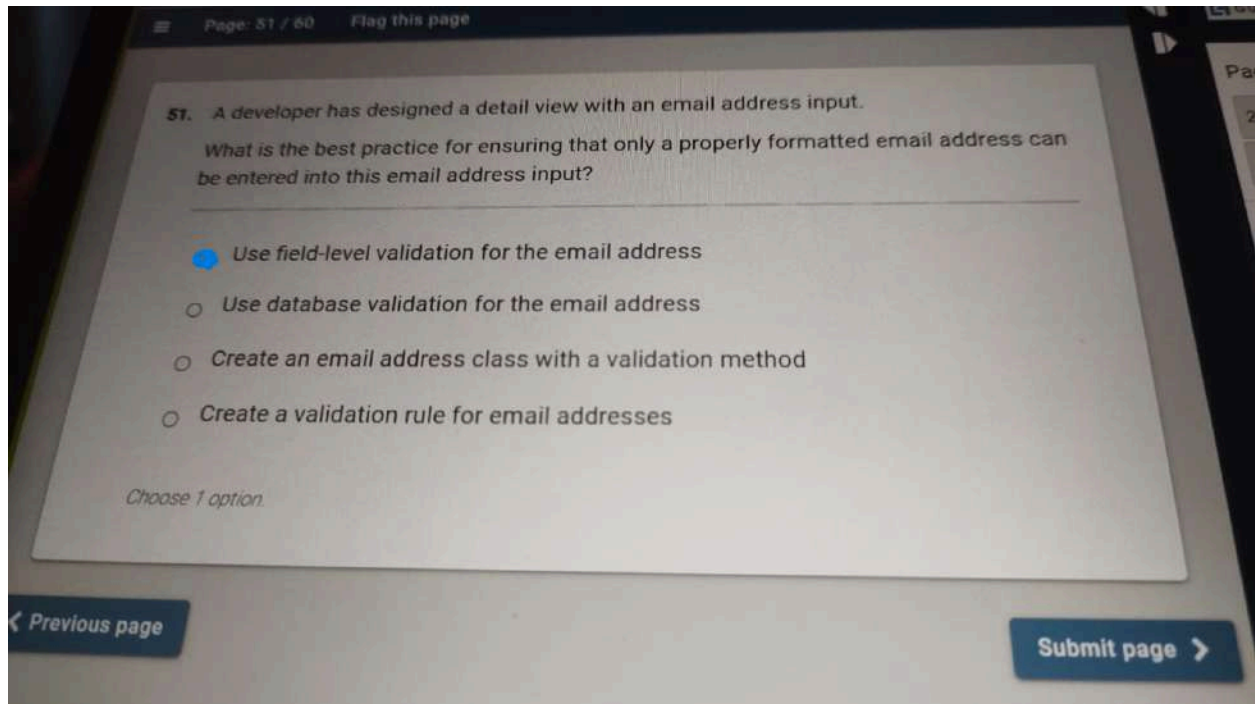

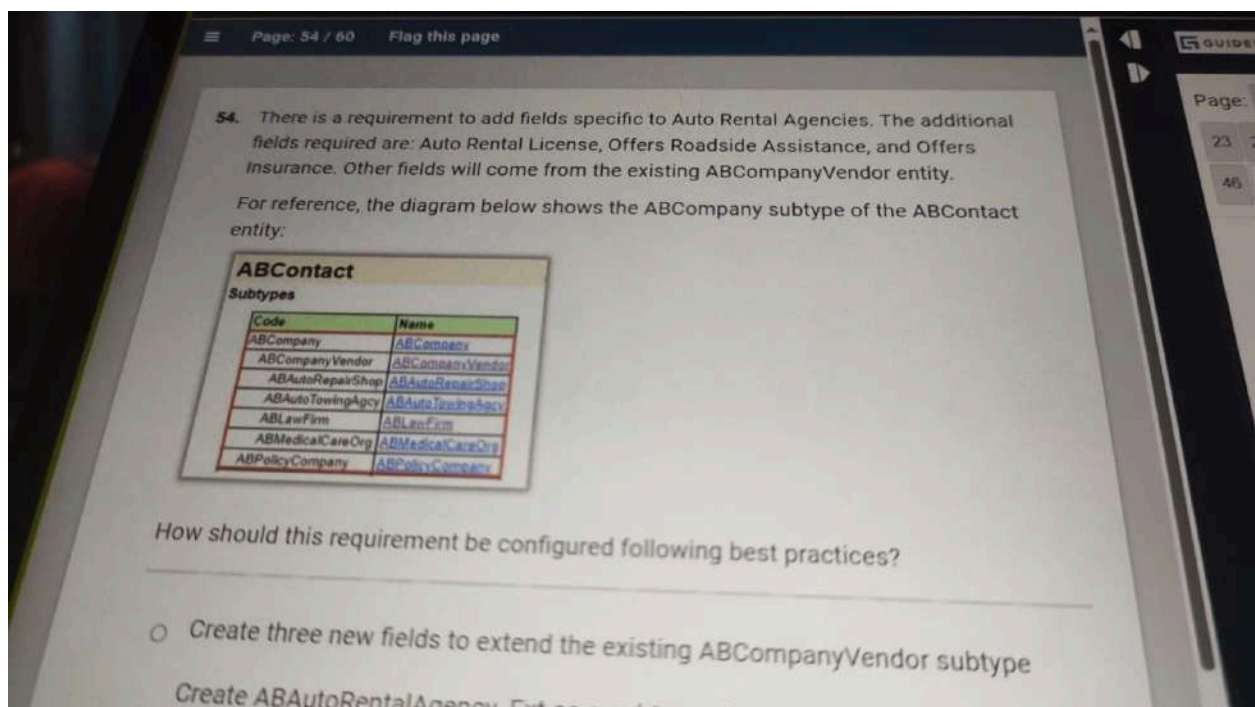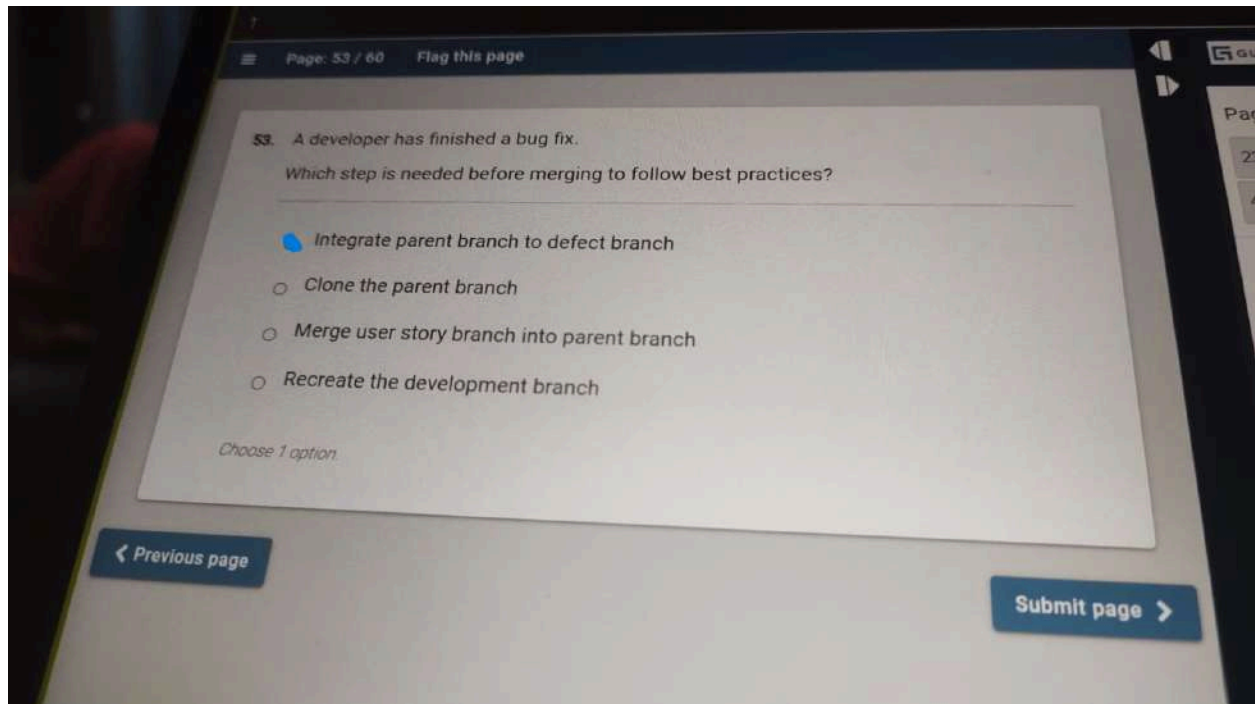

ABAutoRentalAgency	ABAutoRentalAgency
ABLawFirm	ABLawFirm
ABMedicalCareOrg	ABMedicalCareOrg
ABPolicyCompany	ABPolicyCompany

How should this requirement be configured following best practices?

- ☐ Create three new fields to extend the existing ABCompanyVendor subtype
- ☐ Create ABAutoRentalAgency_Ext as a subtype of ABCompany and add the three fields to the subtype
- ☒ Create ABAutoRentalAgency_Ext as a subtype of ABCompanyVendor and add the three fields to the subtype
- ☐ Create a custom entity ABAutoRentalAgency_Ext and add the three fields to this entity

Choose 1 option.

[< Previous page](#)

Page: 55 / 60 Flag this page



55. Which GUnit test method adheres to the Guidewire naming standards?

- ☒ whenAssigningActivityTest
- ☐ claimSegmentationTest
- ☐ testBulkInvoiceBatchJob
- ☐ testThatQuotelsGenerated

Choose 1 option.

[< Previous page](#)

[Submit page >](#)

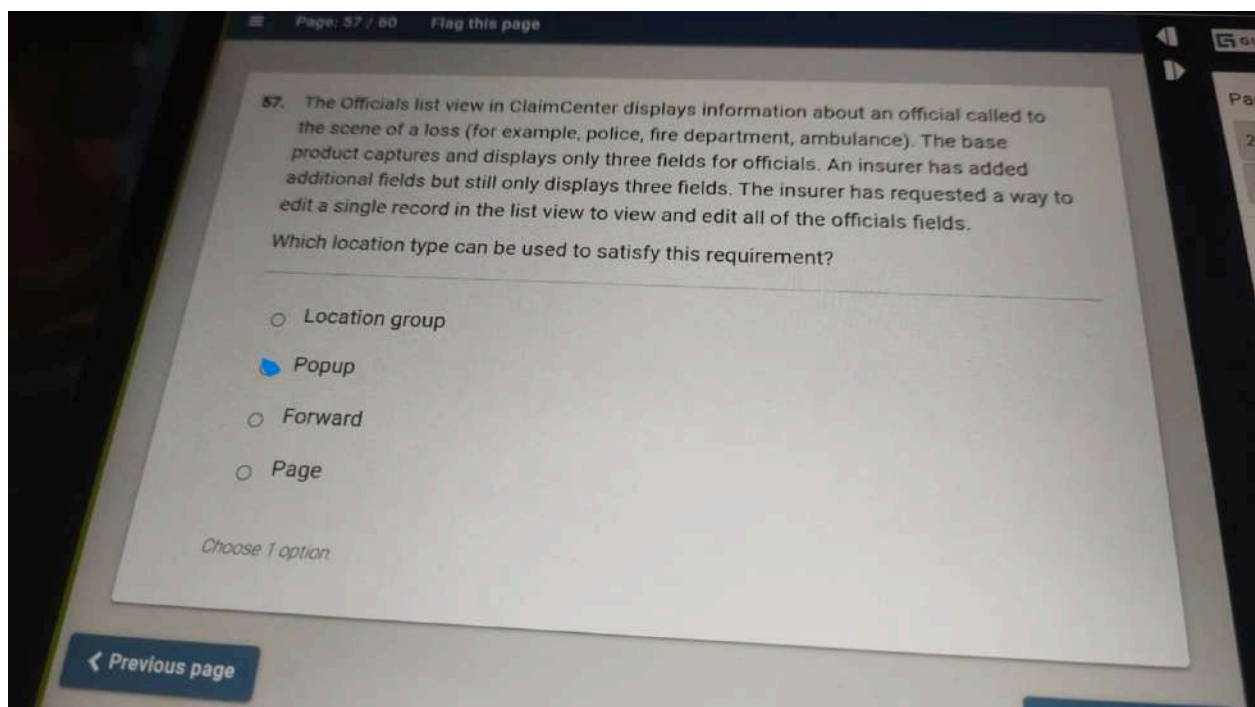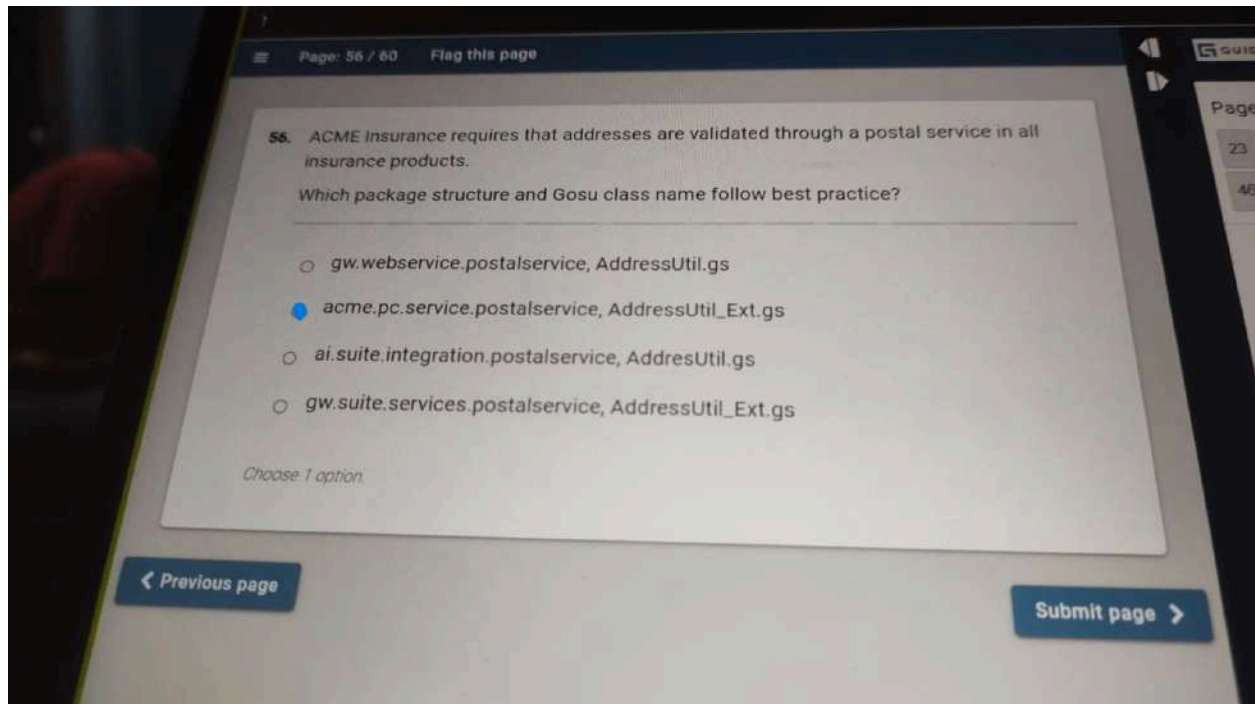

58. Given this function:

```
private function getConnection() : Connection
{
    try
    {
        return DriverManager.getConnection(_dbURL, _dbUsername, _dbPassword)
    }
    catch (e : Throwable)
    {
        throw new ServletException("Failed to open database " + _dbURL + " as " + _dbUsername, e)
    }
}
```

What action will align the function with Gosu best practices?

- ☐ Add a comment for lines with significant code (specifically, lines 933 and 937)
- ☒ Move left curly braces on lines 930, 932, and 936 to the end of the previous lines
- ☐ Change line 935 to read "catch (e : Exception)"
- ☐ In line 933, change DriverManager to driverManager (camel case)

Choose 1 option.

59. An insurer wants to add a new typecode for an alternate address to a base typelist EmployeeAddress that has not been extended.

Following best practices, which step must a developer take to perform this task?

- ☒ Create an EmployeeAddress.ttx file and add a new typecode alternate_Ext
- ☐ Create an EmployeeAddress.tix file and add a new typecode alternate_Ext
- ☐ Create an EmployeeAddress_Ext.tti file and add a new typecode alternate
- ☐ Open the EmployeeAddress.tti and add a new typecode alternate

Choose 1 option.

< Previous page

Submit page >

60. Which GUnit base class is used for tests that involve Gosu queries in PolicyCenter?

- ☒ PCServerTestClassBase
- ☐ PCUnitTestClassBase
- ☐ GUnitTestClassBase
- ☐ SuiteDBTestClassBase

Choose 1 option.

[Previous page](#)

[Submit Exam](#)