

# CS 5522: Artificial Intelligence II

## Reinforcement Learning





Instructor: Alan Ritter

Ohio State University


[These slides were adapted from CS188 Intro to AI at UC Berkeley. All materials available at <http://ai.berkeley.edu>.]

# Reinforcement Learning

---

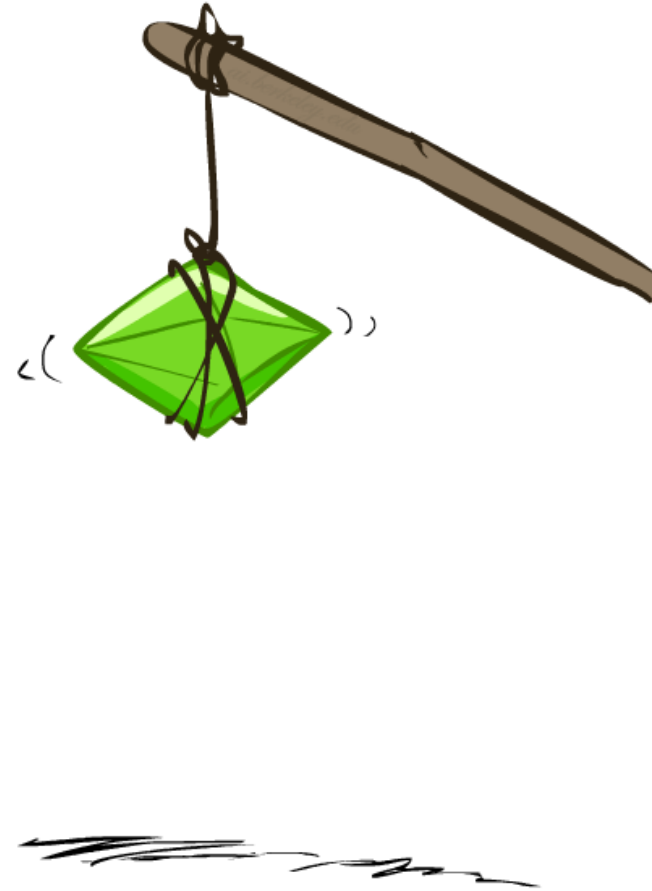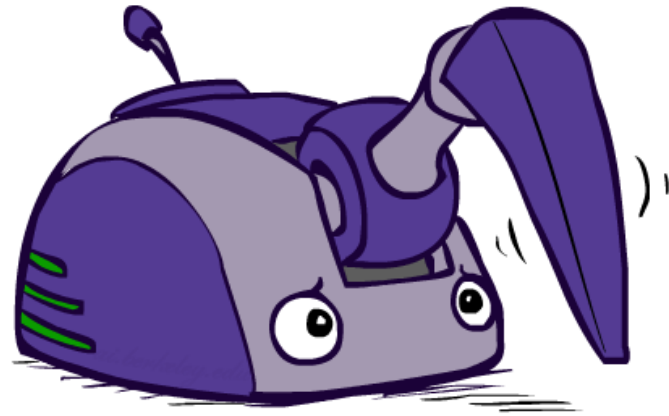

# Reinforcement Learning

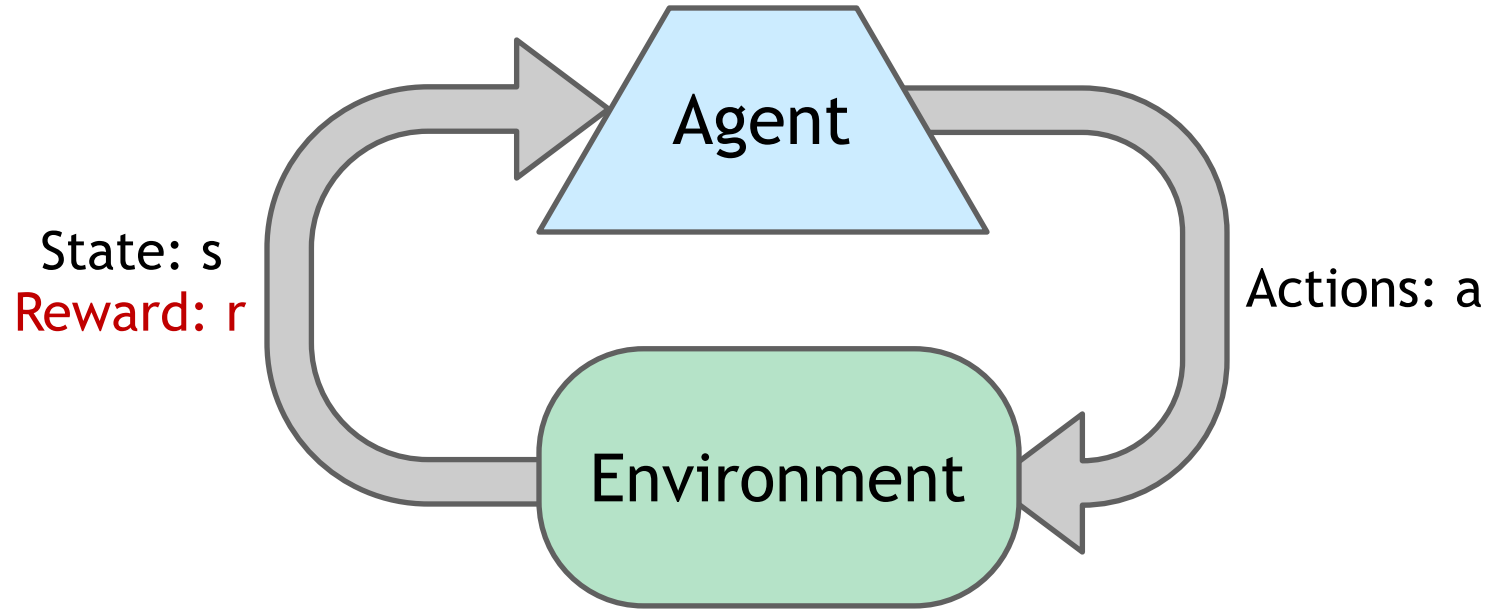

- **Basic idea:**

- Receive feedback in the form of **rewards**
- Agent's utility is defined by the reward function
- Must (learn to) act so as to **maximize expected rewards**
- All learning is based on observed samples of outcomes!

# Example: Learning to Walk



Initial



A Learning Trial



After Learning [1K  
Trials]

# Example: Learning to Walk



Initial

# Example: Learning to Walk



Initial



# Example: Learning to Walk



Initial

# Example: Learning to Walk



Training



# Example: Learning to Walk



Training

# Example: Learning to Walk



Training

# Example: Learning to Walk



Finished

# Example: Learning to Walk



Finished



# Example: Learning to Walk



Finished

# Example: Toddler Robot





# Example: Toddler Robot

---




# Example: Toddler Robot

---



# The Crawler!


---

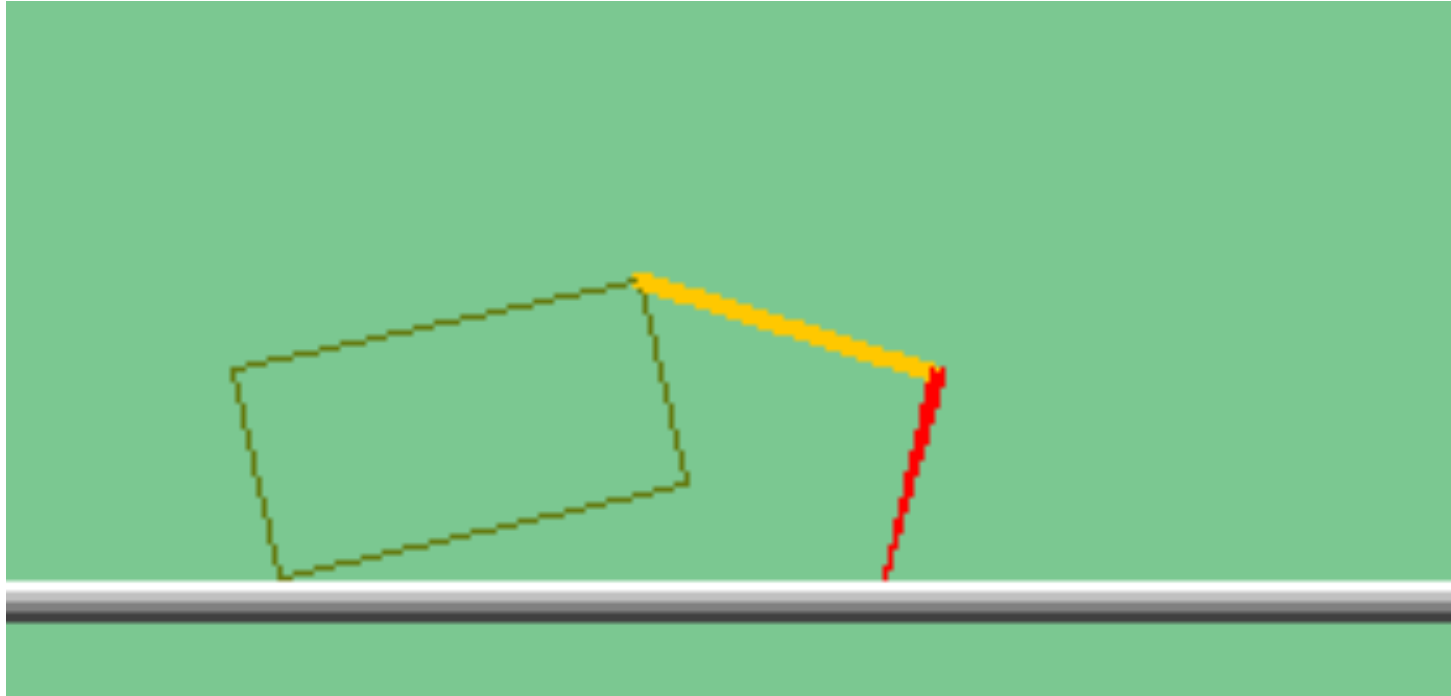


# Video of Demo Crawler Bot



# Video of Demo Crawler Bot

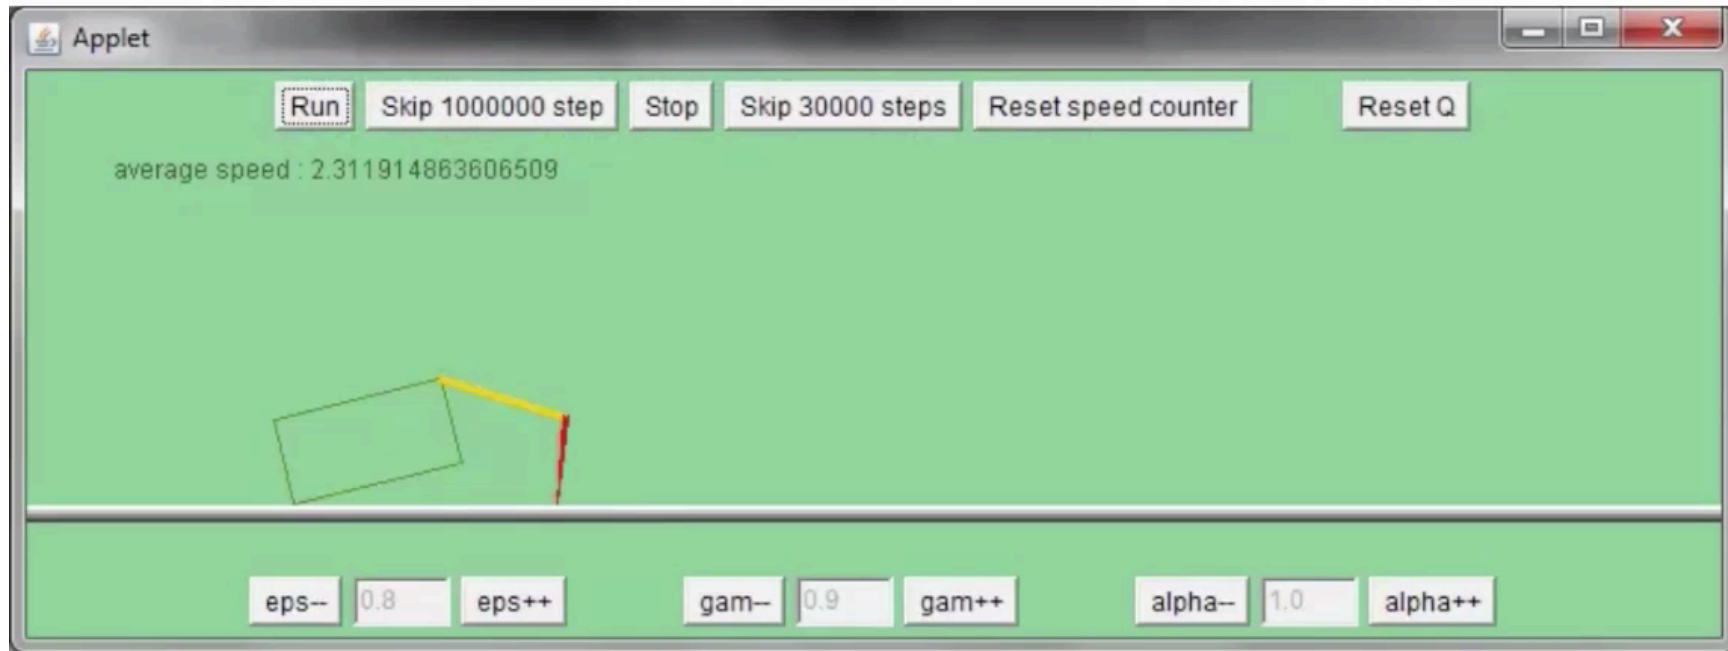

# Video of Demo Crawler Bot

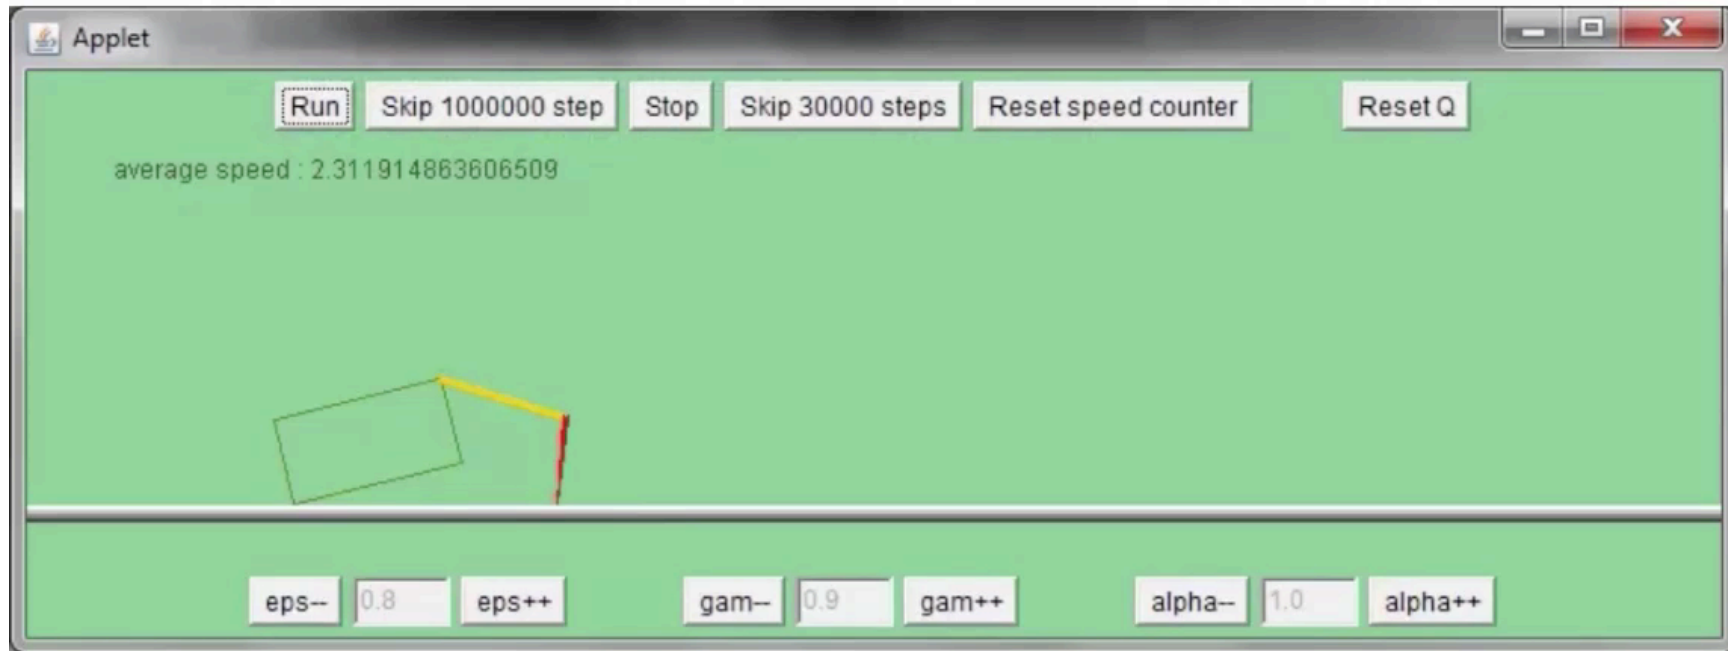




# Reinforcement Learning

- Still assume a Markov decision process (MDP):


- A set of states  $s \in S$
- A set of actions (per state)  $A$
- A model  $T(s,a,s')$
- A reward function  $R(s,a,s')$

- Still looking for a policy  $\pi(s)$

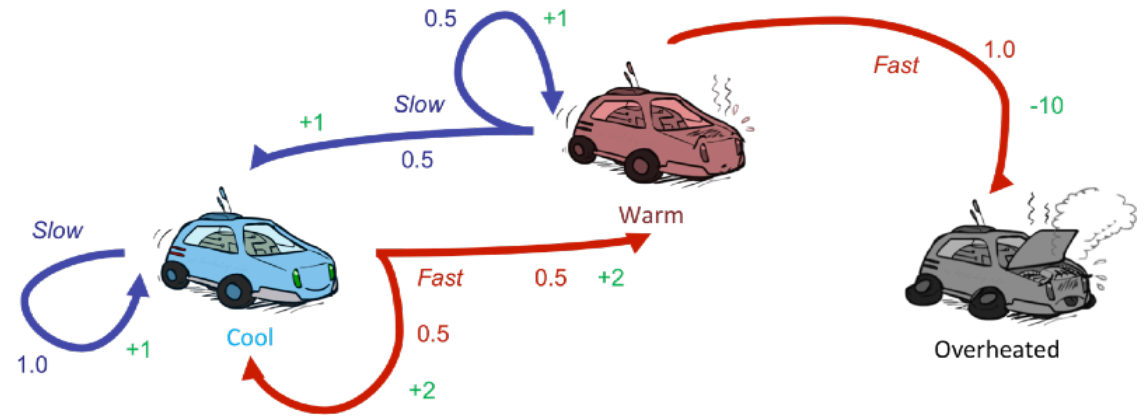

# Reinforcement Learning

- Still assume a Markov decision process (MDP):
  - A set of states  $s \in S$
  - A set of actions (per state)  $A$
  - A model  $T(s,a,s')$
  - A reward function  $R(s,a,s')$
- Still looking for a policy  $\pi(s)$
- New twist: don't know  $T$  or  $R$ 
  - I.e. we don't know which states are good or what the actions do
  - Must actually try actions and states out to learn

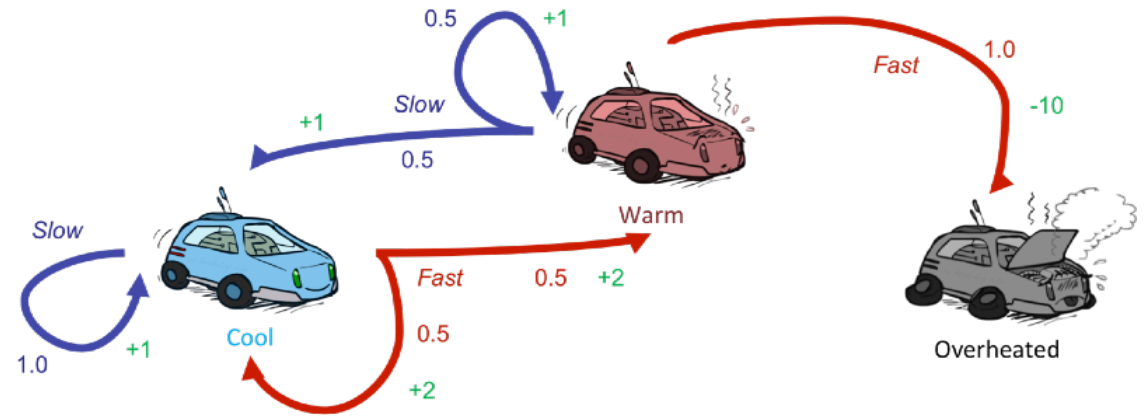

# Reinforcement Learning

- Still assume a Markov decision process (MDP):
  - A set of states  $s \in S$
  - A set of actions (per state)  $A$
  - A model  $T(s,a,s')$
  - A reward function  $R(s,a,s')$
- Still looking for a policy  $\pi(s)$
- New twist: don't know  $T$  or  $R$ 
  - I.e. we don't know which states are good or what the actions do
  - Must actually try actions and states out to learn




# Offline (MDPs) vs. Online (RL)

---


# Offline (MDPs) vs. Online (RL)

---

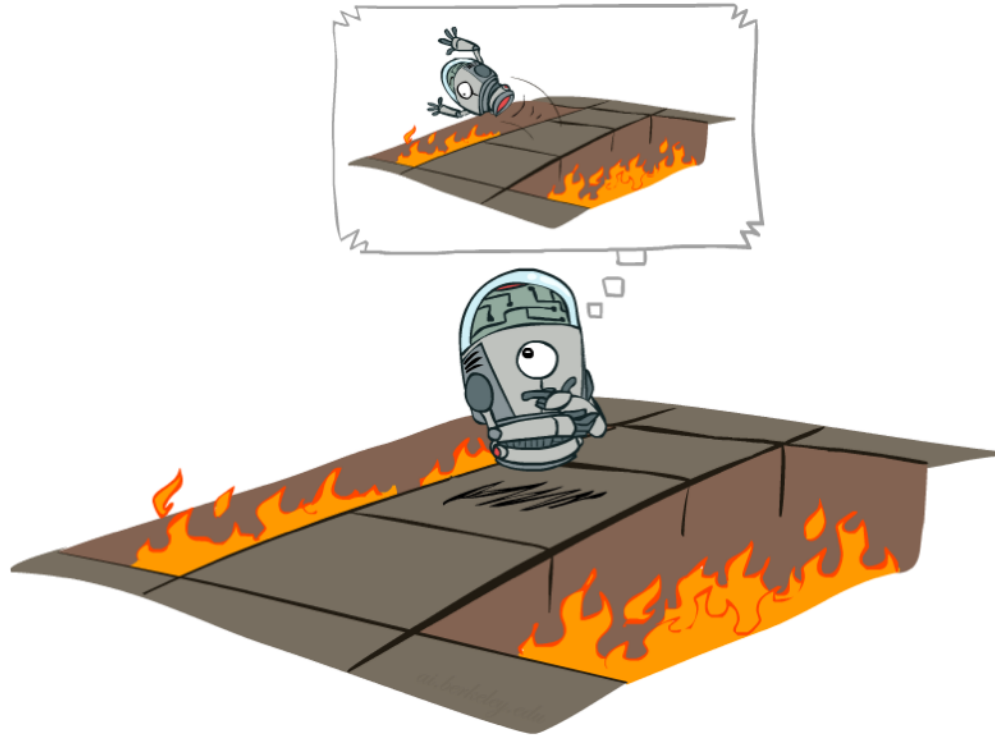

Offline Solution

# Offline (MDPs) vs. Online (RL)

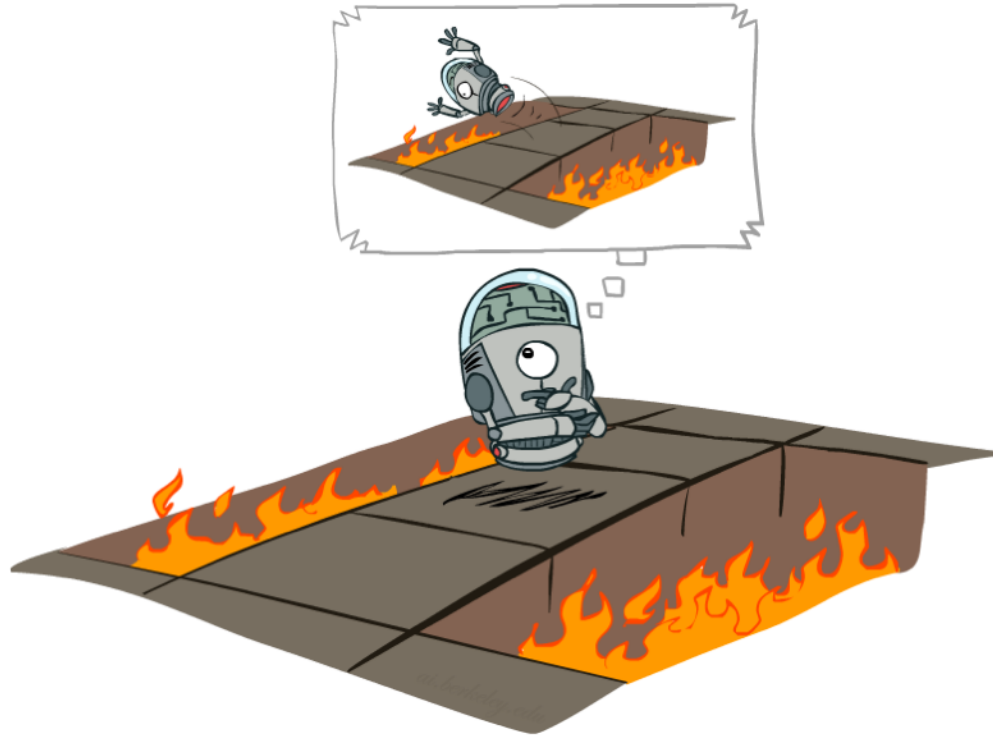

Offline Solution




Online Learning



# Model-Based Learning

---

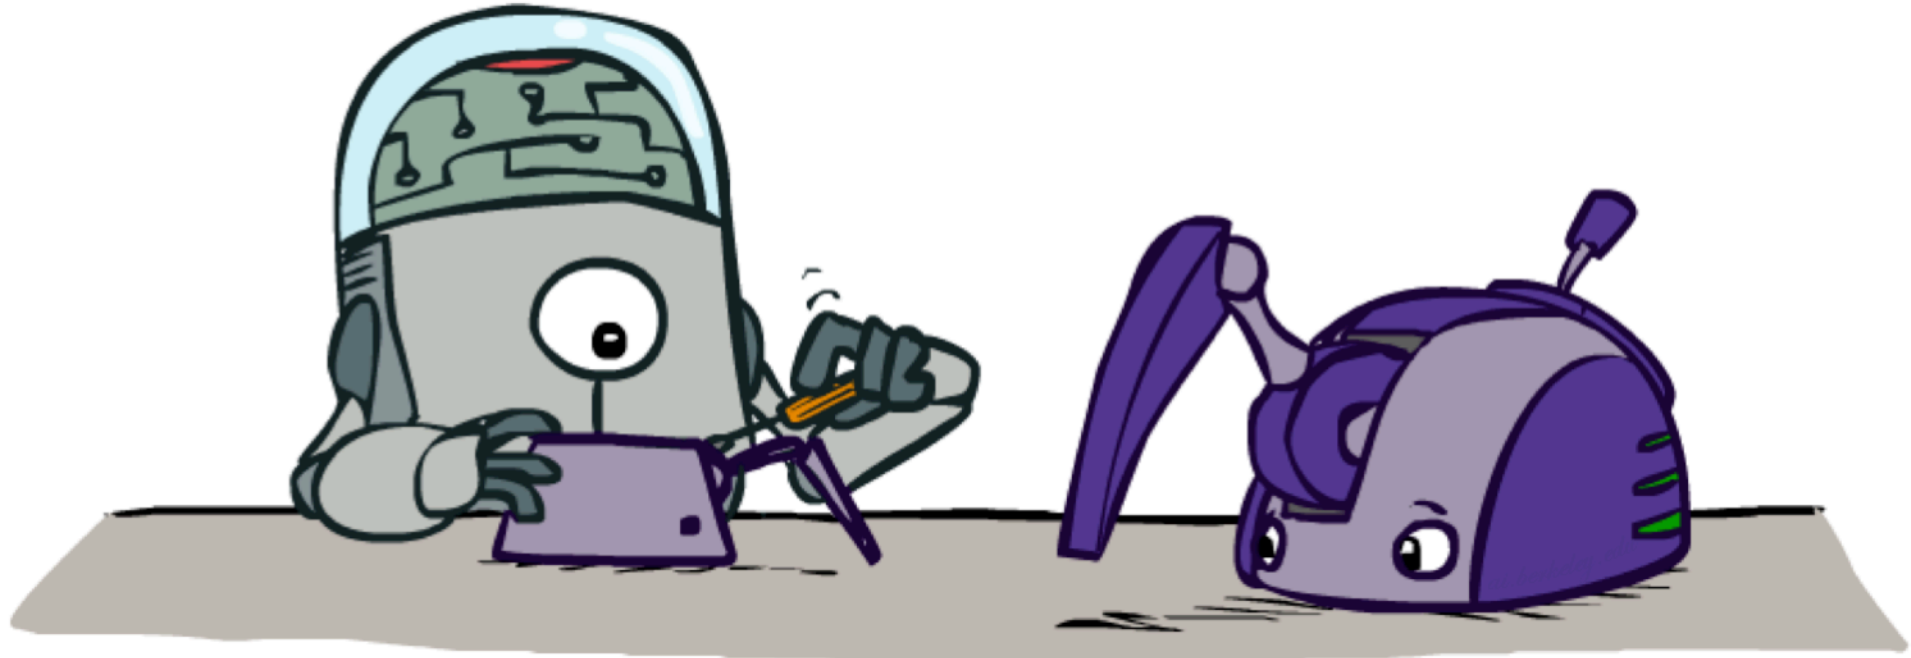

# Model-Based Learning

---

- **Model-Based Idea:**

- Learn an approximate model based on experiences
- Solve for values as if the learned model were correct



# Model-Based Learning

- **Model-Based Idea:**

- Learn an approximate model based on experiences
- Solve for values as if the learned model were correct

- **Step 1: Learn empirical MDP model**

- Count outcomes  $s'$  for each  $s, a$
- Normalize to give an estimate of  $\hat{T}(s, a, s')$
- Discover each  $\hat{R}(s, a, s')$  when we experience  $(s, a, s')$




# Model-Based Learning

- **Model-Based Idea:**
  - Learn an approximate model based on experiences
  - Solve for values as if the learned model were correct
- **Step 1: Learn empirical MDP model**
  - Count outcomes  $s'$  for each  $s, a$
  - Normalize to give an estimate of  $\hat{T}(s, a, s')$
  - Discover each  $\hat{R}(s, a, s')$  when we experience  $(s, a, s')$
- **Step 2: Solve the learned MDP**
  - For example, use value iteration, as before



# Example: Model-Based Learning


Input Policy  
 $\pi$

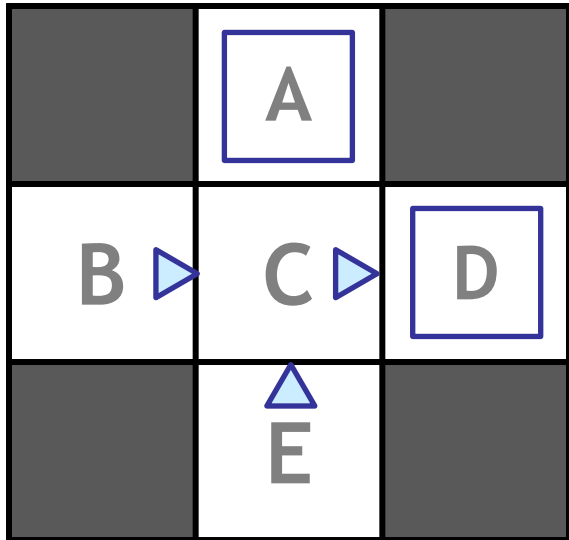

Assume:  $\gamma = 1$

# Example: Model-Based Learning

## Input Policy $\pi$

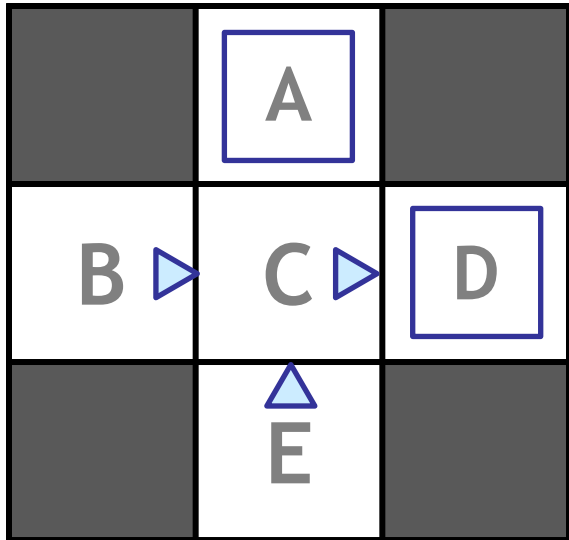

Assume:  $\gamma = 1$

## Observed Episodes (Training)

### Episode 1

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

### Episode 2

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

### Episode 3

E, north, C, -1  
C, east, D, -1  
D, exit, x, +10


### Episode 4

E, north, C, -1  
C, east, A, -1  
A, exit, x, -10



# Example: Model-Based Learning

## Input Policy $\pi$

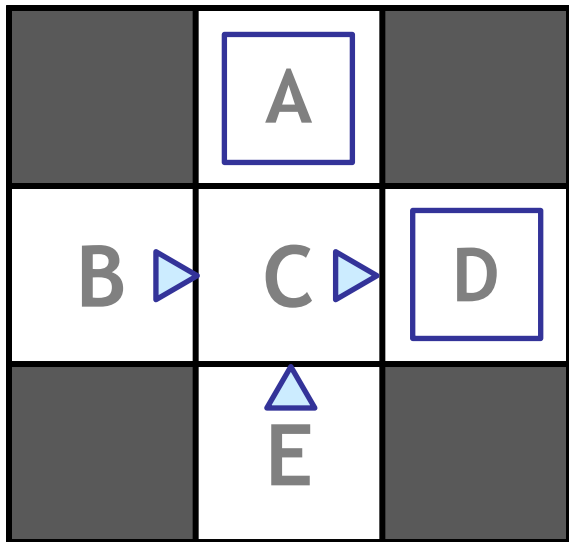

Assume:  $\gamma = 1$

## Observed Episodes (Training)

### Episode 1

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

### Episode 2

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

### Episode 3

E, north, C, -1  
C, east, D, -1  
D, exit, x, +10

### Episode 4

E, north, C, -1  
C, east, A, -1  
A, exit, x, -10

## Learned Model

$$\hat{T}(s, a, s')$$

T(B, east, C) = 1.00  
T(C, east, D) = 0.75  
T(C, east, A) = 0.25  
...

$$\hat{R}(s, a, s')$$

R(B, east, C) = -1  
R(C, east, D) = -1  
R(D, exit, x) = +10  
...

# Example: Expected Age

---

Goal: Compute expected age of cse5522 students

# Example: Expected Age

---

Goal: Compute expected age of cse5522 students

Known  $P(A)$

# Example: Expected Age

---

Goal: Compute expected age of cse5522 students

Known  $P(A)$

$$E[A] = \sum_a P(a) \cdot a$$

# Example: Expected Age

---

Goal: Compute expected age of cse5522 students

Known  $P(A)$

$$E[A] = \sum_a P(a) \cdot a = 0.35 \times 20 + \dots$$

# Example: Expected Age

Goal: Compute expected age of cse5522 students

Known  $P(A)$

$$E[A] = \sum_a P(a) \cdot a = 0.35 \times 20 + \dots$$

Without  $P(A)$ , instead collect samples  $[a_1, a_2, \dots a_N]$

# Example: Expected Age

Goal: Compute expected age of cse5522 students

Known  $P(A)$

$$E[A] = \sum_a P(a) \cdot a = 0.35 \times 20 + \dots$$

Without  $P(A)$ , instead collect samples  $[a_1, a_2, \dots a_N]$

Unknown  $P(A)$ : “Model Based”

# Example: Expected Age

Goal: Compute expected age of cse5522 students

Known  $P(A)$

$$E[A] = \sum_a P(a) \cdot a = 0.35 \times 20 + \dots$$

Without  $P(A)$ , instead collect samples  $[a_1, a_2, \dots a_N]$

Unknown  $P(A)$ : “Model Based”

$$\hat{P}(a) = \frac{\text{num}(a)}{N}$$



# Example: Expected Age

Goal: Compute expected age of cse5522 students

Known  $P(A)$

$$E[A] = \sum_a P(a) \cdot a = 0.35 \times 20 + \dots$$

Without  $P(A)$ , instead collect samples  $[a_1, a_2, \dots a_N]$

Unknown  $P(A)$ : “Model Based”

$$\hat{P}(a) = \frac{\text{num}(a)}{N}$$

$$E[A] \approx \sum_a \hat{P}(a) \cdot a$$

# Example: Expected Age

Goal: Compute expected age of cse5522 students

Known  $P(A)$

$$E[A] = \sum_a P(a) \cdot a = 0.35 \times 20 + \dots$$

Without  $P(A)$ , instead collect samples  $[a_1, a_2, \dots a_N]$

Unknown  $P(A)$ : “Model Based”

Why does this work? Because eventually you learn the right model.

$$\hat{P}(a) = \frac{\text{num}(a)}{N}$$

$$E[A] \approx \sum_a \hat{P}(a) \cdot a$$

# Example: Expected Age

Goal: Compute expected age of cse5522 students

Known  $P(A)$

$$E[A] = \sum_a P(a) \cdot a = 0.35 \times 20 + \dots$$

Without  $P(A)$ , instead collect samples  $[a_1, a_2, \dots, a_N]$

Unknown  $P(A)$ : “Model Based”

Why does this work? Because eventually you learn the right model.

$$\hat{P}(a) = \frac{\text{num}(a)}{N}$$

$$E[A] \approx \sum_a \hat{P}(a) \cdot a$$

Unknown  $P(A)$ : “Model Free”

# Example: Expected Age

Goal: Compute expected age of cse5522 students

Known  $P(A)$

$$E[A] = \sum_a P(a) \cdot a = 0.35 \times 20 + \dots$$

Without  $P(A)$ , instead collect samples  $[a_1, a_2, \dots, a_N]$

Unknown  $P(A)$ : “Model Based”

Why does this work? Because eventually you learn the right model.

$$\hat{P}(a) = \frac{\text{num}(a)}{N}$$

$$E[A] \approx \sum_a \hat{P}(a) \cdot a$$

Unknown  $P(A)$ : “Model Free”

$$E[A] \approx \frac{1}{N} \sum_i a_i$$

# Example: Expected Age

Goal: Compute expected age of cse5522 students

Known  $P(A)$

$$E[A] = \sum_a P(a) \cdot a = 0.35 \times 20 + \dots$$

Without  $P(A)$ , instead collect samples  $[a_1, a_2, \dots, a_N]$

Unknown  $P(A)$ : “Model Based”

Why does this work? Because eventually you learn the right model.


$$\hat{P}(a) = \frac{\text{num}(a)}{N}$$
$$E[A] \approx \sum_a \hat{P}(a) \cdot a$$

Unknown  $P(A)$ : “Model Free”


$$E[A] \approx \frac{1}{N} \sum_i a_i$$

Why does this work? Because samples appear with the right frequencies.

# Model-Free Learning

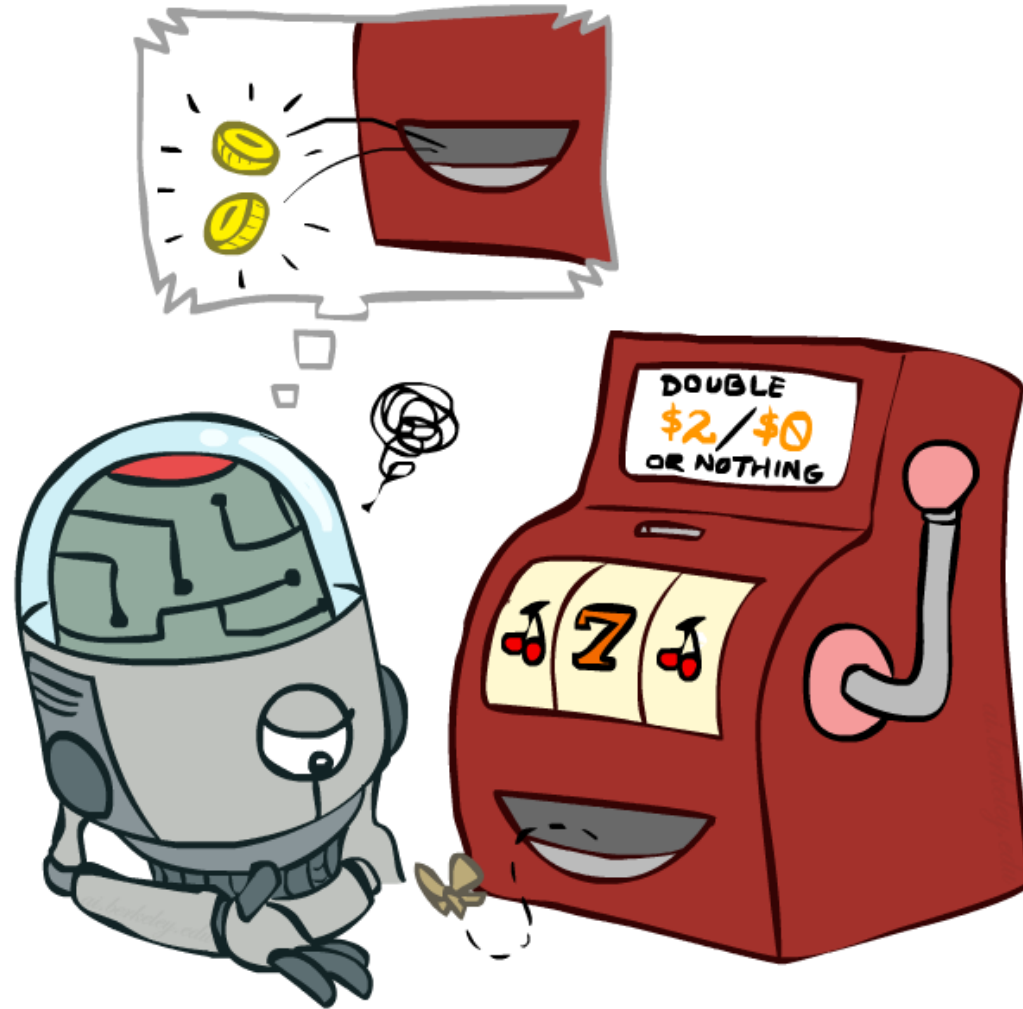

# Passive Reinforcement Learning

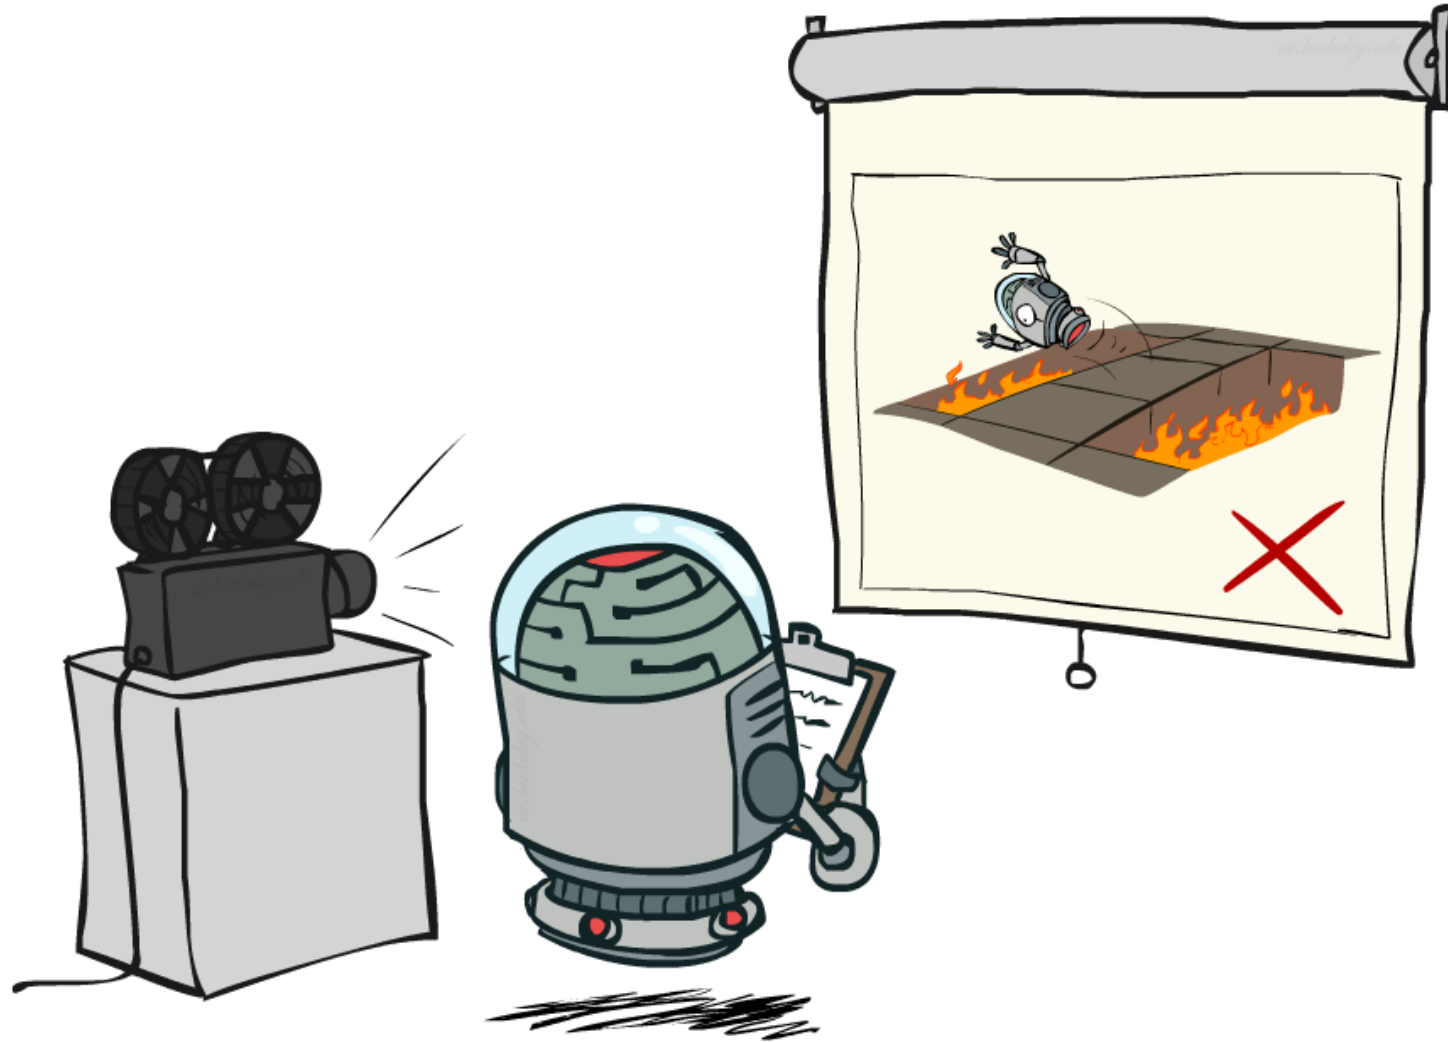


# Passive Reinforcement Learning

- Simplified task: policy evaluation

- Input: a fixed policy  $\pi(s)$
- You don't know the transitions  $T(s,a,s')$
- You don't know the rewards  $R(s,a,s')$
- Goal: learn the state values

- In this case:

- Learner is “along for the ride”
- No choice about what actions to take
- Just execute the policy and learn from experience
- This is NOT offline planning! You actually take actions in the world.

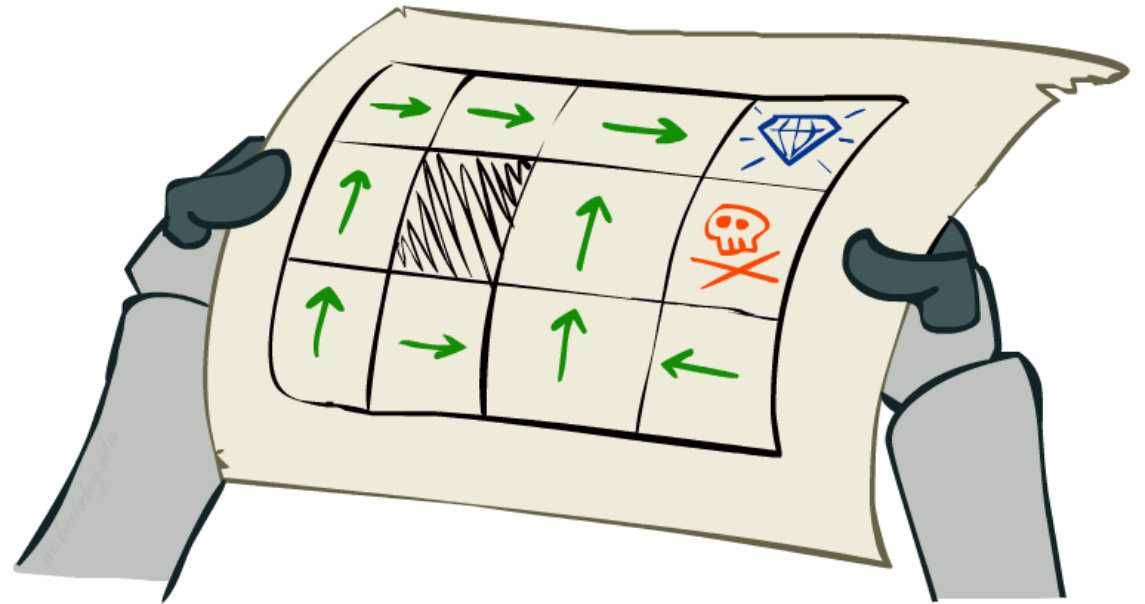



# Direct Evaluation


- Goal: Compute values for each state under  $\pi$
- Idea: Average together observed sample values
  - Act according to  $\pi$
  - Every time you visit a state, write down what the sum of discounted rewards turned out to be
  - Average those samples
- This is called direct evaluation



# Example: Direct Evaluation

Input Policy  $\pi$

Output Values

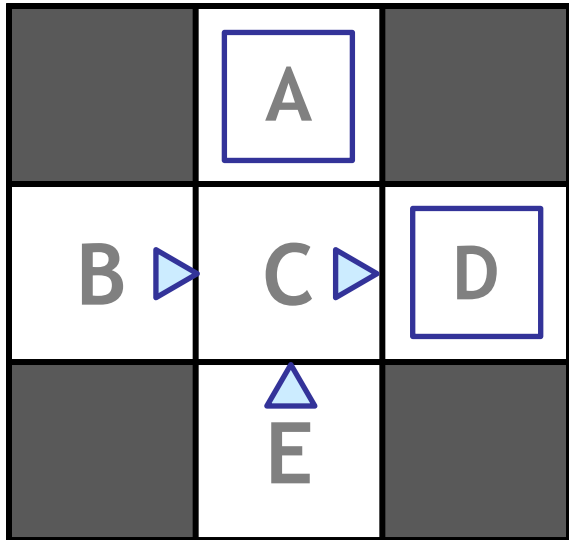


Assume:  $\gamma = 1$

# Example: Direct Evaluation

Input Policy  $\pi$

Observed Episodes (Training)


Output Values

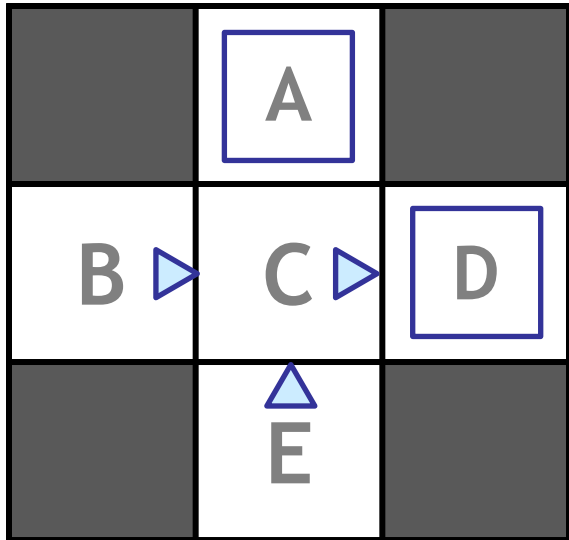

Assume:  $\gamma = 1$

# Example: Direct Evaluation

Input Policy  $\pi$

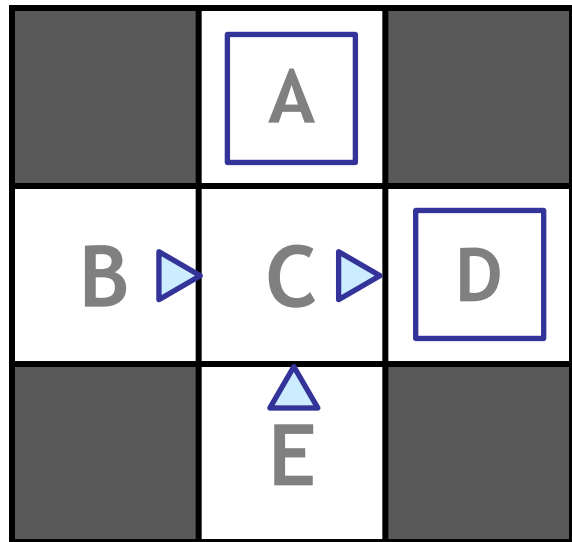

Observed Episodes (Training)

Episode 1


B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

Output Values

Assume:  $\gamma = 1$

# Example: Direct Evaluation

Input Policy  $\pi$

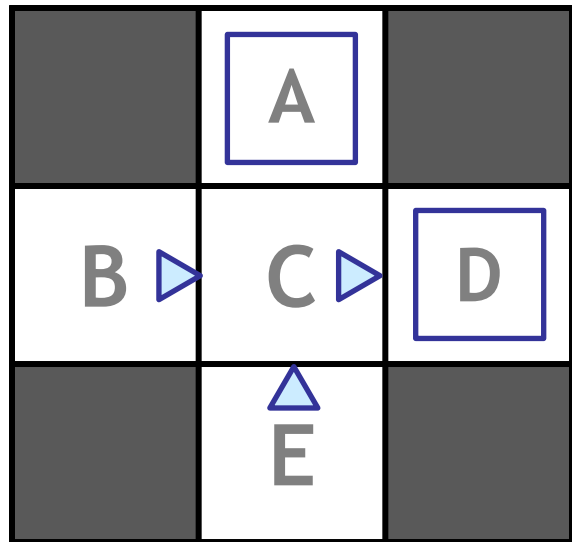

Assume:  $\gamma = 1$

Observed Episodes (Training)

Episode 1

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10


Episode 2

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

Output Values

# Example: Direct Evaluation

Input Policy  $\pi$

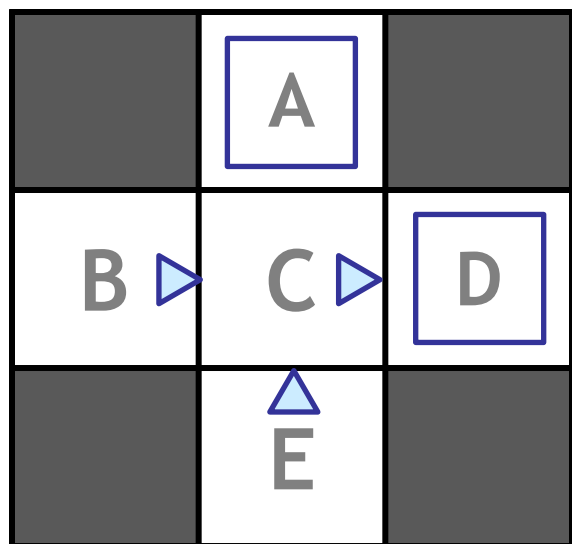

Assume:  $\gamma = 1$

Observed Episodes (Training)

Episode 1

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 2

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10


Episode 3

E, north, C, -1  
C, east, D, -1  
D, exit, x, +10

Output Values

# Example: Direct Evaluation

Input Policy  $\pi$

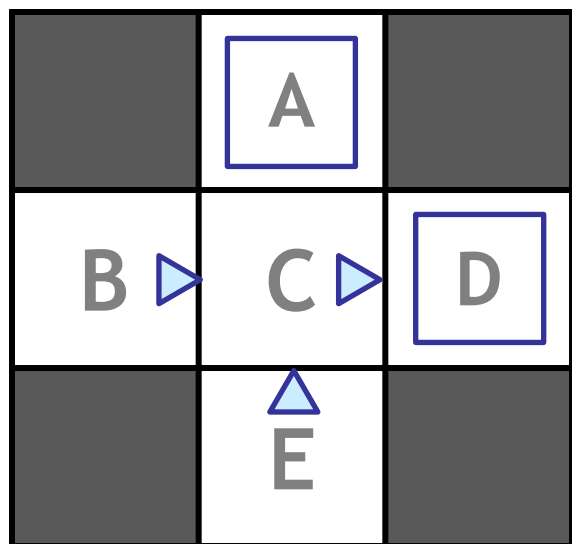

Assume:  $\gamma = 1$

Observed Episodes (Training)

Output Values

Episode 1

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 2

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 3


E, north, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 4

E, north, C, -1  
C, east, A, -1  
A, exit, x, -10

# Example: Direct Evaluation

Input Policy  $\pi$

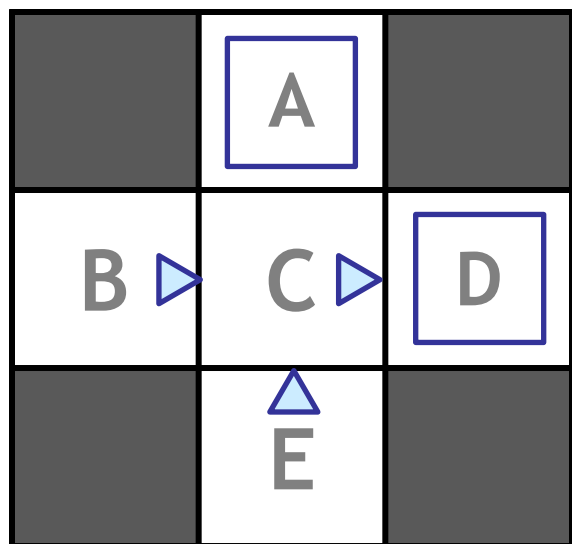

Assume:  $\gamma = 1$

Observed Episodes (Training)

Episode 1

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 2

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10


Episode 3

E, north, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 4

E, north, C, -1  
C, east, A, -1  
A, exit, x, -10


Output Values

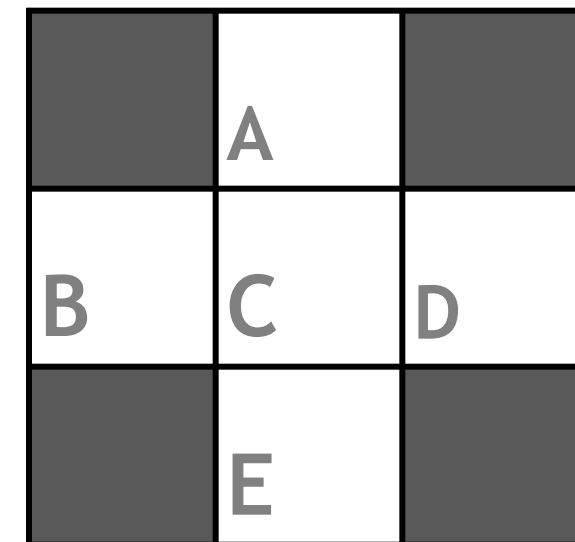



# Example: Direct Evaluation

Input Policy  $\pi$

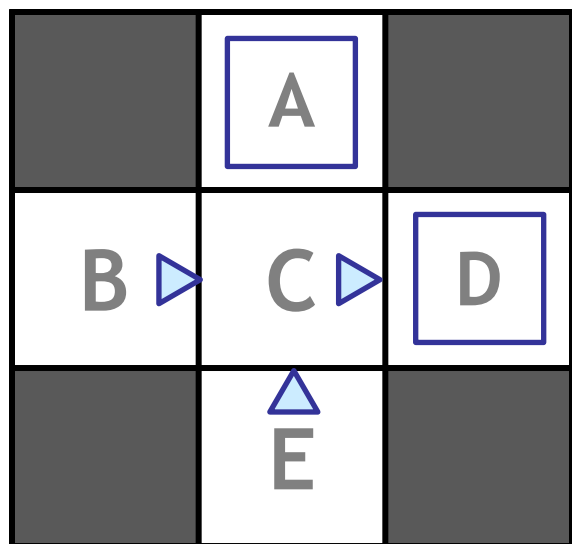

Assume:  $\gamma = 1$

Observed Episodes (Training)

Episode 1

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 2

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 3

E, north, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 4

E, north, C, -1  
C, east, A, -1  
A, exit, x, -10

Output Values

	-10 A	
+8 B	+4 C	+10 D
	-2 E	

# Problems with Direct Evaluation

- What's good about direct evaluation?
  - It's easy to understand
  - It doesn't require any knowledge of T, R
  - It eventually computes the correct average values, using just sample transitions

## Output Values

	-10 A	
+8 B	+4 C	+10 D
	-2 E	

# Problems with Direct Evaluation

- What's good about direct evaluation?
  - It's easy to understand
  - It doesn't require any knowledge of  $T$ ,  $R$
  - It eventually computes the correct average values, using just sample transitions
- What bad about it?
  - It wastes information about state connections
  - Each state must be learned separately
  - So, it takes a long time to learn

## Output Values

	-10 A	
+8 B	+4 C	+10 D
	-2 E	

# Problems with Direct Evaluation

- What's good about direct evaluation?
  - It's easy to understand
  - It doesn't require any knowledge of  $T$ ,  $R$
  - It eventually computes the correct average values, using just sample transitions
- What bad about it?
  - It wastes information about state connections
  - Each state must be learned separately
  - So, it takes a long time to learn


## Output Values

	-10 A	
+8 B	+4 C	+10 D
	-2 E	

*If B and E both go to C under this policy, how can their values be different?*

# Why Not Use Policy Evaluation?


- Simplified Bellman updates calculate  $V$  for a fixed policy:
  - Each round, replace  $V$  with a one-step-look-ahead layer over  $V$

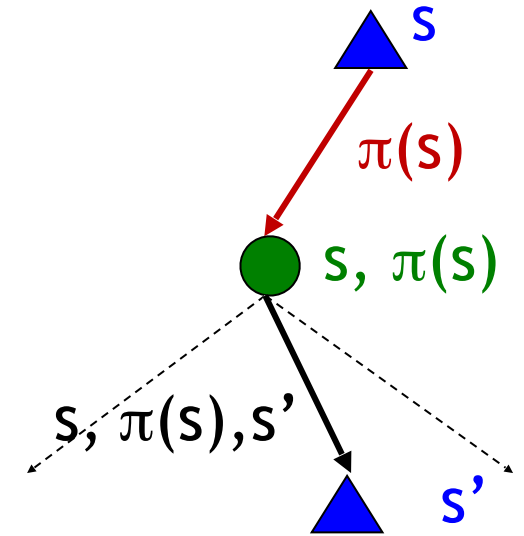

# Why Not Use Policy Evaluation?

- Simplified Bellman updates calculate  $V$  for a fixed policy:
  - Each round, replace  $V$  with a one-step-look-ahead layer over  $V$

$$V_0^\pi(s) = 0$$

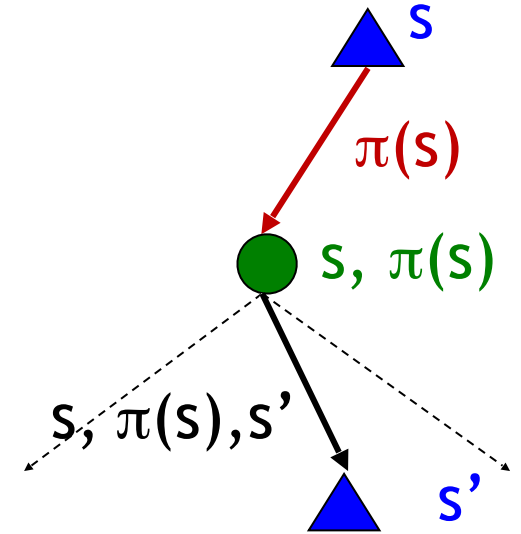


# Why Not Use Policy Evaluation?

- Simplified Bellman updates calculate  $V$  for a fixed policy:
  - Each round, replace  $V$  with a one-step-look-ahead layer over  $V$

$$V_0^\pi(s) = 0$$

$$V_{k+1}^\pi(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^\pi(s')]$$

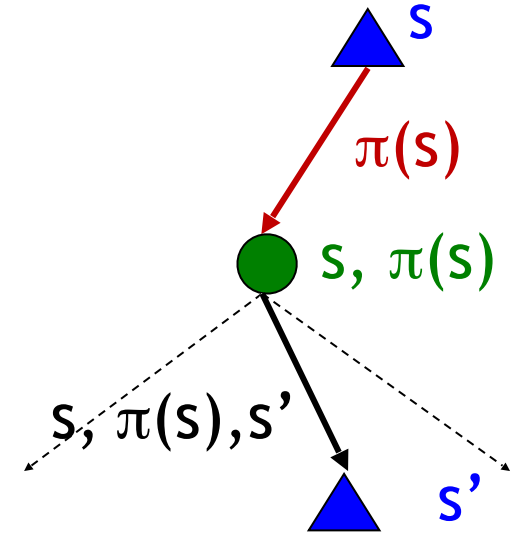


# Why Not Use Policy Evaluation?

- Simplified Bellman updates calculate  $V$  for a fixed policy:
  - Each round, replace  $V$  with a one-step-look-ahead layer over  $V$

$$V_0^\pi(s) = 0$$

$$V_{k+1}^\pi(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^\pi(s')]$$

- This approach fully exploited the connections between the states
- Unfortunately, we need  $T$  and  $R$  to do it!

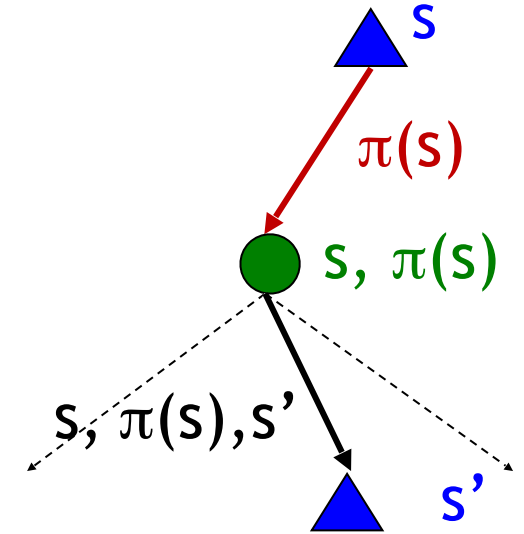




# Why Not Use Policy Evaluation?

- Simplified Bellman updates calculate  $V$  for a fixed policy:
  - Each round, replace  $V$  with a one-step-look-ahead layer over  $V$

$$V_0^\pi(s) = 0$$

$$V_{k+1}^\pi(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^\pi(s')]$$

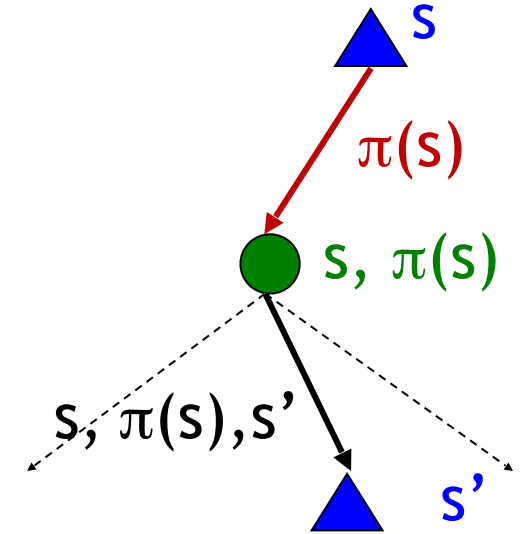

- This approach fully exploited the connections between the states
- Unfortunately, we need  $T$  and  $R$  to do it!
- Key question: how can we do this update to  $V$  without knowing  $T$  and  $R$ ?
  - In other words, how to we take a weighted average without knowing the weights?

# Sample-Based Policy Evaluation?

---

$$V_{k+1}^{\pi}(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^{\pi}(s')]$$

# Sample-Based Policy Evaluation?

---

- We want to improve our estimate of  $V$  by computing these averages:

$$V_{k+1}^{\pi}(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^{\pi}(s')]$$


- Idea: Take samples of outcomes  $s'$  (by doing the action!) and average

# Sample-Based Policy Evaluation?

- We want to improve our estimate of  $V$  by computing these averages:

$$V_{k+1}^{\pi}(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^{\pi}(s')]$$

- Idea: Take samples of outcomes  $s'$  (by doing the action!) and average

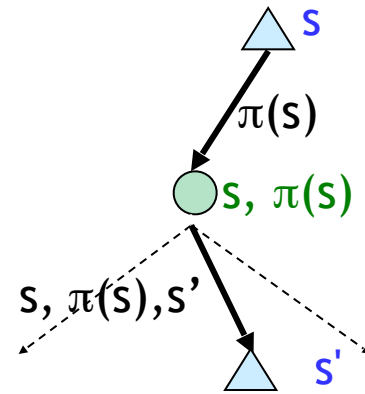


# Sample-Based Policy Evaluation?

- We want to improve our estimate of  $V$  by computing these averages:

$$V_{k+1}^{\pi}(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^{\pi}(s')]$$

- Idea: Take samples of outcomes  $s'$  (by doing the action!) and average

$$sample_1 = R(s, \pi(s), s'_1) + \gamma V_k^{\pi}(s'_1)$$

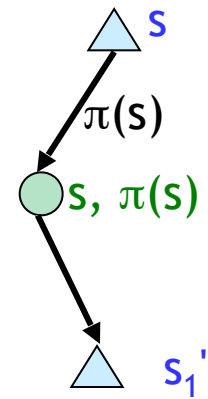

# Sample-Based Policy Evaluation?


- We want to improve our estimate of  $V$  by computing these averages:

$$V_{k+1}^{\pi}(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^{\pi}(s')]$$

- Idea: Take samples of outcomes  $s'$  (by doing the action!) and average

$$sample_1 = R(s, \pi(s), s'_1) + \gamma V_k^{\pi}(s'_1)$$

$$sample_2 = R(s, \pi(s), s'_2) + \gamma V_k^{\pi}(s'_2)$$

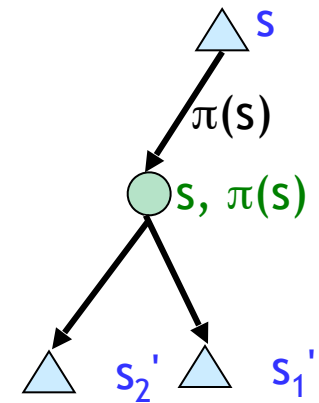

# Sample-Based Policy Evaluation?

- We want to improve our estimate of  $V$  by computing these averages:

$$V_{k+1}^{\pi}(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^{\pi}(s')]$$


- Idea: Take samples of outcomes  $s'$  (by doing the action!) and average

$$sample_1 = R(s, \pi(s), s'_1) + \gamma V_k^{\pi}(s'_1)$$

$$sample_2 = R(s, \pi(s), s'_2) + \gamma V_k^{\pi}(s'_2)$$

...

$$sample_n = R(s, \pi(s), s'_n) + \gamma V_k^{\pi}(s'_n)$$

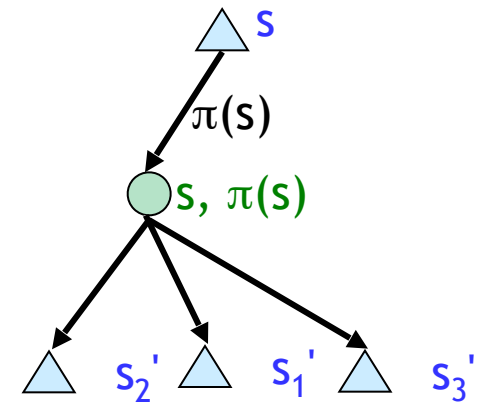

# Sample-Based Policy Evaluation?

- We want to improve our estimate of  $V$  by computing these averages:

$$V_{k+1}^{\pi}(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^{\pi}(s')]$$

- Idea: Take samples of outcomes  $s'$  (by doing the action!) and average


$$sample_1 = R(s, \pi(s), s'_1) + \gamma V_k^{\pi}(s'_1)$$

$$sample_2 = R(s, \pi(s), s'_2) + \gamma V_k^{\pi}(s'_2)$$

...

$$sample_n = R(s, \pi(s), s'_n) + \gamma V_k^{\pi}(s'_n)$$

$$V_{k+1}^{\pi}(s) \leftarrow \frac{1}{n} \sum_i sample_i$$

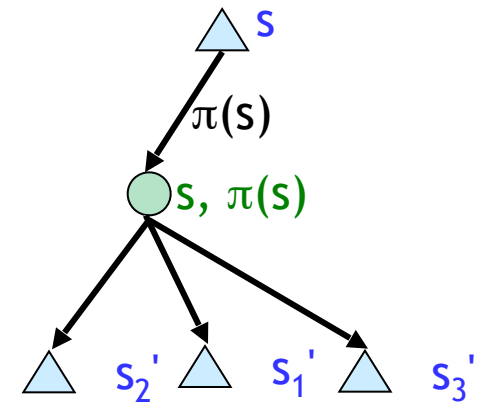



# Sample-Based Policy Evaluation?

- We want to improve our estimate of  $V$  by computing these averages:

$$V_{k+1}^{\pi}(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^{\pi}(s')]$$

- Idea: Take samples of outcomes  $s'$  (by doing the action!) and average


$$sample_1 = R(s, \pi(s), s'_1) + \gamma V_k^{\pi}(s'_1)$$

$$sample_2 = R(s, \pi(s), s'_2) + \gamma V_k^{\pi}(s'_2)$$

...

$$sample_n = R(s, \pi(s), s'_n) + \gamma V_k^{\pi}(s'_n)$$

$$V_{k+1}^{\pi}(s) \leftarrow \frac{1}{n} \sum_i sample_i$$

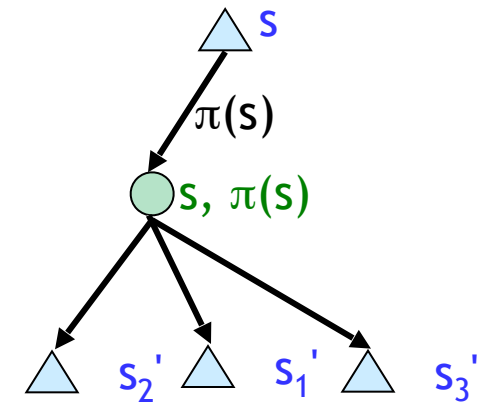

*Almost! But we can't  
rewind time to get  
sample after sample  
from state  $s$ .*

# Sample-Based Policy Evaluation?

- We want to improve our estimate of  $V$  by computing these averages:

$$V_{k+1}^{\pi}(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^{\pi}(s')]$$

- Idea: Take samples of outcomes  $s'$  (by doing the action!) and average


$$sample_1 = R(s, \pi(s), s'_1) + \gamma V_k^{\pi}(s'_1)$$

$$sample_2 = R(s, \pi(s), s'_2) + \gamma V_k^{\pi}(s'_2)$$

...

$$sample_n = R(s, \pi(s), s'_n) + \gamma V_k^{\pi}(s'_n)$$


$$V_{k+1}^{\pi}(s) \leftarrow \frac{1}{n} \sum_i sample_i$$

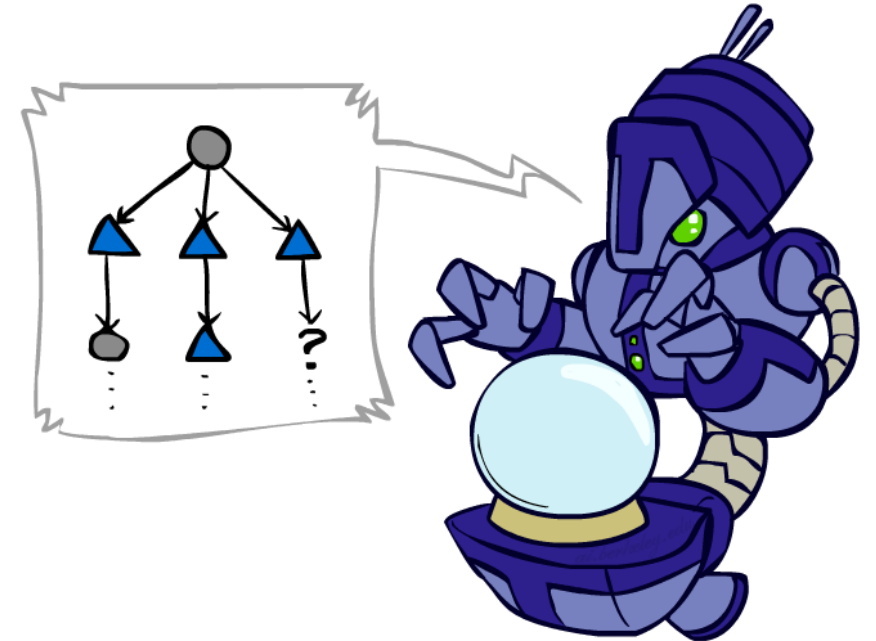

from state  $s$ .


# Temporal Difference Learning

- Big idea: learn from every experience!
  - Update  $V(s)$  each time we experience a transition  $(s, a, s', r)$
  - Likely outcomes  $s'$  will contribute updates more often

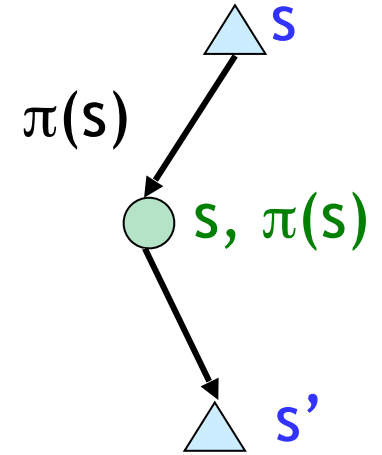


# Temporal Difference Learning

- Big idea: learn from every experience!
  - Update  $V(s)$  each time we experience a transition  $(s, a, s', r)$
  - Likely outcomes  $s'$  will contribute updates more often
- Temporal difference learning of values
  - Policy still fixed, still doing evaluation!
  - Move values toward value of whatever successor occurs: running average

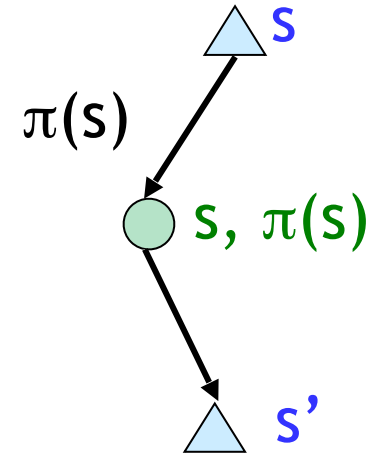

# Temporal Difference Learning


- Big idea: learn from every experience!
  - Update  $V(s)$  each time we experience a transition  $(s, a, s', r)$
  - Likely outcomes  $s'$  will contribute updates more often
- Temporal difference learning of values
  - Policy still fixed, still doing evaluation!
  - Move values toward value of whatever successor occurs: running average

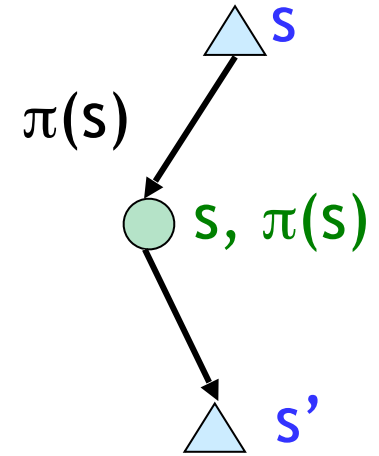

Sample of  $V(s)$ :  $sample = R(s, \pi(s), s') + \gamma V^\pi(s')$

# Temporal Difference Learning

- Big idea: learn from every experience!
  - Update  $V(s)$  each time we experience a transition  $(s, a, s', r)$
  - Likely outcomes  $s'$  will contribute updates more often
- Temporal difference learning of values
  - Policy still fixed, still doing evaluation!
  - Move values toward value of whatever successor occurs: running average

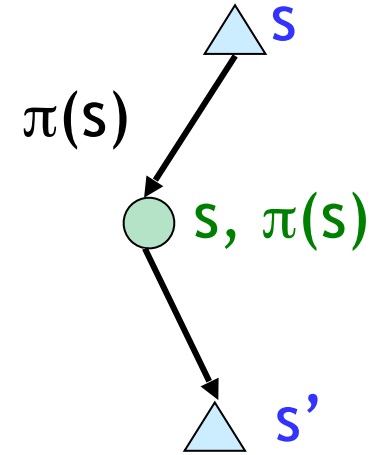


Sample of  $V(s)$ :  $sample = R(s, \pi(s), s') + \gamma V^\pi(s')$

Update to  $V(s)$ :  $V^\pi(s) \leftarrow (1 - \alpha)V^\pi(s) + (\alpha)sample$

# Temporal Difference Learning

- Big idea: learn from every experience!
  - Update  $V(s)$  each time we experience a transition  $(s, a, s', r)$
  - Likely outcomes  $s'$  will contribute updates more often
- Temporal difference learning of values
  - Policy still fixed, still doing evaluation!
  - Move values toward value of whatever successor occurs: running average

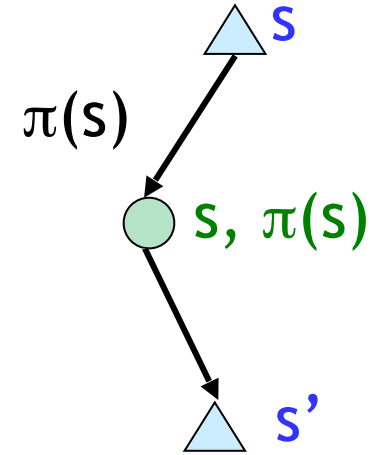

Sample of  $V(s)$ :  $sample = R(s, \pi(s), s') + \gamma V^\pi(s')$

Update to  $V(s)$ :  $V^\pi(s) \leftarrow (1 - \alpha)V^\pi(s) + (\alpha)sample$

Same update:  $V^\pi(s) \leftarrow V^\pi(s) + \alpha(sample - V^\pi(s))$

# Exponential Moving Average

---

- Exponential moving average



# Exponential Moving Average

---

- Exponential moving average
  - The running interpolation update:

# Exponential Moving Average

---

- Exponential moving average

- The running interpolation update  $\bar{x}_n = (1 - \alpha) \cdot \bar{x}_{n-1} + \alpha \cdot x_n$

# Exponential Moving Average

---

- Exponential moving average

- The running interpolation update  $\bar{x}_n = (1 - \alpha) \cdot \bar{x}_{n-1} + \alpha \cdot x_n$
- Makes recent samples more important:

# Exponential Moving Average

- Exponential moving average

- The running interpolation update  $\bar{x}_n = (1 - \alpha) \cdot \bar{x}_{n-1} + \alpha \cdot x_n$
- Makes recent samples more important:

$$\bar{x}_n = \frac{x_n + (1 - \alpha) \cdot x_{n-1} + (1 - \alpha)^2 \cdot x_{n-2} + \dots}{1 + (1 - \alpha) + (1 - \alpha)^2 + \dots}$$

# Exponential Moving Average

- Exponential moving average

- The running interpolation update  $\bar{x}_n = (1 - \alpha) \cdot \bar{x}_{n-1} + \alpha \cdot x_n$
- Makes recent samples more important:

$$\bar{x}_n = \frac{x_n + (1 - \alpha) \cdot x_{n-1} + (1 - \alpha)^2 \cdot x_{n-2} + \dots}{1 + (1 - \alpha) + (1 - \alpha)^2 + \dots}$$

- Forgets about the past (distant past values were wrong anyway)

# Exponential Moving Average

- Exponential moving average

- The running interpolation update  $\bar{x}_n = (1 - \alpha) \cdot \bar{x}_{n-1} + \alpha \cdot x_n$
- Makes recent samples more important:

$$\bar{x}_n = \frac{x_n + (1 - \alpha) \cdot x_{n-1} + (1 - \alpha)^2 \cdot x_{n-2} + \dots}{1 + (1 - \alpha) + (1 - \alpha)^2 + \dots}$$

- Forgets about the past (distant past values were wrong anyway)
- Decreasing learning rate (alpha) can give converging averages

# Example: Temporal Difference Learning

States

	A	
B	C	D
	E	

Assume:  $\gamma = 1$ ,  $\alpha = 1/2$

# Example: Temporal Difference Learning

States

	A	
B	C	D
	E	

Assume:  $\gamma = 1$ ,  $\alpha = 1/2$

	0	
0	0	8
	0	



# Example: Temporal Difference Learning

States

	A	
B	C	D
	E	

Assume:  $\gamma = 1$ ,  $\alpha = 1/2$

Observed Transitions

	0	
0	0	8
	0	

# Example: Temporal Difference Learning

States

	A	
B	C	D
	E	

Assume:  $\gamma = 1$ ,  $\alpha = 1/2$

Observed Transitions

B, east, C, -2

	0	
0	0	8
	0	

# Example: Temporal Difference Learning

States

	A	
B	C	D
	E	

Assume:  $\gamma = 1$ ,  $\alpha = 1/2$

Observed Transitions

B, east, C, -2

	0	
0	0	8
	0	


# Example: Temporal Difference Learning

## States

	A	
B	C	D
	E	

Assume:  $\gamma = 1$ ,  $\alpha = 1/2$

## Observed Transitions

B, east, C, -2

	0	
0	0	8
	0	


$$V^{\pi}(s) \leftarrow (1 - \alpha)V^{\pi}(s) + \alpha [R(s, \pi(s), s') + \gamma V^{\pi}(s')]$$

# Example: Temporal Difference Learning

## States

	A	
B	C	D
	E	

Assume:  $\gamma = 1$ ,  $\alpha = 1/2$

## Observed Transitions

B, east, C, -2

	0	
0	0	8
	0	

	0	
-1	0	8
	0	

$$V^\pi(s) \leftarrow (1 - \alpha)V^\pi(s) + \alpha [R(s, \pi(s), s') + \gamma V^\pi(s')]$$

# Example: Temporal Difference Learning

## States

	A	
B	C	D
	E	

Assume:  $\gamma = 1$ ,  $\alpha = 1/2$

## Observed Transitions

B, east, C, -2

	0	
0	0	8
	0	

C, east, D, -2

	0	
-1	0	8
	0	

$$V^\pi(s) \leftarrow (1 - \alpha)V^\pi(s) + \alpha [R(s, \pi(s), s') + \gamma V^\pi(s')]$$

# Example: Temporal Difference Learning

## States

	A	
B	C	D
	E	

Assume:  $\gamma = 1$ ,  $\alpha = 1/2$

## Observed Transitions

B, east, C, -2

	0	
0	0	8
	0	

C, east, D, -2

	0	
-1	0	8
	0	


$$V^\pi(s) \leftarrow (1 - \alpha)V^\pi(s) + \alpha [R(s, \pi(s), s') + \gamma V^\pi(s')]$$

# Example: Temporal Difference Learning

## States

	A	
B	C	D
	E	

Assume:  $\gamma = 1$ ,  $\alpha = 1/2$

## Observed Transitions

B, east, C, -2

	0	
0	0	8
	0	

C, east, D, -2

	0	
-1	0	8
	0	

	0	
-1	3	8
	0	

$$V^\pi(s) \leftarrow (1 - \alpha)V^\pi(s) + \alpha [R(s, \pi(s), s') + \gamma V^\pi(s')]$$




# Problems with TD Value Learning

- TD value learning is a model-free way to do policy evaluation, mimicking Bellman updates with running sample averages
- However, if we want to turn values into a (new) policy, we're sunk:



$$\pi(s) = \arg \max_a Q(s, a)$$

$$Q(s, a) = \sum_{s'} T(s, a, s') [R(s, a, s') + \gamma V(s')]$$

- Idea: learn Q-values, not values
- Makes action selection model-free too!

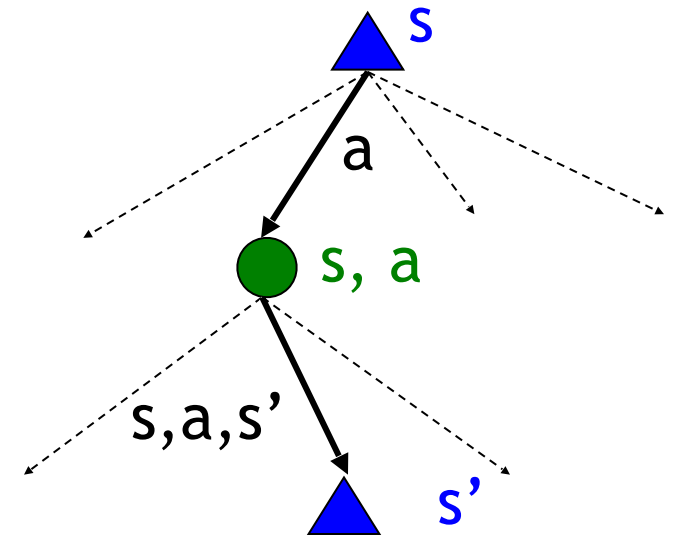


# Active Reinforcement Learning

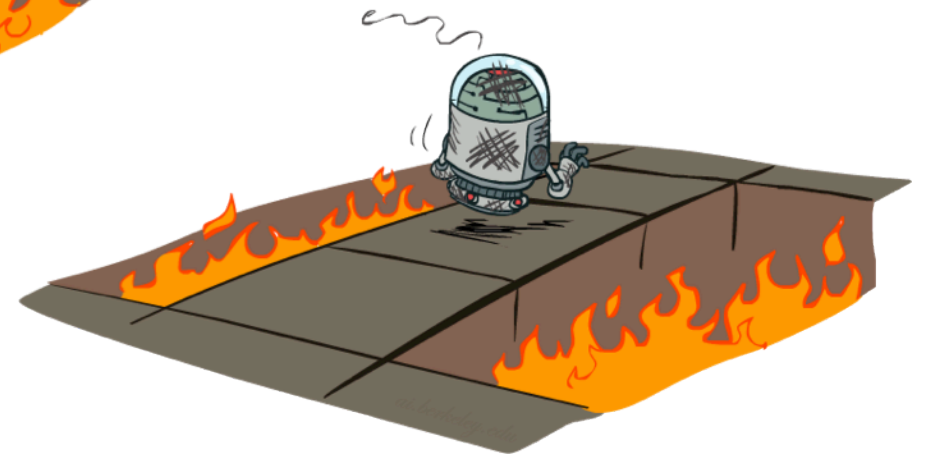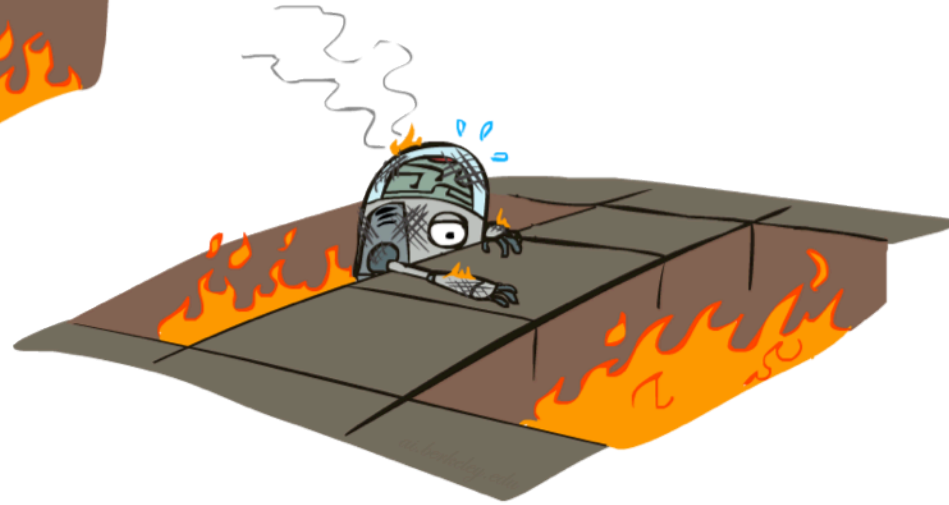

# Active Reinforcement Learning

- Full reinforcement learning: optimal policies (like value iteration)
  - You don't know the transitions  $T(s,a,s')$
  - You don't know the rewards  $R(s,a,s')$
  - You choose the actions now
  - **Goal: learn the optimal policy / values**
- In this case:
  - Learner makes choices!
  - Fundamental tradeoff: exploration vs. exploitation
  - This is NOT offline planning! You actually take actions in the world and find out what happens...

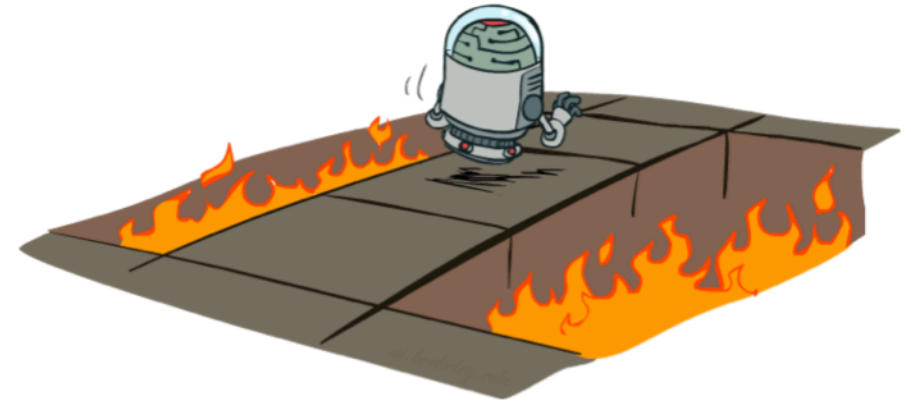

# Detour: Q-Value Iteration

---

- Value iteration: find successive (depth-limited) values
  - Start with  $V_0(s) = 0$ , which we know is right
  - Given  $V_k$ , calculate the depth  $k+1$  values for all states:

# Detour: Q-Value Iteration

---

- Value iteration: find successive (depth-limited) values
  - Start with  $V_0(s) = 0$ , which we know is right
  - Given  $V_k$ , calculate the depth  $k+1$  values for all states:

$$V_{k+1}(s) \leftarrow \max_a \sum_{s'} T(s, a, s') [R(s, a, s') + \gamma V_k(s')]$$

# Detour: Q-Value Iteration

- Value iteration: find successive (depth-limited) values
  - Start with  $V_0(s) = 0$ , which we know is right
  - Given  $V_k$ , calculate the depth  $k+1$  values for all states:

$$V_{k+1}(s) \leftarrow \max_a \sum_{s'} T(s, a, s') [R(s, a, s') + \gamma V_k(s')]$$

- But Q-values are more useful, so compute them instead
  - Start with  $Q_0(s,a) = 0$ , which we know is right
  - Given  $Q_k$ , calculate the depth  $k+1$  q-values for all q-states:

# Detour: Q-Value Iteration

- Value iteration: find successive (depth-limited) values

- Start with  $V_0(s) = 0$ , which we know is right
- Given  $V_k$ , calculate the depth  $k+1$  values for all states:

$$V_{k+1}(s) \leftarrow \max_a \sum_{s'} T(s, a, s') [R(s, a, s') + \gamma V_k(s')]$$

- But Q-values are more useful, so compute them instead

- Start with  $Q_0(s, a) = 0$ , which we know is right
- Given  $Q_k$ , calculate the depth  $k+1$  q-values for all q-states:

$$Q_{k+1}(s, a) \leftarrow \sum_{s'} T(s, a, s') [R(s, a, s') + \gamma \max_{a'} Q_k(s', a')]$$

# Q-Learning

- Q-Learning: sample-based Q-value iteration

$$Q_{k+1}(s, a) \leftarrow \sum_{s'} T(s, a, s') \left[ R(s, a, s') + \gamma \max_{a'} Q_k(s', a') \right]$$



# Q-Learning

- Q-Learning: sample-based Q-value iteration

$$Q_{k+1}(s, a) \leftarrow \sum_{s'} T(s, a, s') \left[ R(s, a, s') + \gamma \max_{a'} Q_k(s', a') \right]$$


- Learn  $Q(s,a)$  values as you go

# Q-Learning

- Q-Learning: sample-based Q-value iteration

$$Q_{k+1}(s, a) \leftarrow \sum_{s'} T(s, a, s') \left[ R(s, a, s') + \gamma \max_{a'} Q_k(s', a') \right]$$

- Learn  $Q(s,a)$  values as you go

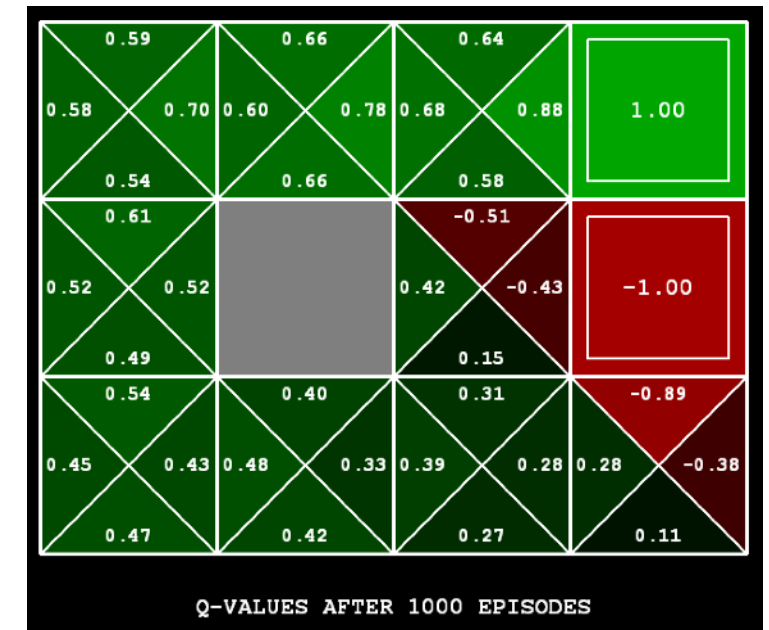

[Demo: Q-learning - gridworld (L10D2)]


[Demo: O-learning - crawler (L10D3)]

# Q-Learning

- Q-Learning: sample-based Q-value iteration

$$Q_{k+1}(s, a) \leftarrow \sum_{s'} T(s, a, s') \left[ R(s, a, s') + \gamma \max_{a'} Q_k(s', a') \right]$$

- Learn  $Q(s,a)$  values as you go
  - Receive a sample  $(s,a,s',r)$

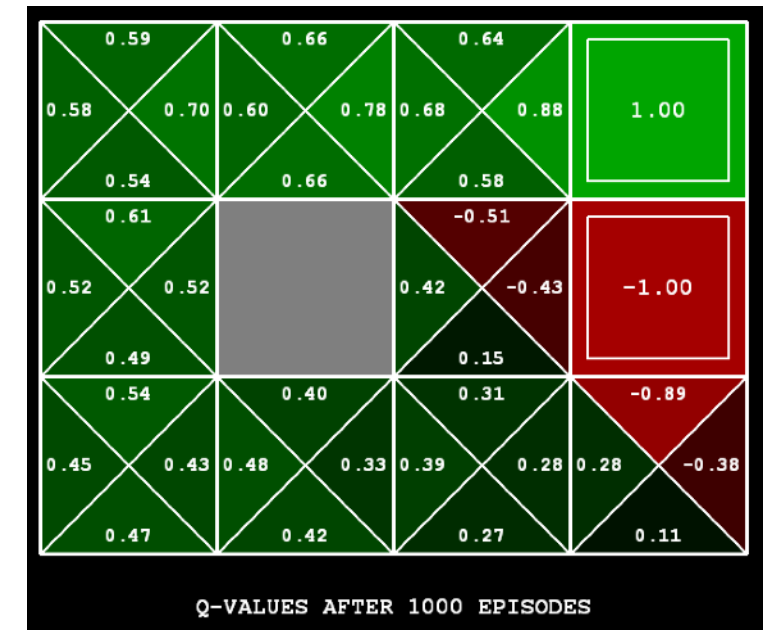

[Demo: Q-learning - gridworld (L10D2)]

[Demo: O-learning - crawler (L10D3)]

# Q-Learning

- Q-Learning: sample-based Q-value iteration

$$Q_{k+1}(s, a) \leftarrow \sum_{s'} T(s, a, s') \left[ R(s, a, s') + \gamma \max_{a'} Q_k(s', a') \right]$$

- Learn  $Q(s,a)$  values as you go
  - Receive a sample  $(s,a,s',r)$
  - Consider your old estimate  $Q(s,a)$



[Demo: Q-learning - gridworld (L10D2)]

[Demo: O-learning - crawler (L10D3)]


# Q-Learning

- Q-Learning: sample-based Q-value iteration

$$Q_{k+1}(s, a) \leftarrow \sum_{s'} T(s, a, s') \left[ R(s, a, s') + \gamma \max_{a'} Q_k(s', a') \right]$$

- Learn  $Q(s,a)$  values as you go
  - Receive a sample  $(s,a,s',r)$
  - Consider your old estimate  $Q(s,a)$
  - Consider your new sample estimate:

$$sample = R(s, a, s') + \gamma \max_{a'} Q(s', a')$$

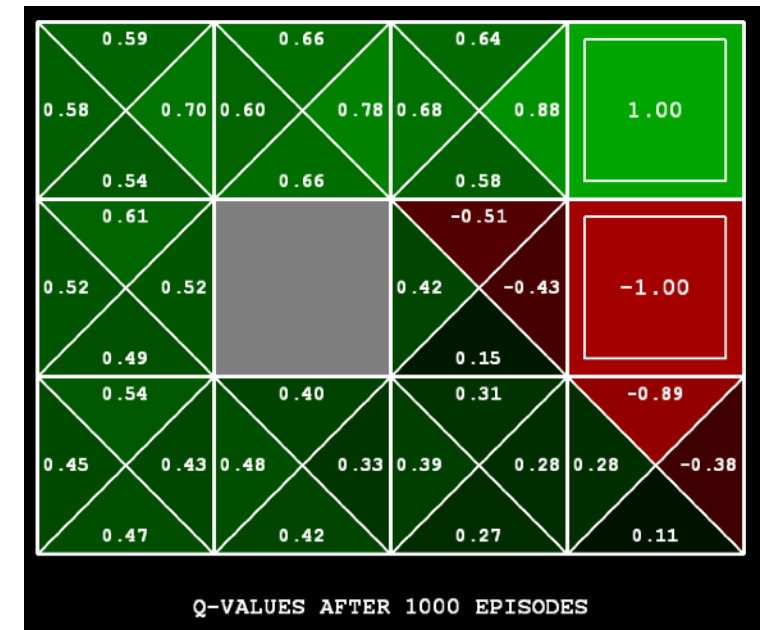

[Demo: Q-learning - gridworld (L10D2)]

[Demo: O-learning - crawler (L10D3)]

# Q-Learning

- Q-Learning: sample-based Q-value iteration


$$Q_{k+1}(s, a) \leftarrow \sum_{s'} T(s, a, s') \left[ R(s, a, s') + \gamma \max_{a'} Q_k(s', a') \right]$$

- Learn  $Q(s,a)$  values as you go

- Receive a sample  $(s,a,s',r)$
- Consider your old estimate  $Q(s,a)$
- Consider your new sample estimate:

$$sample = R(s, a, s') + \gamma \max_{a'} Q(s', a')$$

- Incorporate the new estimate into a running average

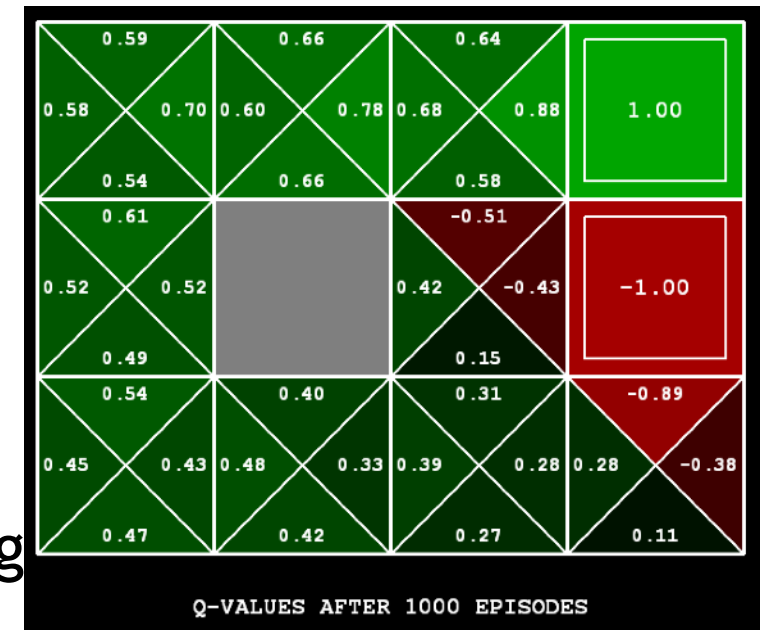

[Demo: Q-learning - gridworld (L10D2)]

[Demo: O-learning - crawler (L10D3)]

# Q-Learning

- Q-Learning: sample-based Q-value iteration

$$Q_{k+1}(s, a) \leftarrow \sum_{s'} T(s, a, s') \left[ R(s, a, s') + \gamma \max_{a'} Q_k(s', a') \right]$$

- Learn  $Q(s,a)$  values as you go

- Receive a sample  $(s,a,s',r)$
  - Consider your old estimate  $Q(s,a)$
  - Consider your new sample estimate:

$$sample = R(s, a, s') + \gamma \max_{a'} Q(s', a')$$

- Incorporate the new estimate into a running average


$$Q(s, a) \leftarrow (1 - \alpha)Q(s, a) + (\alpha) [sample]$$



[Demo: Q-learning - gridworld (L10D2)]

[Demo: O-learning - crawler (L10D3)]

# Video of Demo Q-Learning -- Gridworld

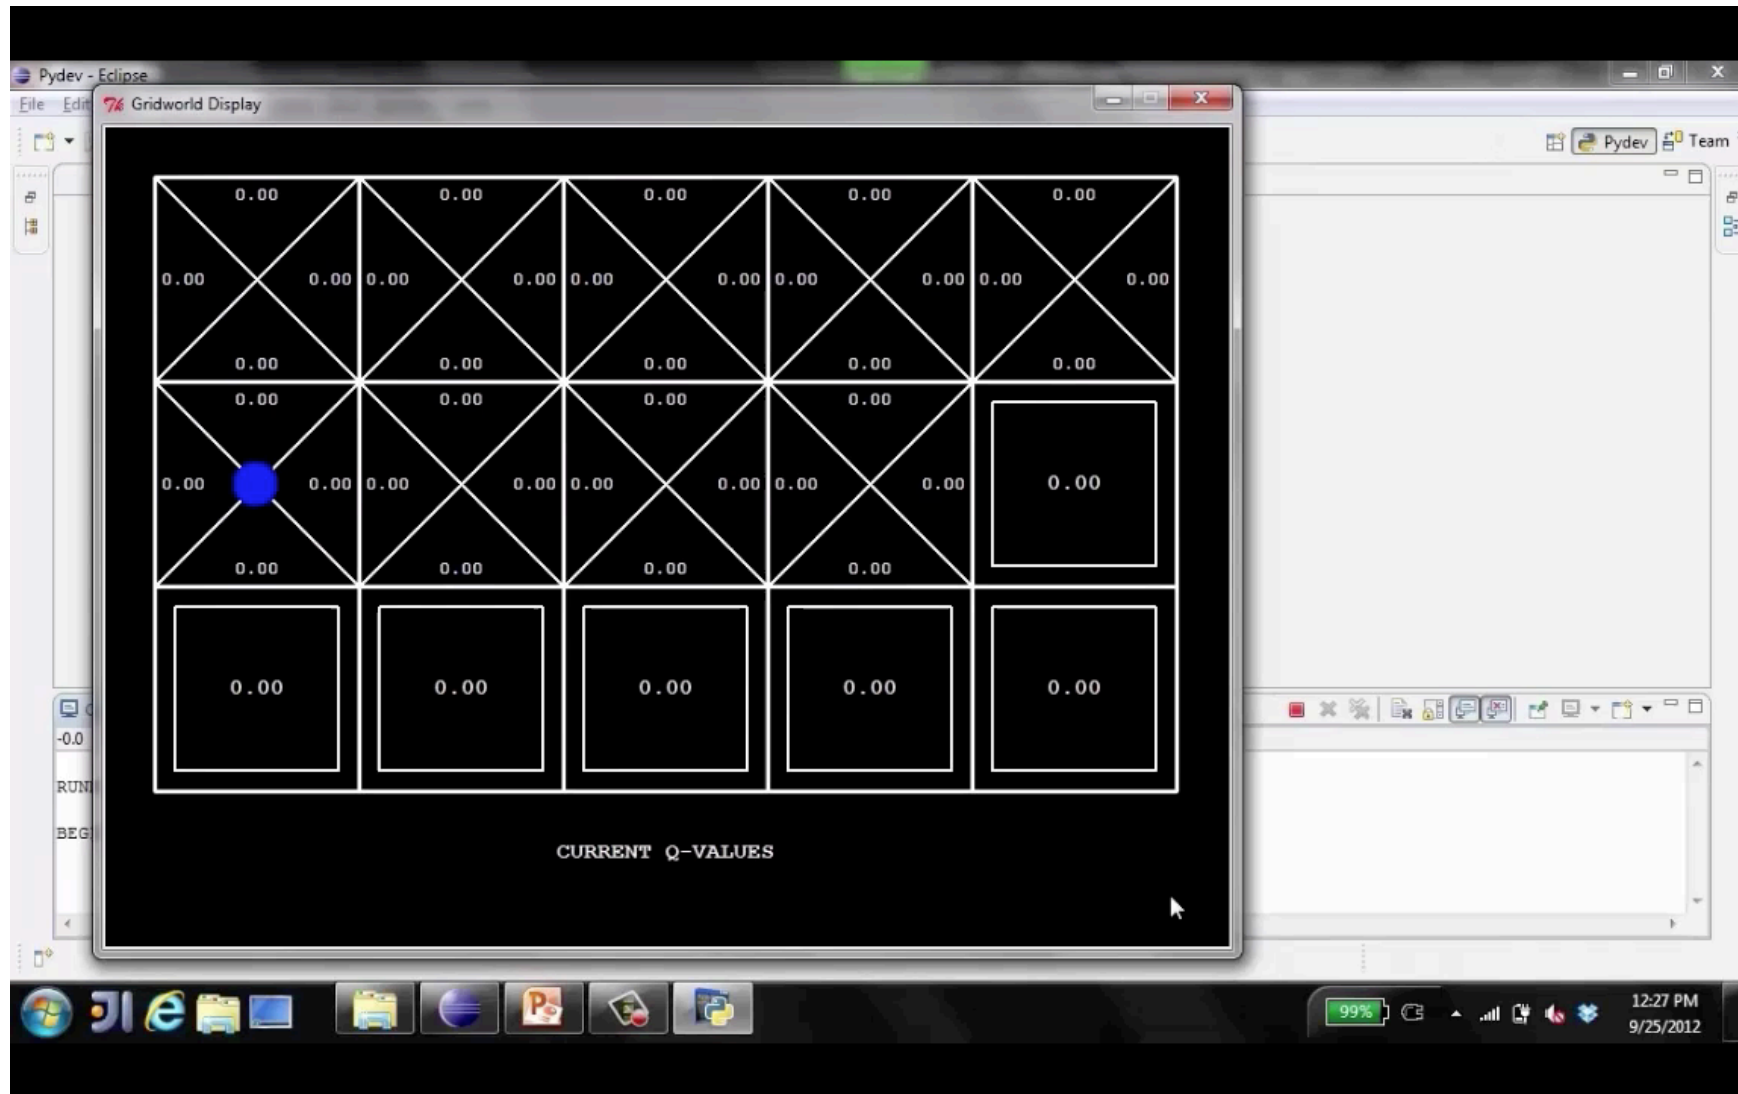










# Video of Demo Q-Learning -- Crawler

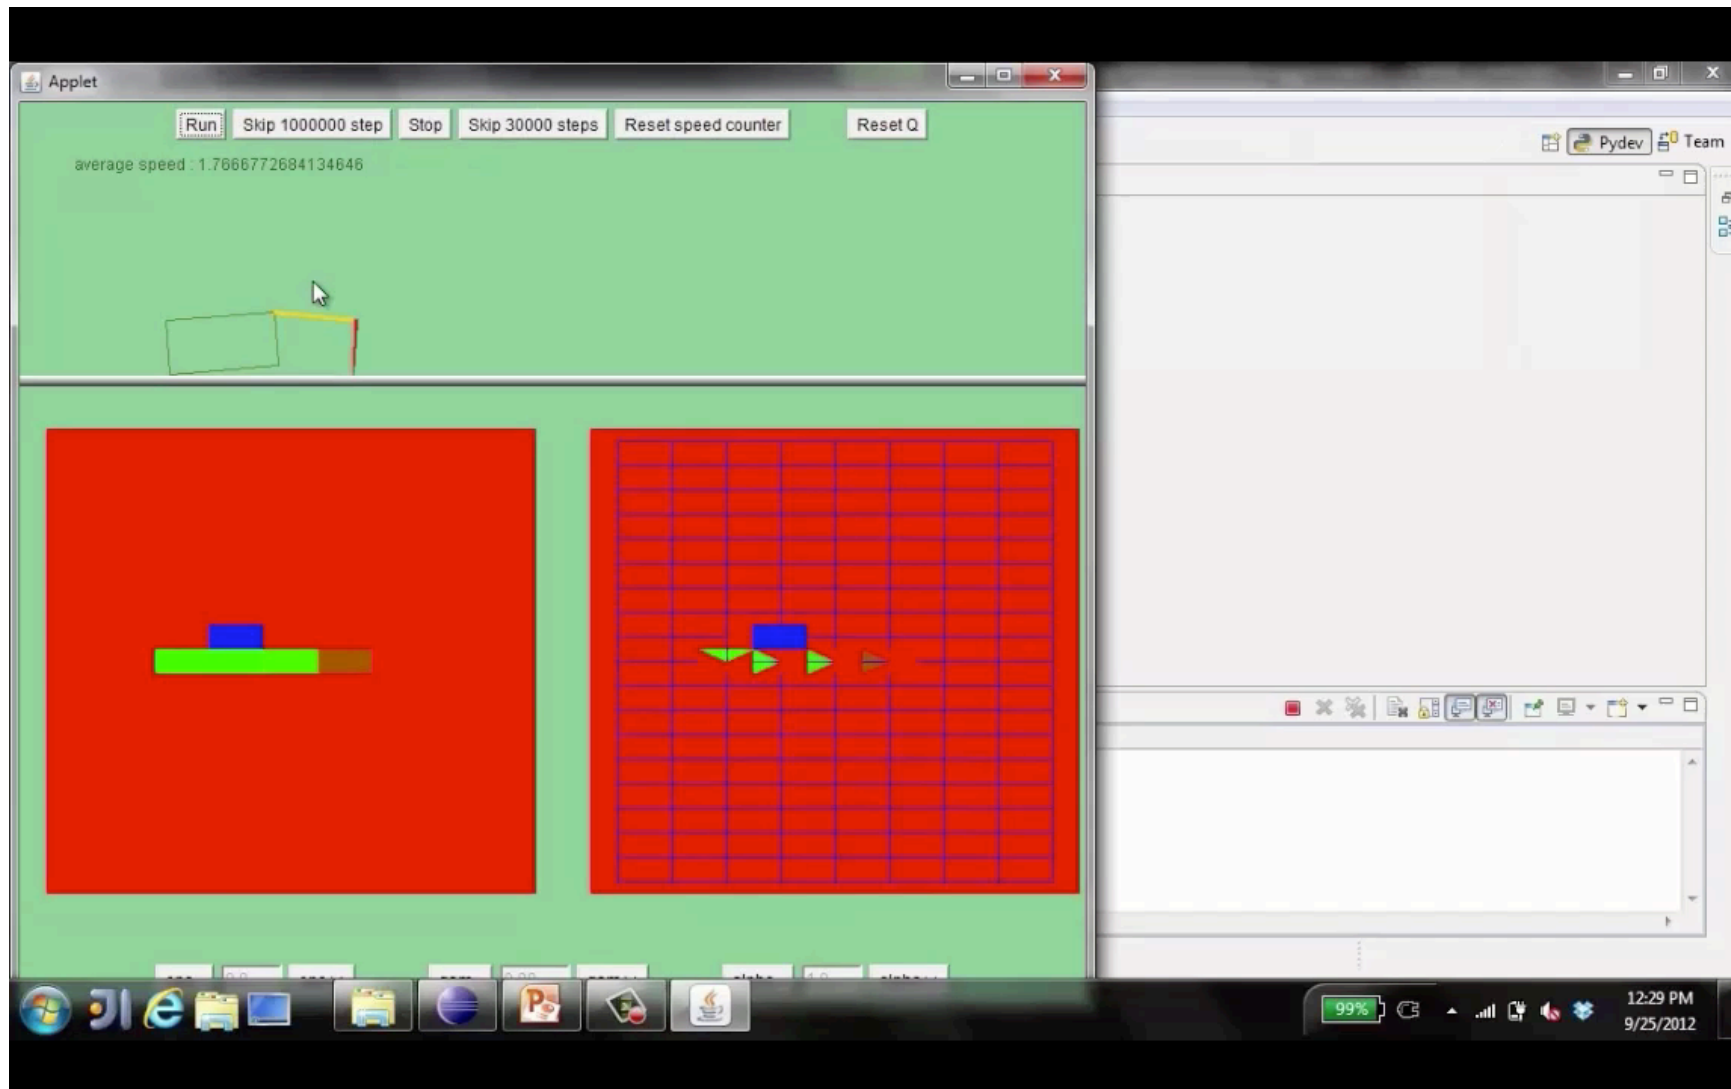

# Video of Demo Q-Learning -- Crawler

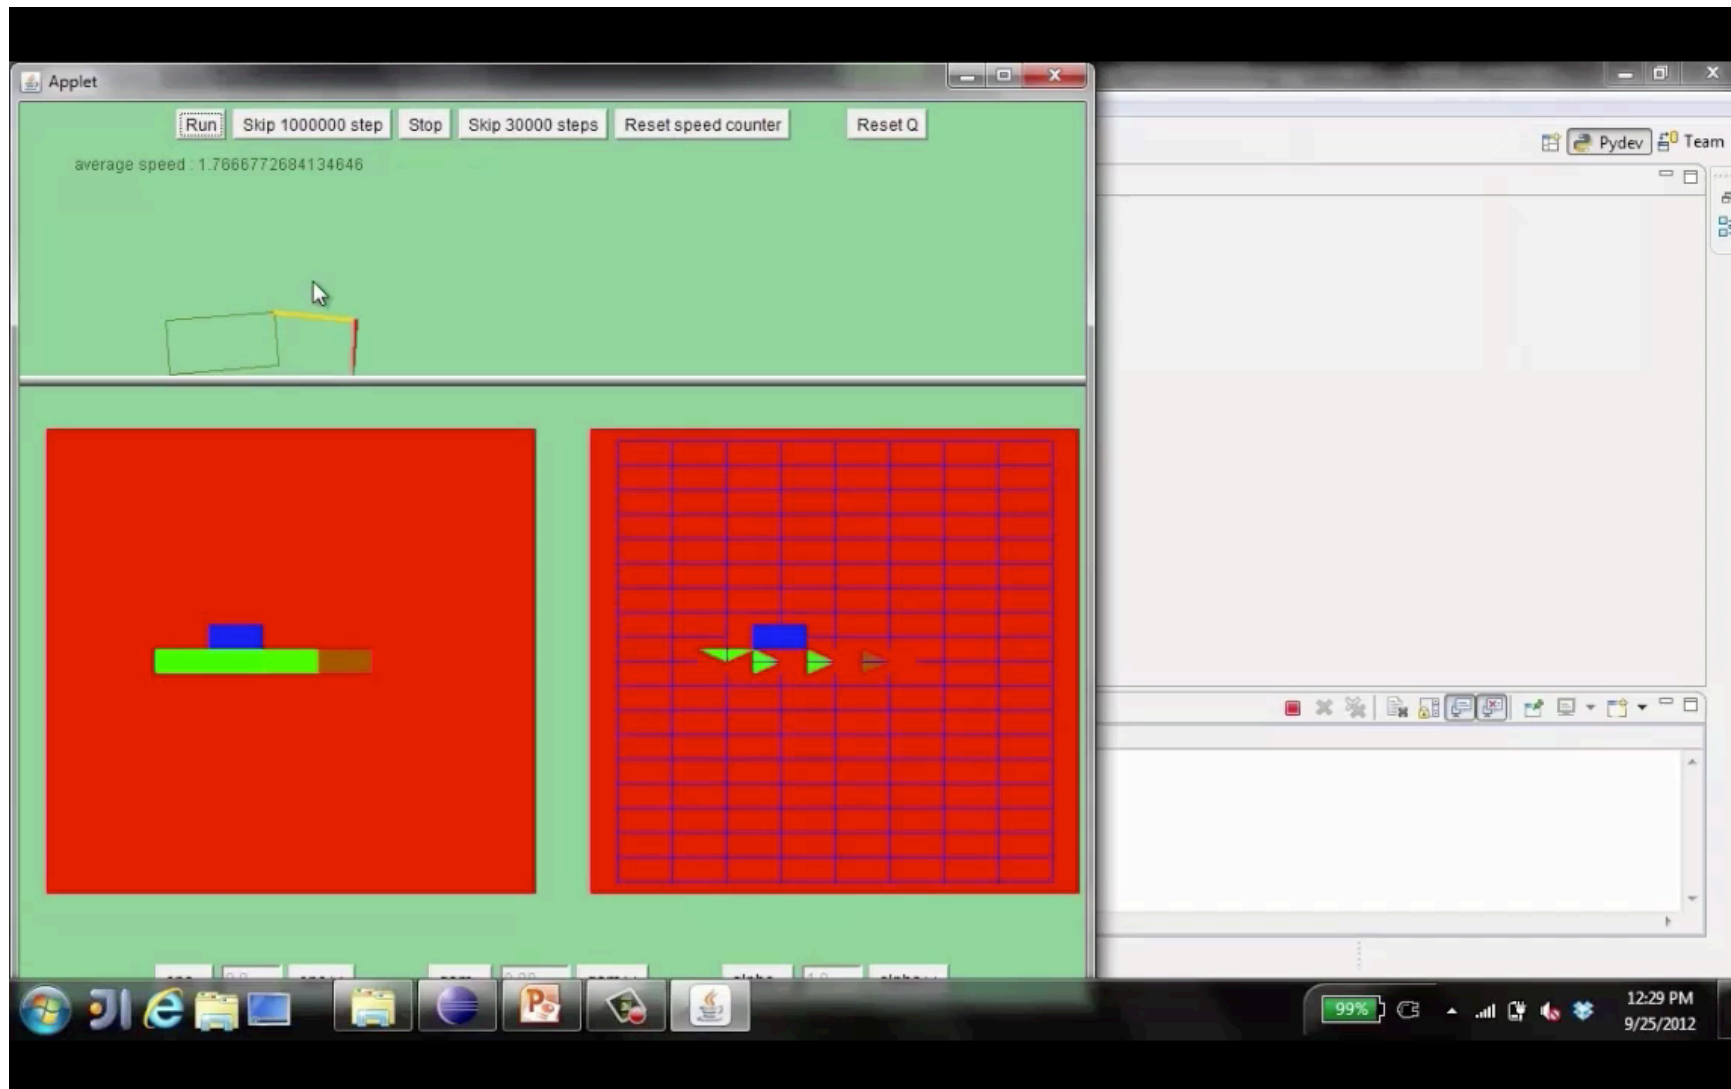

# Video of Demo Q-Learning -- Crawler

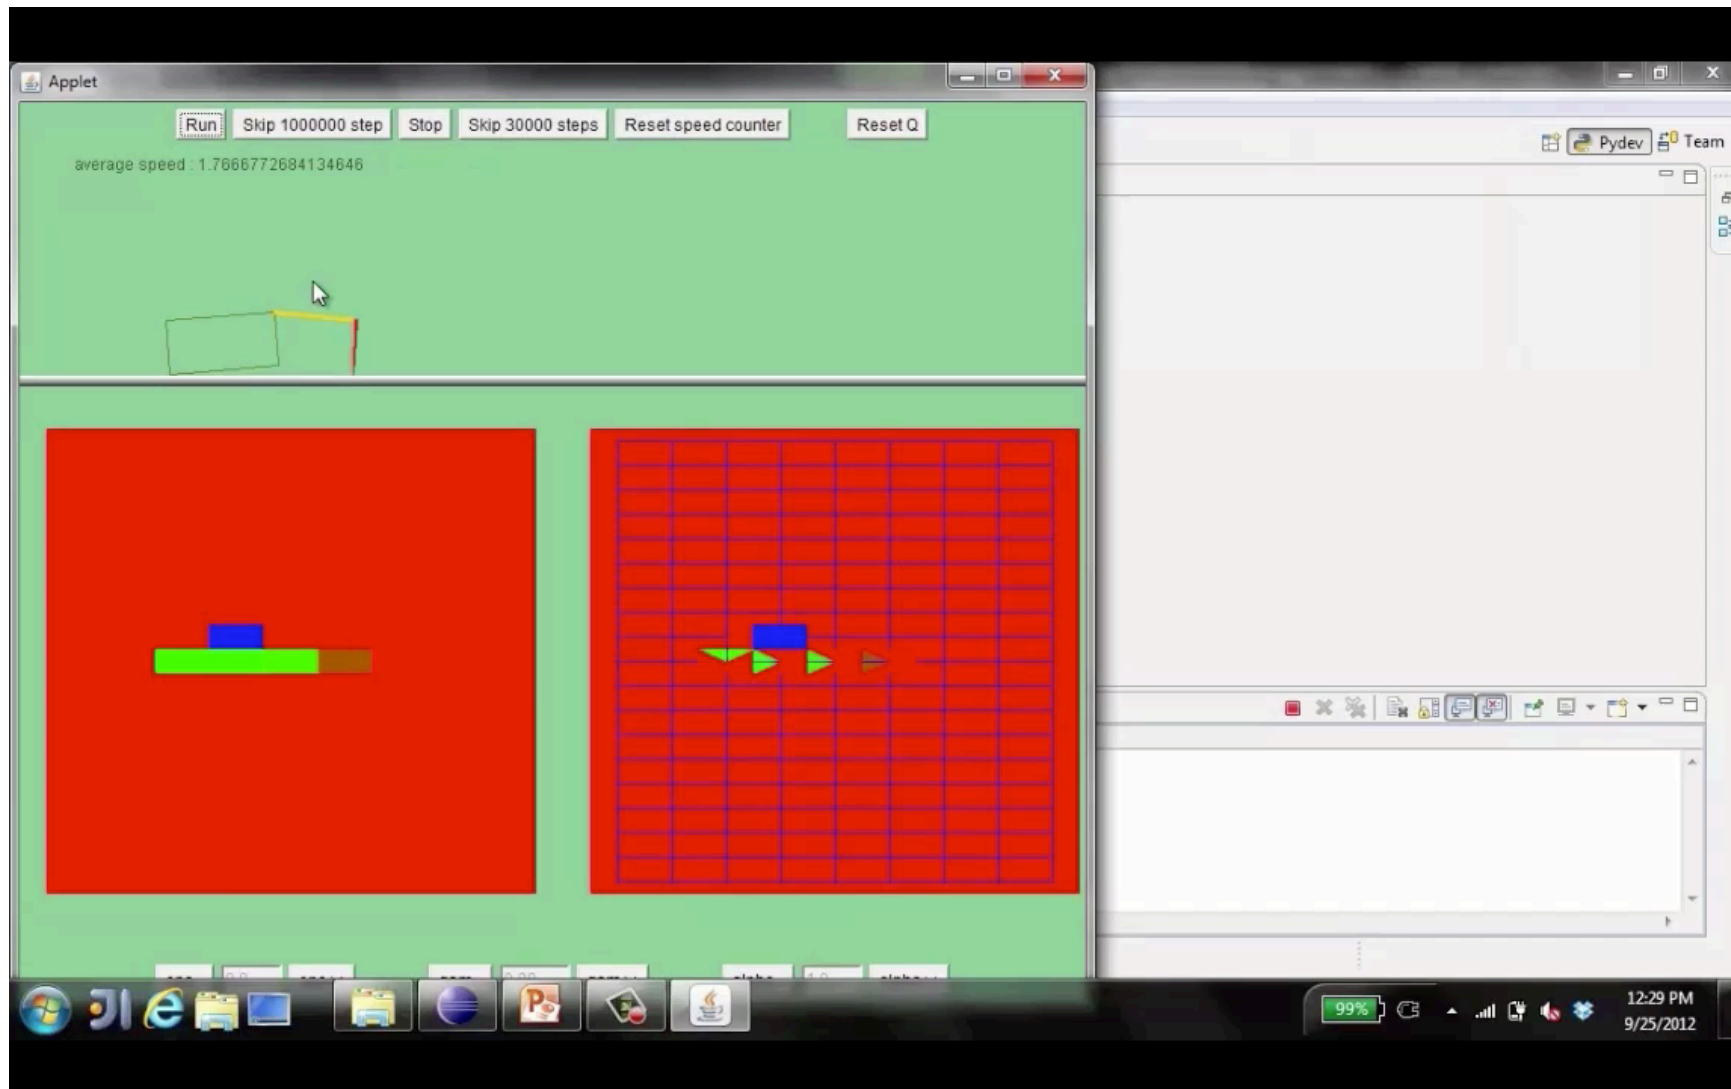

# Q-Learning Properties

- Amazing result: Q-learning converges to optimal policy -- even if you're acting suboptimally!
- This is called **off-policy learning**
- Caveats:
  - You have to explore enough
  - You have to eventually make the learning rate small enough
  - ... but not decrease it too quickly
  - Basically, in the limit, it doesn't matter how you select actions (!)

