
HorizonNet 코드 분석

길다영

2021. 07. 19

<https://github.com/sunset1995/HorizonNet> 참고.

목차

Contents

1

데이터
훈련

Preprocess.py
Train.py

2

Pre-
Processing

3

Estimating
Layout
with HorizonNet

4

Layout
3D Viewer

결과

1.

```
python preprocess.py --img_glob ssu_dataset/train/img/pic424_1.png --output_dir  
ssu_dataset/preprocessed --rgbonly
```

preprocess.py

이미지 조정(정렬)




데
이
터

훈
련

```
python train.py --train_root_dir ssu_dataset/train --valid_root_dir ssu_dataset/valid --  
batch_size_train 1 --num_workers 0 --id model_bs1
```

train.py

데이터 세트에 대해 학습
Batch_size, epochs, num_workers 지정

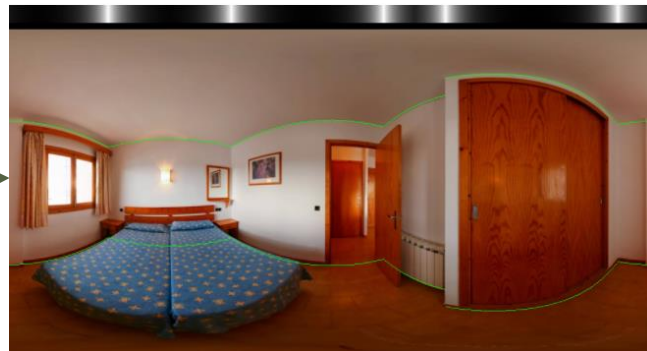

```
python preprocess.py --img_glob ssu_dataset/train/img/pic424_1.png --output_dir ssu_dataset/preprocessed --rgbonly
```

1.

데이터

처리

```
51 # Process each input
52 for i_path in paths:
53     print('Processing', i_path, flush=True)
54
55     # Load and cat input images
56     img_ori = np.array(Image.open(i_path).resize((1024, 512), Image.BICUBIC))[..., :3]
57
58     # VP detection and line segment extraction
59     _, vp, _, _, panoEdge, _, _ = panoEdgeDetection(img_ori,
60                                                       qError=args.q_error,
61                                                       refineIter=args.refine_iter)
62
63     panoEdge = (panoEdge > 0)
64
65     # Align images with VP
66     i_img = rotatePanorama(img_ori / 255.0, vp[2::-1])
67     l_img = rotatePanorama(panoEdge.astype(np.float32), vp[2::-1])
```

소실점 가진 이미지를 align
(구부러진 사진이 펴짐)

```
python train.py --train_root_dir ssu_dataset/train --valid_root_dir ssu_dataset/valid --batch_size_train 1 --num_workers 0 --id model_bs1
```

1.

데이터

훈련

```
107 # Create dataloader
108 dataset_train = PanoCorBonDataset(
109     root_dir=args.train_root_dir,
110     flip=not args.no_flip, rotate=not args.no_rotate, gamma=not args.no_gamma,
111     stretch=not args.no_pano_stretch)
112 loader_train = DataLoader(dataset_train, args.batch_size_train,
113     shuffle=True, drop_last=True,
114     num_workers=args.num_workers,
115     pin_memory=not args.no_cuda,
116     worker_init_fn=lambda x: np.random.seed())
```

Epoch만큼 for문 돌림.

```
170 # Start training
171 for ith_epoch in trange(1, args.epochs + 1, desc='Epoch', unit='ep'):
172
173     # Train phase
174     net.train()
175     if args.freeze_earlier_blocks != -1:
176         b0, b1, b2, b3, b4 = net.feature_extractor.list_blocks()
177         blocks = [b0, b1, b2, b3, b4]
178         for i in range(args.freeze_earlier_blocks + 1):
179             for m in blocks[i]:
180                 m.eval()
181     iterator_train = iter(loader_train)
182     for _ in trange(len(loader_train),
183         desc='Train ep%s' % ith_epoch, position=1):
184         # Set learning rate
185         adjust_learning_rate(optimizer, args)
186
187         args.cur_iter += 1
188         x, y_bon, y_cor = next(iterator_train)
189
190         losses = feed_forward(net, x, y_bon, y_cor)
191         for k, v in losses.items():
192             k = 'train/%s' % k
193             tb_writer.add_scalar(k, v.item(), args.cur_iter)
194         tb_writer.add_scalar('train/lr', args.running_lr, args.cur_iter)
195         loss = losses['total']
196
197     # backprop
198     optimizer.zero_grad()
199     loss.backward()
200     nn.utils.clip_grad_norm(net.parameters(), 3.0, norm_type='inf')
201     optimizer.step()
```

train.py



assets/demo.png


python preprocess.py --img_glob assets/demo.png --output_dir assets/preprocessed/

preprocess.py

demo.aligned_rgb.png



demo.aligned_line.png

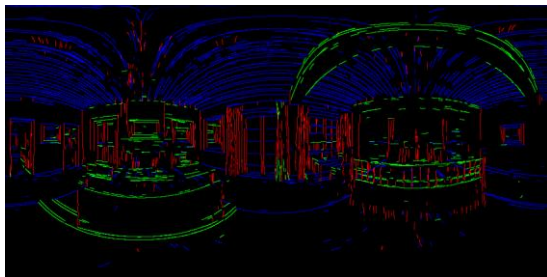

demo_VP.txt

demo2_VP - Windows 메모장

파일(F) 편집(E) 서식(O) 보기(V) 도움말(H)

-0.004342 -0.003421 0.999985

0.001005 0.999994 0.003426

0.999986 -0.001023 0.005268

2.


```
python preprocess.py --img_glob assets/demo.png --output_dir assets/preprocessed/
```

```

51 # Process each input
52 for i_path in paths:
53     print('Processing', i_path, flush=True)
54
55     # Load and cat input images
56     img_ori = np.array(Image.open(i_path).resize((1024, 512), Image.BICUBIC))[..., :3]
57
58     # VP detection and line segment extraction
59     _, vp, _, _, panoEdge, _, _ = panoEdgeDetection(img_ori,
60                                                     qError=args.q_error,
61                                                     refineIter=args.refine_iter)
62     panoEdge = (panoEdge > 0)
63
64     # Align images with VP
65     i_img = rotatePanorama(img_ori / 255.0, vp[2::-1])
66     l_img = rotatePanorama(panoEdge.astype(np.float32), vp[2::-1])
67
68     # Dump results
69     basename = os.path.splitext(os.path.basename(i_path))[0]
70     if args.rgbonly:
71         path = os.path.join(args.output_dir, '%s.png' % basename)
72         Image.fromarray((i_img * 255).astype(np.uint8)).save(path)
73     else:
74         path_vp = os.path.join(args.output_dir, '%s_VP.txt' % basename)
75         path_i_img = os.path.join(args.output_dir, '%s_aligned_rgb.png' % basename)
76         path_l_img = os.path.join(args.output_dir, '%s_aligned_line.png' % basename)
77
78         with open(path_vp, 'w') as f:
79             for i in range(3):
80                 f.write('%s %.6f %.6f %.6f\n' % (vp[i, 0], vp[i, 1], vp[i, 2]))
81         Image.fromarray((i_img * 255).astype(np.uint8)).save(path_i_img)
82         Image.fromarray((l_img * 255).astype(np.uint8)).save(path_l_img)

```

preprocess.py

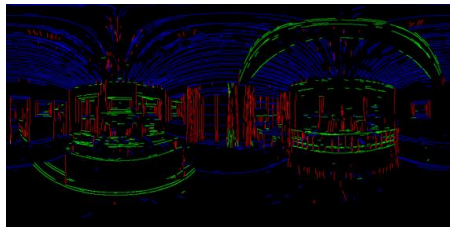

demo2_VP - Windows 메모장

파일(F) 편집(E) 서식(O) 보기(V) 도움말(H)

```

-0.004342 -0.003421 0.999985
0.001005 0.999994 0.003426
0.999986 -0.001023 0.005268

```

파노라마 사진에서
edge와 소실점을 찾음

소실점 가진 이미지를 align
(구부러진 사진이 펴짐)



3.


E
s
t
w
i
i
m
t
a
h
t
i
H
n
o
g
r
i
L
z
a
o
y
n
o
N
u
e
t
t

결과

demo_aligned_rgb.raw.png

```
python inference.py --pth ckpt/resnet50_rnn__st3d.pth --img_glob  
assets/preprocessed/demo_aligned_rgb.png --output_dir assets/inferenced --visualize
```

inference.py

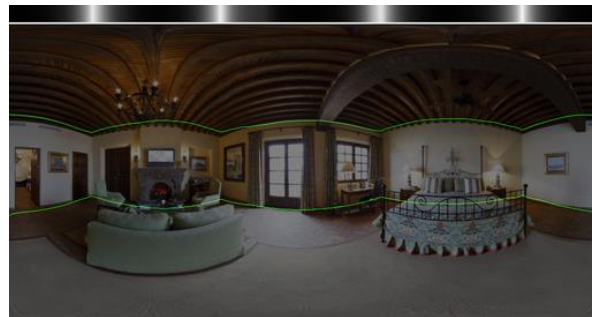

demo_aligned_rgb.json

demo2_aligned_rgb.json X

```
1 [{"z0": 50.0, "z1": -32.29869079589844,  
2 "uv": [[0.13787418603897095, 0.36454907059669495],  
3 [0.13787418603897095, 0.5889818668365479],  
4 [0.3714289665222168, 0.3713512718677521],  
5 [0.3714289665222168, 0.5841352343559265],  
6 [0.6208978891372681, 0.3664819896221161],  
7 [0.6208978891372681, 0.5875996351242065],  
8 [0.867792546749115, 0.35881996154785156],  
9 [0.867792546749115, 0.5931026935577393]]}]
```

<https://velog.io/@arittung/3D-Room-Reconstruction-Using-HorizonNet-%EC%B4%88%EA%B8%B0-%ED%99%98%EA%B2%BD-%EC%84%A4%EC%A0%95-HorizonNet-%EC%8B%A4%ED%96%89>

3.

```
python inference.py --pth ckpt/resnet50_rnn__st3d.pth --img_glob assets/preprocessed/demo_aligned_rgb.png --output_dir assets/inferenced --visualize
```

Preprocess된 이미지 불러옴

```

164 # Prepare image to processed
165 paths = sorted(glob.glob(args.img_glob))
166 if len(paths) == 0:
167     print('no images found')
168 for path in paths:
169     assert os.path.isfile(path), '%s not found' % path
170
171 # Check target directory
172 if not os.path.isdir(args.output_dir):
173     print('Output directory %s not existed. Create one.' % args.output_dir)
174     os.makedirs(args.output_dir)
175 device = torch.device('cpu' if args.no_cuda else 'cuda')
176
177 # Loaded trained model
178 net = utils.load_trained_model(HorizonNet, args.pth).to(device)
179 net.eval()

```

Trained model(pth 파일) 불러옴

Pth 파일(?)

inference.py

Inference()로 넘어감.

```

181 # Inferencing
182 with torch.no_grad():
183     for i_path in tqdm(paths, desc='Inferencing'):
184         k = os.path.split(i_path)[-1][:-4]
185
186         # Load image
187         img_pil = Image.open(i_path)
188         if img_pil.size != (1024, 512):
189             img_pil = img_pil.resize((1024, 512), Image.BICUBIC)
190         img_ori = np.array(img_pil)[..., :3].transpose([2, 0, 1]).copy()
191         x = torch.FloatTensor([img_ori / 255])
192
193         # Inferencing corners
194         cor_id, z0, z1, vis_out = inference(net, x, device,
195                                           args.flip, args.rotate,
196                                           args.visualize,
197                                           args.force_cuboid,
198                                           args.min_v, args.r)
199
200         # Output result
201         with open(os.path.join(args.output_dir, k + '.json'), 'w') as f:
202             json.dump({
203                 'z0': float(z0),
204                 'z1': float(z1),
205                 'uv': [[float(u), float(v)] for u, v in cor_id],
206             }, f)
207
208         if vis_out is not None:
209             vis_path = os.path.join(args.output_dir, k + '.raw.png')
210             vh, vw = vis_out.shape[:2]
211             Image.fromarray(vis_out)\
212                 .resize((vw//2, vh//2), Image.LANCZOS)\
213                 .save(vis_path)

```

3.

```
python inference.py --pth ckpt/resnet50_rnn__st3d.pth --img_glob assets/preprocessed/demo_aligned_rgb.png --output_dir assets/inferenced --visualize
```

1

```

92
93 # Init floor/ceiling plane
94 z0 = 50
95 _, z1 = post_proc.np_refine_by_fix_z(*y_bon_, z0)
96
97 # Detect wall-wall peaks
98 if min_v is None:
99     min_v = 0 if force_cuboid else 0.05
100 r = int(round(W * r / 2))
101 N = 4 if force_cuboid else None
102 xs_ = find_N_peaks(y_cor_, r=r, min_v=min_v, N=N)[0]
103
104 # Generate wall-walls
105 cor, xy_cor = post_proc.gen_ww(xs_, y_bon_[0], z0, tol=abs(0.16 * z1 / 1.6), force_cuboid=force_cuboid)
106 if not force_cuboid:
107     # Check valid (for fear self-intersection)
108     xy2d = np.zeros((len(xy_cor), 2), np.float32)
109     for i in range(len(xy_cor)):
110         xy2d[i, xy_cor[i]['type']] = xy_cor[i]['val']
111         xy2d[i, xy_cor[i-1]['type']] = xy_cor[i-1]['val']
112     if not Polygon(xy2d).is_valid:
113         print(
114             'Fail to generate valid general layout!! '
115             'Generate cuboid as fallback.',
116             file=sys.stderr)
117     xs_ = find_N_peaks(y_cor_, r=r, min_v=0, N=4)[0]
118     cor, xy_cor = post_proc.gen_ww(xs_, y_bon_[0], z0, tol=abs(0.16 * z1 / 1.6), force_cuboid=True)
119

```

논문 3.2 Recovering the Floor and Ceiling Planes
바닥, 천장 평면 초기화

논문 3.3 Recovering Wall Planes / Figure4 (a)
Find_N_peaks() : prominent peak를 찾는 과정

Gen.ww()
: cuboid, non-cuboid 함수 구분
: gen_ww_cuboid() → vote()
: gen_ww_general() → vote()

/misc/post_proc.py로 이동

inference.py


2

```

21 def find_N_peaks(signal, r=29, min_v=0.05, N=None):
22     max_v = maximum_filter(signal, size=r, mode='wrap')
23     pk_loc = np.where(max_v == signal)[0]
24     pk_loc = pk_loc[signal[pk_loc] > min_v]
25     if N is not None:
26         order = np.argsort(-signal[pk_loc])
27         pk_loc = pk_loc[order[:N]]
28         pk_loc = pk_loc[np.argsort(pk_loc)]
29     return pk_loc, signal[pk_loc]
30

```

inference.py

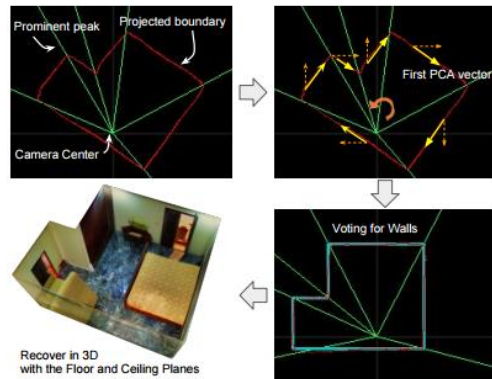

(a) Depicting how we recover the wall planes from our model output.

3.

python inference.py --pth ckpt/resnet50_rnn__st3d.pth --img_glob assets/preprocessed/demo_aligned_rgb.png --output_dir assets/inferenced --visualize

```
337 def gen_ww(init_coors, coors, z=50, coorW=1024, coorH=512, floorW=1024, floorH=512, tol=3, force_cuboid=True):
338     gpid = get_gpid(init_coors, coors)
339     coor = np.hstack([np.arange(coorW)[:], None], coors[:, None])
340     xy = np.coor2xy(coor, z, coorW, coorH, floorW, floorH)
```

1

```
343 # Generate wall-wall
344 if force_cuboid:
345     xy_cor = gen_ww_cuboid(xy, gpid, tol)
346 else:
347     xy_cor = gen_ww_general(init_coors, xy, gpid, tol)
```

Cuboid 경우

Non-cuboid 경우

```
75 def vote(vec, tol):
76     vec = np.sort(vec)
77     n = np.arange(len(vec))[:-1]
78     n = n[:, None] - n[None, :] + 1.0
79     l = squareform(pdist(vec[:, None], 'minkowski', p=1) + 1e-9)
80
81     invalid = (n < len(vec) * 0.4) | (l > tol)
82     if (~invalid).sum() == 0 or len(vec) < tol:
83         best_fit = np.median(vec)
84         p_score = 0
85     else:
86         l[invalid] = 1e5
87         n[invalid] = -1
88         score = n
89         max_idx = score.argmax()
90         max_row = max_idx // len(vec)
91         max_col = max_idx % len(vec)
92         assert max_col > max_row
93         best_fit = vec[max_row:max_col+1].mean()
94         p_score = (max_col - max_row + 1) / len(vec)
95
96     l1_score = np.abs(vec - best_fit).mean()
97
98     return best_fit, p_score, l1_score
```

3

/misc/post_proc.py

2

```
285 def gen_ww_cuboid(xy, gpid, tol):
286     xy_cor = []
287     assert len(np.unique(gpid)) == 4
288
289     # For each part separated by wall-wall peak, voting for a wall
290     for j in range(4):
291         now_x = xy[gpid == j, 0]
292         now_y = xy[gpid == j, 1]
293         new_x, x_score, x_l1 = vote(now_x, tol)
294         new_y, y_score, y_l1 = vote(now_y, tol)
295         if (x_score, -x_l1) > (y_score, -y_l1):
296             xy_cor.append({'type': 0, 'val': new_x, 'score': x_score})
297         else:
298             xy_cor.append({'type': 1, 'val': new_y, 'score': y_score})
```

/misc/post_proc.py

2

```
241 def gen_ww_general(init_coors, xy, gpid, tol):
242     xy_cor = []
243     assert len(init_coors) == len(np.unique(gpid))
244
245     # Candidate for each part separated by wall-wall boundary
246     for j in range(len(init_coors)):
247         now_x = xy[gpid == j, 0]
248         now_y = xy[gpid == j, 1]
249         new_x, x_score, x_l1 = vote(now_x, tol)
250         new_y, y_score, y_l1 = vote(now_y, tol)
251         u0 = np.coorx2u(init_coors[(j - 1 + len(init_coors)) % len(init_coors)])
252         u1 = np.coorx2u(init_coors[j])
253         if (x_score, -x_l1) > (y_score, -y_l1):
254             xy_cor.append({'type': 0, 'val': new_x, 'score': x_score, 'action': 'ori', 'gpid': j, 'u0': u0, 'u1': u1, 'tbd': True})
255         else:
256             xy_cor.append({'type': 1, 'val': new_y, 'score': y_score, 'action': 'ori', 'gpid': j, 'u0': u0, 'u1': u1, 'tbd': True})
257
```

/misc/post_proc.py

감사합니다.

The End
