


ERROR SHEET ON ASG

I Got an error when I launching an instance I gave a script to launch apache it is running fine but in web it is not deploys I check security group I have provided http port 80 and even I have provided all traffic. Httpd status is active

ANS:-

I was pasting the wrong ip public address. I rectified and checked with the correct public id of a instance.

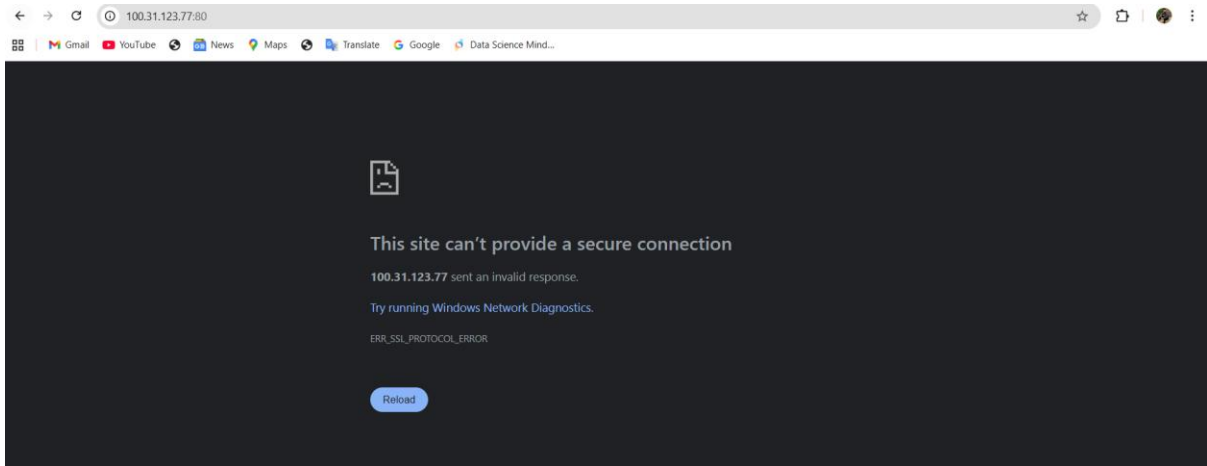


```
Amazon Linux 2023
https://aws.amazon.com/linux/amazon-linux-2023

[ec2-user@ip-12-0-0-174 ~]$ systemctl status httpd
● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; enabled; preset: disabled)
   Active: active (running) since Tue 2025-12-09 10:24:23 UTC; 6min ago
     Docs: man:httpd.service(8)
  Main PID: 3622 (httpd)
    Status: "Total requests: 0; Idle/Busy workers 98/2; Requests/sec: 0; Bytes served/sec: 0 B/sec"
     Tasks: 230 (limit: 1115)
    Memory: 16.2M
       CPU: 310ms
    OGroup: /system.slice/httpd.service
            └─ 3622 /usr/sbin/httpd -DFOREGROUND
              └─ 3789 /usr/sbin/httpd -DFOREGROUND
                └─ 3796 /usr/sbin/httpd -DFOREGROUND
                  └─ 3797 /usr/sbin/httpd -DFOREGROUND
                    └─ 3835 /usr/sbin/httpd -DFOREGROUND
                      └─ 26902 /usr/sbin/httpd -DFOREGROUND

Dec 09 10:24:23 ip-12-0-0-174.ec2.internal systemd[1]: Starting httpd.service - The Apache HTTP Server...
Dec 09 10:24:23 ip-12-0-0-174.ec2.internal systemd[1]: Started httpd.service - The Apache HTTP Server.
Dec 09 10:24:23 ip-12-0-0-174.ec2.internal httpd[3622]: Server configured, listening on: port 80
[ec2-user@ip-12-0-0-174 ~]$ netstat -na | grep 80
tcp6      0      0 :::80          :::*           LISTEN
udp6      0      0 fe80::f6:eaff:fee9::546 :::*           *
unix  2      [ ACC ]     STREAM  LISTENING   3800      /run/dbus/system_bus_socket
unix  2      [ ACC ]     STREAM  LISTENING   3802      /run/.heim_org.h51.kcm-socket
unix  3      [ ]       STREAM  CONNECTED   31680
unix  3      [ ]       STREAM  CONNECTED   3803

[ec2-user@ip-12-0-0-174 ~]$ nc -z 80
-bash: nc: command not found
[ec2-user@ip-12-0-0-174 ~]$ nc -z tcp:80
-bash: nc: command not found
[ec2-user@ip-12-0-0-174 ~]$ nc -zv 100.31.123.77 80
-bash: nc: command not found
```

Resolved after entering the correct public id



2. I got this issue now where load balancer ask me me to take at least two subnets

And it is not giving option to select

Now I have created another public subnet the issue got resolved

network mapping [info](#)

The load balancer routes traffic to targets in the selected subnets, and in accordance with your IP address settings.

VPC [info](#)

The load balancer will exist and scale within the selected VPC. The selected VPC is also where the load balancer targets must be hosted unless routing to Lambda or on-premises targets, or if using VPC peering. To confirm the VPC for your targets, view [target groups](#).

[Create VPC](#)

IP pools [info](#)

You can optionally choose to configure an IPAM pool as the preferred source for your load balancers IP addresses. Create or view Pools in the [Amazon VPC IP Address Manager console](#).

☐ Use IPAM pool for public IPv4 addresses

The IPAM pool you choose will be the preferred source of public IPv4 addresses. If the pool is depleted IPv4 addresses will be assigned by AWS.

Availability Zones and subnets [info](#)

Select at least two Availability Zones and a subnet for each zone. A load balancer node will be placed in each selected zone and will automatically scale in response to traffic. The load balancer routes traffic to targets in the selected Availability Zones only.

☒ us-east-1a (use1-az1)

Subnet

Only CIDR blocks corresponding to the load balancer IP address type are used. At least 8 available IP addresses are required for your load balancer to scale efficiently.

[pub_subnet1.1](#)

At least two subnets must be specified.

Security groups [info](#)

A security group is a set of firewall rules that control the traffic to your load balancer. Select an existing security group, or you can [create a new security group](#).

3) I got an error it is not showing public Id

EC2 > Instances > i-0ac727efb82fbdb88d

Instance summary for i-0ac727efb82fbdb88d (Myinstance) [info](#)

Updated less than a minute ago

Instance ID [i-0ac727efb82fbdb88d](#)

Public IPv4 address [-](#)

Private IPv4 addresses [12.0.3.63](#)

IPV4 address [-](#)

Instance state [Running](#)

Public DNS [-](#)

Hostname type [IP name: ip-12-0-3-63.ec2.internal](#)

Private IP DNS name (IPv4 only) [ip-12-0-3-63.ec2.internal](#)

Answer private resource DNS name [-](#)

Instance type [t2.micro](#)

Auto-assigned IP address [-](#)

VPC ID [vpc-0018a135ed108a41b \(My_vpc_virginaR\)](#)

Subnet ID [subnet-0e9115a216ca7844c \(pub_subnet1.1\)](#)

Instance AIN [arn:aws:ec2:us-east-1:679625722057:instance/i-0ac727efb82fbdb88d](#)

Elastic IP addresses [-](#)

AWS Compute Optimizer finding [Opt-in to AWS Compute Optimizer for recommendations. | Learn more](#)

Auto Scaling Group name [-](#)

IAM Role [-](#)

IMDSv2 [Required](#)

Managed [false](#)

Operator [-](#)

Details **Status and alarms** **Monitoring** **Security** **Networking** **Storage** **Tags**

Instance details [info](#)

AMI ID [ami-08d7a8bb50c3c24e](#)

Monitoring [Disabled](#)

Platform details [Linux/UNIX](#)

AMI name [al2023-ami-2023-9-20251208-0-kernel-6.12-486_64](#)

Allowed image [-](#)

Termination protection [Disabled](#)

Stop protection [Disabled](#)

Launch time [Tue Dec 09 2025 19:06:32 GMT+0530 \(India Standard Time\) \(4 minutes\)](#)

AMI location [amazon/al2023-ami-2023-9-20251208-0-kernel-6.12-486_64](#)

Availability Zones and subnets [info](#)

Select at least two Availability Zones and a subnet for each zone. A load balancer node will be placed in each selected zone and will automatically scale in response to traffic. The load balancer routes traffic to targets in the selected Availability Zones only.

us-east-1a (us-east-1)

Subnet
Only CIDR blocks corresponding to the load balancer IP address type are used. At least 8 available IP addresses are required for your load balancer to scale efficiently.

IPv4 subnet CIDR: 12.0.0.0/22

pub_subnetN.1

us-east-1b (us-east-1)

Subnet
Only CIDR blocks corresponding to the load balancer IP address type are used. At least 8 available IP addresses are required for your load balancer to scale efficiently.

IPv4 subnet CIDR: 12.0.0.0/22

my_subnet2

Security groups [info](#)

A security group is a set of firewall rules that control the traffic to your load balancer. Select an existing security group, or you can [create a new security group](#).

Security groups
Select up to 5 security groups

Listeners and routing [info](#)

A listener is a process that checks for connection requests using the port and protocol you configure. The rules that you define for a listener determine how the load balancer routes requests to its registered targets.

▼ Listener: HTTP80

Remove

Protocol

Port

1-65535

Default action [info](#)
The default action is used if no other rules apply. Choose the default action for traffic on this listener.

Routing action

☒ Forward to target groups
☐ Redirect to URL
☐ Return fixed response

Forward to target group [info](#)
Choose a target group and specify routing weight or [create target group](#).

Target group

Weight

0-999

Percent

+ Add target group
You can add up to 4 more target groups.

Target group stickiness [info](#)
Enable the load balancer to bind a user's session to a specific target group. To use stickiness the client must support cookies. If you want to bind a user's session to a specific target, turn on the Target Group attribute Stickiness.

☐ Turn on target group stickiness

Listener tags - optional
Consider adding tags to your listener. Tags enable you to categorize your AWS resources so you can more easily manage them.

Add listener tag

You can add up to 50 more tags.

Add listener

You can add up to 40 more listeners.

► Load balancer tags - optional
Consider adding tags to your load balancer. Tags enable you to categorize your AWS resources so you can more easily manage them. The 'Key' is required, but 'Value' is optional. For example, you can have Key = production-webserver, or Key = webserver, and Value = production.

Optimize with service integrations - optional [info](#)
Optimize your load balancing architecture by integrating AWS services with this load balancer at launch. You can also add these and other services after your load balancer is created by reviewing the load balancer's "Integrations" tab.

Amazon CloudFront + AWS Web Application Firewall (WAF) - new [info](#)
Optimize: Performance, Availability, Security

☐ Apply application layer acceleration and security protections - in front of the load balancer
Automatically configure and create a CloudFront distribution with the basic recommended AWS WAF security protections, and associates it to your load balancer. [Additional charges apply](#)

► Benefits and considerations

I found the issue in subnet I have not enable auto assign ip, then in enabled it

VPC > Subnets > subnet-Qe9715a216ca7844c > Edit subnet settings

Edit subnet settings [info](#)

Subnet
Subnet ID

Name

Auto-assign IP settings [info](#)
Enable AWS to automatically assign a public IPv4 or IPv6 address to a new primary network interface for an instance in this subnet.

☐ Enable auto-assign public IPv4 address [info](#)
☒ Enable auto-assign customer-owned IPv4 address [info](#)
Option disabled because no customer-owned pools found.

Resource-based name (RBN) settings [info](#)
Specify the hostname type for EC2 instances in this subnet and optional RBN DNS query settings.

☐ Enable resource name DNS A record on launch [info](#)
☒ Enable resource name DNS AAAA record on launch [info](#)

Hostname type [info](#)

☐ Resource name
☒ IP name

DNS64 settings
Enable DNS64 to allow IPv6-only services in Amazon VPC to communicate with IPv4-only services and networks.

☐ Enable DNS64 [info](#)

Cancel

Save

