

# How film length, genre and budget affect a film's reception among audiences

Arjun Dhatt

20/12/2020

## Keywords

- Film
- Genre
- Budget
- Linear Regression
- Title

## Abstract

In this report, I will be looking at the various factors that influence a film's reception among audiences. Using the 'ggplot2movies' packages, I will be looking at the dataset 'movies' and filtering the dataset to include relevant variables such as — title, rating, genre, and budget. Then I will run an analysis to identify the variables that affect a film's reception among audiences. After completing the analysis, I concluded that ...

## Introduction

Many factors can influence an audience's reaction to a film. Various variables such as the length of the film, the genre, budget can influence the film's reception. This poses the interesting question — how does a film's length, genre and budget affect its reception among audiences?

In the report, I will investigate this question by taking a deep look at the interplay between all the factors. I began the analysis by cleaning the 'ggplot2movies' data so that it only includes variables of interest such as — film title, film length, film rating, and film budget.

Since some of the variables I listed above do not contain information for some important variables, I deleted those entries so that all films in the dataset are analyzed from the same standpoint.

I began the analysis by looking at the variable budget. I conducted a linear regression and using p-value I determined that [...]. Next, I looked at various film genres. [List rest of variables and the work that I did with them. ]

With the results from the analysis discussed above, I concluded that []

In the rest of this report, I will begin by looking at the data, showing my analysis, and then a conclusion.

## Data

```
library(ggplot2movies)
library(dplyr)
```

```
##
## Attaching package: 'dplyr'
```

```
## The following objects are masked from 'package:stats':
##
##   filter, lag
## The following objects are masked from 'package:base':
##
##   intersect, setdiff, setequal, union

movies <- mutate(movies, decade = ifelse(year %in% 1950:1959, "1950s",
                                          ifelse(year %in% 1960:1969, "1960s",
                                          ifelse(year %in% 1970:1979, "1970s",
                                          ifelse(year %in% 1980:1989, "1980s",
                                          ifelse(year %in% 1990:1999, "1990s",
                                          ifelse(year %in% 2000:2009, "2000s", "<1949"))))))))


movies <- mutate(movies, )

moviesx <- movies[c('title', 'year', 'length', 'budget', 'rating', 'votes') ]


moviesfiltered <- filter(moviesx, votes > (quantile(movies$votes, .50)))

hist(moviesfiltered$votes)
```


**Histogram of moviesfiltered\$votes**

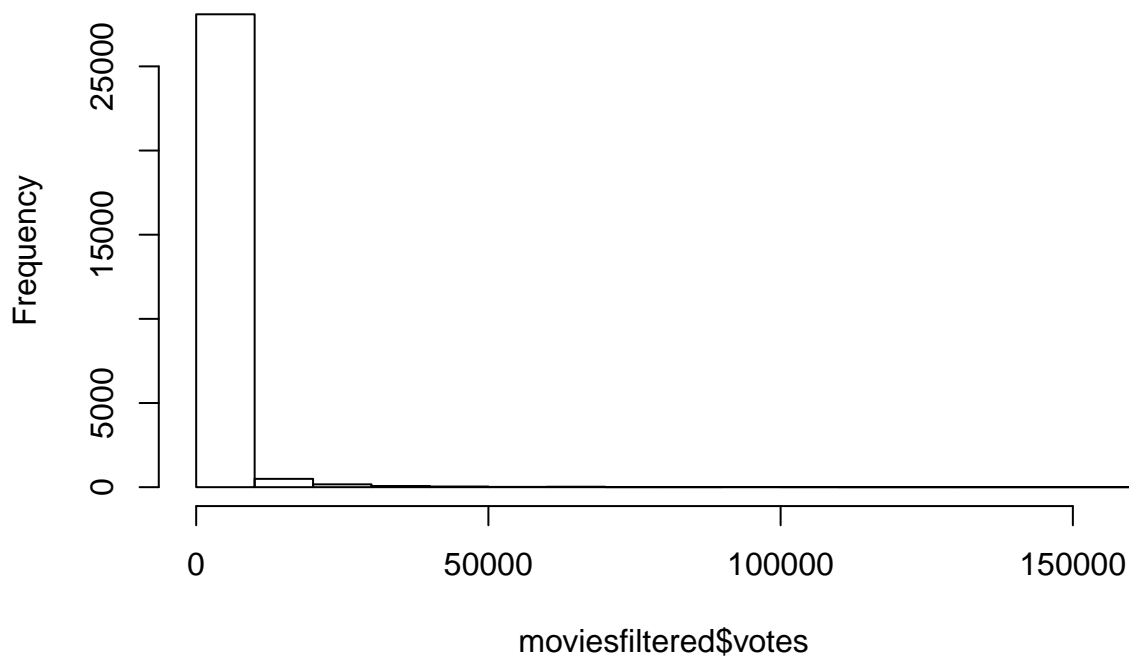

```
boxplot(movies$votes)
```

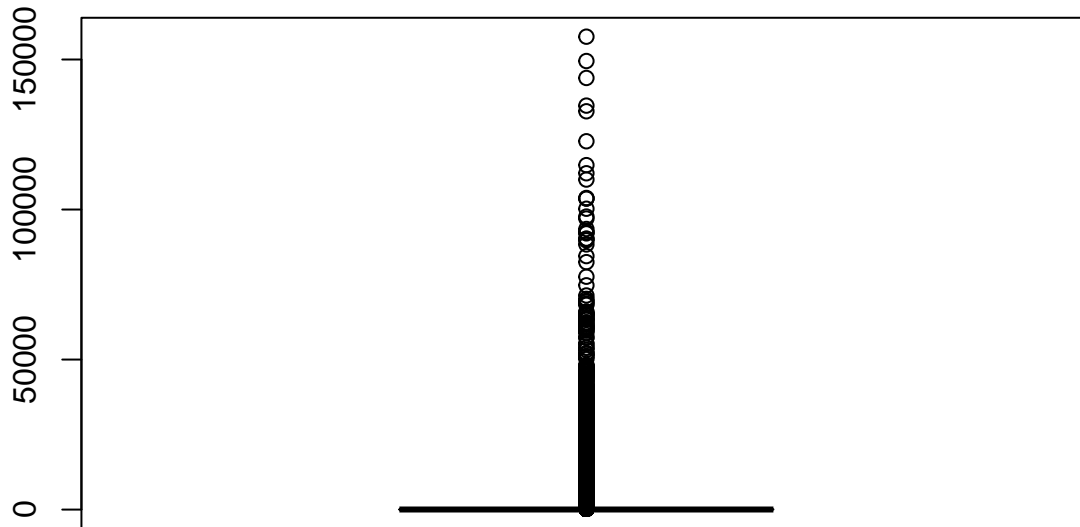

```
boxplot(moviesfiltered$votes)
```

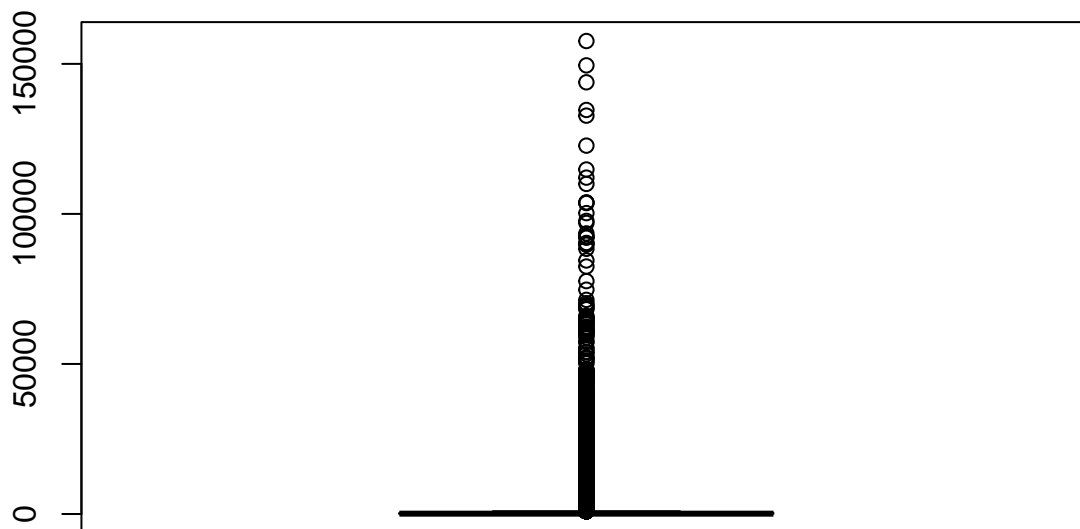

In this report, I will be using the ‘ggplot2movies’ dataset. The data is collected from the website <https://www.imdb.com> — a website dedicated to collecting information about various films, television shows, and celebrities. Users are able to complete reviews on the IMDB website allowing them to provide a score for a film on a scale from 1-10.

The ‘ggplot2movies’ package selects films from the IMDB site if they had a known length and had been rated by at least one IMDB user. Each film corresponds to one entry in the dataset and contains information on up to 25 variables; not all films contain information about all 25 categories. For example, many of the films from before 1960 do not contain information about the film budget which will be important when determining whether budget affects a films reception. The ‘ggplot2movies’ package contains information on a total of 58,788 films. All of the films used in the dataset were collected from the year 1893 to 2005.

Although the dataset contains information on 25 variables, I will only be analyzing a select few variables in the dataset. The variables and descriptions of the variables I will be analyzing can be seen below:

- ‘title’ — provides the titles of the movie
- ‘year’ — provides the year that the film was released
- ‘budget’ — provides the total budget of the film in US dollars
- ‘length’ — provides the length of the film
- ‘rating’ — provides the average rating of the film by IMDB users

- ‘mpaa’ — provides the MPAA (Motion Pictures Association of America) rating of the film

To make the variable ‘year’ easier to analyze, I created a variable titled ‘decade’ so that the films are grouped by decade. This makes it much easier to analyze because there are fewer values to analyze.

Below, you can see what the first few values of our dataset looklike:

```
head(moviesfiltered)
```

```
## # A tibble: 6 x 6
##   title                year length budget rating votes
##   <chr>              <int>  <int>  <int>  <dbl> <int>
## 1 $                 1971    121    NA     6.4   348
## 2 $pent             2000     91    NA     4.3    45
## 3 $windle           2002     93    NA     5.3   200
## 4 '49-'17           1917     61    NA     6     51
## 5 '94 du bi dao zhi qing 1994     96    NA     5.9    53
## 6 '?' Motorist, The    1906     10    NA     7     44
```


The population in this case is every person that watched the film and can rate the film on a scale from 1 to 10. The population frame in this case is all people who have an IMDB account, watched the film, and can rate the film on a scale from 1 to 10. Entries in the dataset were found by searching through IMDB and collecting data on films if they had a known length and had been rated by at least one IMDB user.

The key features of the data is the breadth of films that the data offers. We get information about films from various eras of cinema ensuring that our data is a good representation of films in general. The advantage of the dataset arises from the fact that our data is well representative of film in general; this means that when we perform an analysis on the data, we know that our results are meaningful. Despite the fact that it is well representative of film, it’s largely representative of Western cinema and missing out other large industries around the world; this can be viewed as a disadvantage because our data does not represent the entire film industry. If our data included films from the Eastern world, the results from our analysis may be different.

When observing the dataset, we can see that the dataset is severely left-skewed when looking at a histogram based on a film’s year of release.

```
library(ggplot2movies)
library(dplyr)
hist(movies$year)
```

## Histogram of movies\$year

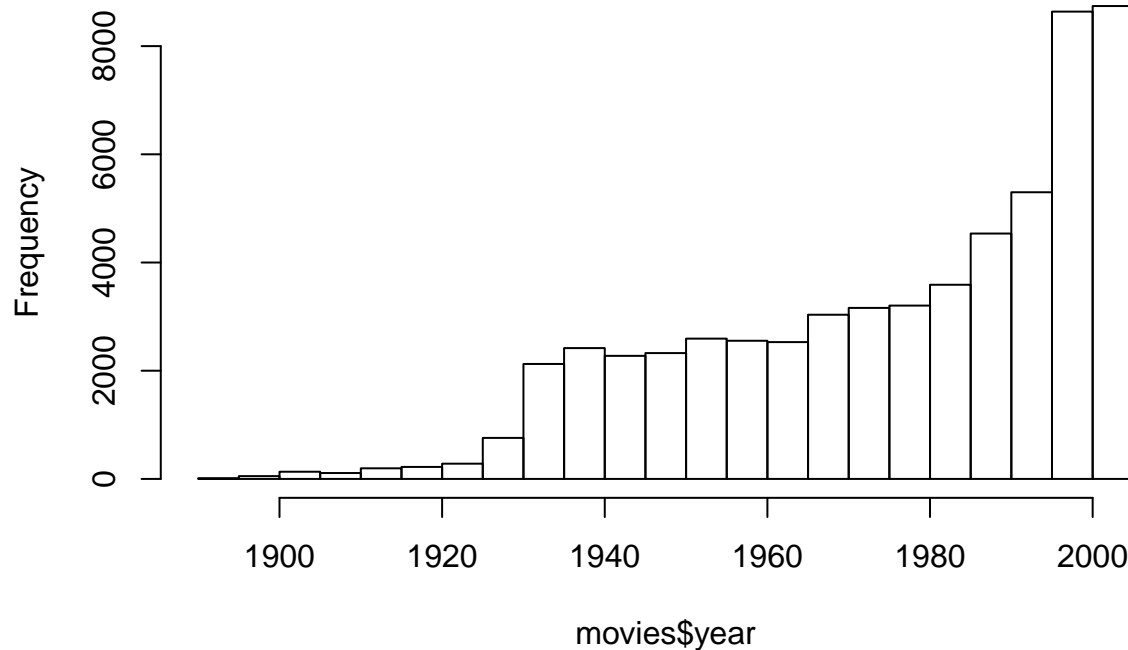

### Model

In this paper, I will be using linear regression to see how different variables can affect a film's reception.

A linear regression model can be explained by

$$y = a * x_0 + b$$

. In this case,

$$y$$

is the film's dependant variable and details the film's reception, while

$$x_0$$

is the independant variable that I want to determine if it affects the dependant variable. Using the `lm()` function in R, I will create a linear regression model, and then I will look at the summary of the model to see if the p-value is significant. If the p-value is less than 0.05, then I know that the independant variable affects a film's reception.

The dependant variable that I will be using in the linear regression model is 'rating'. Since I am analyzing a 'film's reception' in this paper, the variable that best encompasses reception is the average rating that IMDB users provide for the film.

The independant variables I will be analyzing are: - 'length'- this is simply provided by the variable 'length' - 'year'- this is simply provided by the variable 'year'. I did mutate another variable titled 'decade' which makes visualizing the data easier, but when performing linear regression, 'year' is more thorough so I decided to use 'year' as an independant variable. - 'budget'- this is simply provided by the variable 'budget'.

All 3 variables that I am analyzing are continuous variables.

Because I am identifying how a film's reception is affected by various independant variables, it makes sense to run linear regression as I want to see the cause and effect relationship between an independant and dependant variable.

## How budget affects a films reception

```
#Many rows of our data do not contain a budget, so I will remove those rows
budgetonly <- na.omit(moviesfiltered)
budgetonly
```

```
## # A tibble: 4,272 x 6
##   title                year length  budget rating votes
##   <chr>              <int> <int>    <int> <dbl> <int>
## 1 'G' Men             1935    85   450000    7.2   281
## 2 'Manos' the Hands of Fate 1966    74    19000    1.6  7996
## 3 'Til There Was You      1997   113 23000000    4.8   799
## 4 .com for Murder         2002    96  5000000    3.7   271
## 5 10 Things I Hate About You 1999    97 16000000    6.7 19095
## 6 100 Mile Rule           2002    98  1100000    5.6   181
## 7 101                    1989   117   200000    7.8   299
## 8 102 Dalmatians          2000   100 85000000    4.7  1987
## 9 11:14                   2003    95  6000000    7.1   605
## 10 12 Angry Men           1957    96   340000    8.7 29278
## # ... with 4,262 more rows
```

```
linregbudget <- lm(rating~budget, data=budgetonly)
summary(linregbudget)
```

```
##
## Call:
## lm(formula = rating ~ budget, data = budgetonly)
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -4.5420 -0.8426  0.1588  1.0456  3.8604
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  6.040e+00  2.496e-02 241.986  <2e-16 ***
## budget       1.196e-09  8.395e-10   1.425    0.154
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 1.365 on 4270 degrees of freedom
## Multiple R-squared:  0.0004752, Adjusted R-squared:  0.0002411
## F-statistic:  2.03 on 1 and 4270 DF, p-value: 0.1543
```

```
#Judging by the high p-value, we can conclude that a films budget does not affect its reception among t
```


## How length affects a films reception

```
linreglength <- lm(rating~length, data=moviesfiltered)
summary(linreglength)
```

```
##
## Call:
## lm(formula = rating ~ length, data = moviesfiltered)
##
## Residuals:
```

```
##      Min      1Q  Median      3Q      Max
## -4.9570 -0.8594  0.2275  1.0353  3.9750
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)  5.9148270  0.0195429 302.658  <2e-16 ***
## length      0.0004844  0.0001910   2.536   0.0112 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 1.397 on 28934 degrees of freedom
## Multiple R-squared:  0.0002222, Adjusted R-squared:  0.0001876
## F-statistic: 6.431 on 1 and 28934 DF, p-value: 0.01122
```

```
plot(rating~length,data=moviesfiltered )
```

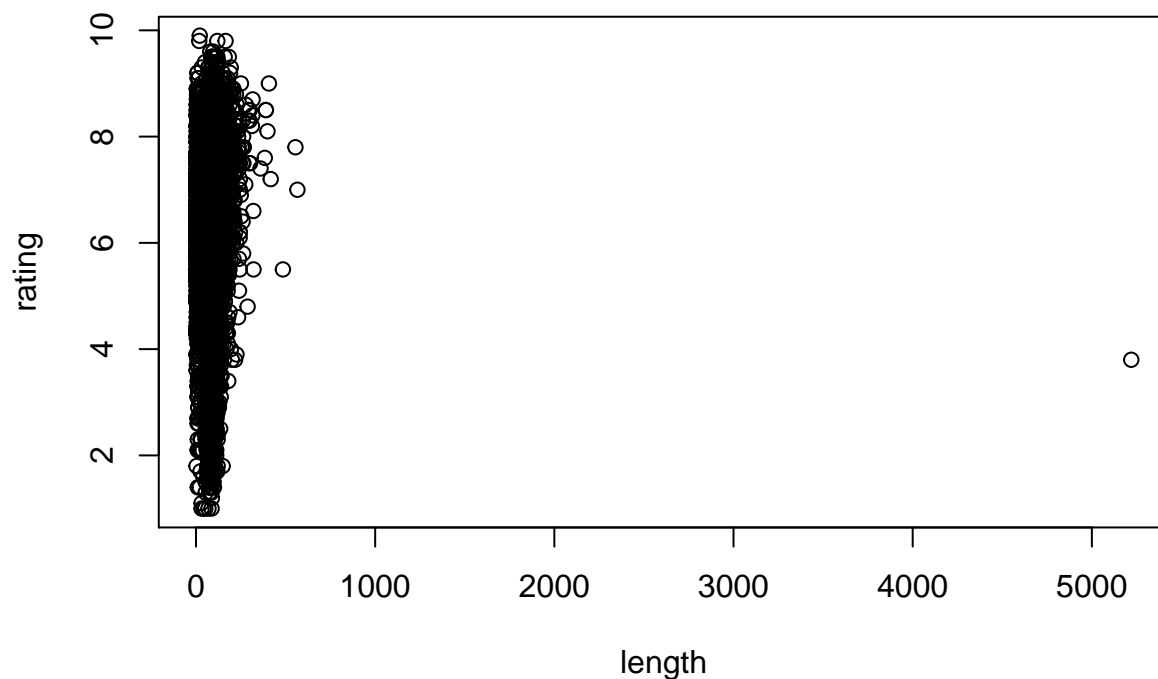

*#Yes, films that are longer get better rating*

Does the decade a film was released in affects its reception?

How certain genres compare to other genres

Show analysis of data

```
# Important to note that movies can fall in more than 1 category
actionmovies <- subset(movies, Action == 1)
animationmovies <- subset(movies, Animation == 1)
comedymovies <- subset(movies, Comedy == 1)
dramamovies <- subset(movies, Drama == 1)
romancemovies <- subset(movies, Romance == 1)
documentarymovies <- subset(movies, Documentary == 1)
actionmovies <- subset(movies, Action == 1)
```

*#Perform linear regression on each one to see how it affects a films reception*

## **Results**

Show what we concluded from our analysis

## **Appendix**

Show all lines of code and extraneous graphs