BHASHINI TRANSLATION PLUGIN v3

Usage Documentation

Digital India Bhashini Division

Version: 3.0

Date: 14-05-2025

Table of Contents

Sl. No	Title	Page Number
1	Introduction	2
2	Translation Plugin Implementation Steps	3
4	Additional Features	12
5	FAQs	13
6	Contact Us	15

Introduction

This comprehensive guide provides all the information you need to seamlessly integrate Version 3 of our powerful translation plugin into your website, enabling smooth translation between English and Bhartiya languages.

Key Features:

1. **Seamless Translation**: Effortlessly translate your website content between English and Bhartiya languages with high accuracy.
2. **Glossary Addition**: Utilise glossary for domain specific translations, enabling accurate and context aware translations.
3. **Selective Translation**: Skip translation for specific text enclosed within certain tags, ensuring precise control over what gets translated.
4. **Customizable Placement:** Position the translation plugin widget on your website's bottom left or bottom right, tailored to your design preferences.
5. **Preferred Language Storage:** Remember the language used for translating a page in a website and auto-translate any page from the website to the previously translated language when opened in a browser.

By following this guide, you'll be able to leverage the full potential of the BHASHINI Translation Plugin, making your website more accessible and user-friendly for a multilingual audience.

Translation Plugin Implementation Steps

The Bhashini Plugin can be embedded in any website using the following approach. The integration behaviour may differ based on the framework being used.

For **Vanilla JS / Static HTML Sites**

Step 1: Add the plugin script at the bottom of the <body> tag in index.html

```
<script src="https://translation-plugin.bhashini.co.in/v3/website_translation_ utility.js"></script>
```

Properties of the Script Tag

1. **`src`**:
    - **Definition**: The `src` attribute specifies the URL of an external script file to be executed.
    - **Explanation**: In this case, `https://translation-plugin.bhashini.co.in/v3/website_translation_utility.js` is the URL that points to the JavaScript file for the BHASHINI Translation Plugin. This file contains the necessary code to enable translation functionality on your website.

Step 2: Wherever you want the plugin to appear, add a container with the class bhashini-plugin-container:

```
<div class="bhashini-plugin-container"></div>
```

Since vanilla JS sites load and render DOM synchronously, the plugin script will immediately find the target container and mount itself without issues.

For **React / Next.js or other SPA frameworks**

Add useEffect inside the last component, such as Footer

```
useEffect(() => {
    const script = document.createElement("script");
    script.src = " https://translation-plugin.bhashini.co.in/v3/website_t
    ranslation_utility.js ";
    script.async = true;
  document.body.appendChild(script);
}, []);
```

This ensures the plugin is injected **only after** the component is mounted and the target DOM element exists.

2. In Next.js, place the script inside useEffect or load it using next/script with strategy="afterInteractive" to avoid hydration issues

	The plugin is visible in the website as shown here. It will be visible within the container having the class. Users can click the Select button and identify the language to translate to.

Placement of the Script Tag

For optimal performance and easier management, it is recommended to place this script tag at the end of the body tag:

```
<body>
      <!-- Your website content goes here -->  <!--
      BHASHINI Translation Plugin Script -->
      <script src="https://translation-
      plugin.bhashini.co.in/v3/website_transla
      tion_utility.js"></script>
</body>
```

To utilise the BHASHINI Translation Plugin within your application, you would need to register within the onboarding application for BHASHINI service (https://dashboard.bhashini.co.in/user/register) or login if you already have an account (https://dashboard.bhashini.co.in/user/login)

Once logged in, you can request for access to the Translation Plugin Application by following the following steps:

Click on View Parikshan Applications

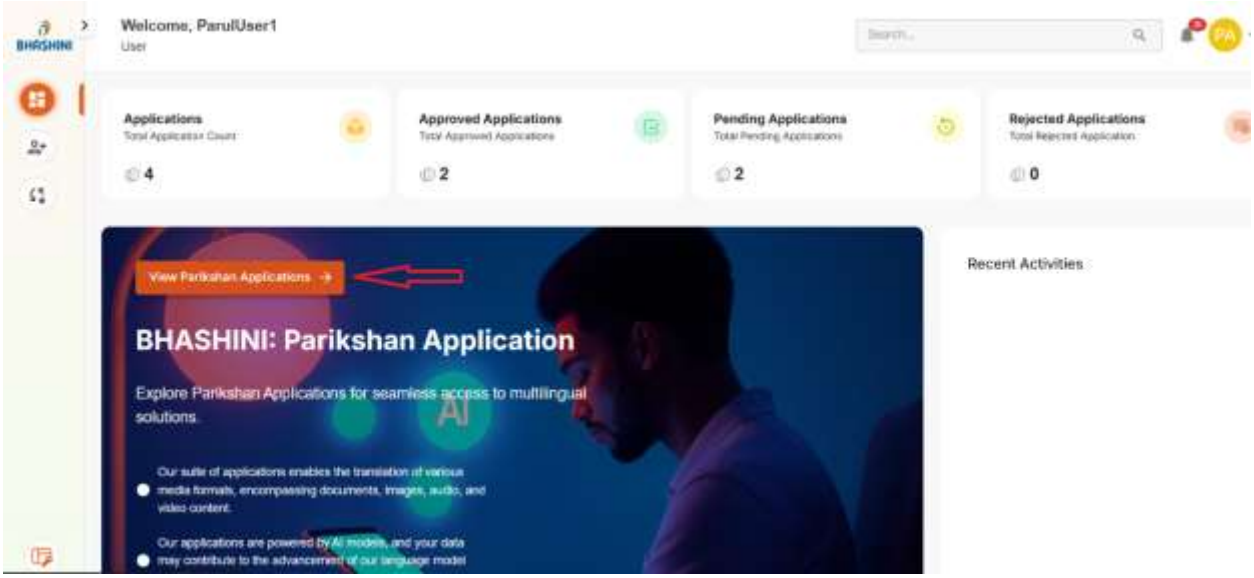

Click on Request Application button for Bhashini Translation Plugin

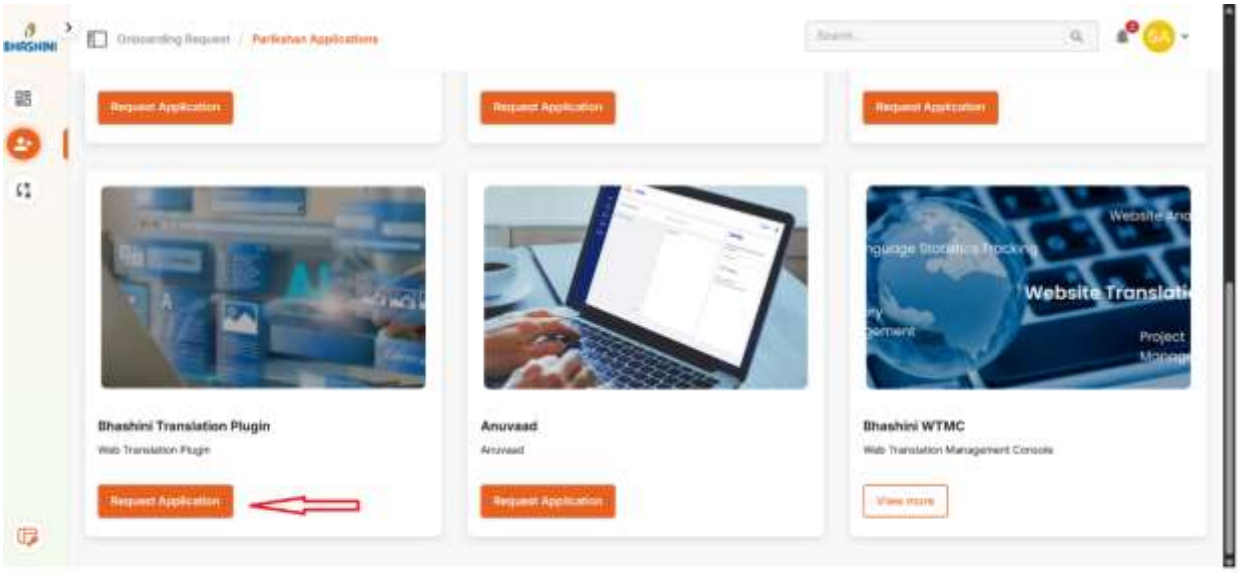

On clicking the Request Application button, a pop-up appears prompting you to select a manager from the 'Select Onboarding Manager' dropdown where you may select the name of Onboarding Manager you may be in touch with. Alternately, if you are unsure, please select NA/Others and click on Request Access button.

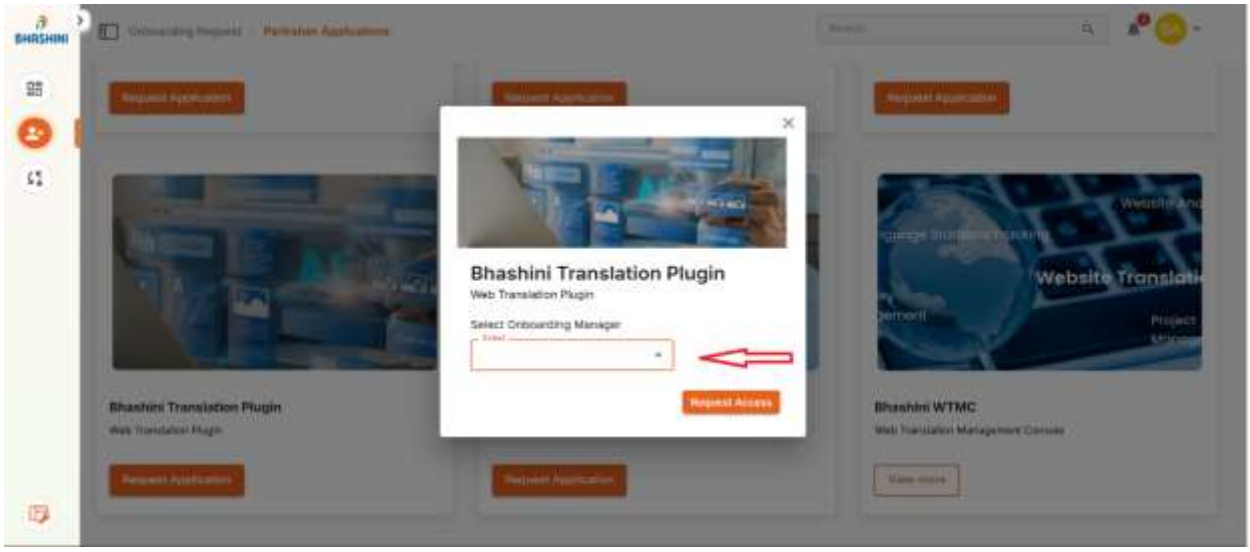

Next you will be shown a pop up to enter your Host Name URL (your website URL for which you require the translation plugin)

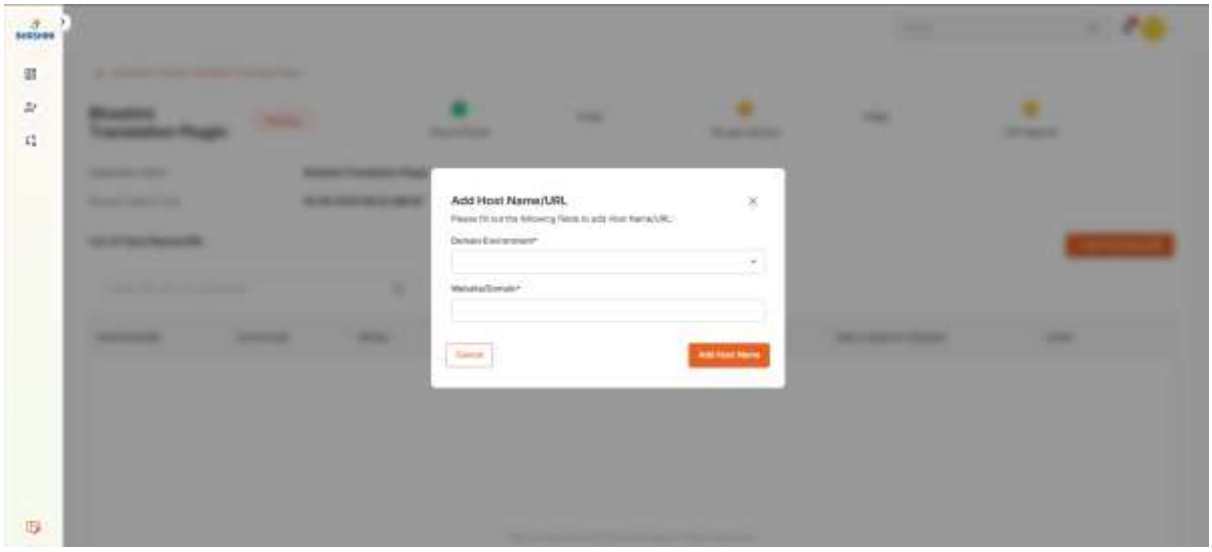

Click on the Domain Environment dropdown and select the environment of the website (hostname URL) for which you are requesting the translation plugin. You can choose from Test, UAT or Production

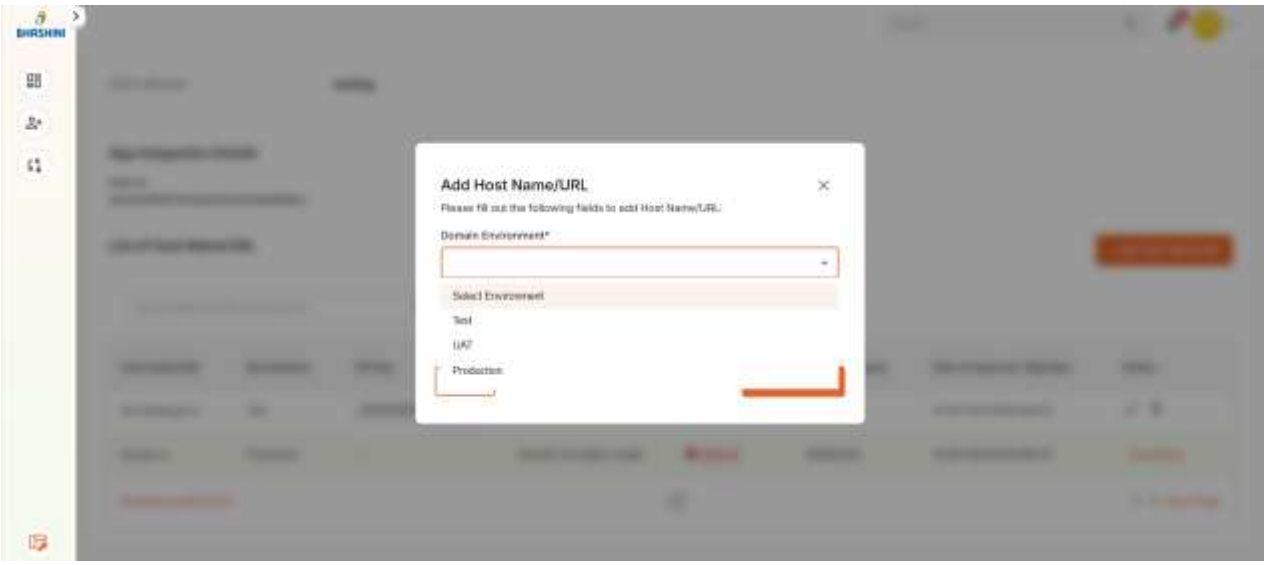

Next enter the website URL as shown in example below.

Enter the hostname of your website [Only the domain name such as bhashini.gov.in if your website is https://www.bhashini.gov.in/home for instance]. https://www. Or /home path should not be a part of the Hostname.

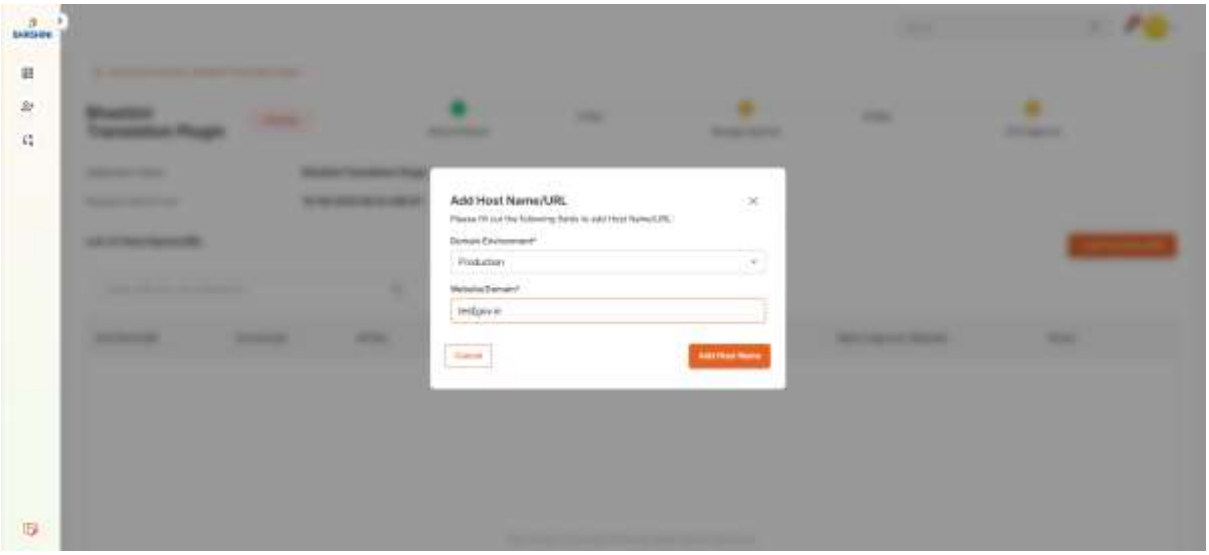

Your request for Translation Plugin is successfully submitted and assigned to the chosen Manager. Request will look like below with Request Raised as green on timeline. Please allow a few days' time for approval process which is twofold that is manager approves and then the CEO approves. You can track the progress of your request any time by logging into your account.

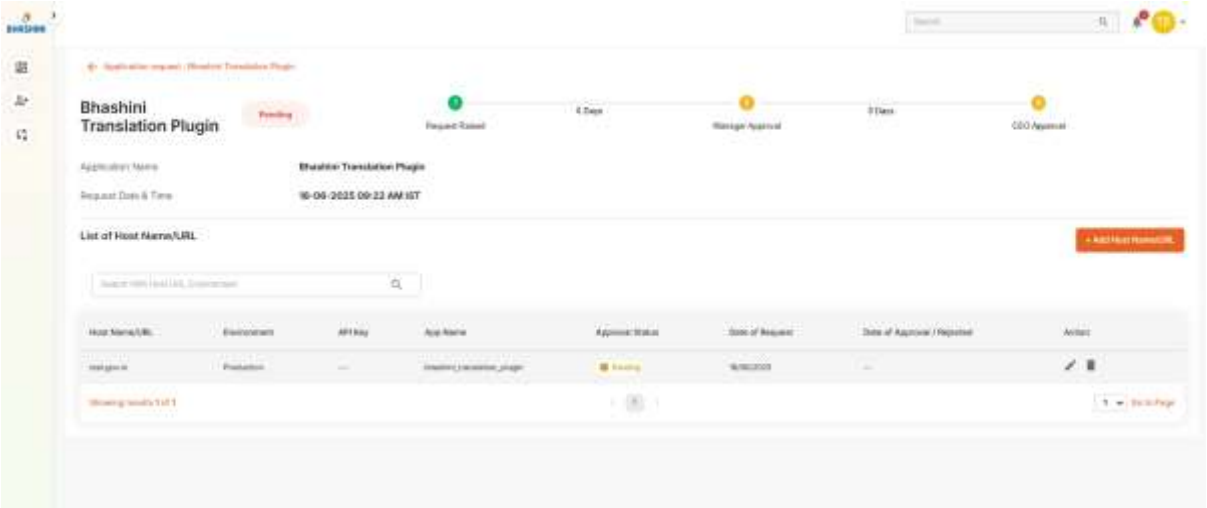

What if you need to request for another website URL? Simply click on Add Host Name/URL button and repeat the above steps. This can be done at any time.

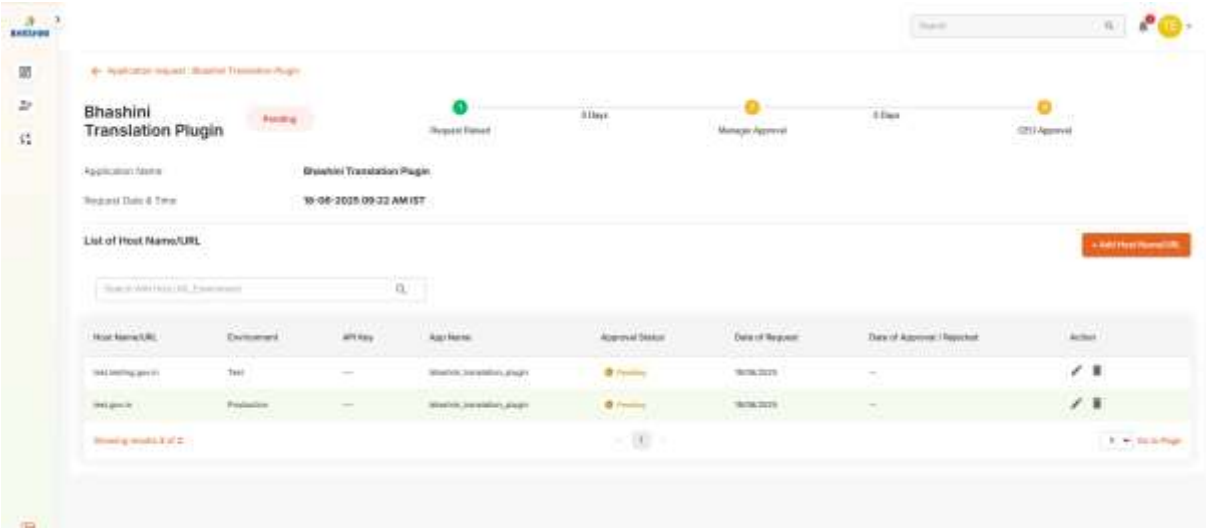

Once CEO approves or rejects the request you will be able to see the domain mapping requests in below states (Approved or Rejected)

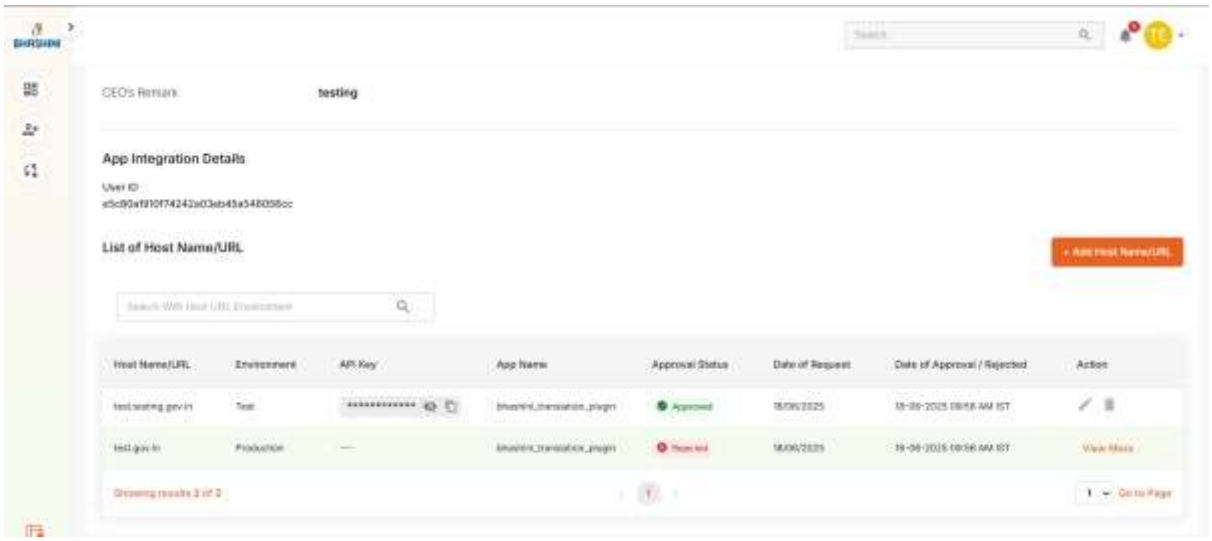

Notice the User ID visible on the screen above.
Also Note that on Approval of Host Name URL mapping request, you will be able to see the API key in a masked state for data privacy.
Click on the eye icon to view the key and click on the copy icon next to it to copy the key and use it.

Additional Features

Skip Translation:

By adding the class `bhashini-skip-translation` to any HTML element, you can exclude that specific element from being translated by the BHASHINI Translation Plugin. This is useful for text that should remain in its original language, such as brand names, technical terms, or any other content you want to keep unchanged.

Below is an example that demonstrates how to use the BHASHINI Translation Plugin on your webpage and how to skip the translation of certain text by using the class “bhashini-skip-translation”.

```
<body>
     <!-- Your website content goes here -->
     <!-- BHASHINI Translation Plugin Script -->
     <p> Translate This </p>
     <p class="bhashini-skip-translation">Skip Translating This</p>
     <script src="https://translation-
     plugin.bhashini.co.in/v3/website_transla
     tion_utility.js"></script> </script>
</body>
```

Glossary:

Once logged into BHASHINI's onboarding application and your host name - domain mapping is performed, the glossary entries mapped to the API Key within Udyat application will be used to perform replacements when the BHASHINI translation plugin is used within your website. To create these glossary entries, kindly contact your onboarding manager for a glossary list to be uploaded between English and Indic languages accordingly.

Preferred Language Storage:

Whenever a user utilizes your website and translates a specific page to an Indic language and moves to a different webpage in your site, the new webpage gets translated to the previously translated Indic language by keeping a track of preferred language storage system in the browser's local storage.

FAQs

1. How do I display Manipuri (Meetei) Font if it's not installed on the user's computer?

To ensure the Manipuri (Meetei) font is displayed correctly even if it's not installed on the user's computer, you can import the necessary font from Google Fonts. Add the following line of code to your CSS file:

```
@import
url('https://fonts.googleapis.com/css2?family=Noto+Sans+Meetei+Mayek:wght@100..900&display=swap');
```

This will load the "Noto Sans Meetei Mayek" font, which supports the Manipuri (Meetei) script, ensuring it displays correctly on your website regardless of the fonts installed on the user's device.

As a fallback option, you can specify alternative fonts in case the primary font fails to load. Here's an example of how to set up your CSS to include a fallback:

```
body {          font-family: ‘Arial', 'sans-serif','Noto Sans Meetei

Mayek', ;

}
```

In this example, if the "Arial" font or a generic sans-serif font cannot be loaded, the browser will attempt to use "Noto Sans Meetei Mayek" font as a backup. This ensures that text is always displayed, even if the preferred font isn't available.

2. Is it possible to skip translation for any specific tags?

Yes, as specified in the Implementation Steps section, you can skip tags to be translated by using “bhashini-skip-translation” class for the specific tag.

3. I have the plugin retranslating the page in certain circumstances. For example, when a dropdown menu is hovered on, it retranslates that content, even though it doesn’t change. How do I resolve this?

This issue occurs because the plugin detects a DOM reload, where the text content is internally replaced even if it hasn't changed visibly. When the DOM is reloaded, the plugin treats it as new content and retranslates it.

To avoid this, you should minimize DOM reloads by ensuring that the content is managed in a way that doesn’t trigger these reloads. One effective approach is to style the content using inline CSS. By doing so, you reduce the chances of the DOM being reloaded when interacting with elements like dropdown menus, which in turn prevents unnecessary retranslations.

4. How to change the color of the icon

To change the color of the icon, “language-icon-color” has to beed passed in the script tag

For eg: `<script src=https://translation-plugin.bhashini.co.in/v3/website_translation_ utility.js`

```
language-icon-color= “#fff”

></script>
```

3. Certain keywords are translated wrongly. How do I resolve this?

BHASHINI offers Translation Plugin services with Glossary System to override default translations with domain specific translations.

Example:

- Default Translation: "Digital India Bhashini Division" is translated to "डिजटल इं डया भै सनी प्रभाग".
- With Glossary Term: If the glossary term between English and Hindi is entered as "डिजटल इं डया भा षणी डवीज़न", this will override the default translation.

To utilize glossary within your system, please reach out to your onboarding manager.

Contact Us

For any further information, please email to ceo-dibd@digitalindia.gov.in