


Raw JDBC:

1. Open a connection
2. Create a statement
3. Close connection / Statement
4. Catching SQL Exception

What we need to change :



1. SQL Query
2. Parameter values
3. Result mapping

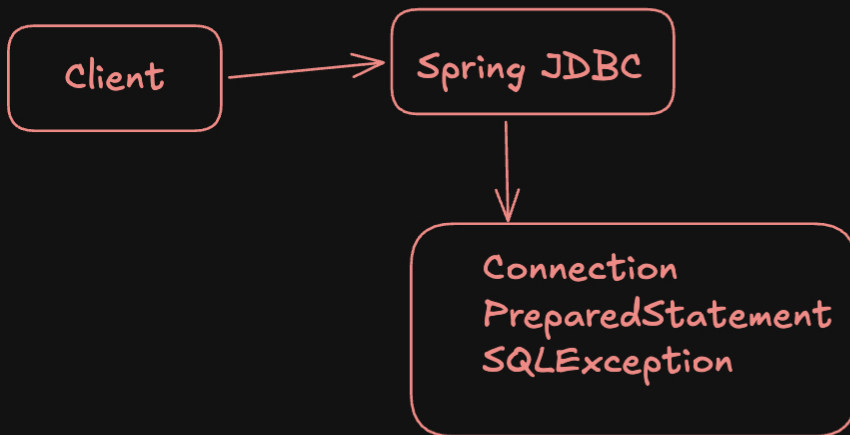

Template Design Pattern

```
m1();  
m2();  
m3();  
m4();
```

A vertical arrow points downwards from the right side of the method calls, indicating a sequence or a template.

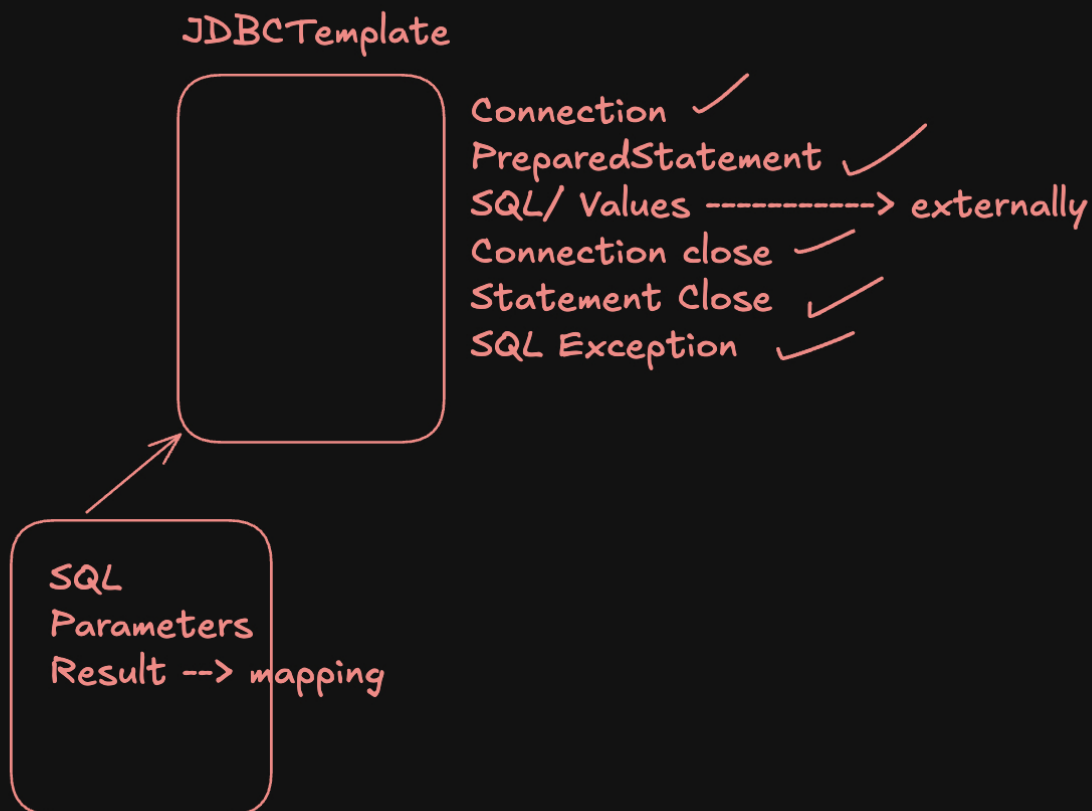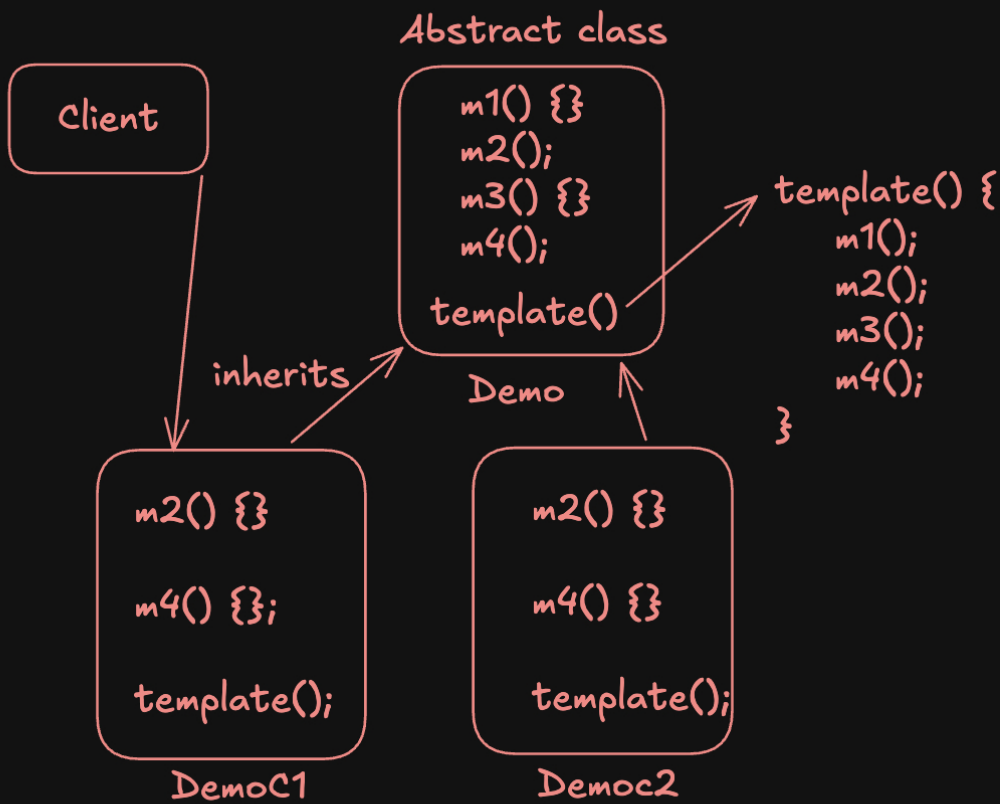


interface

DataSource

```
Connection c = dataSource.getConnection();
```


Connection --> Expensive

Connection Pool

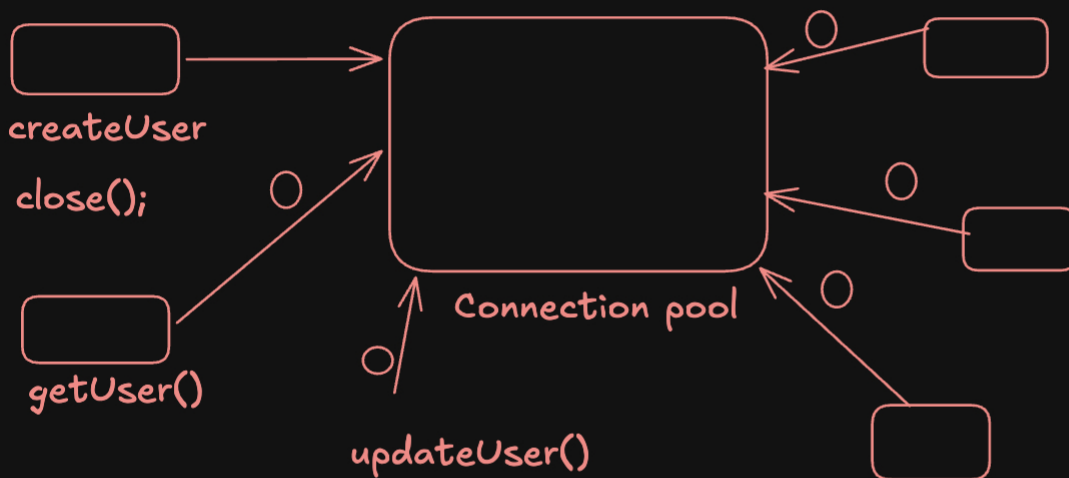


HikariCP

1. Detect Spring JDBC on the classpath
2. Detect a JDBC driver
3. Read spring.datasource properties
4. Detect an available connection-pool implementation
5. Prefer HikariCP when available
6. Create a configured DataSource
7. Register it as a Spring bean

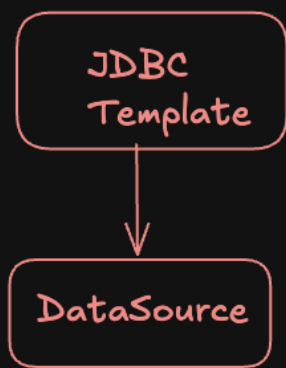

update() —→ CREATE/UPDATE/DELETE
query() —→ SELECT (read)
queryForObject() —→ ONE ROW ONLY

Interface

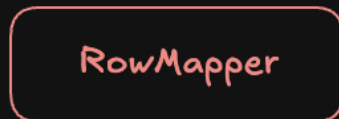

<T> mapRow(Resultset result,
int rowNumber);

Exception Translation :

