

 ✓	What is CSS? video	07:11
 ✓	Basic CSS Format video	04:22
 ✓	Including CSS video	14:51
 ✓	Color Property video	05:43
 ✓	Background Color Property video	02:34
 ✓	Practice Qs video	03:03
 ✓	Color Systems (Name & RGB) video	12:50
 ✓	Hex Codes video	11:21
 ✓	Practice Qs video	01:54
 ✓	Text Align Property video	10:02
 ✓	Font Weight & Text Decoration video	10:32
 ✓	Line Height & Letter Spacing video	04:36
 ✓	Units in CSS (Pixel) video	07:00
 ✓	Font Family video	07:01
 ✓	Practice Qs video	06:44

CSS

Cascading Style Sheets



html



html with css



What is CSS ?

It is a language that is used to describe the **style** of a document

html > css
↓
content ↗

text
color
bg color
button
⋮
↑ properties



Avengers (comics)

52 languages

Article Talk

Read Edit View history Tools

From Wikipedia, the free encyclopedia

*This article is about the Marvel Comics team. For the comic books that feature this team, see *The Avengers (comic book)*. For the Marvel Cinematic Universe adaptation, see *Avengers (Marvel Cinematic Universe)*.*

The **Avengers** are a team of **superheroes** appearing in **American comic books** published by **Marvel Comics**, created by writer-editor **Stan Lee** and artist/co-plotter **Jack Kirby**. The team made its debut in *The Avengers* #1 (cover-dated September 1963). Labeled "Earth's Mightiest Heroes," the original Avengers consisted of **Iron Man**, **Ant-Man**, **Hulk**, **Thor** and the **Wasp**. **Captain America** was discovered trapped in ice in issue #4, and joined the group after they revived him.

The Avengers are an all-star ensemble cast of established superhero characters from the **Marvel Comics** portfolio. Diegetically, these superheroes usually operate independently but occasionally assemble as a team to tackle especially formidable villains. This in contrast to certain other superhero teams such as the **X-Men**, whose characters were created specifically to be part of their team, with the team being central to their identity. The Avengers were created to create a new line of books to sell and to cross-promote Marvel Comics characters. An Iron Man fan might buy an Avengers book because Iron Man appears in them, and perhaps in turn take an interest in Thor, who appears in the same book as Iron Man's friend and comrade.^[2] The cast usually features a few highly popular characters who have their own solo books, such as Iron Man, alongside a number of lesser-known characters who benefit from exposure, such as **Quicksilver**.^[3]

The Avengers have appeared in a wide variety of media outside of comic books, including several different animated television series and direct-to-video films. Beginning in 2008, they were adapted in a **film series** from **Marvel Studios**, known as the **Marvel Cinematic Universe**, culminating with *The Avengers* in 2012, with more appearances of the team in subsequent films.

Publication history



The team debuted in *The Avengers* #1 (September 1963). Much like the **Justice League**, the Avengers were an assemblage of superheroes who each had an existing series of his own. All of the characters were created by **Stan Lee** and **Jack Kirby**. This initial series, published bi-monthly through issue #6 (July

The Avengers

Cover of *The Avengers* Vol. 3 #38 (March 2001). Depicting (left-to-right): Hulk, Iron Man, Wasp, Thor, Vision, Captain America, Wonder Man, Hank Pym (as Goliath), Scarlet Witch, Carol Danvers (as Warbird), Quicksilver, and Delroy Garrett (as Triathlon). Art by Alan Davis

Publication information	
Publisher	Marvel Comics
First appearance	<i>The Avengers</i> #1 (September 1963)
Created by	Stan Lee (writer/editor) Jack Kirby (artist/co-plotter)
In-story information	
Base(s)	The Progenitor (a dead celestial) ^[1] Avengers Mansion (formerly) Hydro-Base (formerly) Avengers Tower (formerly)

APNA COLLEGE

Elements Console Sources

```
<!DOCTYPE html>
<html class="client-js vector-feature-language-in-header-enabled vector-
eature-language-in-main-page-header-disabled vector-feature-language-alen
t-in-sidebar-enabled vector-feature-sticky-header-disabled vector-feature
-page-tools-pinned-disabled vector-feature-toc-pinned-enabled vector-feat
ure-main-menu-pinned-disabled vector-feature-limited-width-enabled vector
-feature-limited-width-content-enabled vector-feature-zebra-design-disabl
ed vector-animations-ready ve-available" lang="en" dir="ltr">
  <head>
  </head>
  <body class="skin-vector skin-vector-search-vue mediawiki ltr sitedir-l
tr mw-hide-empty-elt ns=0 ns-subject mw-editable page-Avengers_comics r
ootpage-Avengers_comics skin-vector-2022 action-view uls-dialog-sticky-
hide">
    <a class="mw-jump-link" href="#bodyContent">Jump to content</a>
    <div class="vector-header-container">
    <div class="mw-page-container">
    body.skin-vector.skin-vector-search-vue.mediawiki.ltr.sitedir-ltr.mw-hide-empty-e
    </div>
  </body>
</html>
```

Styles Computed Layout Event Listeners DOM Breakpoints

Filter

```
element.style {
}

body {
  background-color: #f8f9fa;
  color: #202122;
  overflow-y: scroll;
}

html, body {
  font-family: sans-serif
}

html, body {
  height: 100%;
}

body {
  margin: 0;
}
```

Console What's new

Highlights from the C...

CSS property doc...

Basic Format of CSS

heading $\rightarrow$ h1 $\rightarrow$ Red

a = 2

b = 5

Selector

h1 {

color: red;

}

Property

Value



How to Include Styles?

- **Inline Styles**

Writing style directly inline on each element

```
<h1 style="color: red"> Apna College </h1>
```



EXPLORER

CSS

index.html

index.html X

index.html > html > body > p

```
1 <!DOCTYPE html>
2 <html lang="en">
3   <head>
4     <meta charset="UTF-8" />
5     <meta http-equiv="X-UA-Compatible" content="IE=edge" />
6     <meta name="viewport" content="width=device-width, initial-scale=1.0" />
7     <title>CSS Chapter 1</title>
8   </head>
9   <body>
10     <!-- Inline Style -->
11     <h1 style="color: red">Apna College</h1>
12     <h1 style="color: red">Shradha Khapra</h1>
13     <h1 style="color: red">Hello World!</h1>
14     <p style="color: pink">This is a paragraph.</p>
15     <button style="color: blue; background-color: orange">Help</button>
16   </body>
17 </html>
18
```





How to Include Styles?

- Using `<style>` tag

Style is added using the `<style>` element in the same document

```
<style>  
  h1 {  
    color : red;  
  }  
</style>
```



EXPLORER

css

index.html

index.html

index.html > html > head > style

```

1  <!DOCTYPE html>
2  <html lang="en">
3    <head>
4      <meta charset="UTF-8" />
5      <meta http-equiv="X-UA-Compatible" content="IE=edge" />
6      <meta name="viewport" content="width=device-width, initial-scale=1.0" />
7      <title>CSS Chapter 1</title>
8      <style>
9        h1 {
10          color: red;
11          background-color: black;
12        }
13      </style>
14    </head>
15    <body>
16      <!-- Inline Style -->
17      <!-- <h1 style="color: red">Apna College</h1>
18      <h1 style="color: red">Shradha Khapra</h1>
19      <h1 style="color: red">Hello World!</h1>
20      <p style="color: pink">This is a paragraph.</p>
21      <button style="color: blue; background-color: orange">Help</button>
22
23      <!-- Style Tag -->
24      <h1>Apna College</h1>
25      <h1>Shradha Khapra</h1>
26      <h1>Hello World!</h1>
27    </body>
28  </html>

```



How to Include Styles?

- **External Stylesheet**

Writing CSS in a separate document & linking it with HTML file

↓
css file

abc.html
def.html
index.html } APNA COLLEGE

abc.css
style.css
myStyle.css }



Linking HTML with CSS File

<head>


```
<link rel="stylesheet" ref="style.css">
```

</head>



Color Property

Used to set the color of foreground

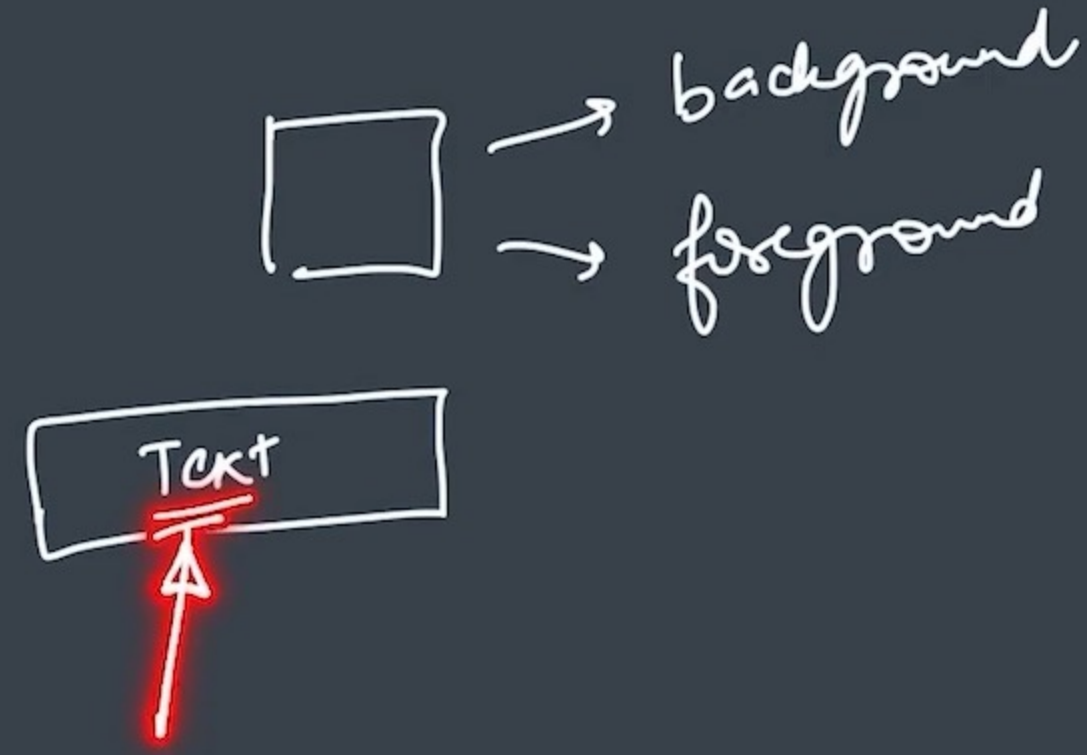

`color : purple;`

`color : #ffffff;`



CSS Chapter 1

color - CSS: Cascading Style S

+

developer.mozilla.org/en-US/docs/Web/CSS/color

APNA COLLEGE

mdn web docs

References

Guides

MDN Plus

Theme

Log in

Get MDN Plus

English (US)

References > CSS > color

caption-side

caret-color

clear

clip

clip-path

color

color-scheme

column-*

columns

contain-*

container-*

content

content-visibility

counter-*

cursor

color

The **color** CSS property sets the foreground [color value](#) of an element's text and [text decorations](#), and sets the [currentcolor](#) value. **currentcolor** may be used as an indirect value on *other* properties and is the default for other color properties, such as [border-color](#).

Try it

CSS Demo: color

RESET

: blue

color: #00ff00;

color: rgb(214, 122, 127);

color: hsl(30, 100%, 50%);

color: hsla(30, 100%, 50%, .3);

color: hwb(1.5708rad 20% 10% / 0.

Chancellor sitting in
Lincoln's Inn Hall.
Implacable November
weather. As much mud in
the streets as if the
waters had but newly
retired from the face of
the earth, and it would
be wonderful to meet
Megalosaurus, forty feet
long or so, waddling like

In this article

Try it

Syntax

Accessibility concerns

Formal definition

Formal syntax

Examples

Background Color Property

Used to set the color of background

```
background-color : purple;
```

```
background-color : #ffffff;
```



Practice Qs

Write CSS for these Elements according to the given style guidelines:

Hi there!

My name is Tom & I am there to help you.

Need Help

h2 : orange text

button : blue background color
white text

p : black background color
white text

CSS



Color Systems

Named Colors

color = black;

Each browser recognizes around 140 named colors.

Eg - red, blue, pink, purple, magenta, teal etc.



Color Systems

RGB

```
color = rgb(0, 0, 0);
```


Red Green Blue (0-255)

red is `rgb(255, 0, 0)`

black is `rgb(0, 0, 0)`

blue is `rgb(0, 0, 255)`

yellow is `rgb(255, 255, 0)`

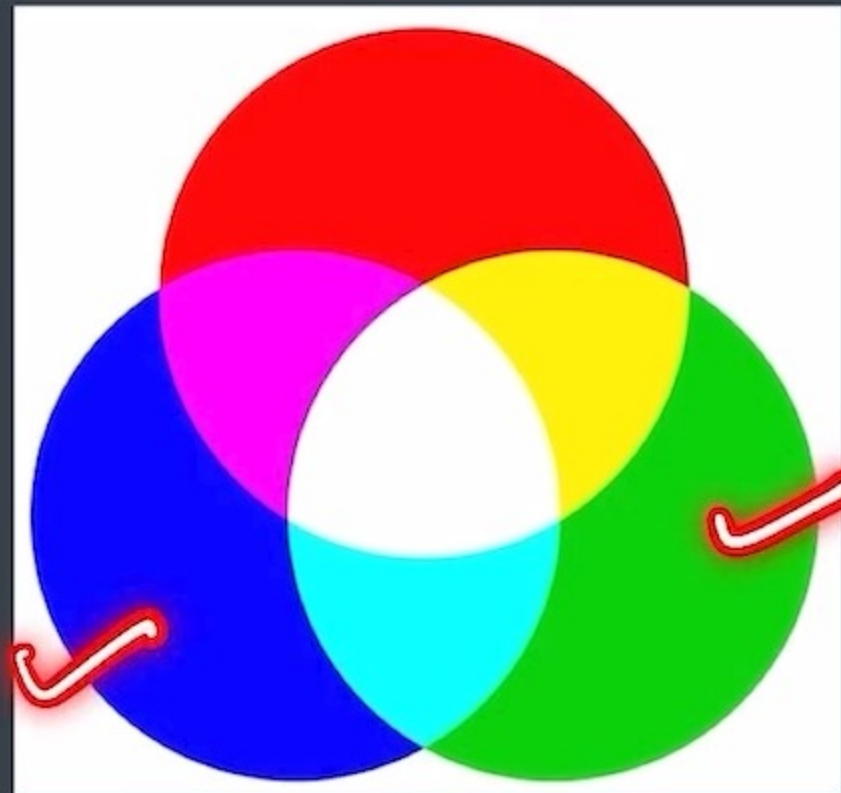

Red
Green
Blue



Color Systems

RGB

→ 1st

Red Green Blue (0-255)

red is `rgb(255, 0, 0)`


black is `rgb(0, 0, 0)`

blue is `rgb(0, 0, 255)`

yellow is `rgb(255, 255, 0)`

`color : rgb(255, 0, 0)`

`color = rgb(0, 0, 0);`

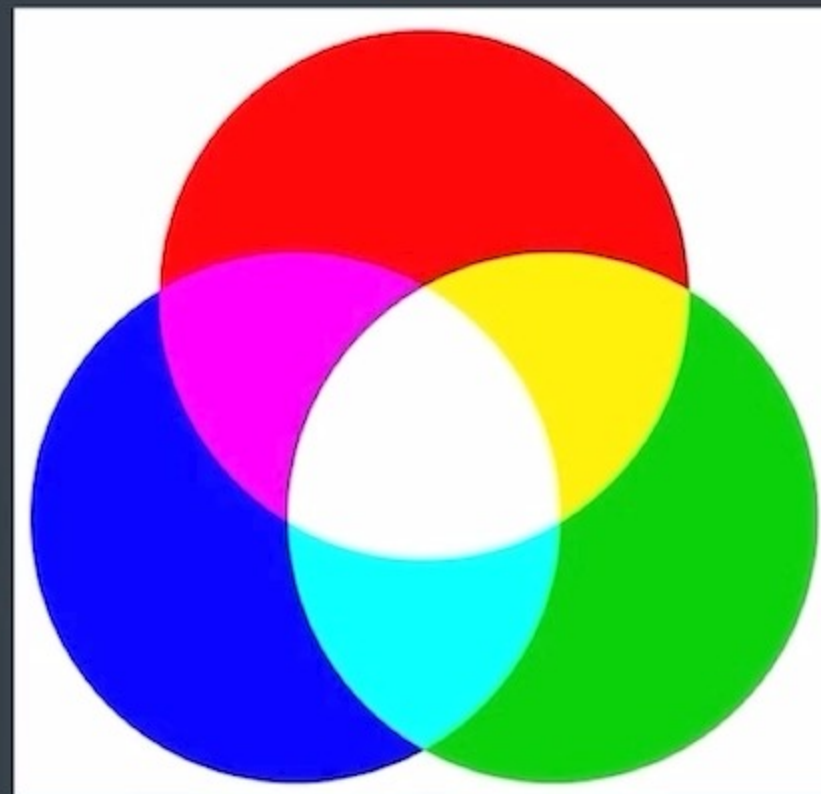

Red channel
Green channel
Blue channel



rgb → millions

rgb (120, 43, 145)
-R- -G- -B- ↑



Color Systems

Hexadecimal or Hex

color = #FFFFFF;
 R G B

Letters : 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F

→ rgb(R, G, B)



Number Systems

Decimal (math)

Digits: 0 to 9

used in daily math

base 10

0-9 0-9 0-9

000 - 999

Binary

Digits: 0 & 1

used in computers

base 2

0,1 0,1 0,1

000 $\leftrightarrow$ 111

Hexadecimal

0-9 A,B,C,D,E,F (16 chars)

hexcode / color system

base 16



Color Systems

Hexadecimal or Hex


R: 0-255
hexcode: 00 - ff

color: #000000;

color: #ffffff; ✓

APNA
COLLEGE

#ffa511

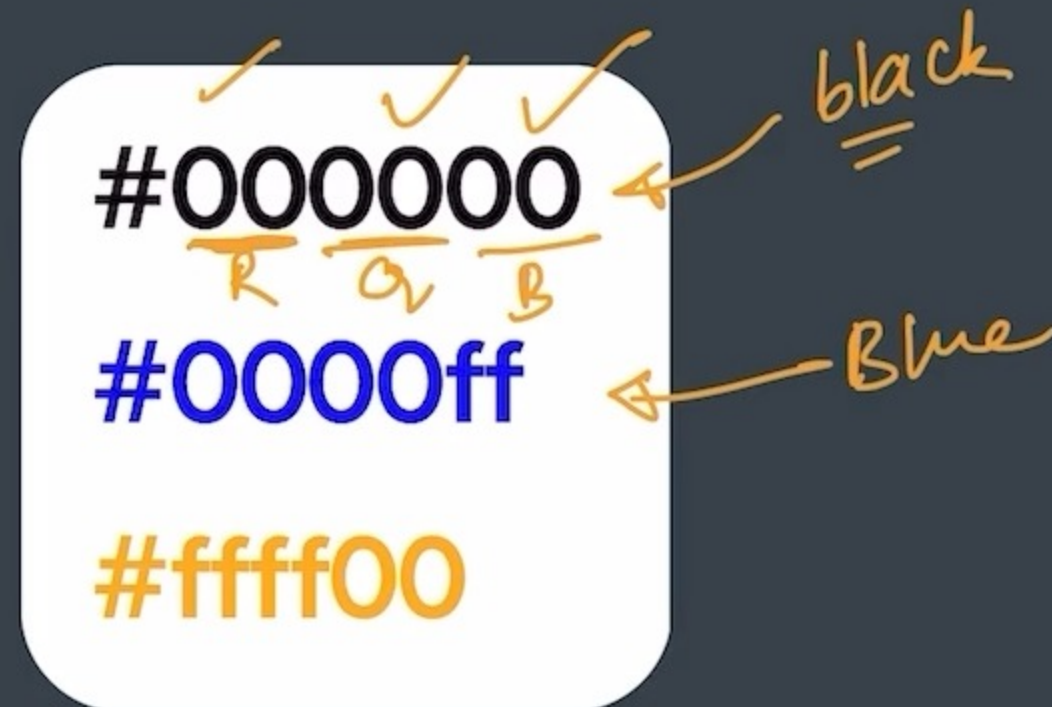

$$255 = ff$$

Practice Qs

✓ Write the hexcode equivalent to $\text{rgb}(\underbrace{255}_R, \underbrace{255}_G, \underbrace{255}_B)$ and tell what color is it.

$\#ff\overline{ff}\overline{ff}$ = white color

$\overline{ff}$
white

Write the best possible rgb and hexcodes for following colors.



yellow

$\text{rgb}(\underline{255}, \underline{255}, \underline{0}) = \#ff\overline{ff}00$ ✓



blue

$\text{rgb}(0, 0, 255) = \#0000ff$



Text Properties

text-align

font-weight

text-decoration

line-height

letter-spacing

font-size



text-align

text-align: left / start

text-align: right / end

text-align: center

text-align: justify



font-weight

→ light
→ bold

100 — 900

100, 200, 300, 400, 500, 600, 700, 800, 900

APNA
COLLEGE

font-weight: normal //400

font-weight: bold //700

font-weight: 100

font-weight: bolder

font-weight: lighter




text-decoration

sets the **appearance of decorative lines** on text like underline

text-decoration: underline

text-decoration: overline

text-decoration: line-through

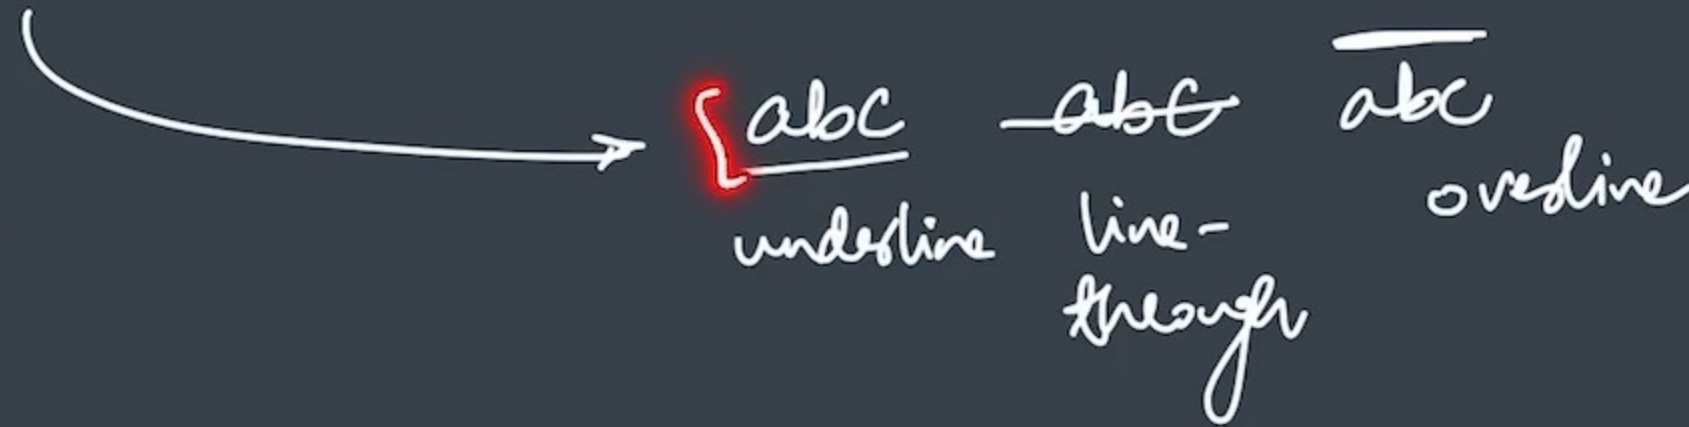

armankhan082020@gmail.com



Text Style

text-decoration - CSS: Cascad

text-decoration-color - CSS: C

text-decoration-style - CSS: C

developer.mozilla.org/en-US/docs/Web/CSS/text-decoration-color

mdn web docs

References

Guides

MDN Plus

Theme

Log in

Get MDN Plus

English (US)

References > CSS > text-decoration-color

▼ text-*

text-align

text-align-last

text-combine-upright

text-decoration

text-decoration-color

text-decoration-line

text-decoration-skip

text-decoration-skip-ink

text-decoration-style

text-decoration-thickness

text-emphasis

text-emphasis-color

text-emphasis-position

text-emphasis-style

text-indent

The `text-decoration-color` CSS property sets the color of decorations added to text by `text-decoration-line`.

The color applies to decorations, such as underlines, overlines, strikethroughs, and wavy lines like those used to mark misspellings, in the scope of the property's value.

Try it

CSS Demo: text-decoration-color

RESET

`text-decoration-color: red;`

`text-decoration-color: #21ff21;`

`text-decoration-color: rgb(255, 9`

`text-decoration-color: hsl(70, 10`

`text-decoration-color: currentCol`

I'd far rather be happy than right
any day.

In this article

Try it

Syntax

Accessibility concerns

Formal definition
armankhan082020@gmail.com

Formal syntax

Examples

Specifics

text-decoration

text-decoration: **red** underline

text-decoration: **wavy** overline

text-decoration: **dotted** line-through

armankhan082020@gmail.com



Text Style

text-decoration - CSS: Cascad

text-decoration-style - CSS: C

developer.mozilla.org/en-US/docs/Web/CSS/text-decoration-style

mdn web docs

References

Guides

MDN Plus

Theme

Log in

Get MDN Plus

English (US)

text-decoration

text-decoration-color

text-decoration-line

text-decoration-skip

text-decoration-skip-ink

text-decoration-style

text-decoration-thickness

text-emphasis

text-emphasis-color

text-emphasis-position

text-emphasis-style

text-indent

text-justify

text-orientation

text-overflow

text-rendering

text-decoration-style

The `text-decoration-style` CSS property sets the style of the lines specified by `text-decoration-line`. The style applies to all lines that are set with `text-decoration-line`.

Try it

CSS Demo: text-decoration-style

RESET

text-decoration-style: solid;

text-decoration-style: double;

text-decoration-style: dotted;

text-decoration-style: dashed;

text-decoration-style: wavy;

I'd far rather be happy than right
any day.

In this article

Try it

Syntax

Formal definition

Formal syntax

armankhan082020@gmail.com

Examples

Specifications

Browse

text-decoration

text-decoration: **red** underline

text-decoration: **wavy** overline

text-decoration: **dotted** line-through

abc
~~~~

abc  
====

abc  
----



# text-decoration

- ① underline
- ② line-through
- ③ anchor tag x

text-decoration: red underline

text-decoration: wavy overline

text-decoration: dotted line-through







EXPLORER

CSS

index.html


# style.css

index.html

# style.css

# style.css &gt; a

```
1  h1 {
2    text-align: center;
3    text-decoration: wavy red underline;
4  }
5
6  h3 {
7    text-align: start;
8    text-decoration: pink line-through;
9  }
10
11 p {
12   text-align: justify;
13   font-weight: 400;
14 }
15
16 h2 {
17   font-weight: 800;
18   text-decoration: double blue overline;
19 }
20
21 a {
22   text-decoration: none;
23 }
24
```



abc  
def ↑

# line-height

controls the **height** of the line of text

line-height: normal

line-height: 2.5





abc  
def ↓

# line-height

controls the **height** of the line of text

line-height: normal

line-height: 2.5

2

0.5

2.5 = 2.5 x normal  
2 x normal  
0.5 x normal



# letter-spacing

controls the **horizontal spacing** behavior between text characters

letter-spacing: normal

letter-spacing: 10px





EXPLORER

&lt;&gt; index.html

# style.css

CSS

&lt;&gt; index.html

# style.css

# style.css &gt; h1

```
1  h1 {
2    text-align: center;
3    text-decoration: wavy red underline;
4    letter-spacing: 10px;
5  }
6
7  h3 {
8    text-align: start;
9    text-decoration: pink line-through;
10 }
11
12 p {
13   text-align: justify;
14   font-weight: 400;
15   line-height: 1.5;
16 }
17
18 h2 {
19   font-weight: 800;
20   text-decoration: double blue overline;
21 }
22
23 a {
24   text-decoration: none;
25 }
26
```



# Iron Man

[Google me](#) Iron Man is a superhero appearing in American comic books published by Marvel Comics. The character was co-created by writer and editor Stan Lee, developed by scripter Larry Lieber, and designed by artists Don Heck and Jack Kirby. The character made his first appearance in Tales of Suspense #39 (cover dated March 1963), and received his own title in Iron Man #1 (May 1968). In 1963, the character founded the Avengers superhero team with Thor, Ant-Man, Wasp and the Hulk.

## Publication history

### Premiere

Iron Man's Marvel Comics premiere in Tales of Suspense #39 (cover dated March 1963) was a collaboration among editor and story-plotter Stan Lee, scripter Larry Lieber, story-artist Don Heck, and cover-artist and character-designer Jack Kirby.[2] In 1963, Lee had been toying with the idea of a businessman superhero.

### Solo series

After issue #99 (March 1968), the Tales of Suspense series was renamed Captain America. An Iron Man story appeared in the one-shot comic Iron Man and Sub-Mariner (April 1968), before the "Golden Avenger"[19] made his solo debut with Iron Man #1 (May 1968).[20] The series's indicia gives its copyright title Iron Man, while the trademarked cover logo of most issues is The Invincible Iron Man.

## Fictional character biography

Anthony Edward Stark is the son of Howard Stark, a wealthy industrialist who leads Stark Industries, and Maria Stark. A boy genius, he entered MIT at 15 to study engineering and physics. After his parents are killed in a car accident, he inherits his father's company.





# Font-size **units** in CSS

## Absolute

px

pt  
//

pc  
//

cm

mm

in

## Relative

%

em

rem

ch

vh

vw + many more



$5px = 5px$ 

## Pixels (px)

most commonly used absolute unit

96px = 1 inch

not suitable for responsive websites

```
font-size: 50px ;
```





font-family → *type*

specifies a prioritized list of one or more font family names

font-family: arial ;

font-family: avant garde, didot, sans-serif ;

backup family  
of fonts







## Practice Qs

Design the given Apna College logo using CSS instructions

- set the font-family to League spartan
- set the color of text to #ffa511
- center align the text
- make the text size 55px & font-weight 900
- set spacing between letters to 2px
- set the line height to 1.5x the normal value
- add a teal double underline
- uppercase all the letters only using css (use Google)



EXPLORER

CSS

index.html

# style.css

&lt;&gt; index.html

# style.css X

# style.css &gt; h1

```
1  h1 {  
2    font-family: league spartan;  
3    color: #ffa511;  
4    text-align: center;  
5    font-size: 55px;  
6    font-weight: 900;  
7    letter-spacing: 2px;  
8    line-height: 1.5;  
9    text-decoration: teal double underline;  
10   text-transform: uppercase;  
11 }  
12
```

armankhan082020@gmail.com





# APNA COLLEGE

armankhan082020@gmail.com

