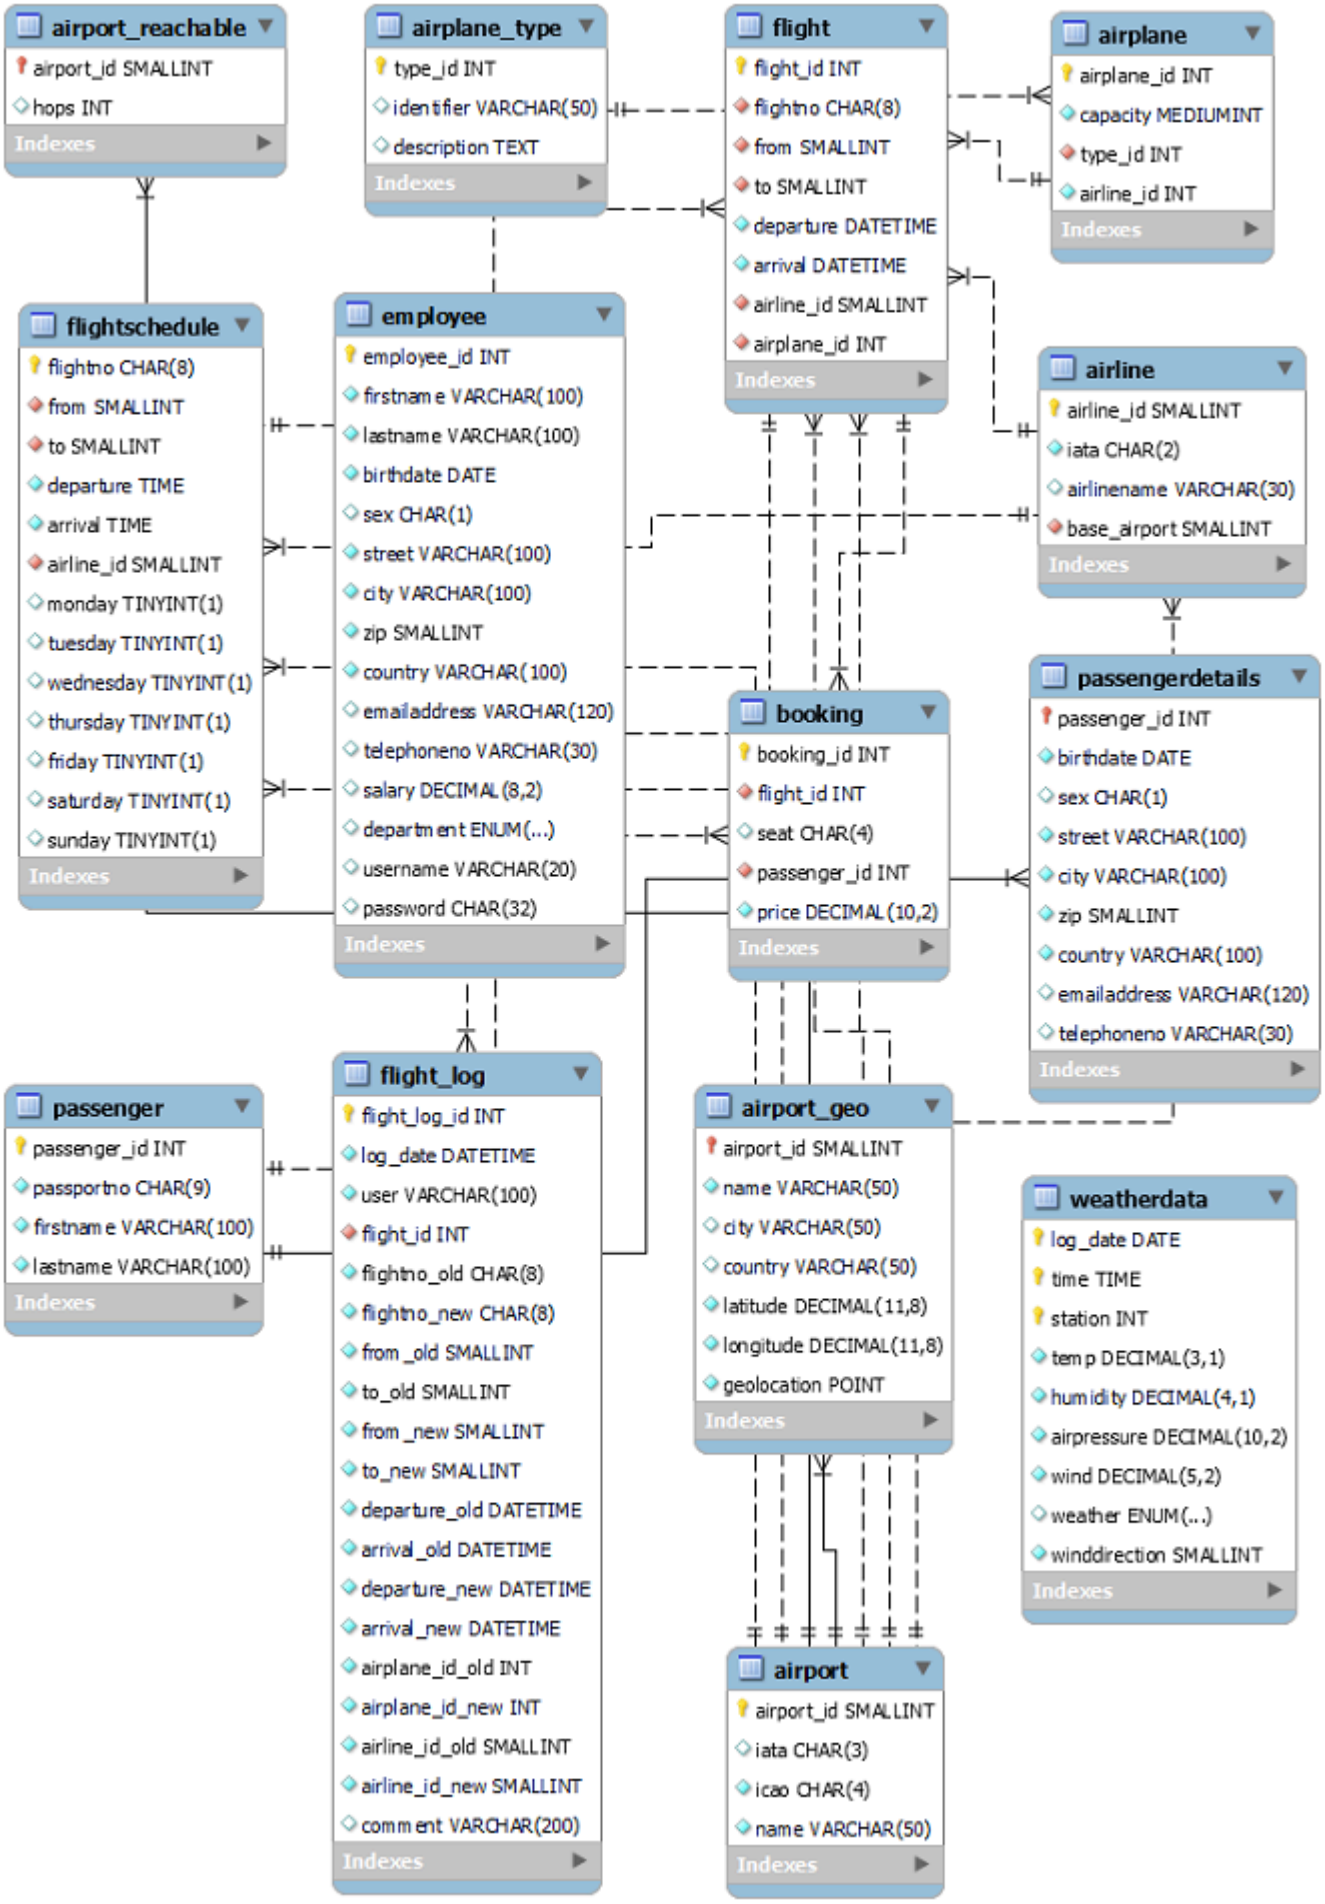
3 airportdb Structure

The following diagram provides an overview of the `airportdb` database structure.

Figure 1 airportdb Schema


airport_reachable
airport_id SMALLINT
hops INT
Indexes
airplane_type
type_id INT
identifier VARCHAR(50)
description TEXT
Indexes
flight
flight_id INT
flightno CHAR(8)
from SMALLINT
to SMALLINT
departure DATETIME
arrival DATETIME
airline_id SMALLINT
airplane_id INT
Indexes
airplane
airplane_id INT
capacity MEDIUMINT
type_id INT
airline_id INT
Indexes
flightschedule
flightno CHAR(8)
from SMALLINT
to SMALLINT
departure TIME
arrival TIME
airline_id SMALLINT
monday TINYINT(1)
tuesday TINYINT(1)
wednesday TINYINT(1)
thursday TINYINT(1)
friday TINYINT(1)
saturday TINYINT(1)
sunday TINYINT(1)
Indexes
employee
employee_id INT
firstname VARCHAR(100)
lastname VARCHAR(100)
birthdate DATE
sex CHAR(1)
street VARCHAR(100)
city VARCHAR(100)
zip SMALLINT
country VARCHAR(100)
emailaddress VARCHAR(120)
telephoneno VARCHAR(30)
salary DECIMAL(8,2)
department ENUM(...)
username VARCHAR(20)
password CHAR(32)
Indexes
airline
airline_id SMALLINT
iata CHAR(2)
airlinename VARCHAR(30)
base_airport SMALLINT
Indexes
passengerdetails
passenger_id INT
birthdate DATE
sex CHAR(1)
street VARCHAR(100)
city VARCHAR(100)
zip SMALLINT
country VARCHAR(100)
emailaddress VARCHAR(120)
telephoneno VARCHAR(30)
Indexes
booking
booking_id INT
flight_id INT
seat CHAR(4)
passenger_id INT
price DECIMAL(10,2)
Indexes
passenger
passenger_id INT
passportno CHAR(9)
firstname VARCHAR(100)
lastname VARCHAR(100)
Indexes
flight_log
flight_log_id INT
log_date DATETIME
user VARCHAR(100)
flight_id INT
flightno_old CHAR(8)
flightno_new CHAR(8)
from_old SMALLINT
to_old SMALLINT
from_new SMALLINT
to_new SMALLINT
departure_old DATETIME
arrival_old DATETIME
departure_new DATETIME
arrival_new DATETIME
airplane_id_old INT
airplane_id_new INT
airline_id_old SMALLINT
airline_id_new SMALLINT
comment VARCHAR(200)
Indexes
airport_geo
airport_id SMALLINT
name VARCHAR(50)
city VARCHAR(50)
country VARCHAR(50)
latitude DECIMAL(11,8)
longitude DECIMAL(11,8)
geolocation POINT
Indexes
weatherdata
log_date DATE
time TIME
station INT
temp DECIMAL(3,1)
humidity DECIMAL(4,1)
airpressure DECIMAL(10,2)
wind DECIMAL(5,2)
weather ENUM(...)
winddirection SMALLINT
Indexes
airport
airport_id SMALLINT
iata CHAR(3)
icao CHAR(4)
name VARCHAR(50)
Indexes

© 2026 Oracle