


Q-HAS lies above the classical error-cost frontier on every held-out class

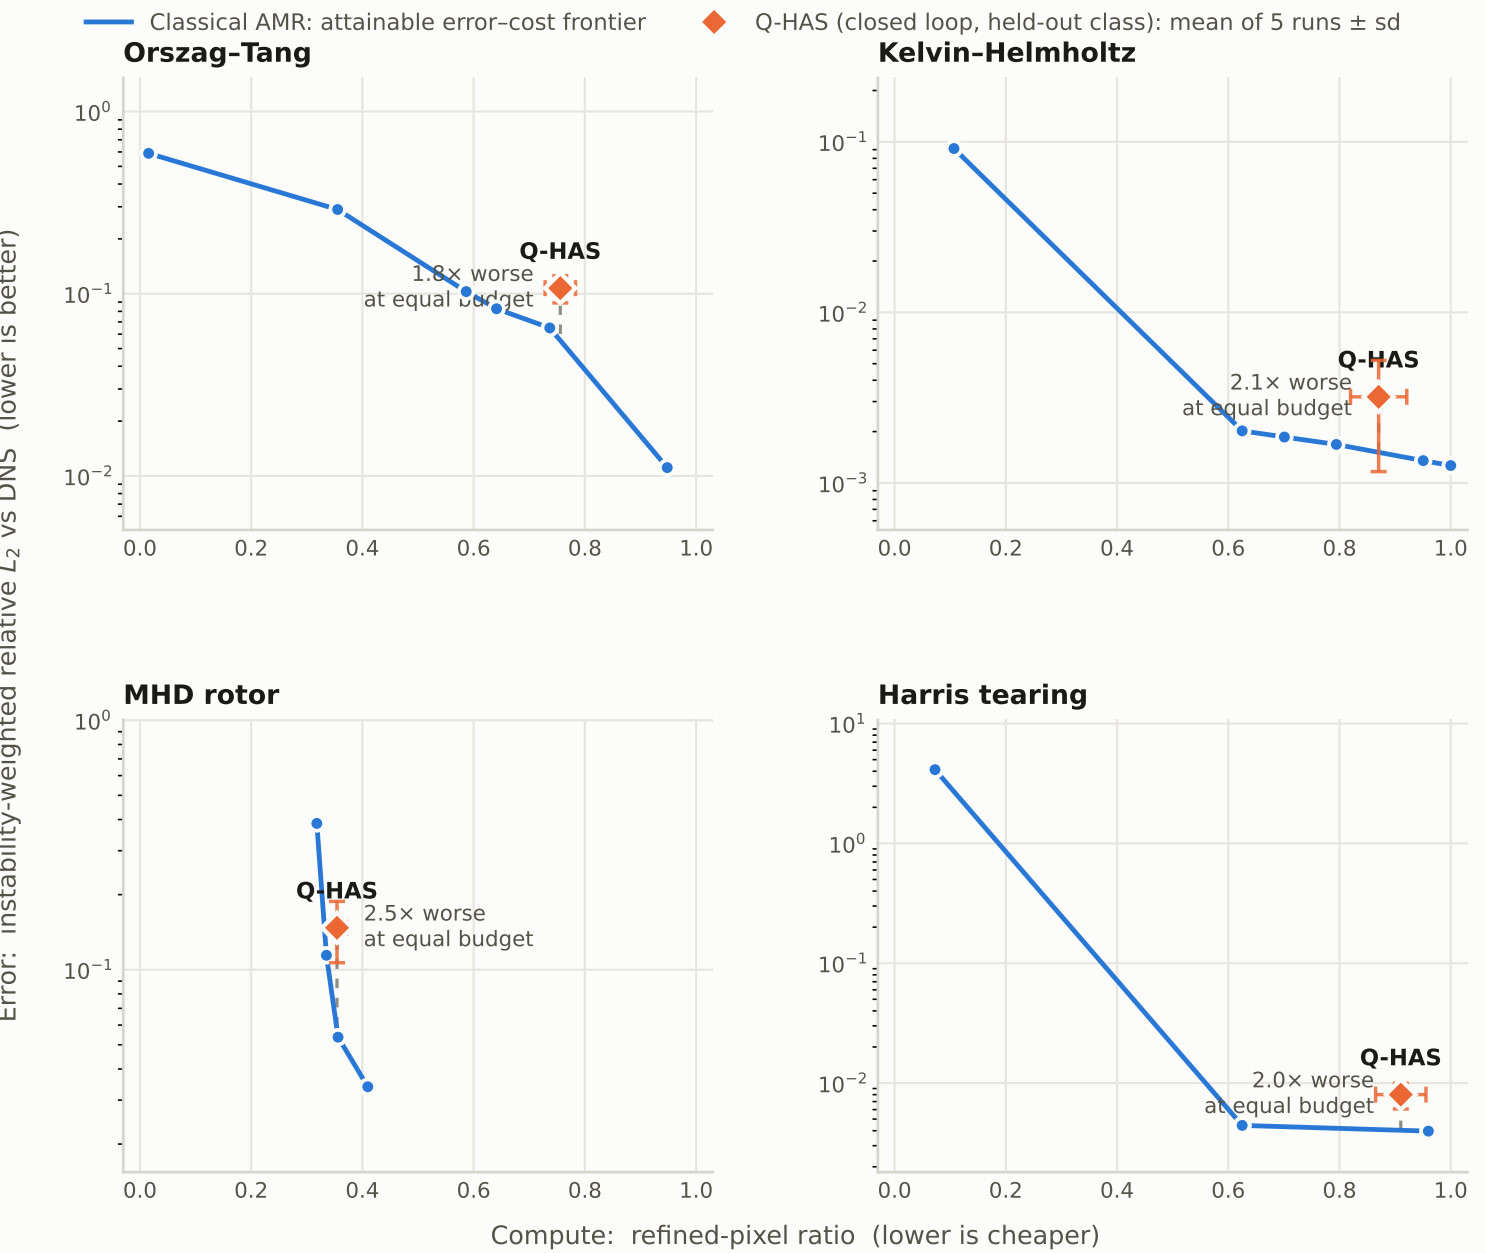

Per-panel error axes are independent: instability classes differ in dynamic range, and a shared axis would imply a cross-class comparability that does not hold. The error axis is logarithmic, so a given ratio spans the same vertical distance in every panel. Frontier points from runs that aborted on divergence are excluded (T1 audit).