VENTARCH™

DOOR & WINDOW SYSTEMS

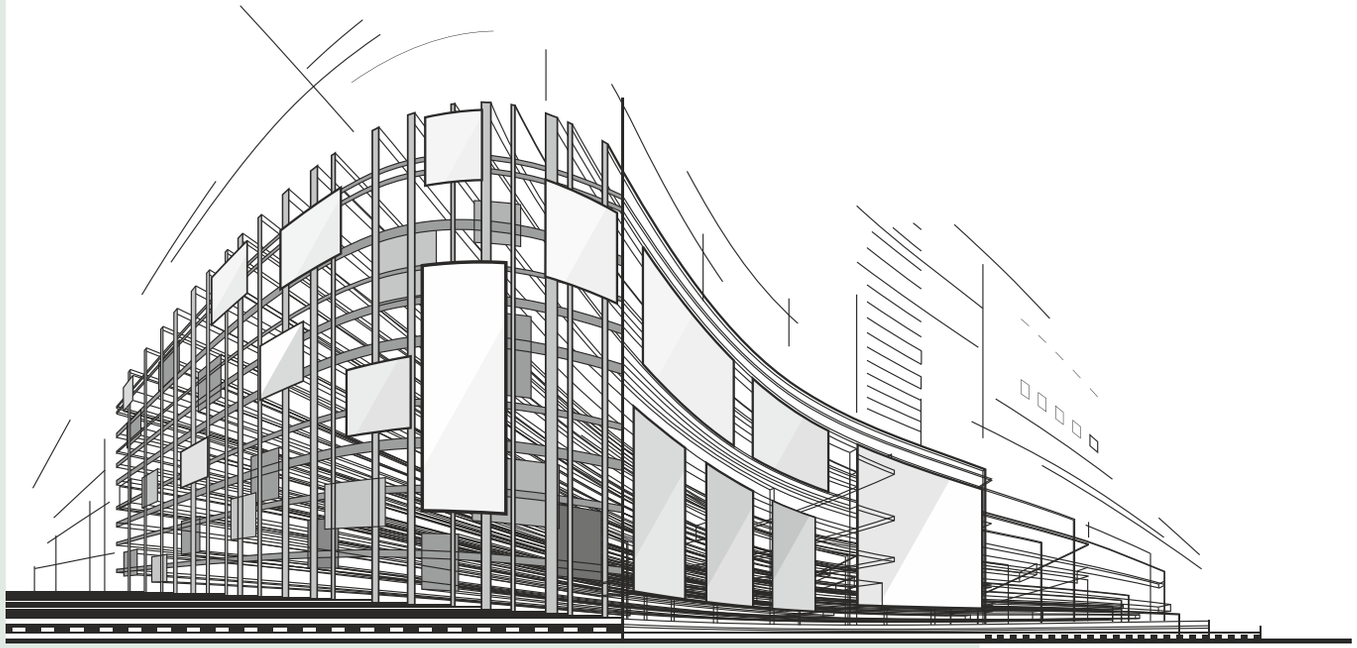

Architectural Aluminium Systems

PRODUCT CATALOGUE

VERSION 1.0

VENTARCH™
DOOR & WINDOW SYSTEMS

About Us

We, at ROYAL ARCHITECTURAL SOLUTIONS, are an INDIAN system supplier and a "ONE STOP SHOP" for all your Architectural Aluminium Door & Window needs.

We design and supply indigenously developed Aluminium door and window systems under our VENTRACH brand. We source the Aluminium Sections from Extrusion plants with the highest quality standards and our team is always on site to assure the best quality and speedy service. We have our own in-house systems which are available to fabricators with hardware and sealing component compatibility fully assured.

VENTARCH is a system designed and built around the best hardware and Aluminium section components available in the market. It is a Euro-groove system with tropicalized features and functionality. Euro-groove design allows diversity in hardware and still maintains full inter-system compatibility. Most of our systems allow for double and triple sealing in order to provide for excellent noise reduction and protection against adverse weather conditions.

We are also authorized distributors of the Italian brand SCHLEGEL-GIESSE, hardware and sealing solutions for Western India with stock points at Ahmedabad and Mumbai. It is a long established company which ranks among the top hardware and sealing component manufacturer in the world today with an established customer base in India as well.

Our other Backward and Forward integrations include our firms ULTRA INNOVATIONS and ROYAL ULTRACOATS.

ULTRA INNOVATIONS, which manufactures and installs Aluminium and Stainless-Steel Railing systems, has executed prestigious big-ticket projects across India and has recently started exports.

ROYAL ULTRACOATS, is a semi-automatic powder coating plant with the latest machinery to give our customers the flexibility of sourcing pre-coated aluminum sections. We only use the best quality powders from across the world to give you the best and long-lasting coating options available in the market today.

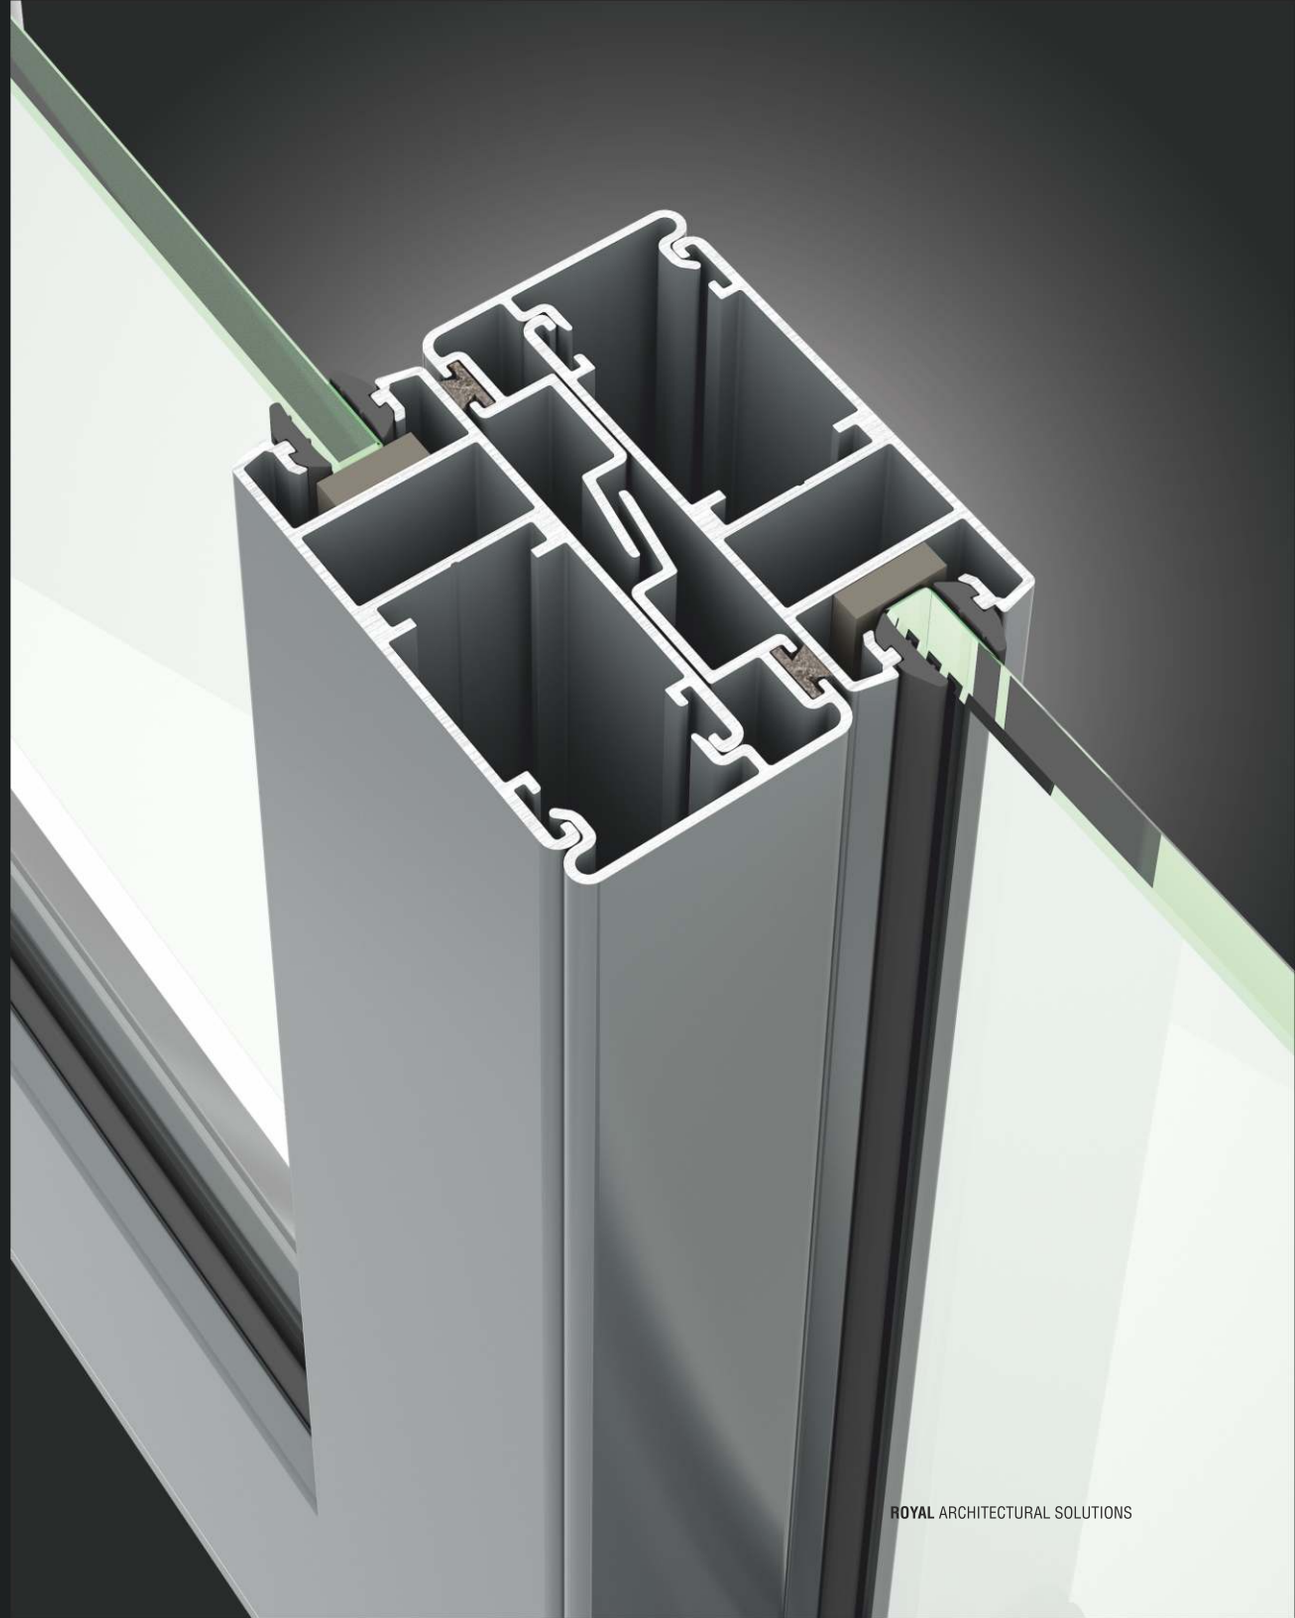

VENTARCH™
DOOR & WINDOW SYSTEMS

— O.S.OPERATOR —
— SLIDING WINDOWS —
— CASEMENT WINDOWS —
— CASEMENT DOOR —
— PIVOT WINDOWS —
— TILT & SLIDE — — TILT & TURN —
— CURTAIN WALL —
— SEMIUNITIZED —

TYPES OF EURO GROOVE



































VENTARCH™
DOOR & WINDOW SYSTEMS

ROYAL ARCHITECTURAL SOLUTIONS

VENTARCH™
DOOR & WINDOW SYSTEMS

INDEX

SLIDING WINDOWS	
22MM	
551023	8
551024	8
551022	8
551025	8
992093	8
992134	8
25MM	
955388	10
955389	10
955369	10
992012	10
992011	10
955391	10
955368	10
955390	10
914744	10
914401	10
992088	10
26MM SLEEK	
955388	14
955389	14
992265	14
992012	14
992011	14
914401	14
992268	14
992266	14
992267	14
27MM	
812536	16
955069	16
914036	16
817061	16
914037	16
812683	16
992135	16
817034	16
914038	16
992147	16
992134	16
817915	16
29MM	
914402	18
914644	18
551009	18
914400	18
914643	18
812520	18
914699	18
914401	18
914519	18
914405	19
914642	19
914897	19
992222	19
992111	19
914900	19
914404	19
817086	19
914698	19
992134	19
914806	19
914565	19
817032	19
914530	19
29MM SLEEK	
812858	19
992324	19
37MM	
992248	24
812514	24
914742	24
551015	24
551016	24
955077	24
967067	24
914668	25
914409	25
992173	25
992086	25
812676	25
817088	25
955110	25
992312	25
992091	25
992087	25
817072	25
817089	25
992148	25
914806	25
914565	25
992134	25
992245	25
37MM SLEEK	
812859	25
992326	25
CASEMENT WINDOWS	
30MM	
992108	30
992058	30
992110	30
992057	30
32MM	
745611	32
819080	32
819081	32
746510	32
819082	32
746509	32
40MM	
914028	34
914890	34
819006	34
819014	34
819002	34
914891	34
819013	34
819008	34
819012	35
817023	35
914517	35
914030	35
817091	35
817050	35
817921	35
50MM	
914351	38
914756	38
914353	38
914520	38
914352	38
914797	38
914564	38
914549	39
914354	39
914641	39
992095	39
992036	39
914868	39
CASEMENT DOOR	
40MM	
819022	44
812659	44
817918	44
819013	44
819021	44
819002	44
819008	44
914030	44
817091	44
817050	44
817921	44
50MM	
914774	46
914775	46
992214	46
992109	46
914776	46
914797	46
992208	46
914777	46
914549	47
914354	47
914641	47
992095	47
992036	47
914868	47
PIVOT WINDOWS	
914775	52
992165	52
992166	52
992095	52
914549	52
914641	52
914868	52
992036	52
O.S.OPERATOR	
992177	56
992178	56
992095	56
914549	56
914641	56
914868	56
992036	56
TILT & SLIDE	
914774	60
914775	60
992109	60
992095	60
914549	60
914641	60
914868	60
992036	60
TILT & TURN	
914351	64
914520	64
914775	64
992109	64
992095	65
914868	65
914549	65
992036	65
914641	65
CURTAIN WALL	
45MM	
914160	68
914171	68
957035	68
914104	68
50MM	
551038	70
551037	70
992098	70
992097	70
551041	70
551042	70
992099	70
57MM	
551026	72
551027	72
812957	72
812958	72
812959	72
812960	72
992090	72
SEMI UNITIZED	
67MM	
551060	76
551010	76
551012	76
551011	76
819503	76
968039	76
992004	76
967053	77
967054	77
992003	77
OFFICE PARTITION SYSTEM	
OFFICE PARTITION	79
STILE DOOR SYSTEM	80

VENTARCH™
DOOR & WINDOW SYSTEMS

SLIDING WINDOWS

VENTARCH™
DOOR & WINDOW SYSTEMS

SLIDING
WINDOWS

We give solutions to cover every type of opening with quality sliding windows designed for tropical conditions keeping in mind full water drainage and minimum air leakage. Our sliding window systems are designed for easy operation with a sturdy construction that gives a long and useful life. Excellent sealing characteristics and option of Double Glass units offer sound suppression with very low heat transfer across the windows which in turn give you excellent power savings over time. Designed for Ease of Fabrication with maximum on-floor productivity, these windows are the ideal fit for every quality conscious fabricator. The Euro groove system gives the end user full flexibility over type of hardware being used.

22mm | 25mm | 26mm SLEEK | 27mm | 29mm | 29mm SLEEK | 37mm | 37mm SLEEK

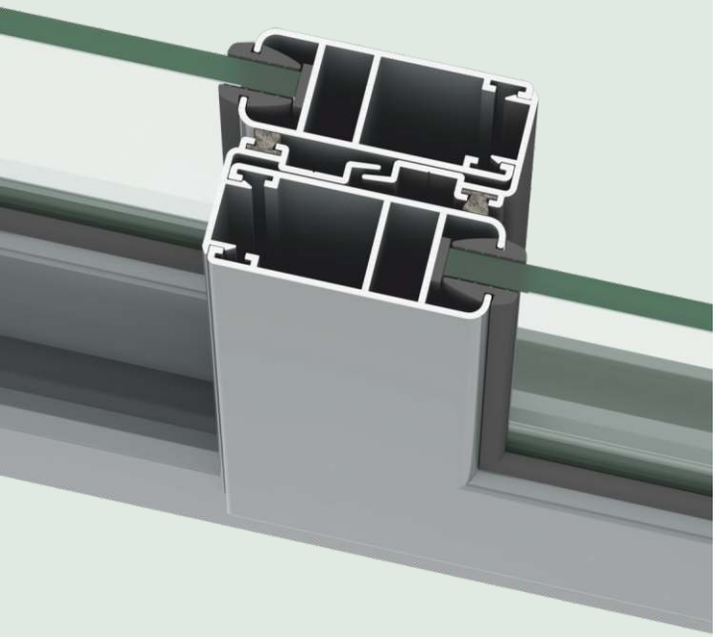

22mm
SLIDING WINDOWS

FEATURES

Shutter Depth	: 22mm
Locking Type	: Single Point Lock
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: Sealing with wool pile
S Glass Range	: 4 mm To 6 mm
Sightline with Shutter	: 82 mm
2 Track Depth	: 54 mm
3 Track Depth	: 84 mm
Window Height (Max.)	: 1530 mm
Finishes	: Powder/Wood/Anodizing
Hardware & WoolPile	: NA



2 TRACK
SECTION NO. : 551023
Weight / Mtr : 0.800



3 TRACK
SECTION NO. : 551024
Weight / Mtr : 1.130



SHUTTER
SECTION NO. : 551022
Weight / Mtr : 0.550



INTERLOCK
SECTION NO. : 551025
Weight / Mtr : 0.230



MOSQUITO SHUTTER
SECTION NO. : 992093
Weight / Mtr : 0.768



MOSQUITO CLIP
SECTION NO. : 992134
Weight / Mtr : 0.117

22mm TWO TRACK TWO SHUTTER ASSEMBLY

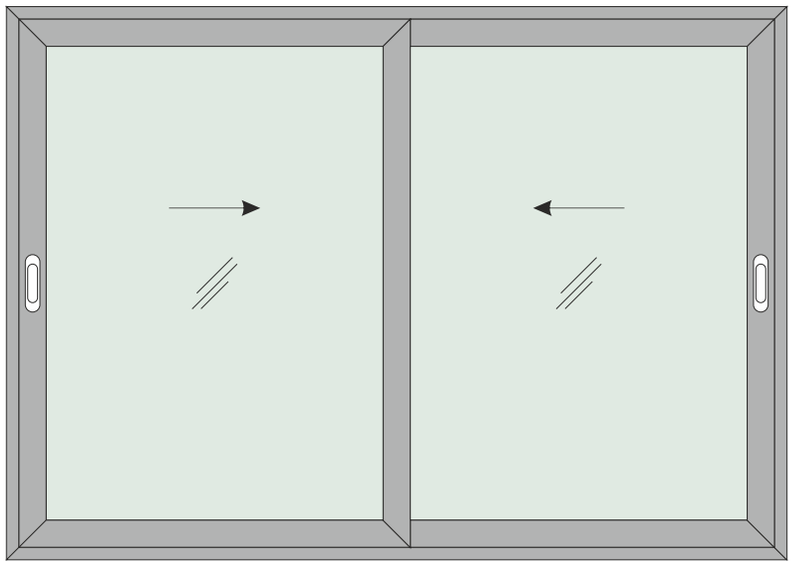

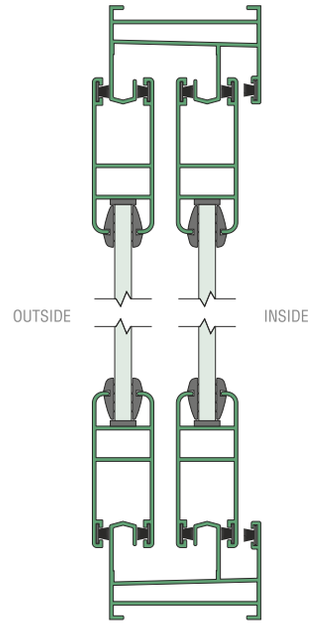

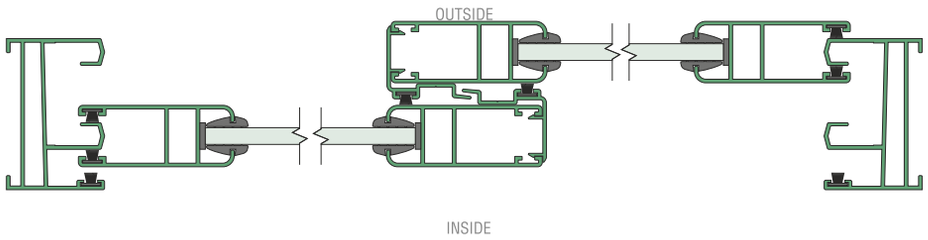



22mm INTERLOCK



22mm THREE TRACK
WITH MOSQUITO

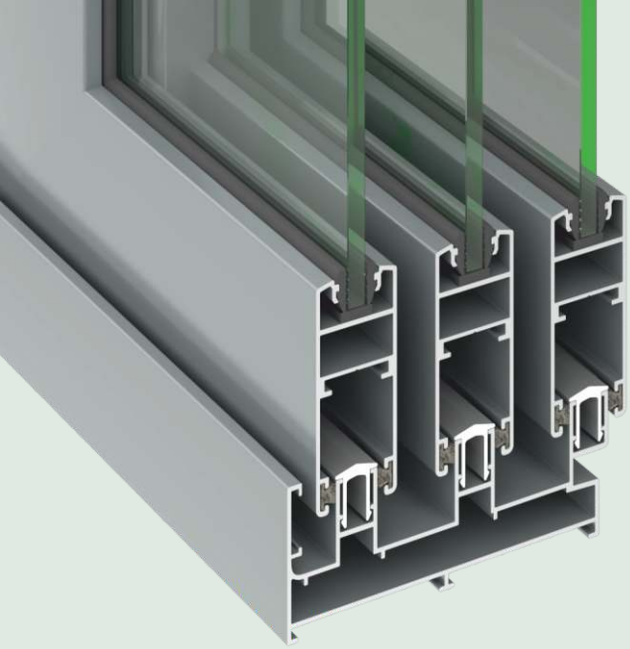

25mm
SLIDING WINDOWS

FEATURES

Shutter Depth	: 25mm
Locking Type	: Single & Multipoint Lock with Handle
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 8mm (Sealing with wool pile)
S Glass Range	: 4 mm To 6 mm
Sightline with Shutter	: 95 mm
2 Track Depth	: 50 mm
3 Track Depth	: 86 mm
Window Height (Max.)	: 2100 mm
Finishes	: Powder/Wood/Anodizing
Hardware & WoolPile	: SCHLEGEL GIESSE



2 TRACK
SECTION NO. : 955388
Weight / Mtr : 0.795



3 TRACK
SECTION NO. : 955389
Weight / Mtr : 1.240



MESH TRACK
SECTION NO. : 955369
Weight / Mtr : 0.355



2 TRACK WITH LEG
SECTION NO. : 992012
Weight / Mtr : 1.015

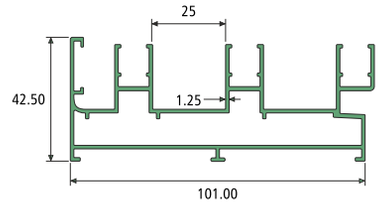

3 TRACK WITH LEG
SECTION NO. : 992011
Weight / Mtr : 1.450



INTERLOCK
SECTION NO. : 955391
Weight / Mtr : 0.370



MOSQUITO INTERLOCK
SECTION NO. : 955368
Weight / Mtr : 0.310



SHUTTER
SECTION NO. : 955390
Weight / Mtr : 0.750



MOSQUITO SHUTTER
SECTION NO. : 914744
Weight / Mtr : 0.635



RAIL TRACK
SECTION NO. : 914401
Weight / Mtr : 0.148



MATING
SECTION NO. : 992088
Weight / Mtr : 0.396

25mm THREE TRACK THREE SHUTTER ASSEMBLY

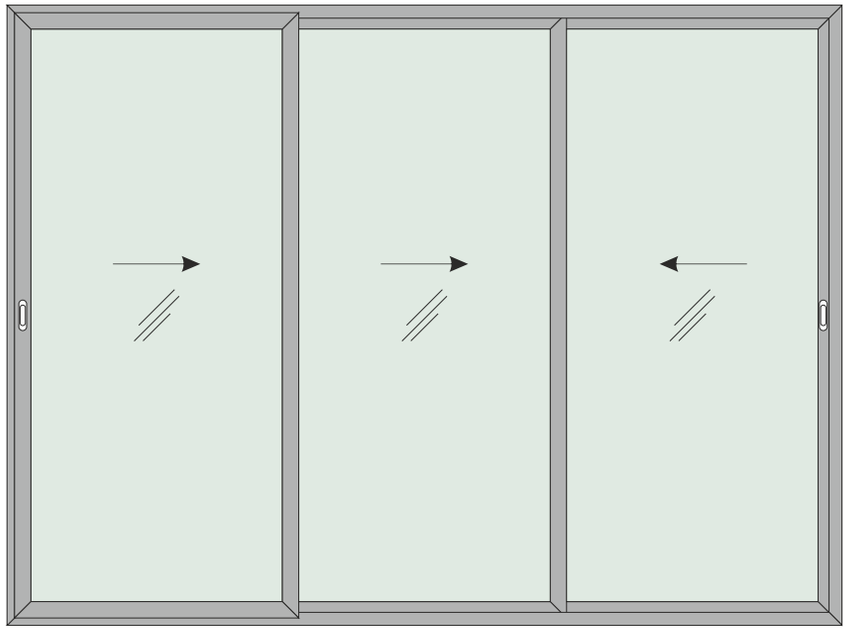

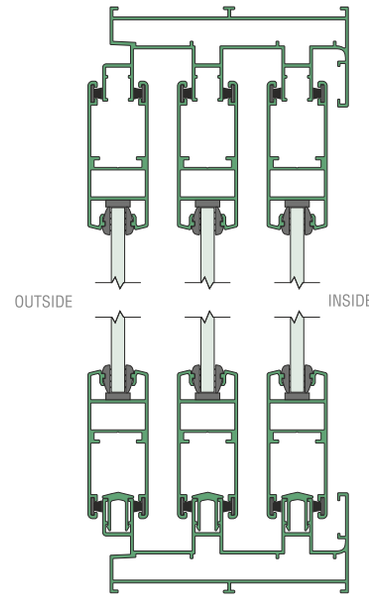

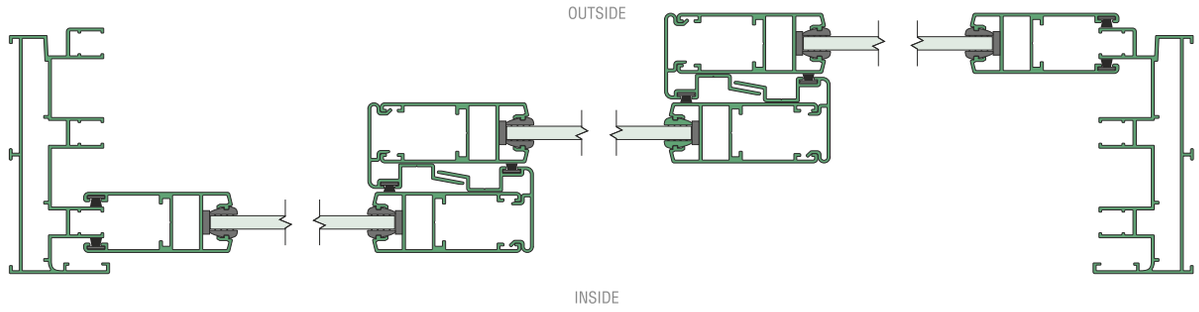



25mm MESH TRACK



25mm THREE TRACK
WITH MOSQUITO

25mm TWO TRACK FOUR SHUTTER ASSEMBLY

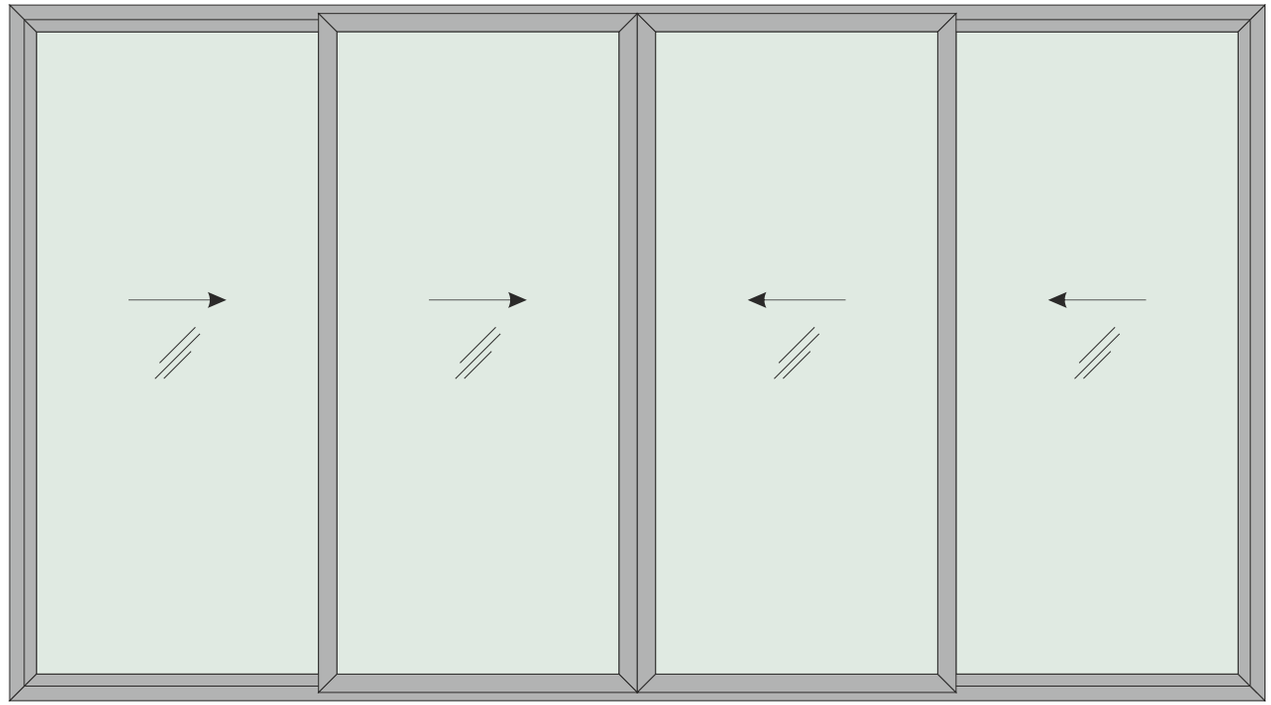

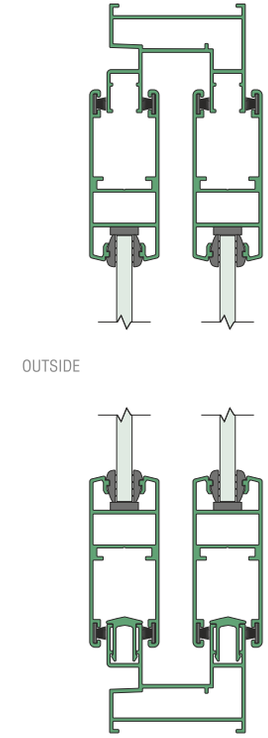

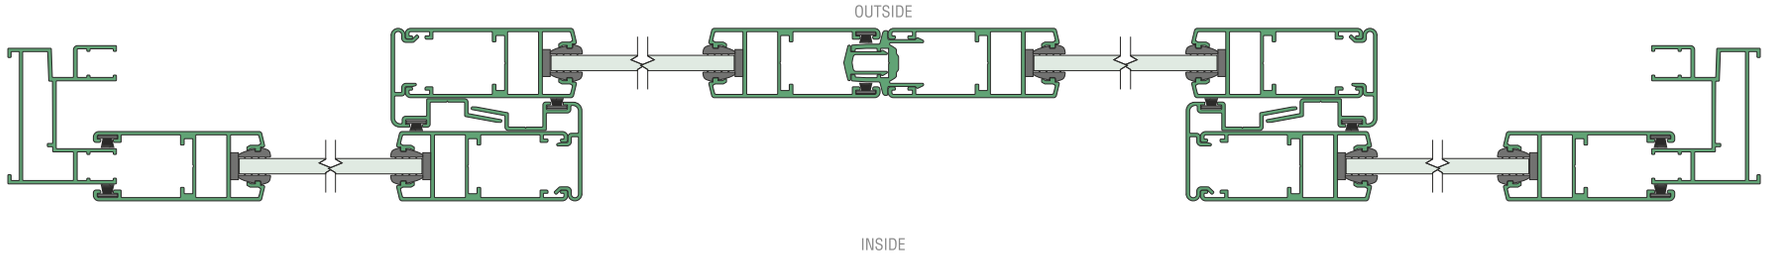

VENTARCH
DOOR & WINDOW SYSTEMS

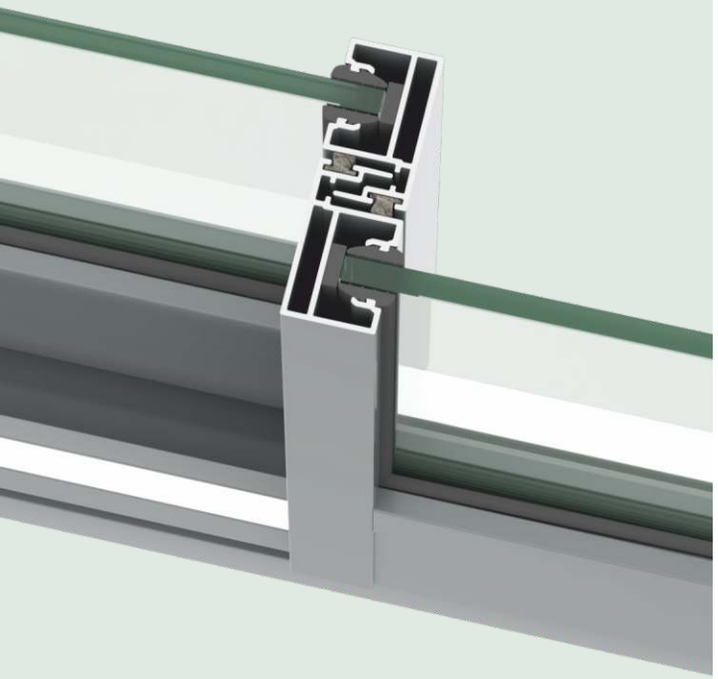

26mm SLEEK
SLIDING WINDOWS

FEATURES

Shutter Depth	: 26mm
Locking Type	: Single Point Lock
Corner Details	: 90 degree
Sealing Overlap	: 9 mm (Sealing with wool pile)
S Glass Range	: 4 mm To 6 mm
Sightline with Shutter	: 87 mm
2 Track Depth	: 50 mm
3 Track Depth	: 86 mm
Window Height (Max.)	: 1830 mm
Finishes	: Powder/Wood/Anodizing
Hardware & WoolPile	: SCHLEGEL GIESSE



2 TRACK
SECTION NO. : 955388
Weight / Mtr : 0.795



3 TRACK
SECTION NO. : 955389
Weight / Mtr : 1.240



HANDLE
SECTION NO. : 992265
Weight / Mtr : 0.694



2 TRACK
SECTION NO. : 992012
Weight / Mtr : 1.015

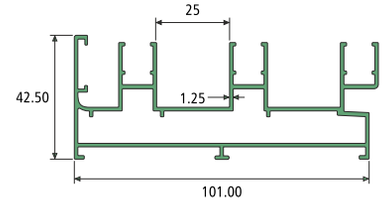

3 TRACK
SECTION NO. : 992011
Weight / Mtr : 1.450



RAIL TRACK
SECTION NO. : 914401
Weight / Mtr : 0.148



REINFORCEMENT INTERLOCK
SECTION NO. : 992268
Weight / Mtr : 0.975



TOP & BOTTOM
SECTION NO. : 992266
Weight / Mtr : 0.753



INTERLOCK
SECTION NO. : 992267
Weight / Mtr : 0.460

26mm TWO TRACK TWO SHUTTER ASSEMBLY

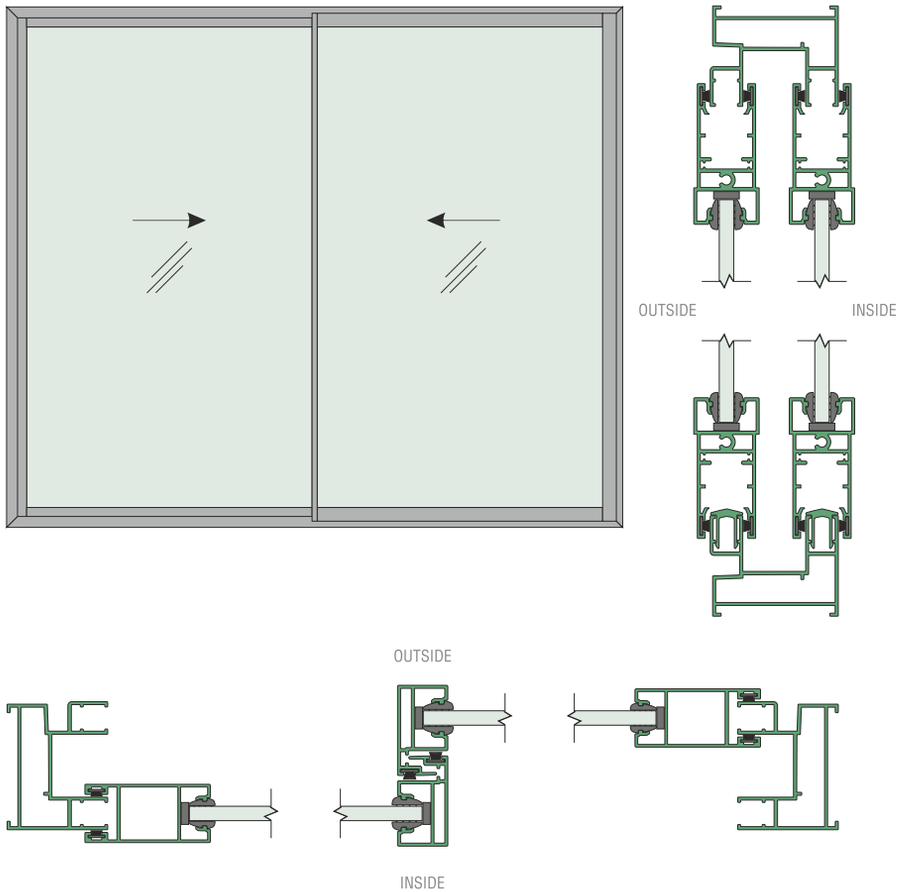

26mm THREE TRACK THREE SHUTTER ASSEMBLY

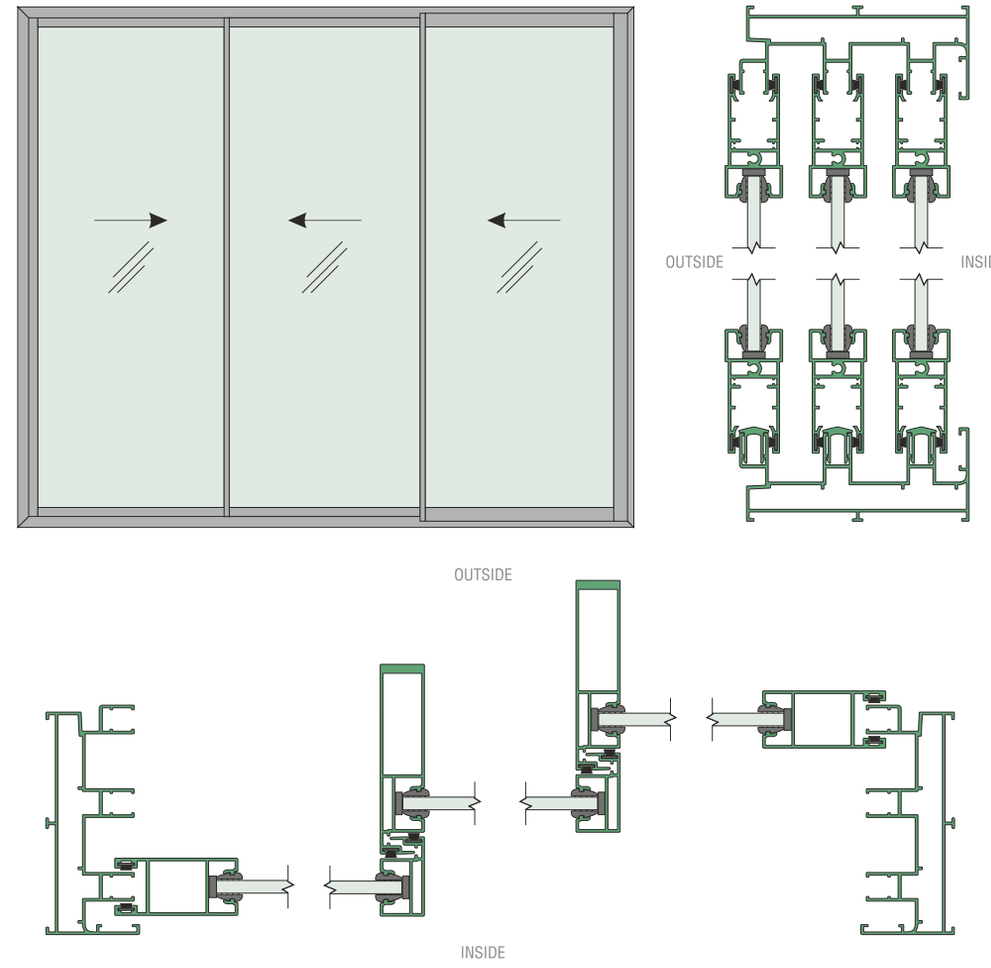

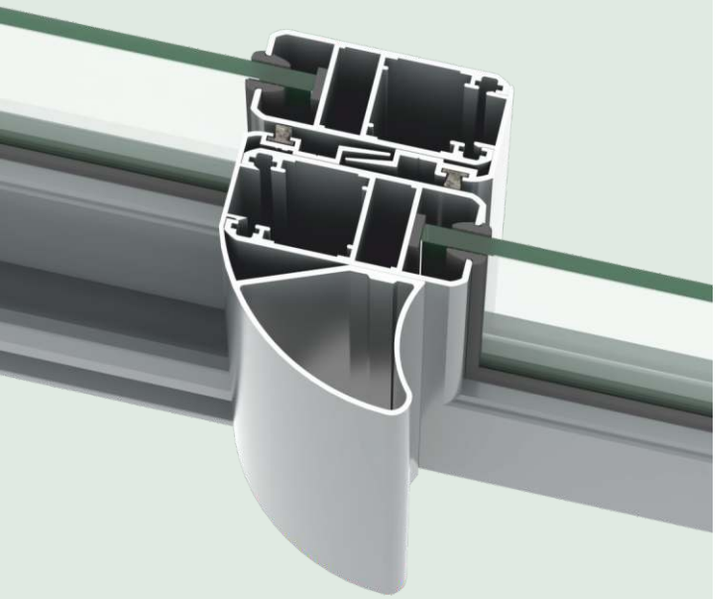

27mm
SLIDING WINDOWS

FEATURES

Shutter Depth	: 27mm
Locking Type	: Single & Multipoint Lock with Champion Plus
Corner Details	45 degree cut with corner connector
Sealing Overlap	: 11mm (Sealing with wool pile)
Single Glass Range	: 4 / 5 / 6 mm
Double Glass Range	: 18mm
Laminated Glass	: NA
Sightline with Shutter	: 99mm
2 Track Depth	: 40mm
3 Track Depth	: 75mm
Window Height (Max.)	: 2135mm
Finishes	: Powder/Wood/Anodizing
Hardware & WoolPile	: SCHLEGEL GIESSE

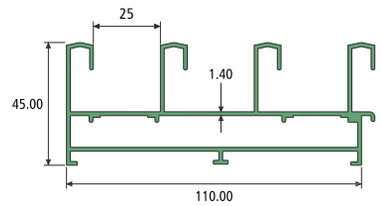

4 TRACK
SECTION NO. : 812536
Weight / Mtr : 1.765



3 TRACK
SECTION NO. : 955069
Weight / Mtr : 1.405



2 TRACK
SECTION NO. : 914036
Weight / Mtr : 0.873



RAIN TRACK
SECTION NO. : 817061
Weight / Mtr : 0.195



SGU SHUTTER
SECTION NO. : 914037
Weight / Mtr : 0.863



DGU SHUTTER
SECTION NO. : 812683
Weight / Mtr : 0.904



MOSQUITO SHUTTER
SECTION NO. : 992135
Weight / Mtr : 0.824



REINFORCEMENT INTERLOCK
SECTION NO. : 817034
Weight / Mtr : 0.920



INTERLOCK
SECTION NO. : 914038
Weight / Mtr : 0.273



MATING PROFILE
SECTION NO. : 992147
Weight / Mtr : 0.263



MOSQUITO CLIP
SECTION NO. : 992134
Weight / Mtr : 0.117



SHUTTER CAP
SECTION NO. : 817915
Weight / Mtr : 0.083

27mm TWO TRACK TWO SHUTTER ASSEMBLY

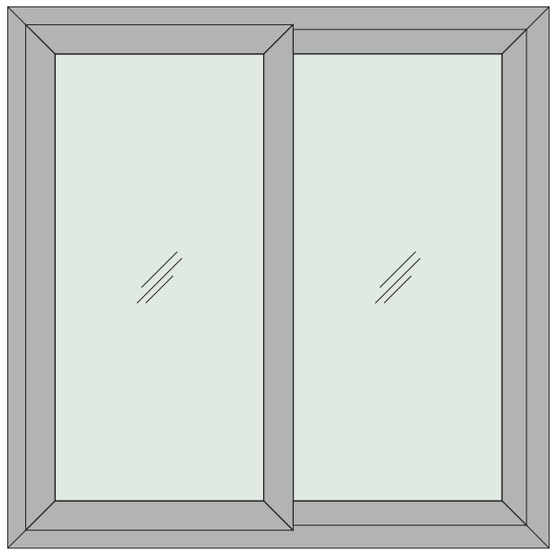

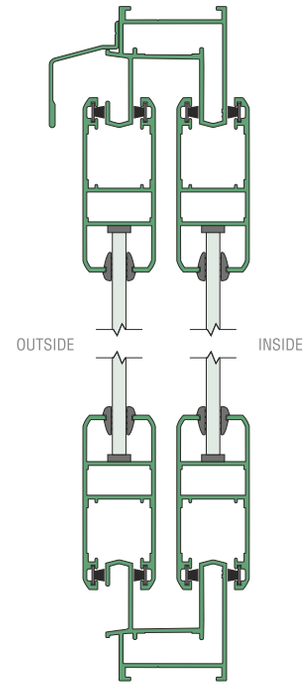

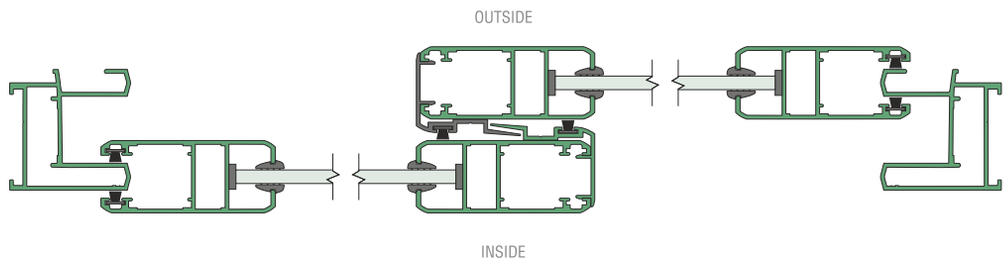



27mm DGU



27mm THREE TRACK
WITH MOSQUITO

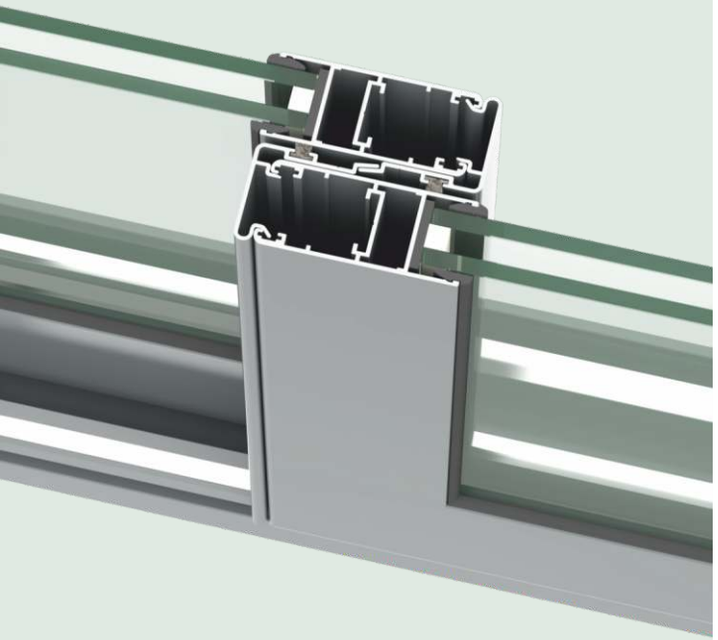

29mm / 29mm SLEEK
SLIDING WINDOWS

FEATURES

Shutter Depth	: 29mm
Locking Type	: Single&Multipoint Lock with Handle
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 8mm (Sealing with wool pile)
S Glass Range	: 5 mm To 20 mm
Sightline with Shutter	: 104 mm
2 Track Depth	: 50 mm
3 Track Depth	: 86 mm
Window Height (Max.)	: 2440 mm
Finishes	: Powder/Wood/Anodizing
Hardware & WoolPile	: SCHLEGEL GIESSE



3 TRACK
SECTION NO. : 914402
Weight / Mtr : 1.724



3 TRACK LIGHT
SECTION NO. : 914644
Weight / Mtr : 1.420

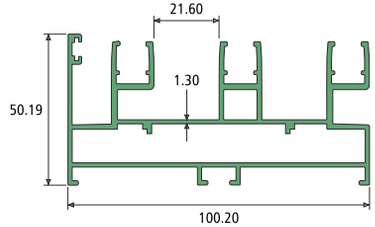

3 TRACK WITH LEG
SECTION NO. : 551009
Weight / Mtr : 1.969



2 TRACK
SECTION NO. : 914400
Weight / Mtr : 1.100



2 TRACK LIGHT
SECTION NO. : 914643
Weight / Mtr : 0.865



2 TRACK WITH LEG
SECTION NO. : 812520
Weight / Mtr : 1.325



FLY MESH TRACK
SECTION NO. : 914699
Weight / Mtr : 0.427



RAIL TRACK
SECTION NO. : 914401
Weight / Mtr : 0.148



RAIN TRACK
SECTION NO. : 914519
Weight / Mtr : 0.283



SGU SHUTTER
SECTION NO. : 914405
Weight / Mtr : 0.890



SGU SHUTTER LIGHT
SECTION NO. : 914642
Weight / Mtr : 0.815



DGU SHUTTER
SECTION NO. : 914897
Weight / Mtr : 0.796



MOSQUITO SHUTTER
SECTION NO. : 992222
Weight / Mtr : 0.816



SLEEK REINFORCEMENT INTERLOCK
SECTION NO. : 812858
Weight / Mtr : 1.184



SHUTTER FOR LAMINATED GLASS
SECTION NO. : 992111
Weight / Mtr : 0.890



MOSQUITO SHUTTER LIGHT
SECTION NO. : 914900
Weight / Mtr : 0.705



INTERLOCK
SECTION NO. : 914404
Weight / Mtr : 0.350



DOUBLE INTERLOCK
SECTION NO. : 817086
Weight / Mtr : 0.528



SLEEK INTERLOCK
SECTION NO. : 992324
Weight / Mtr : 0.524



MOSQUITO SHUTTER
SECTION NO. : 914698
Weight / Mtr : 0.617



MOSQUITO CLIP
SECTION NO. : 992134
Weight / Mtr : 0.117



REINFORCEMENT PROFILE
SECTION NO. : 914806
Weight / Mtr : 1.104



REINFORCEMENT CAP
SECTION NO. : 914565
Weight / Mtr : 0.093



MIDDLE
SECTION NO. : 817032
Weight / Mtr : 0.672



MATING
SECTION NO. : 914530
Weight / Mtr : 0.415

29mm THREE TRACK THREE SHUTTER ASSEMBLY

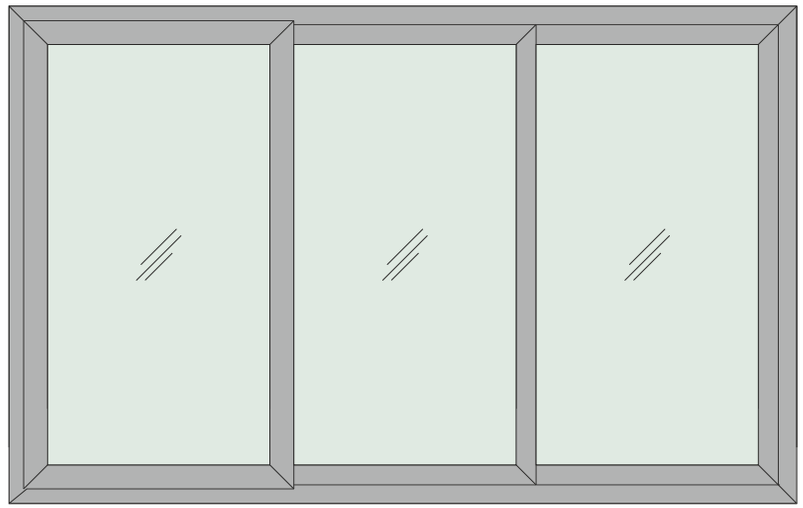



OUTSIDE INSIDE



OUTSIDE

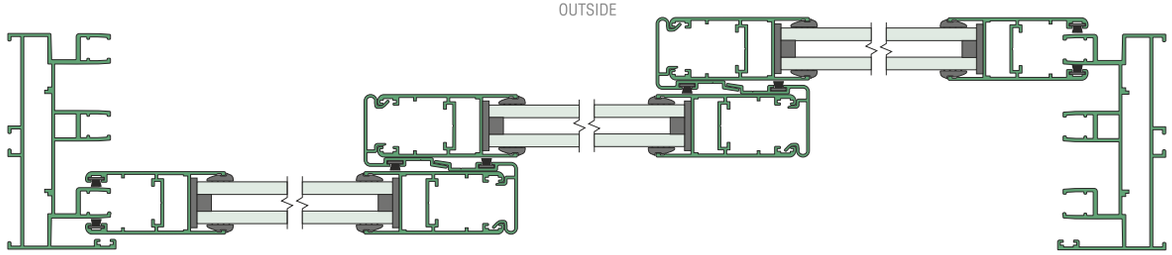

INSIDE



29mm FLYMESH



29mm THREE TRACK
WITH MOSQUITO

29mm SLEEK TWO TRACK TWO SHUTTER ASSEMBLY

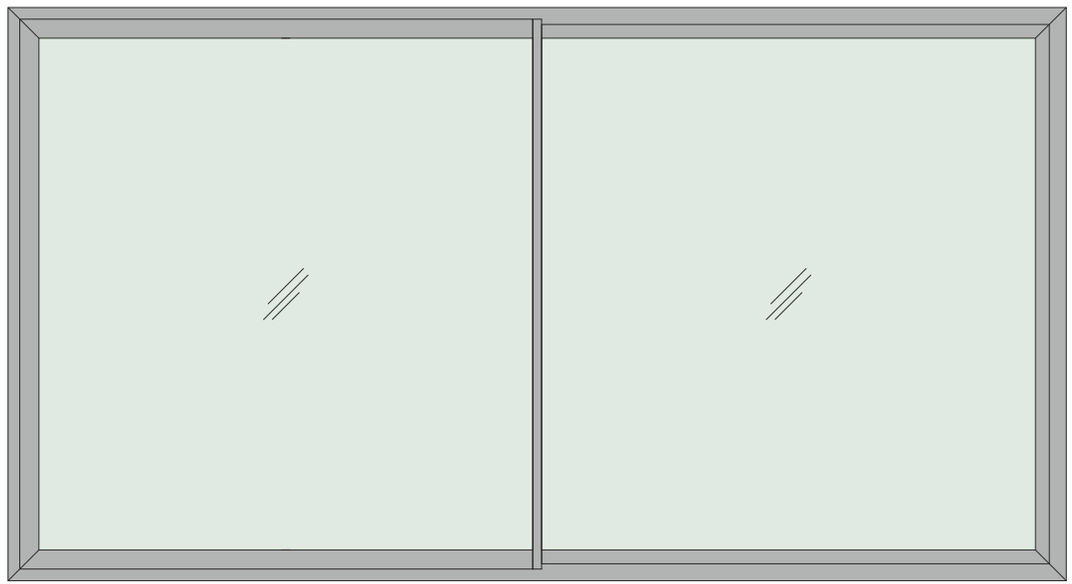

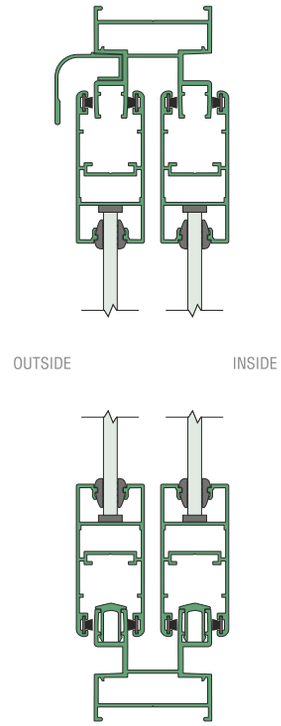

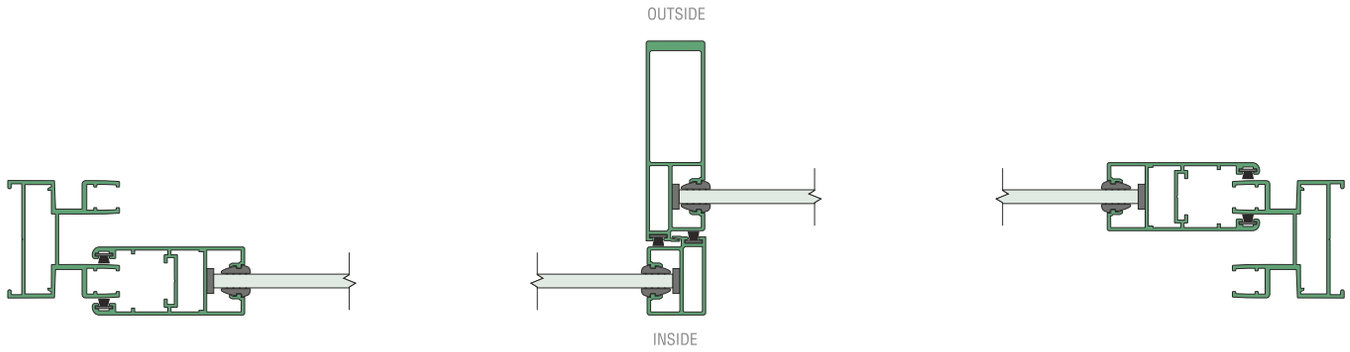

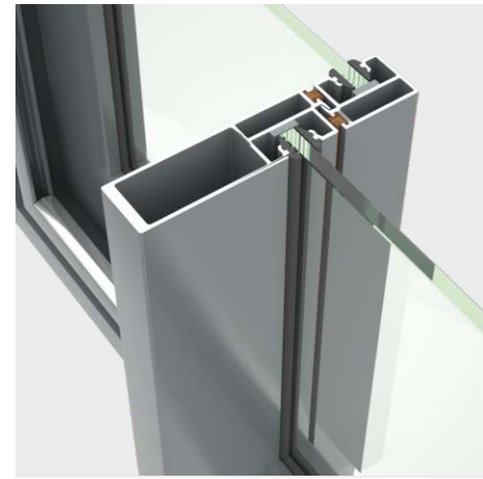

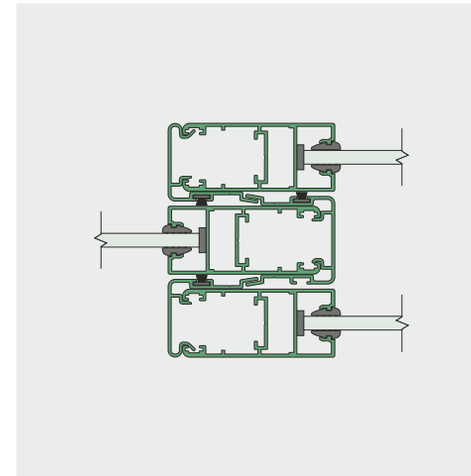

29mm FLYMESH

29mm TWO TRACK FOUR SHUTTER ASSEMBLY

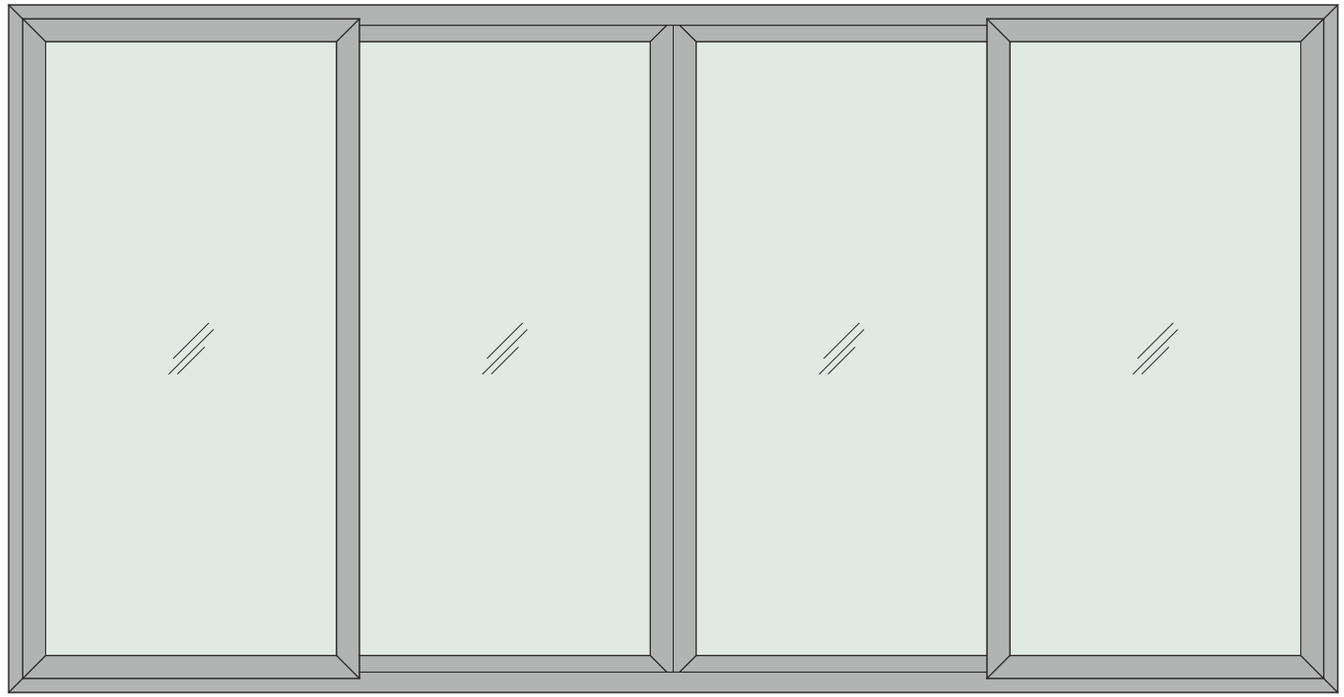

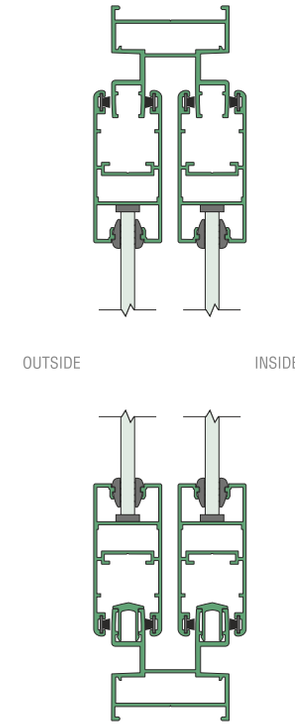

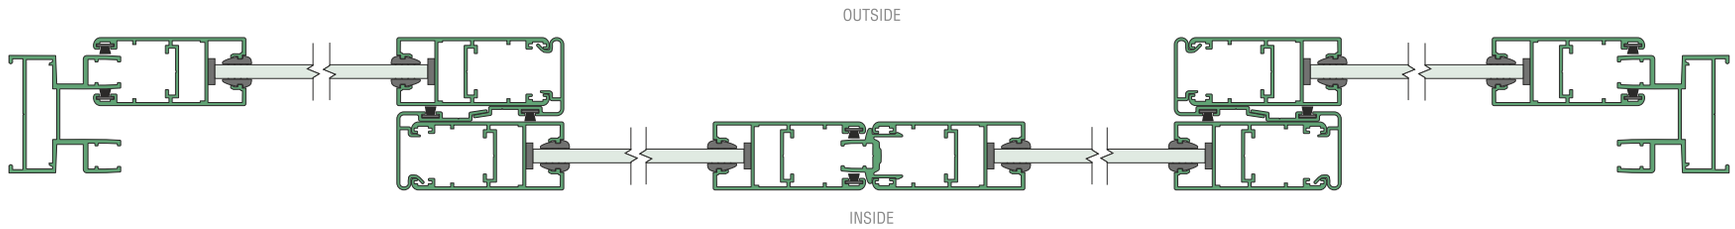

VENTARCH™
DOOR & WINDOW SYSTEMS

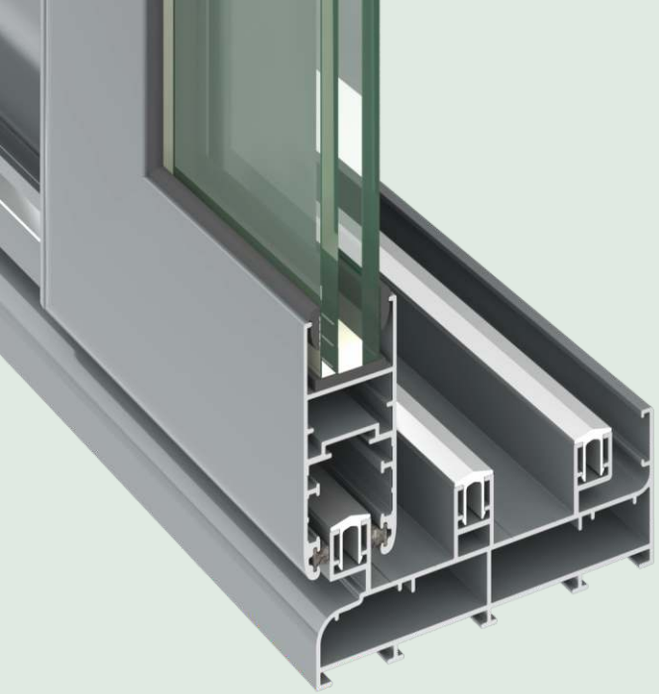

37mm / 37mm SLEEK
SLIDING WINDOWS

FEATURES

Shutter Depth	: 37mm
Locking Type	: Single&Multipoint Lock with Handle
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 9 mm (Sealing with wool pile)
Glass Range	: 6 mm To 24 mm
Sightline with Shutter	: 124 mm
2 Track Depth	: 61 mm
3 Track Depth	: 110 mm
Window Height (Max.)	: 3010 mm
Finishes	: Powder/Wood/Anodizing
Hardware & WoolPile	: SCHLEGEL GIESSE



2 TRACK
SECTION NO. : 992248
Weight / Mtr : 1.431

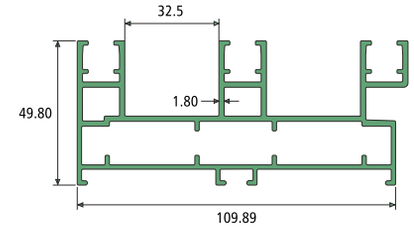

3 TRACK
SECTION NO. : 812514
Weight / Mtr : 2.309



RAIL TRACK
SECTION NO. : 914742
Weight / Mtr :0.175

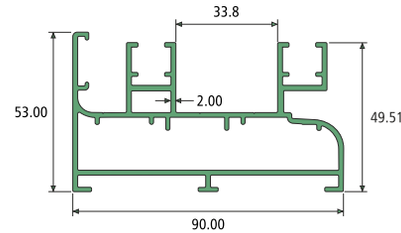

2 TRACK WITH LEG
SECTION NO. : 551015
Weight / Mtr :1.822

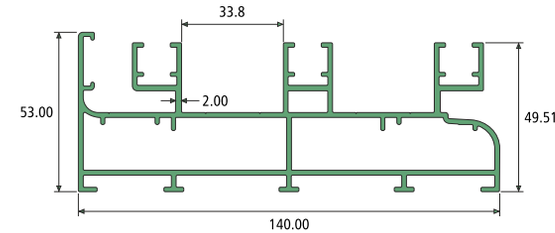

3 TRACK WITH LEG
SECTION NO. : 551016
Weight / Mtr : 2.688

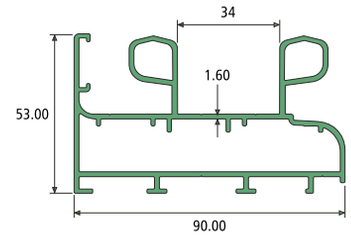

2 TRACK WITH LEG
SECTION NO. : 955077
Weight / Mtr :1.819

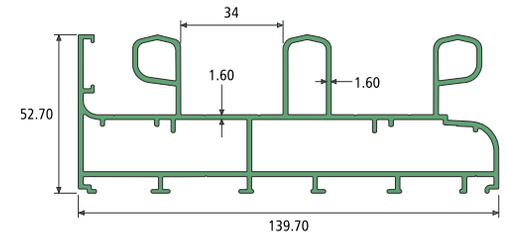

3 TRACK WITH LEG
SECTION NO. : 967067
Weight / Mtr : 2.675



SGU SHUTTER
SECTION NO. : 914668
Weight / Mtr : 1.335



DGU SHUTTER
SECTION NO. : 914409
Weight / Mtr : 1.274



LAMINATED GLASS SHUTTER
SECTION NO. : 992173
Weight / Mtr : 1.450



MOSQUITO SHUTTER
SECTION NO. : 992086
Weight / Mtr : 1.397

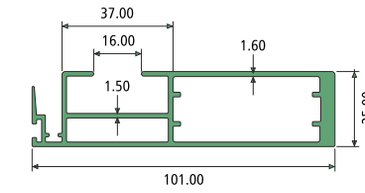

SLEEK REINFORCEMENT INTERLOCK
SECTION NO. : 812859
Weight / Mtr : 1.472



MOSQUITO SHUTTER WITH
WOOLPILE SEALING GROOVE
SECTION NO. : 812676
Weight / Mtr : 1.518



DOUBLE INTERLOCK
SECTION NO. : 817088
Weight / Mtr :1.055



INTERLOCK
SECTION NO. : 955110
Weight / Mtr : 0.689



INTERLOCK
SECTION NO. : 992312
Weight / Mtr : 0.693



SLEEK INTERLOCK
SECTION NO. : 992326
Weight / Mtr : 0.676



INTERMEDIATE SHUTTER
SECTION NO. : 992091
Weight / Mtr :0.957



LAMINATED GLASS ADAPTOR
SECTION NO. : 992087
Weight / Mtr : 0.297



MATING PROFILE
FRONT FITTED COUNTER PLATE
SECTION NO. : 817072
Weight / Mtr : 0.720



MOSQUITO MIDDLE
SECTION NO. : 817089
Weight / Mtr : 0.673



MATING PROFILE
INSERTED COUNTER PLATE
SECTION NO. : 992148
Weight / Mtr : 0.478



REINFORCEMENT PROFILE
SECTION NO. : 914806
Weight / Mtr : 1.104



REINFORCEMENT CAP
SECTION NO.:914565
Weight / Mtr : 0.093



MOSQUITO CLIP
SECTION NO.:992134
Weight / Mtr : 0.117



INTERLOCK CAP
SECTION NO.:992245
Weight / Mtr : 0.071

37mm THREE TRACK THREE SHUTTER ASSEMBLY

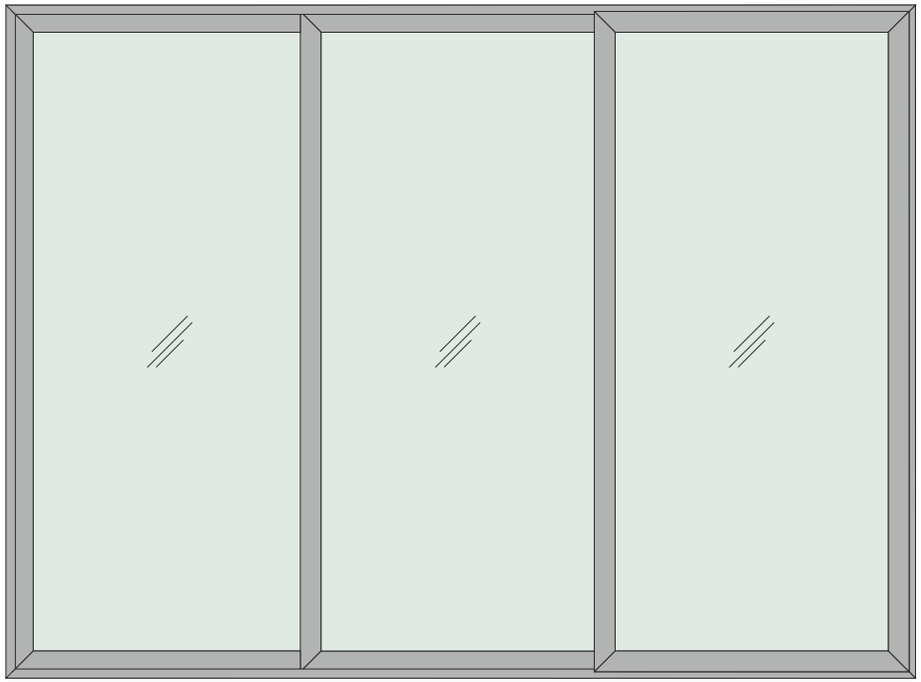



OUTSIDE INSIDE



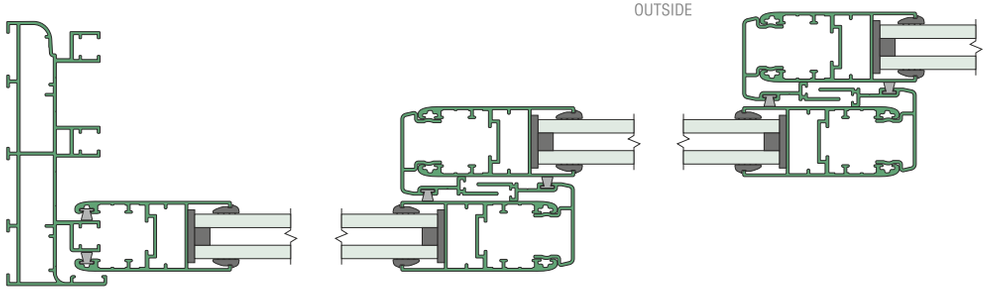

OUTSIDE

INSIDE





37mm FLYMESH



37mm SHUTTER WITH REINFORCEMENT

37mm SLEEK TWO TRACK TWO SHUTTER ASSEMBLY

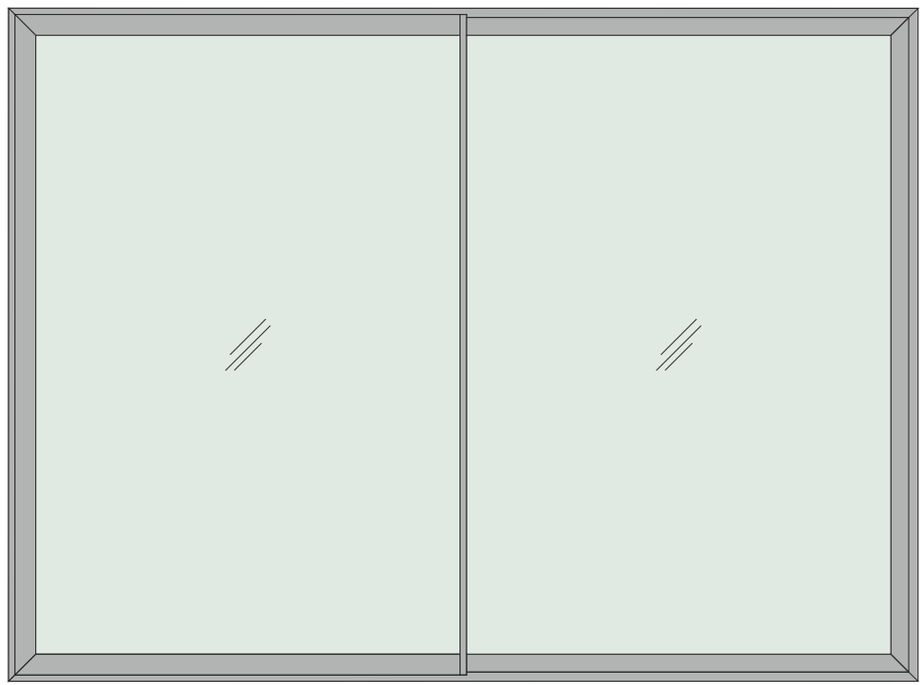

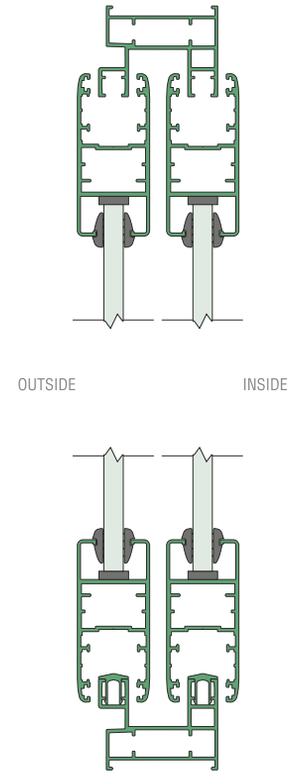

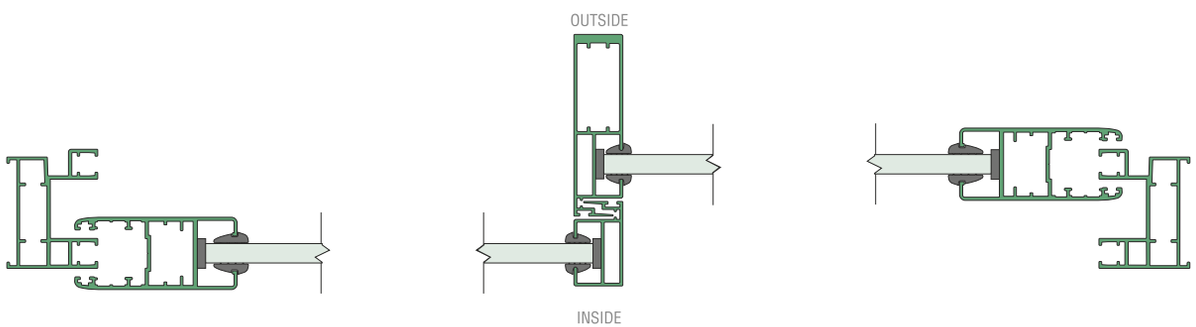

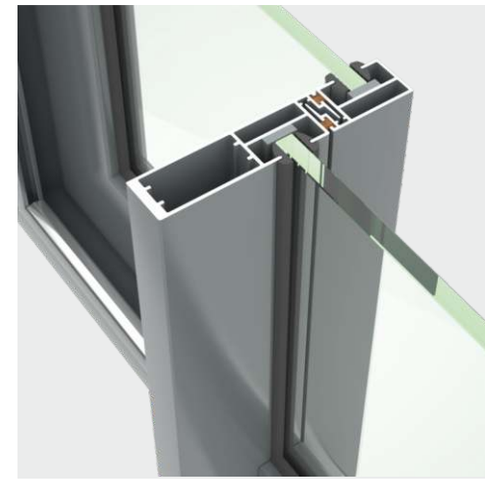

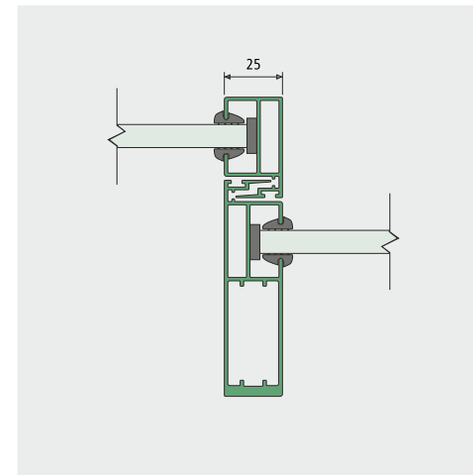

37mm SLEEK INTERLOCK

VENTARCH™
DOOR & WINDOW SYSTEMS

CASEMENT WINDOWS

VENTARCH™
DOOR & WINDOW SYSTEMS

CASEMENT
WINDOWS

For those who prefer casement solutions for their windows we present the Ventarch Casement Series. Designed with tropical conditions in mind, we give a full range of options for top hung, side hung with indoor and outdoor opening. Excellent sealing options and flexibility with Euro Groove compatible hardware give fabricators a range of options. Various opening angles with Friction stays and both visible and invisible hinge options satisfy both utilitarian and aesthetic needs. Needless to say, that these are both sound and thermal transfer resistant windows and doors.

30mm | 32mm | 40mm | 50mm

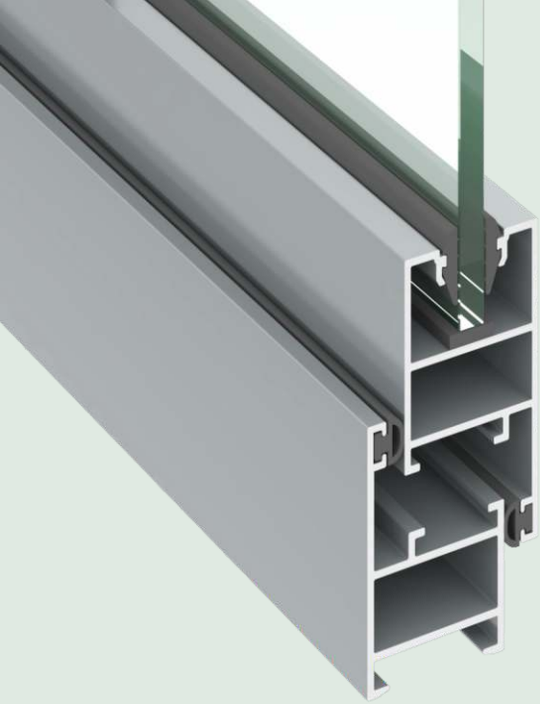

30mm
CASEMENT WINDOWS

FEATURES

Frame Depth	: 30mm
Locking Type	: Single&Multipoint Lock with Handle
Glass Range	: 4 mm to 6mm
Openable Sight Line	: 73.4 mm
Fix Sight Line	: 44.4 mm
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 6 mm (Sealing with Gasket)
Window Height (Max.)	: 1530 mm
Hardware	: SCHLEGEL GIESSE



FRAME
SECTION NO. : 992108
Weight / Mtr : 0.497

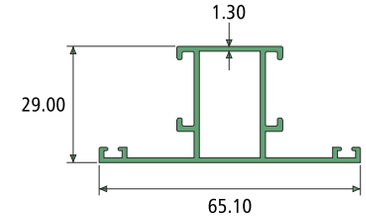

MULLION
SECTION NO. : 992058
Weight / Mtr : 0.584



SHUTTER
SECTION NO. : 992110
Weight / Mtr :0.648



CLIP
SECTION NO. : 992057
Weight / Mtr : 0.200

30mm FIX WINDOW

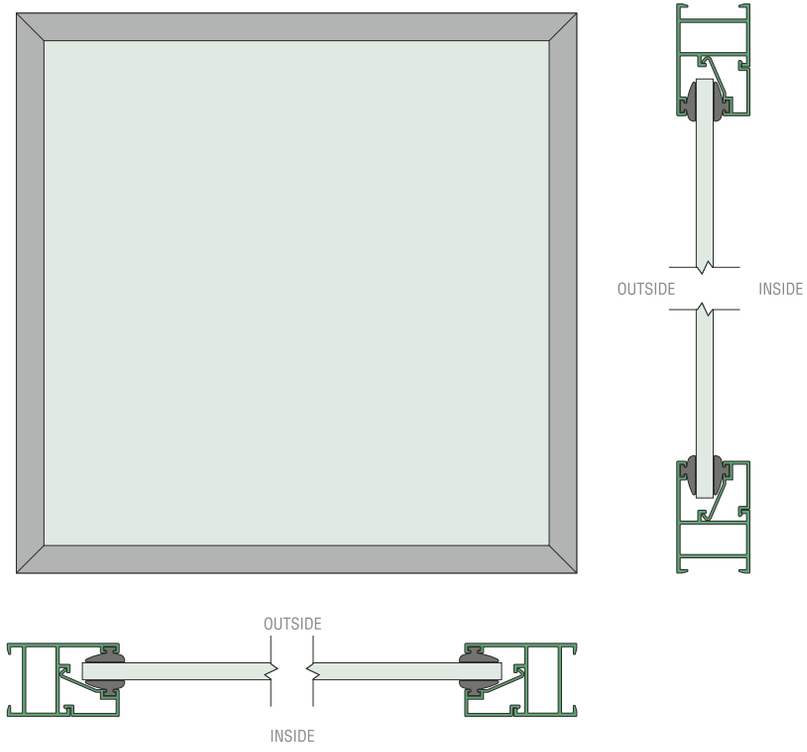

30mm TOP HUNG WINDOW

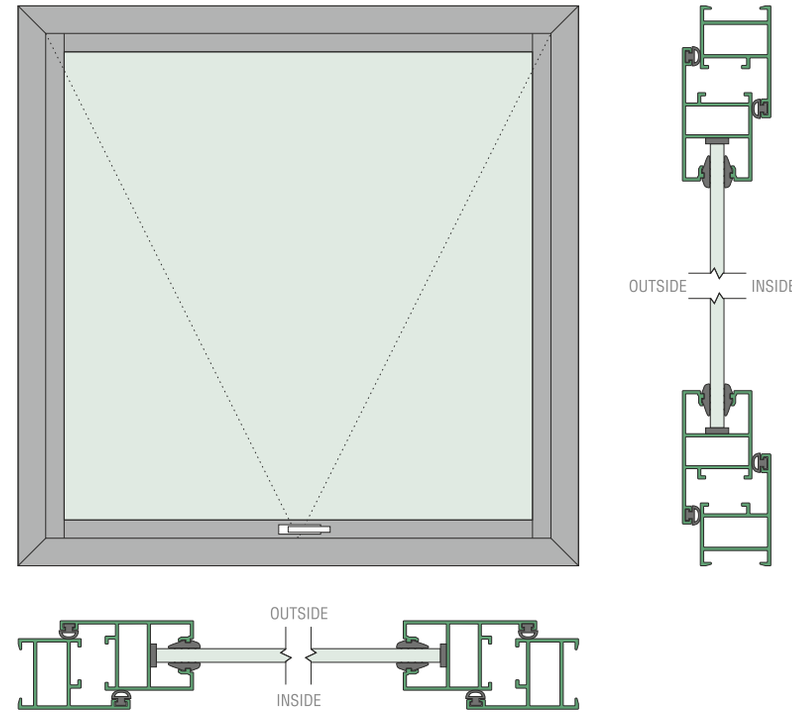

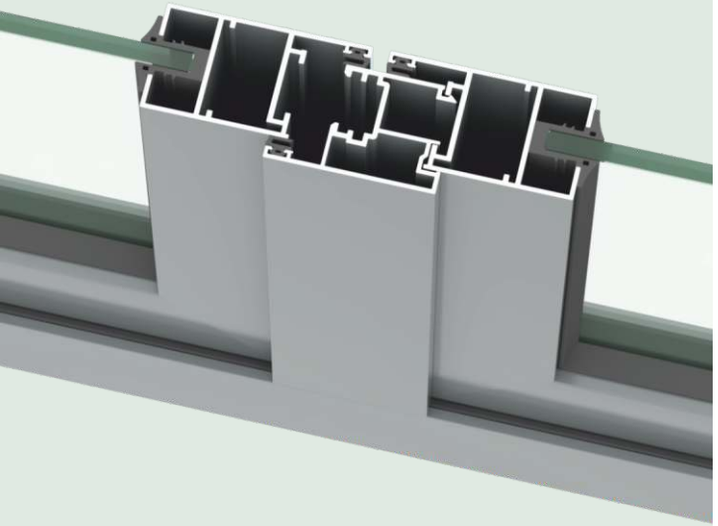

32mm
CASEMENT WINDOWS

FEATURES

Frame Depth	: 32 mm
Locking Type	: Single & Multipoint Lock with Handle
Glass Range	: 4 mm to 6mm
Openable Sight Line	: 76.4 mm
Fix Sight Line	: 40 mm
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 6mm (Sealing with Gasket)
Window Height (Max.)	: 1650 mm
Hardware	: SCHLEGEL GIESSE



FRAME
SECTION NO. :745611
Weight / Mtr : 0.449

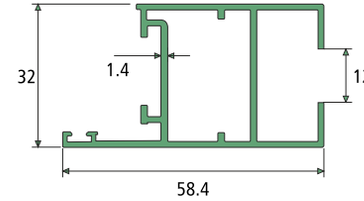

IN / OUT OPENABLE SHUTTER
SECTION NO. : 819080
Weight / Mtr : 0.726



MULLION
SECTION NO. : 819081
Weight / Mtr : 0.694



INVERSION PROFILE
SECTION NO. : 746510
Weight / Mtr : 0.369



FLYING MULLION
SECTION NO. : 819082
Weight / Mtr : 0.623



SGU CLIP
SECTION NO. : 746509
Weight / Mtr : 0.202

32mm FIX + OUTWARD OPENABLE WINDOW

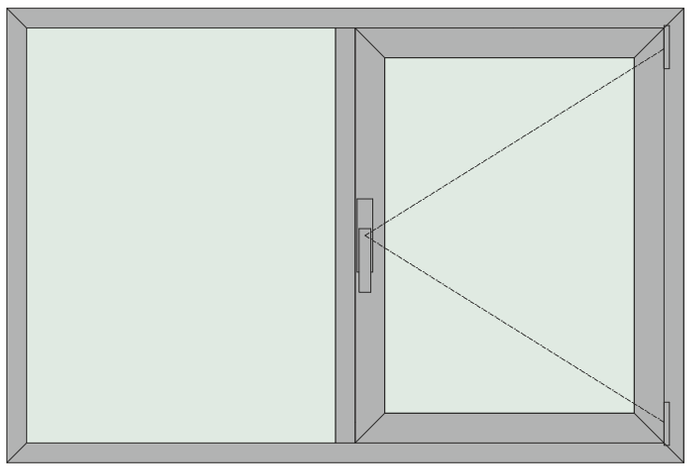

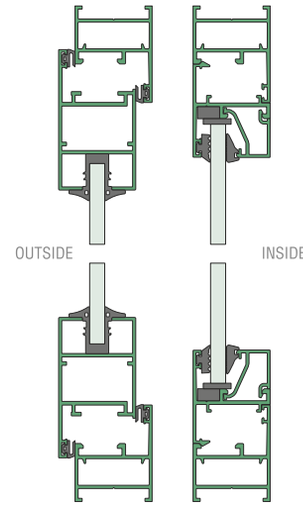

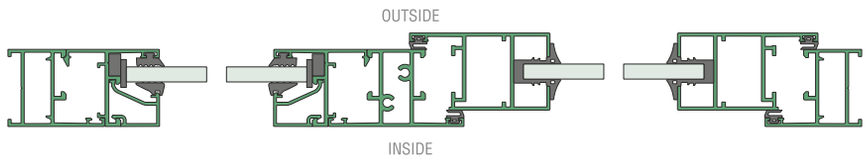

32mm DOUBLE WINDOW INWARD OPENABLE

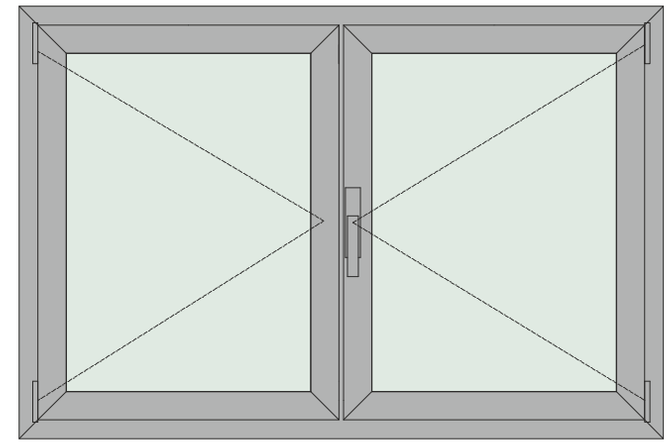

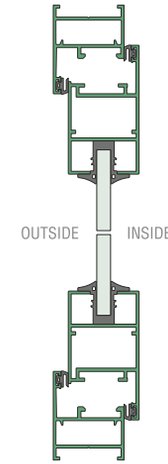

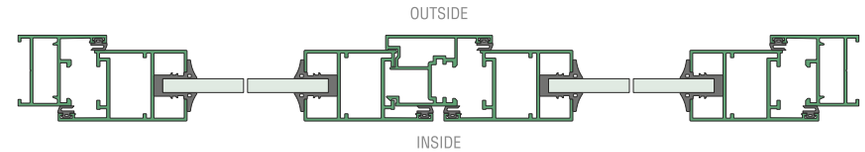

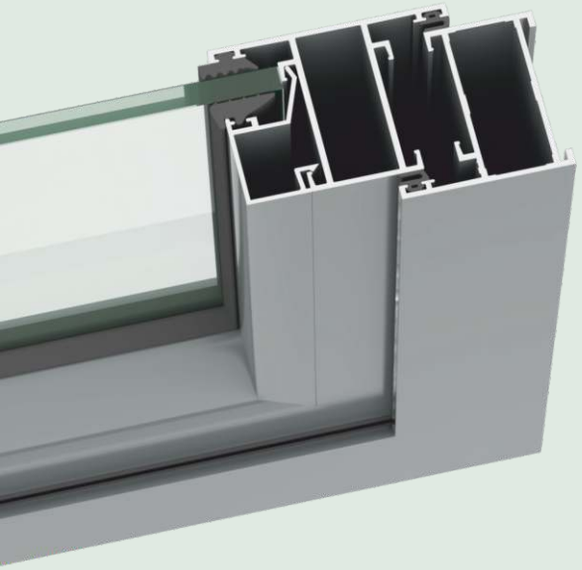

40mm
CASEMENT WINDOWS

FEATURES

Frame Depth	: 40mm
Locking Type	: Single&Multipoint Lock with Handle
Glass Range	: 5 mm to 28 mm
Openable Sight Line	: 72.3 mm
Fix Sight Line	: 39 mm
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 6mm (Sealing with Gasket)
Window Height (Max.)	: 1830 mm
Hardware	: SCHLEGEL GIESSE



FRAME
SECTION NO. : 914028
Weight / Mtr : 0.547

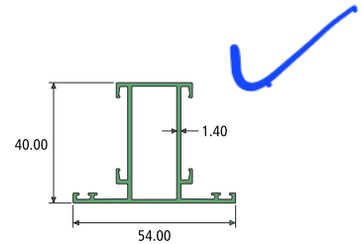

INSIDE / OUTSIDE SHUTTER
SECTION NO. : 914890
Weight / Mtr :0.660



MULLION
SECTION NO. : 819006
Weight / Mtr : 0.715



INVERSION
SECTION NO. : 819014
Weight / Mtr : 0.433



FLING MULLION
SECTION NO. : 819002
Weight / Mtr :0.662

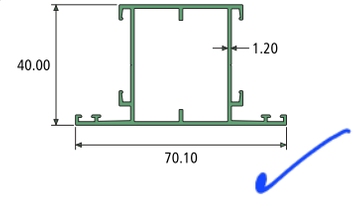

BIG SHUTTER
SECTION NO. : 914891
Weight / Mtr : 0.755



BIG SHUTTER
SECTION NO. : 819013
Weight / Mtr : 0.867



MULLION
SECTION NO. : 819008
Weight / Mtr : 0.905

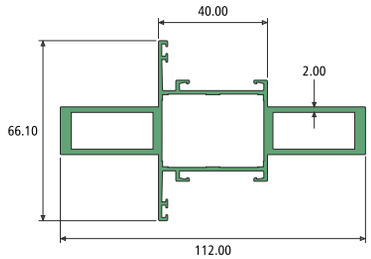

REINFORCEMENT MULLION
SECTION NO. : 819012
Weight / Mtr : 1.961

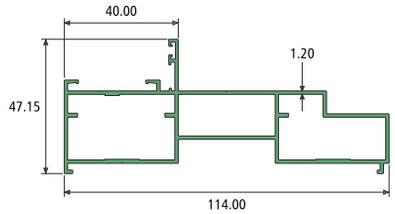

FRAME
SECTION NO. : 817023
Weight / Mtr : 1.252



MOSQUITO SHUTTER
SECTION NO. : 914517
Weight / Mtr : 0.468



SGU CLIP (upto 8mm Glass)
SECTION NO. : 914030
Weight / Mtr : 0.210



SGU CLIP (upto 5mm Glass)
SECTION NO. : 817091
Weight / Mtr : 0.213



DGU CLIP (upto 21mm Glass)
SECTION NO. : 817050
Weight / Mtr : 0.187



DGU CLIP (upto 26mm Glass)
SECTION NO. : 817921
Weight / Mtr : 0.159

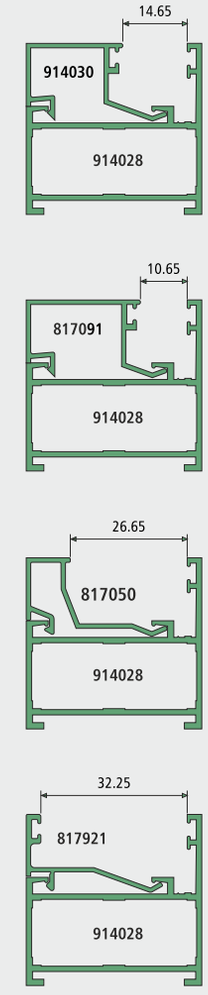

VARIOUS CLIP DETAILS

40mm CASEMENT WINDOWS (OUTSIDE DOUBLE OPENABLE WITH FLYING MULLION)

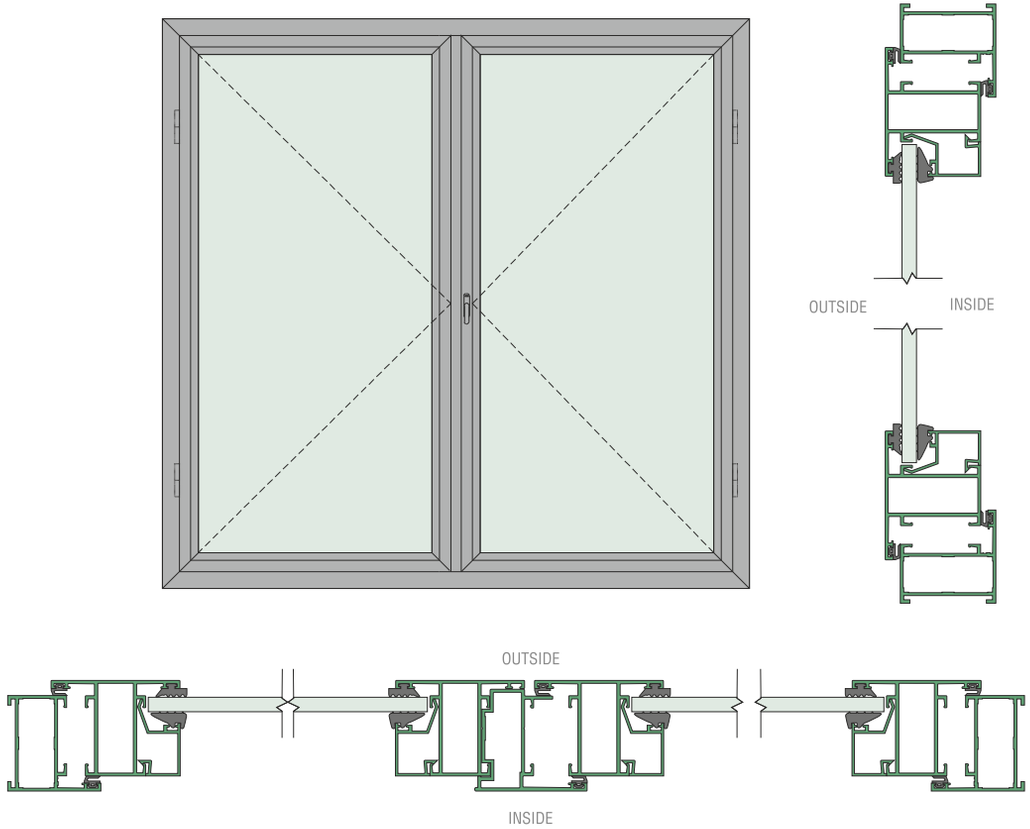

40mm CASEMENT WINDOWS (OUTSIDE OPENABLE)

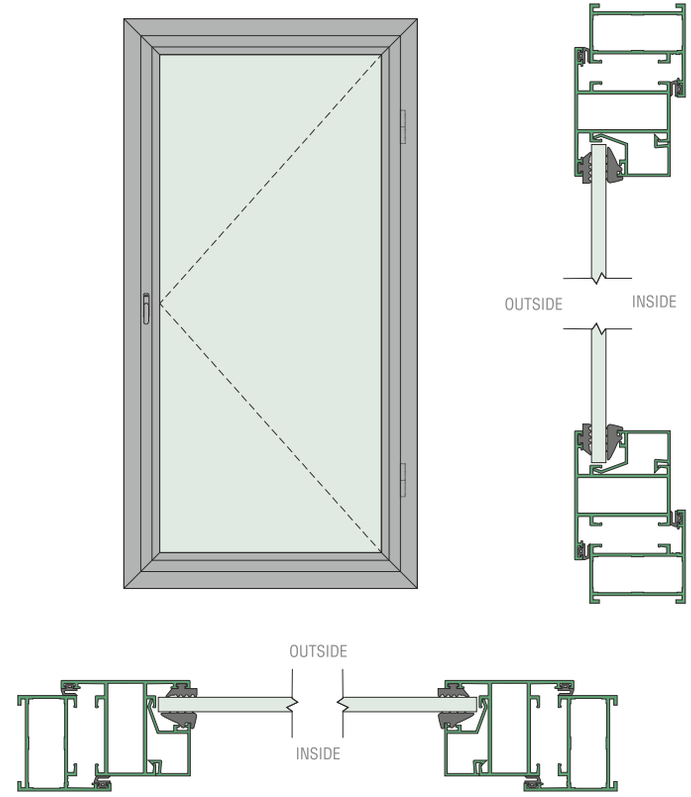

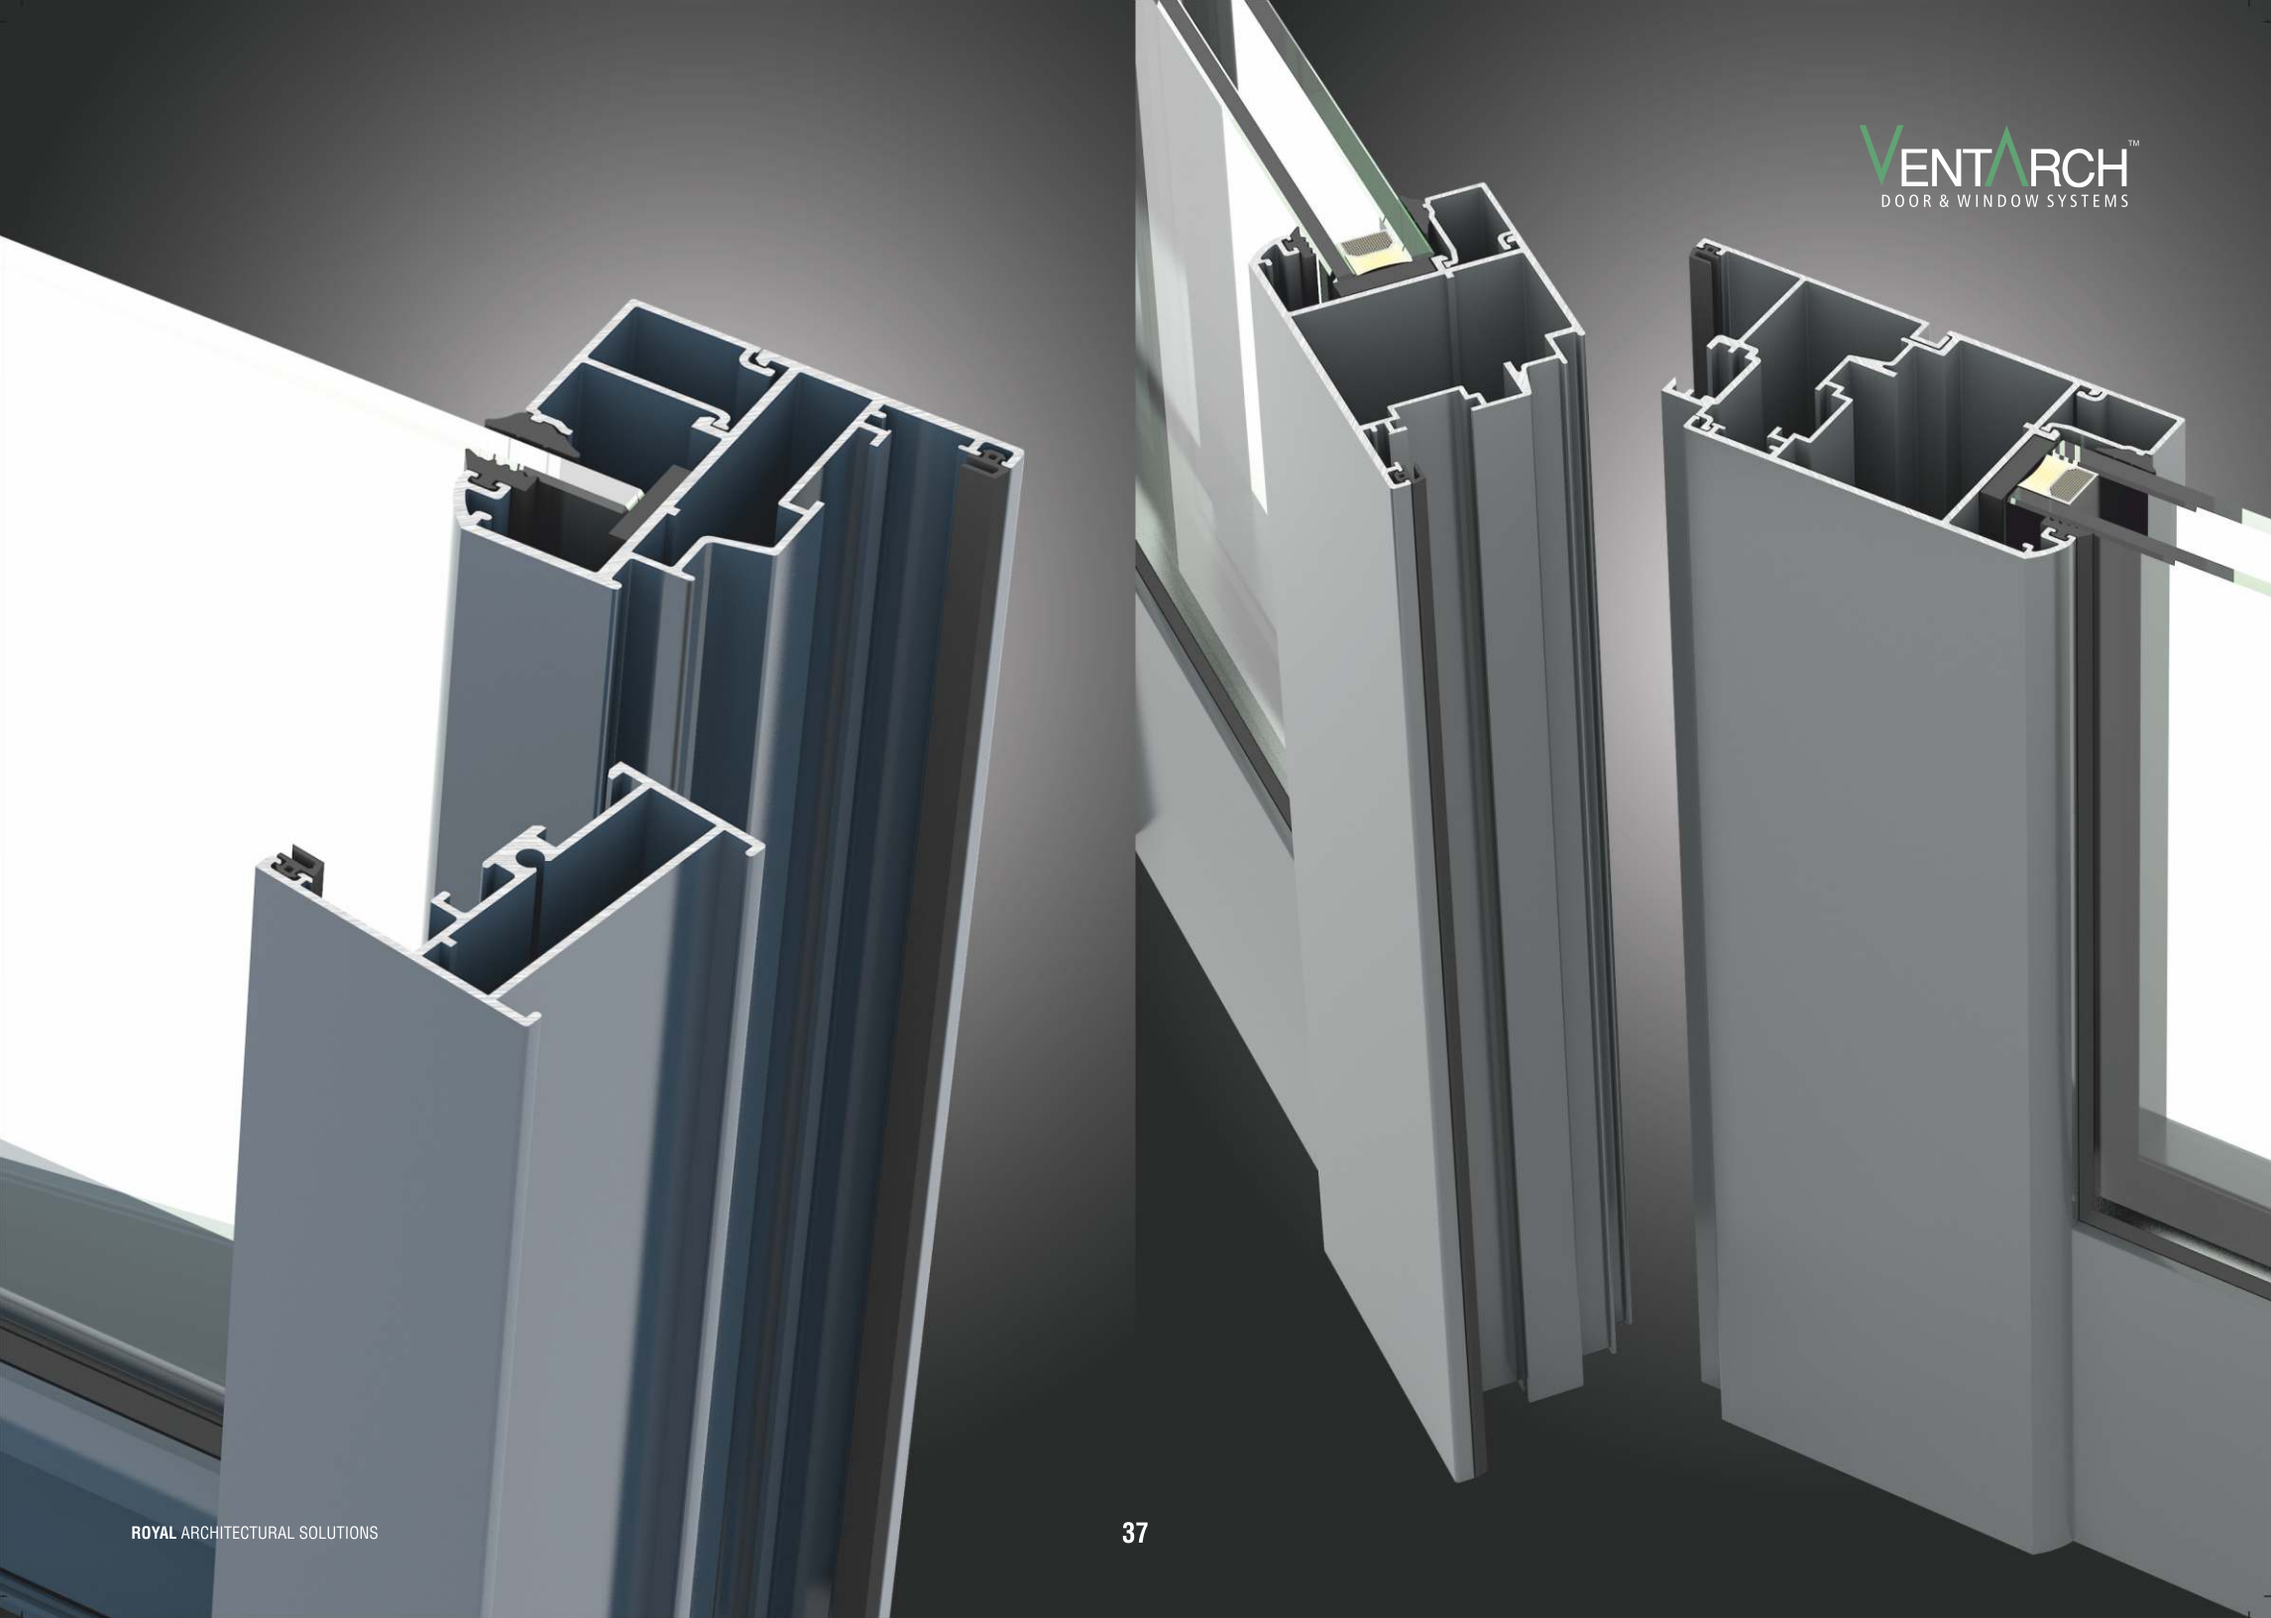
VENTARCH™
DOOR & WINDOW SYSTEMS

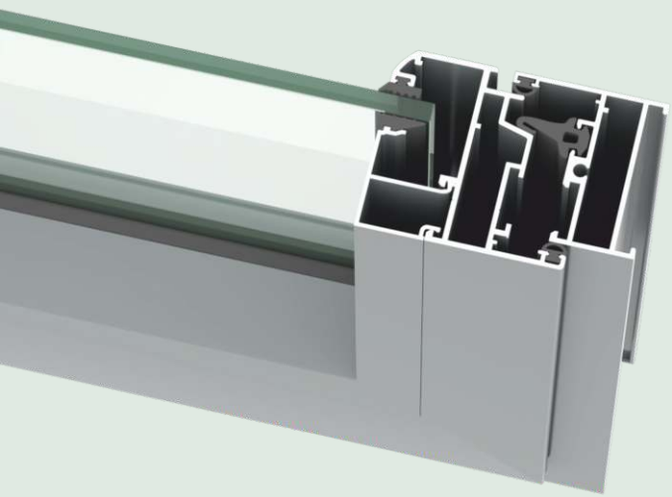

50mm
CASEMENT WINDOWS

FEATURES

Frame Depth	: 50mm
Locking Type	: Single&Multipoint Lock with Handle
Glass Range	: 5 mm to 38mm
Openable Sight Line	: 97.5mm
Fix Sight Line	: 46 mm
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 6mm (Sealing with Gasket)
Window Height (Max.)	: 2100 mm
Hardware	: SCHLEGEL GIESSE

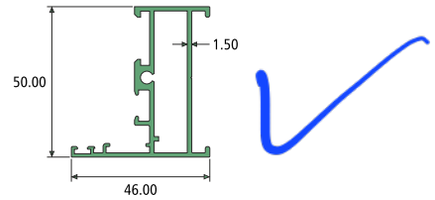

FRAME
SECTION NO. : 914351
Weight / Mtr : 0.818



BIG FRAME
SECTION NO. : 914756
Weight / Mtr : 1.185

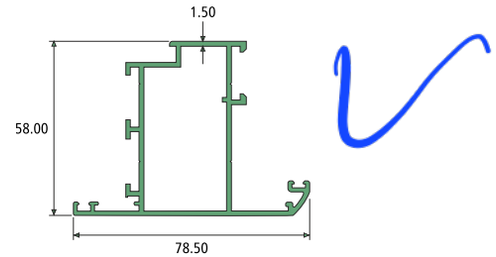

OUTSIDE OP. SHUTTER
SECTION NO. : 914353
Weight / Mtr : 1.138



INSIDE OP. SHUTTER
SECTION NO. : 914520
Weight / Mtr : 0.955



MULLION
SECTION NO. : 914352
Weight / Mtr : 1.015

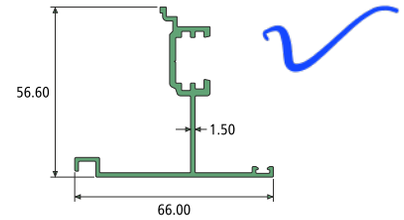

FLYING MULLION
SECTION NO. : 914797
Weight / Mtr : 0.707



INVERSION
SECTION NO. : 914564
Weight / Mtr : 0.508



SGU CLIP
SECTION NO. : 914549
Weight / Mtr : 0.305



SGU RADIUS CLIP
SECTION NO. : 914354
Weight / Mtr : 0.290



DGU CLIP
SECTION NO. : 914641
Weight / Mtr : 0.230



LAMINATED GLASS CLIP
SECTION NO. : 992095
Weight / Mtr : 0.288



DGU CLIP (upto 33mm Glass)
SECTION NO. : 992036
Weight / Mtr : 0.193



DGU CLIP (upto 38mm Glass)
SECTION NO. : 914868
Weight / Mtr : 0.185

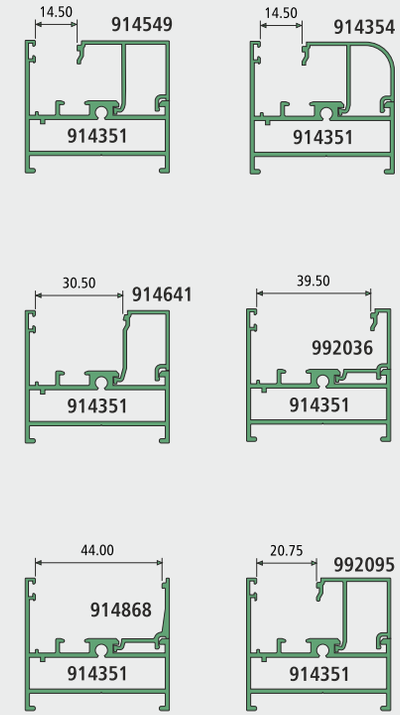

VARIOUS CLIP DETAILS

50mm CASEMENT WINDOW (INSIDE OPENABLE DOUBLE WITH FLYING MULLION)

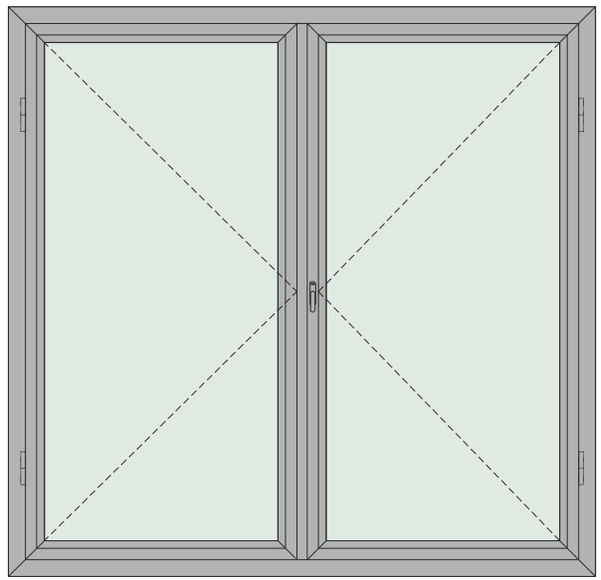







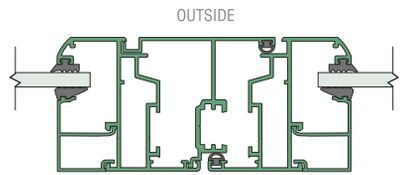



50mm CASEMENT WINDOW (INSIDE OPENABLE)

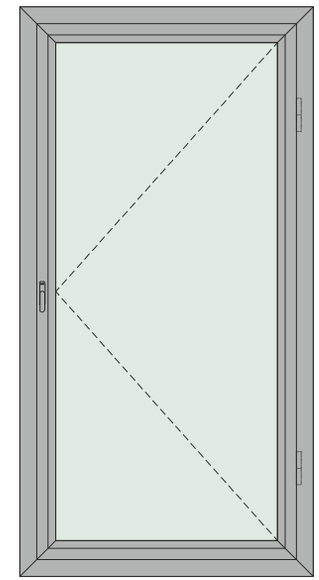





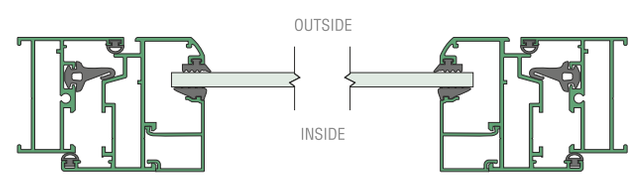

50mm CASEMENT WINDOW (FIX + OUTSIDE OPENABLE)

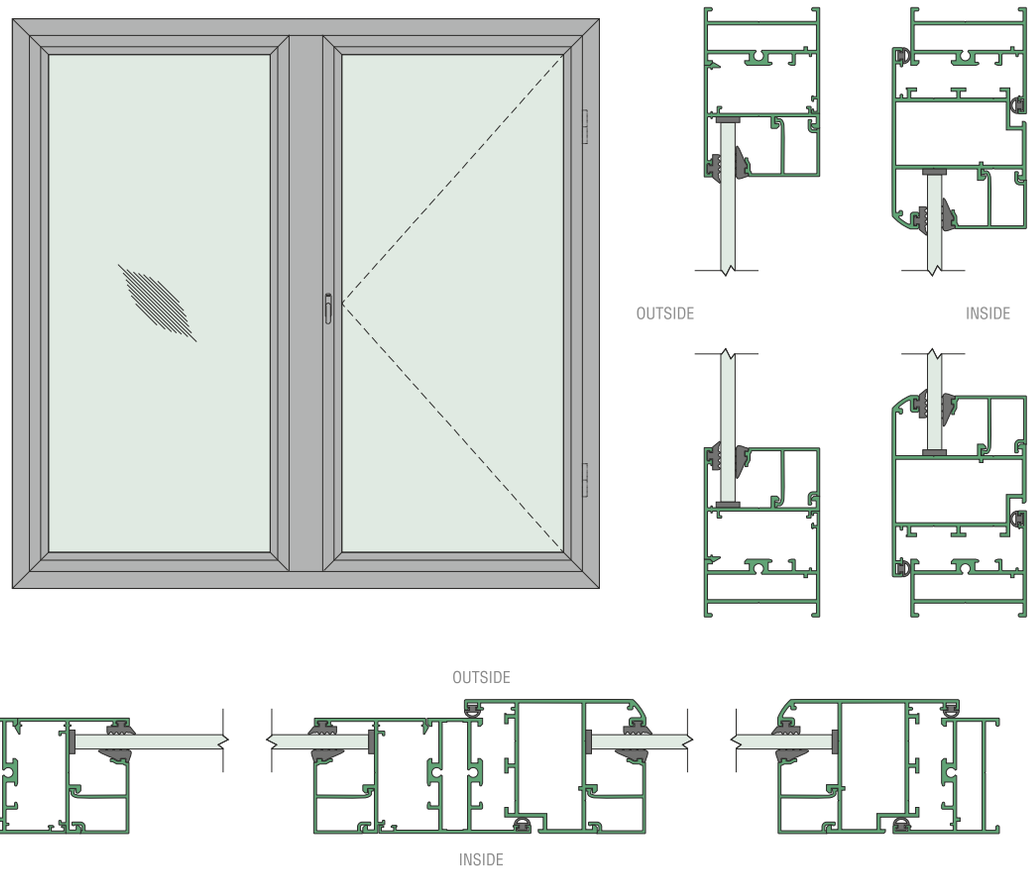

50mm CASEMENT WINDOW (TOP HUNG)

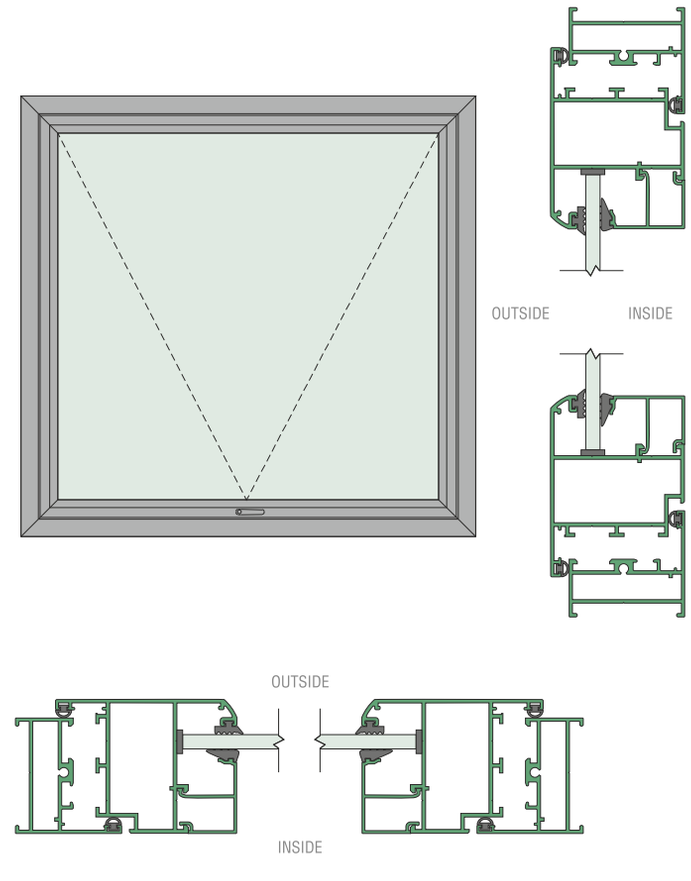

VENTARCH™
DOOR & WINDOW SYSTEMS

CASEMENT DOOR

VENTARCH™
DOOR & WINDOW SYSTEMS

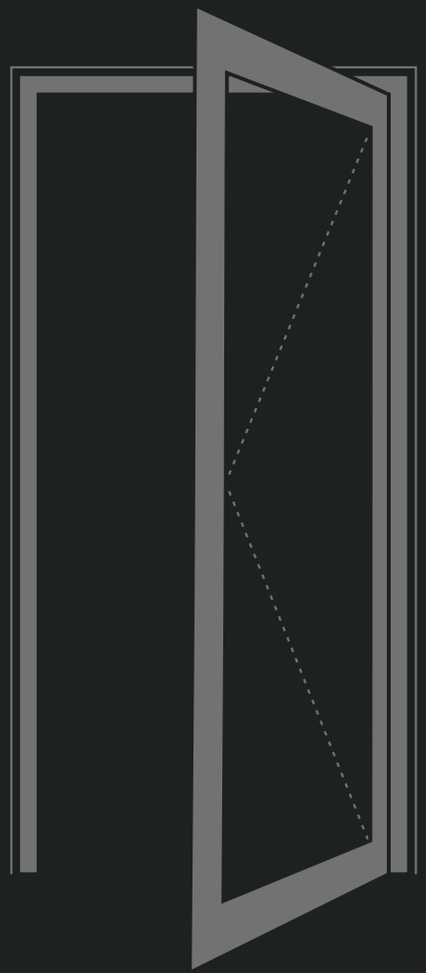

CASEMENT
DOORS

Double leaf doors with flying mullion and frameless bottom section with full SGU and DGU compatibility are also available. Excellent Sealing and flexibility with Euro Groove compatible hardware give fabricators a range of options. Availability of both visible and invisible hinges satisfy both utilitarian and aesthetic needs. Needless to say, that these are both sound and thermal transfer resistant windows and doors.

40mm | 50mm

40mm
CASEMENT DOOR

FEATURES

Frame Depth	: 40mm
Locking Type	: Single&Multipoint Lock with Handle
Glass Range	: 5 mm to 28 mm
Openable Sight Line	: 104.4 mm
Fix Sight Line	: 55.3 mm
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 6mm (Sealing with Gasket)
Window Height (Max.)	: 2135 mm
Hardware	: SCHLEGEL GIESSE



DOOR FRAME
SECTION NO. : 819022
Weight / Mtr : 0.783

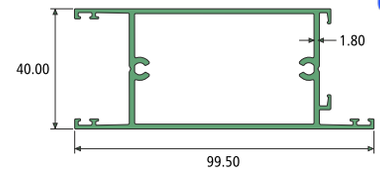

DOOR - BOTTOM
SECTION NO. : 812659
Weight / Mtr : 1.298



DOOR-BOTTOM-ADAPTOR
SECTION NO. : 817918
Weight / Mtr : 0.305



BIG SHUTTER
SECTION NO. : 819013
Weight / Mtr : 0.867



Z MULLION SHUTTER
SECTION NO. : 819021
Weight / Mtr : 0.870



FLYING MULLION
SECTION NO. : 819002
Weight / Mtr :0.662



MULLION
SECTION NO. : 819008
Weight / Mtr : 0.905



SGU CLIP
SECTION NO. : 914030
Weight / Mtr : 0.210



SGU CLIP
SECTION NO. : 817091
Weight / Mtr : 0.213



DGU CLIP
SECTION NO. : 817050
Weight / Mtr : 0.187



DGU CLIP
SECTION NO. : 817921
Weight / Mtr : 0.159

40mm CASEMENT DOOR (DGU GLASS INSIDE OPENABLE)

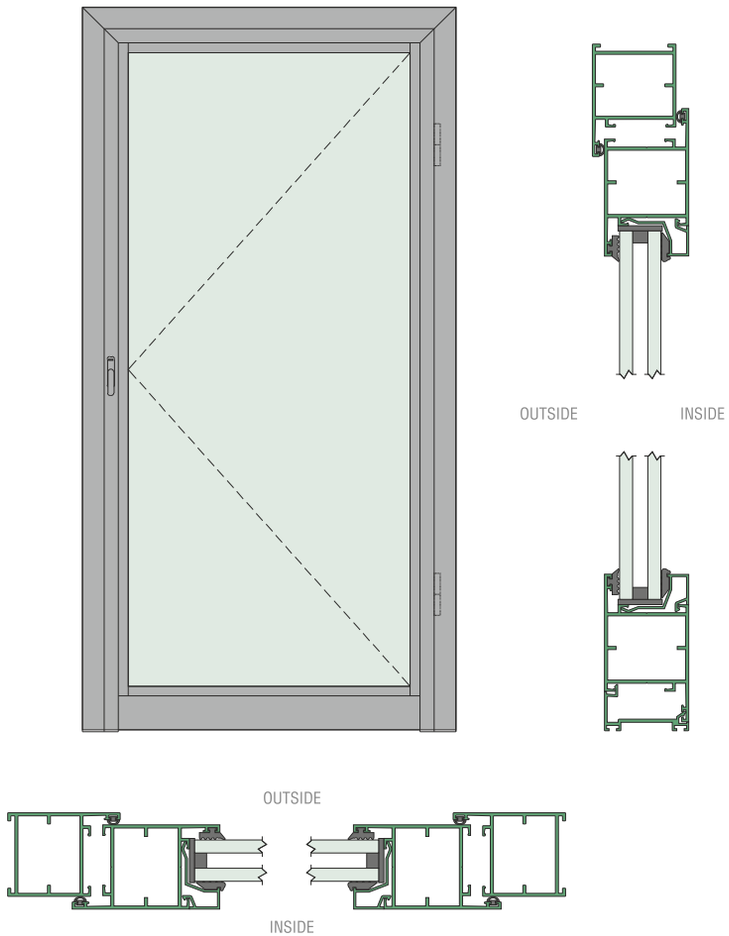

40mm CASEMENT DOOR (SGU GLASS OUTSIDE OPENABLE)

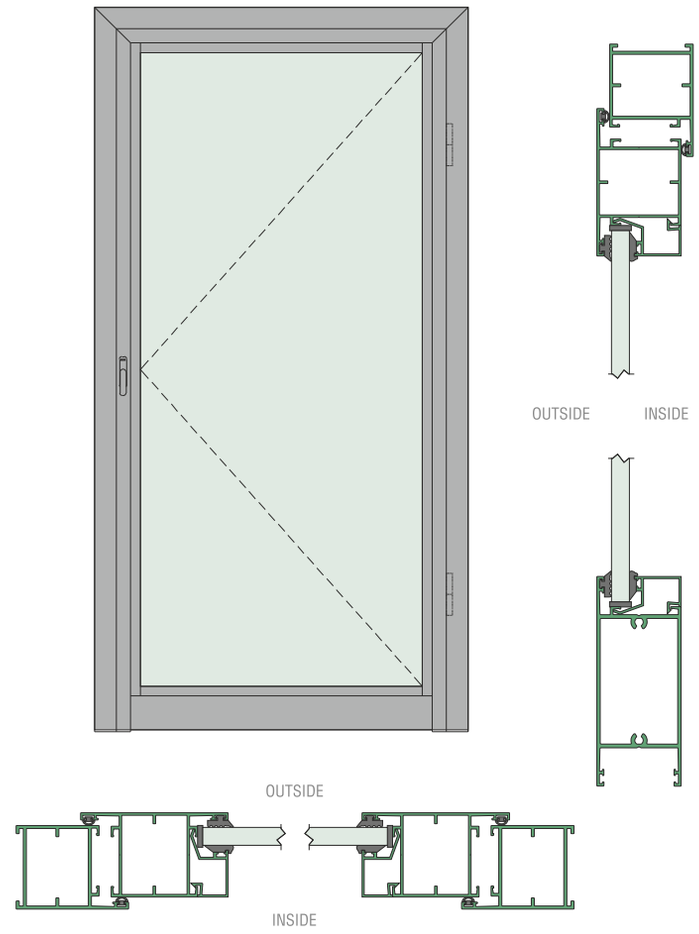

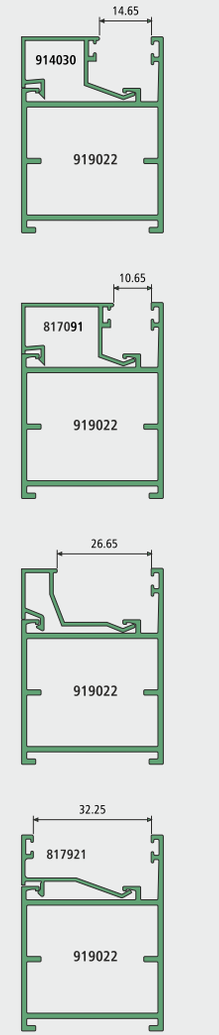

VARIOUS CLIP DETAILS

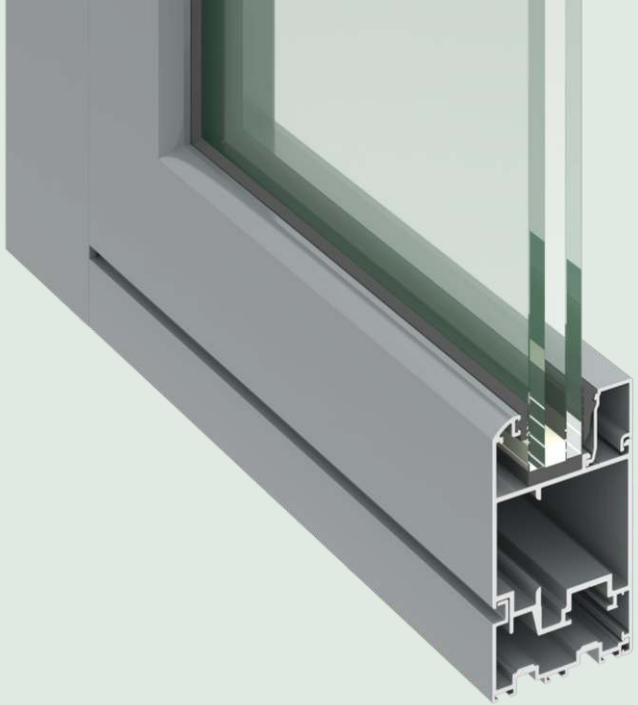

50mm
CASEMENT DOOR

FEATURES

Frame Depth	: 50mm
Locking Type	: Single&Multipoint Lock with Handle
Glass Range	: 5 mm to 38mm
Openable Sight Line	: 142 mm
Fix Sight Line	: 74 mm
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 6mm (Sealing with Gasket)
Window Height (Max.)	: 2440 mm
Hardware	: SCHLEGEL GIESSE

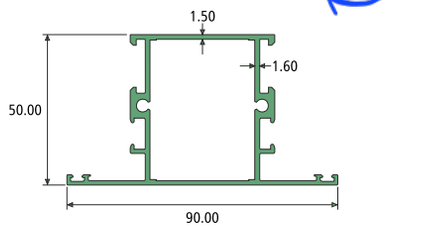

MULLION
SECTION NO. : 914774
Weight / Mtr : 1.235



FRAME
SECTION NO. : 914775
Weight / Mtr : 1.080

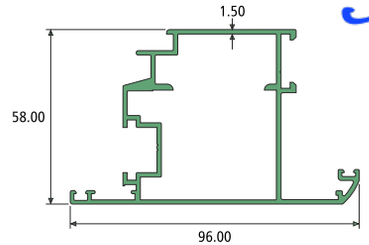

OUTSIDE OP. SHUTTER
(MULTI POINT LOCKING)
SECTION NO. : 992214
Weight / Mtr : 1.402

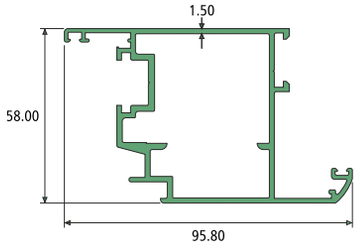

INSIDE OP. SHUTTER
SECTION NO. : 992109
Weight / Mtr :1.540

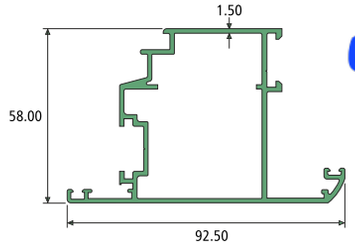

OUTSIDE OP. SHUTTER
(SINGLE POINT LOCKING)
SECTION NO. : 914776
Weight / Mtr : 1.292



FLYING MULLION
SECTION NO. : 914797
Weight / Mtr : 0.707



DOOR BOTTOM ADAPTOR
SECTION NO. : 992208
Weight / Mtr : 0.526

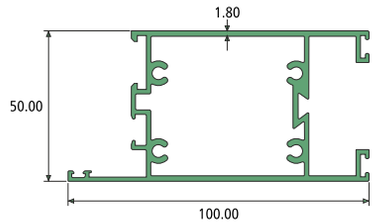

DOOR BOTTOM
SECTION NO. : 914777
Weight / Mtr : 1.766



SGU CLIP
SECTION NO. : 914549
Weight / Mtr : 0.305



SGU RADIUS CLIP
SECTION NO. : 914354
Weight / Mtr : 0.290



DGU CLIP
SECTION NO. : 914641
Weight / Mtr : 0.228



LAMINATED GLASS CLIP
SECTION NO. : 992095
Weight / Mtr : 0.288



DGU CLIP(upto 33mm Glass)
SECTION NO. : 992036
Weight / Mtr : 0.193



DGU CLIP (upto 38mm Glass)
SECTION NO. : 914868
Weight / Mtr : 0.185

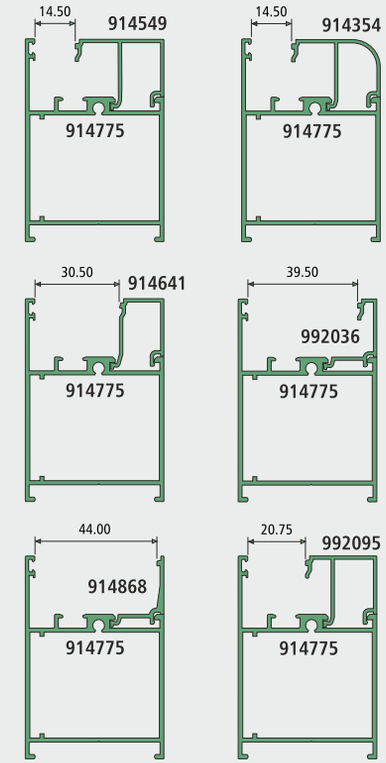

VARIOUS CLIP DETAILS

50mm CASEMENT DOOR (DGU GLASS INSIDE OPENABLE)

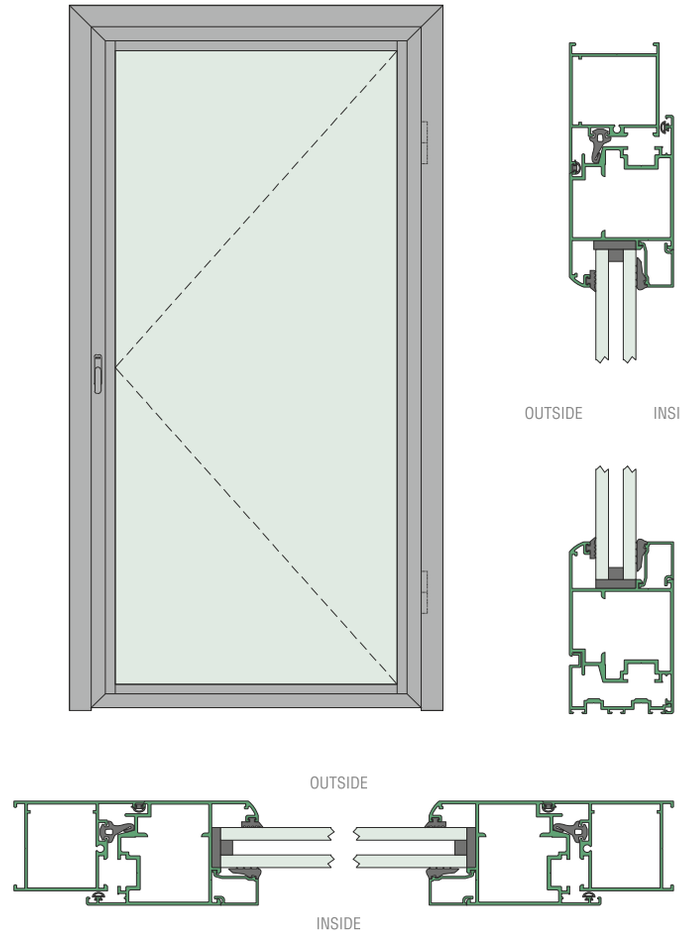

50mm CASEMENT DOOR (SGU GLASS OUTSIDE OPENABLE)

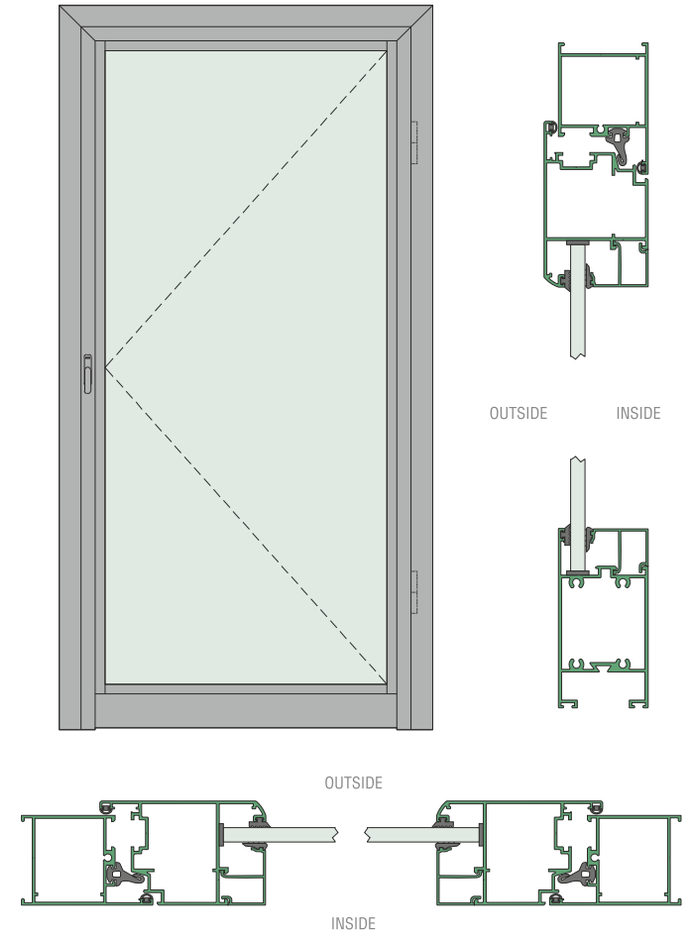

50mm CASEMENT DOUBLE DOOR (DGU GLASS OUTSIDE OPENABLE)

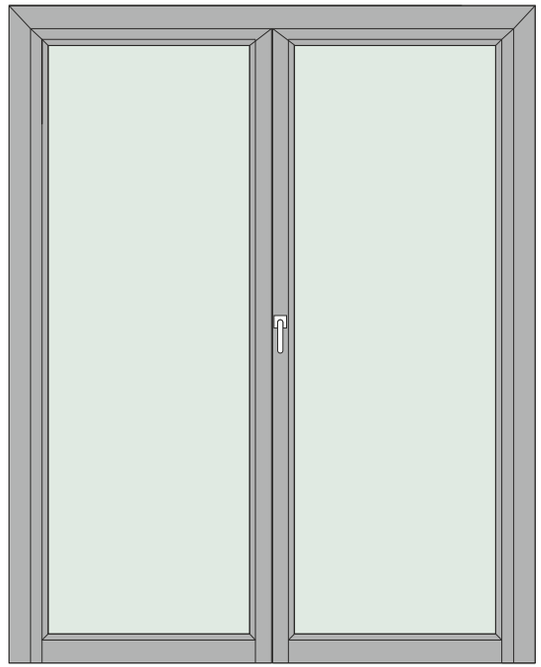





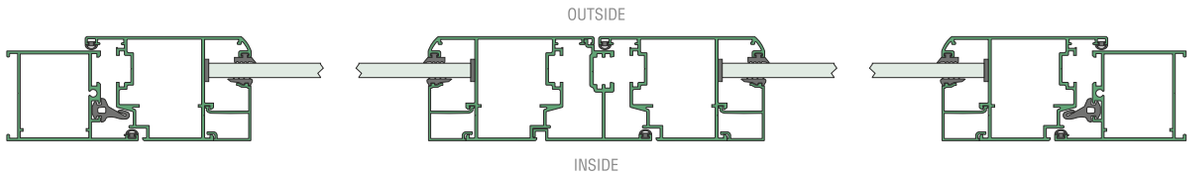

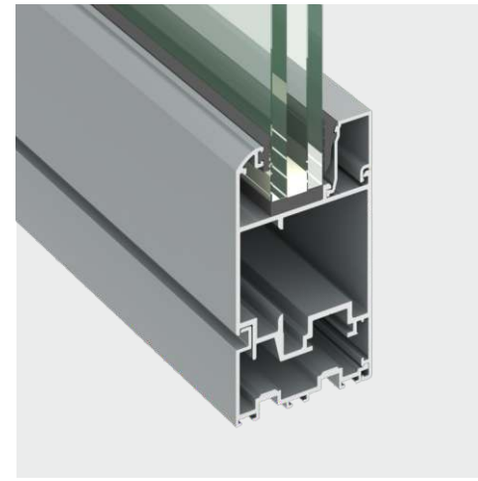

WITH DOOR BOTTOM ADAPTOR

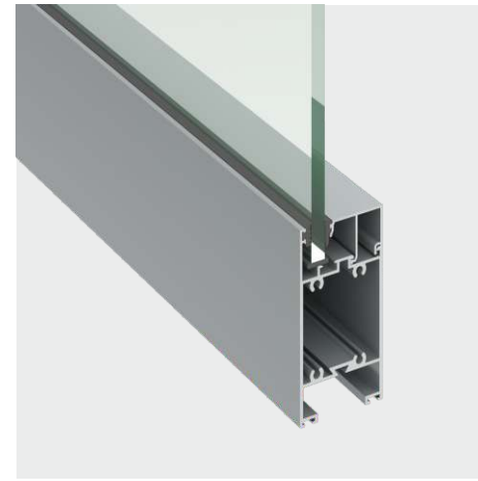

WITH DOOR BOTTOM

VENTARCH™
DOOR & WINDOW SYSTEMS

PIVOT WINDOWS

VENTARCH™
DOOR & WINDOW SYSTEMS

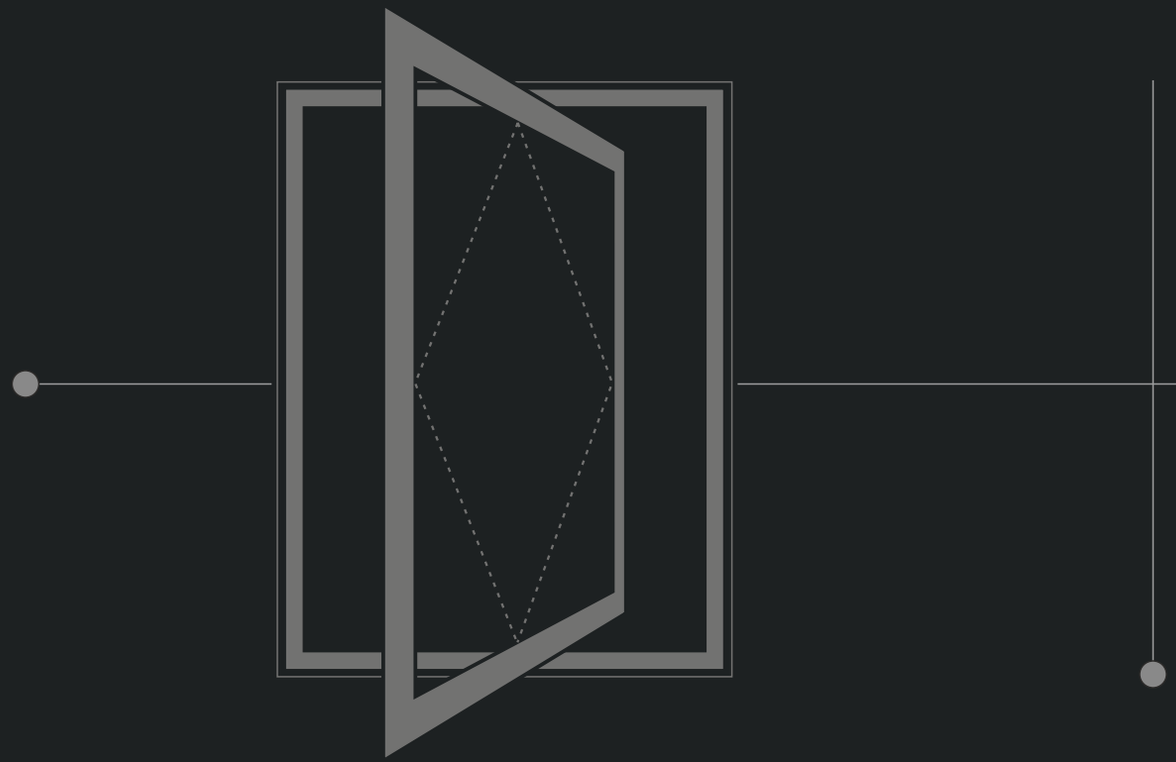

PIVOT
WINDOWS

Pivot windows offer a solution for openings which have a constraint of space or for just pure aesthetics. The sash opens 90° to 180°, either vertically or horizontally. Designed around world class hardware. These windows however cannot be equipped with filter screens

50mm

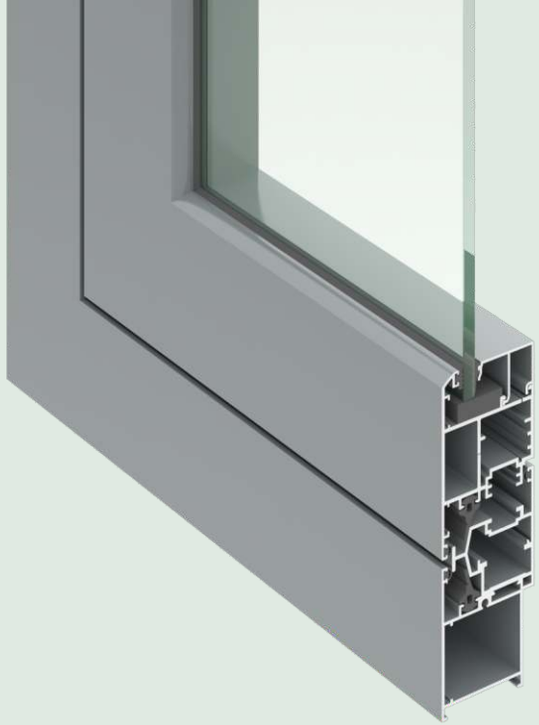

PIVOT
WINDOWS

FEATURES

Frame Depth	: 50mm
Locking Type	: Multipoint Lock with Handle
Glass Range	: 5 mm to 38mm
Openable Sight Line	: 166.50 mm
Fix Sight Line	: 74 mm
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 6 mm (Sealing with Gasket)
Window Height (Max.)	: 2200 mm
Window Width (Max.)	: 1600 mm
Window Weight (Max.)	: 100 Kg. (Aluminium+Glass)
Hardware	: SCHLEGEL GIESSE



FRAME
SECTION NO. : 914775
Weight / Mtr : 1.080



ADAPTOR
SECTION NO. : 992165
Weight / Mtr : 1.072



SHUTTER
SECTION NO. : 992166
Weight / Mtr :1.623



LAMINATED GLASS CLIP
SECTION NO. : 992095
Weight / Mtr : 0.288



SGU CLIP
SECTION NO. : 914549
Weight / Mtr : 0.305



DGU CLIP
SECTION NO. : 914641
Weight / Mtr : 0.228



DGU CLIP
SECTION NO. : 914868
Weight / Mtr : 0.185



DGU CLIP
SECTION NO. : 992036
Weight / Mtr : 0.193











VERTICAL (OPEN IN) PIVOT WINDOW

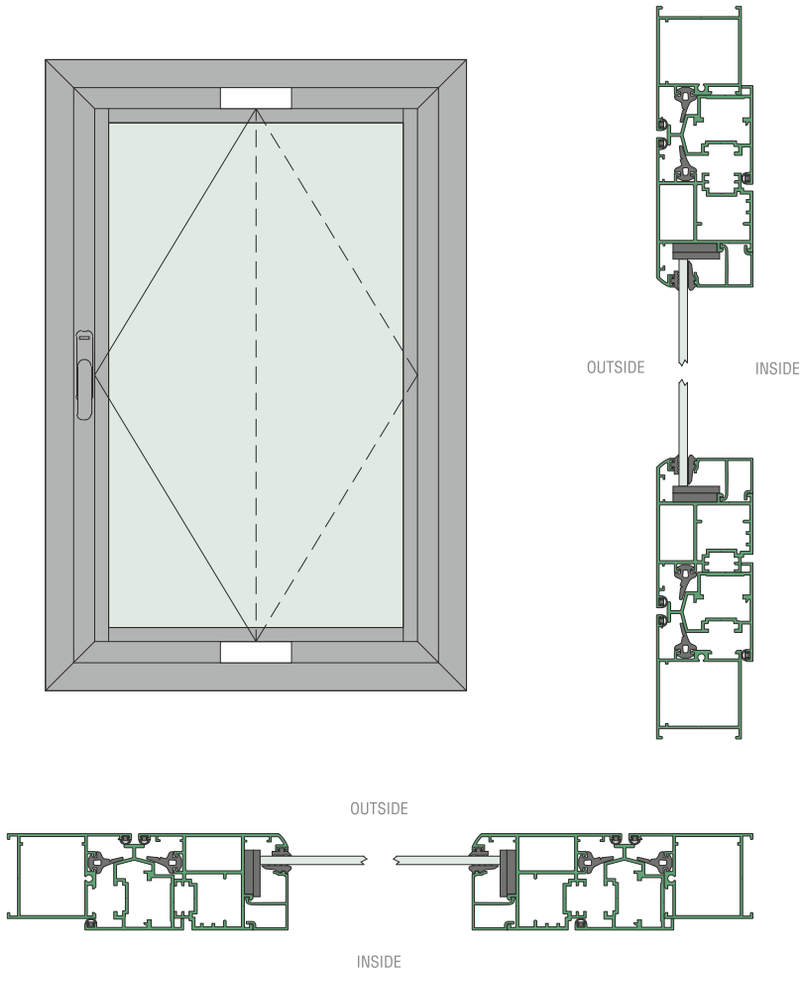

HORIZONTAL (OPEN OUT) PIVOT WINDOW

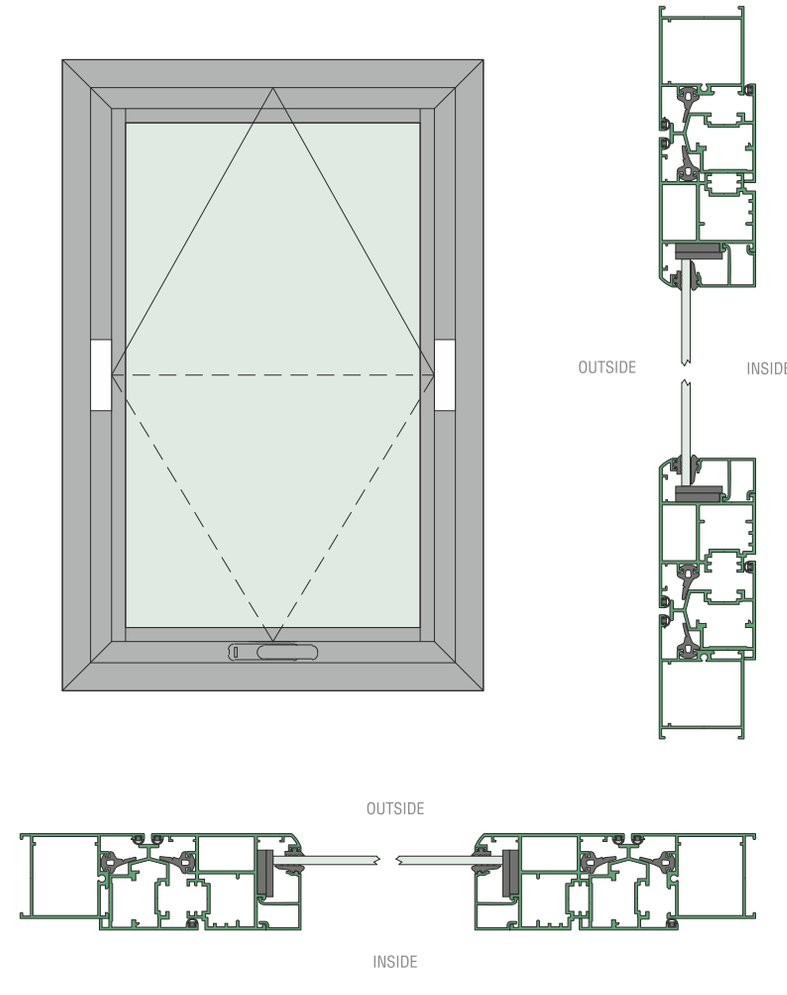

VENTARCH™
DOOR & WINDOW SYSTEMS

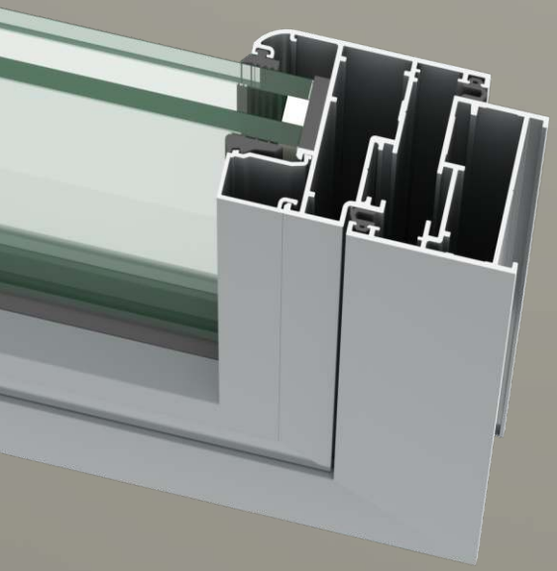

O.S. OPERATORS

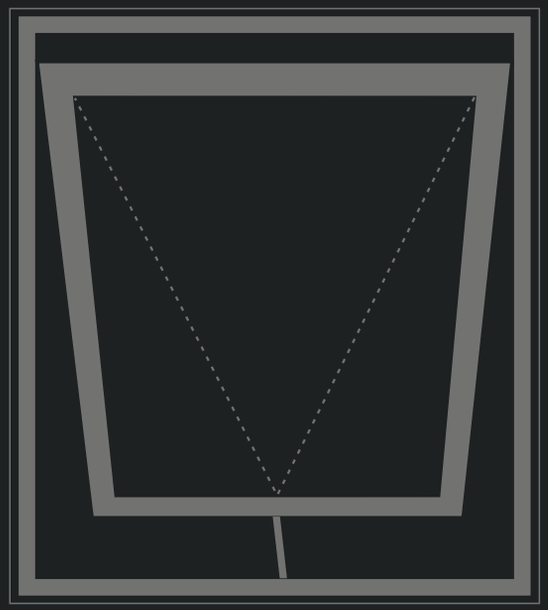

O.S.
OPERATOR 2.0

OS Operator for outswing windows offer three options with one solution. Having a screen, limiting the opening and having multiple lock points for better insulation, security and lessening the air/wind/water penetration. Our design is compatible with small openings well.

50mm

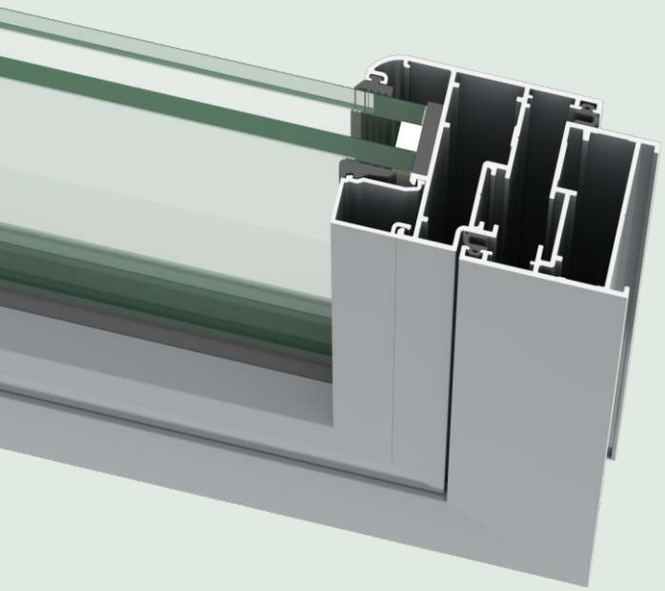

O.S.
OPERATOR 2.0

FEATURES

Frame Depth	: 50mm
Locking Type	: Single&Multipoint Lock with Handle
Glass Range	: 5 mm to 38mm
Openable Sight Line	: 97.8 mm
Fix Sight Line	: NA
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 6mm (Sealing with Gasket)
Window Height (Max.)	: 2100 mm
Hardware	: SCHLEGEL GIESSE





FRAME
SECTION NO. : 992177
Weight / Mtr : 0.882

SHUTTER
SECTION NO. : 992178
Weight / Mtr : 1.100











LAMINATED GLASS CLIP
SECTION NO. : 992095
Weight / Mtr : 0.288

SGU CLIP
SECTION NO. : 914549
Weight / Mtr : 0.305

DGU CLIP
SECTION NO. : 914641
Weight / Mtr : 0.230

DGU CLIP
SECTION NO. : 914868
Weight / Mtr : 0.185

DGU CLIP
SECTION NO. : 992036
Weight / Mtr : 0.193











O.S. OPERATOR TOP HUNG WINDOW

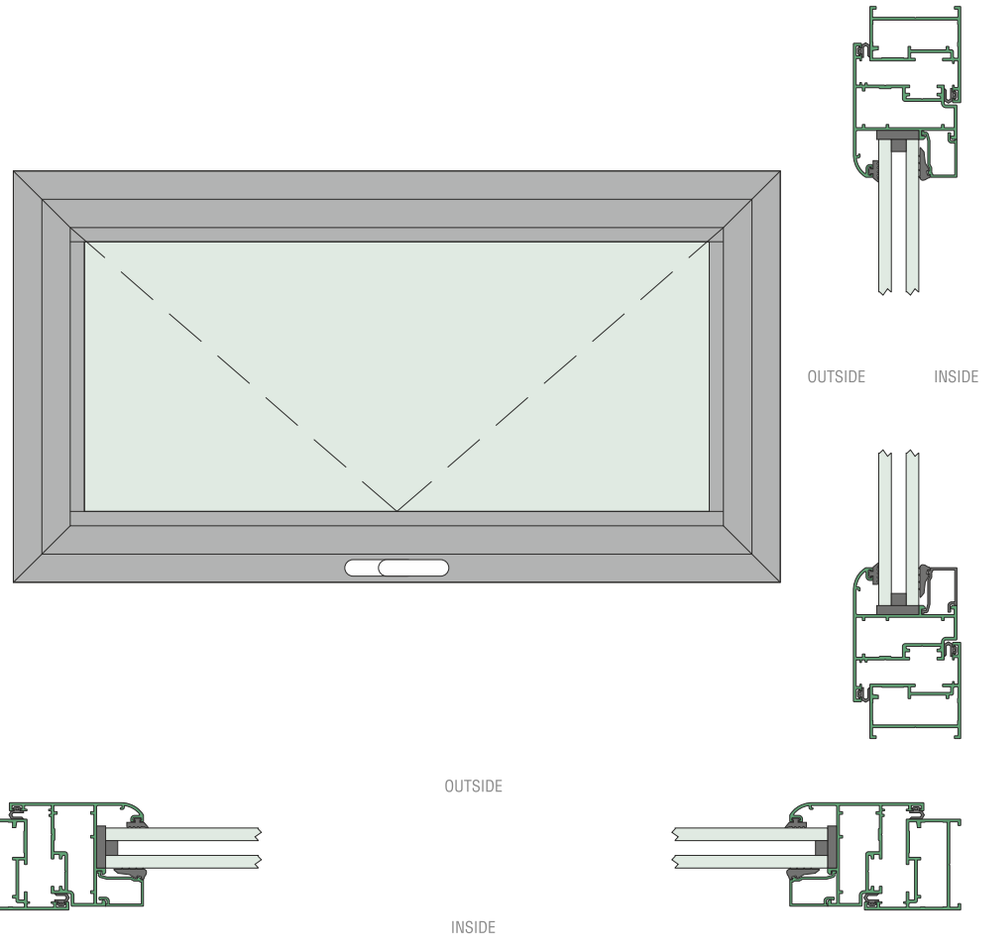

O.S. OPERATOR SIDE HUNG WINDOW

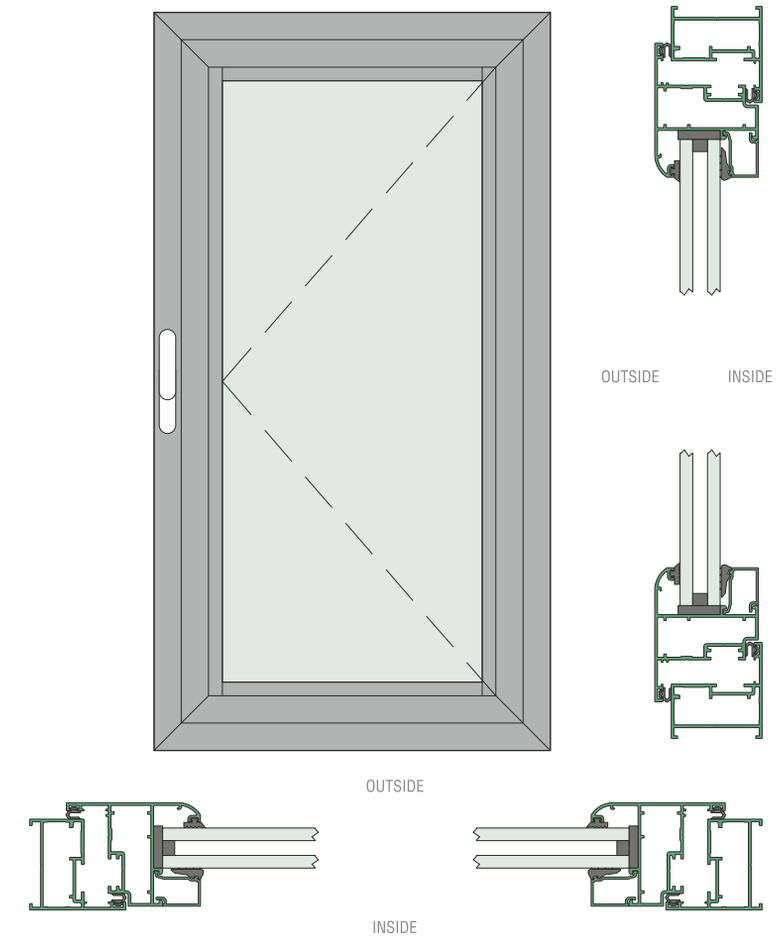

VENTARCH™
DOOR & WINDOW SYSTEMS

TILT&SLIDE WINDOWS

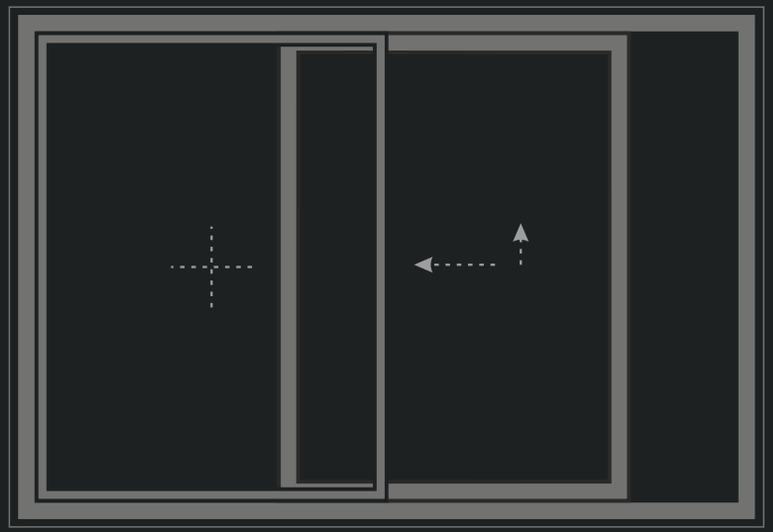

TILT&SLIDE
WINDOWS

Tilt and Slide windows are a twist on conventional slider windows. Both sashes slide independently and also offer a tilt option for providing ventilation while controlling access thus providing enhanced security.

50mm

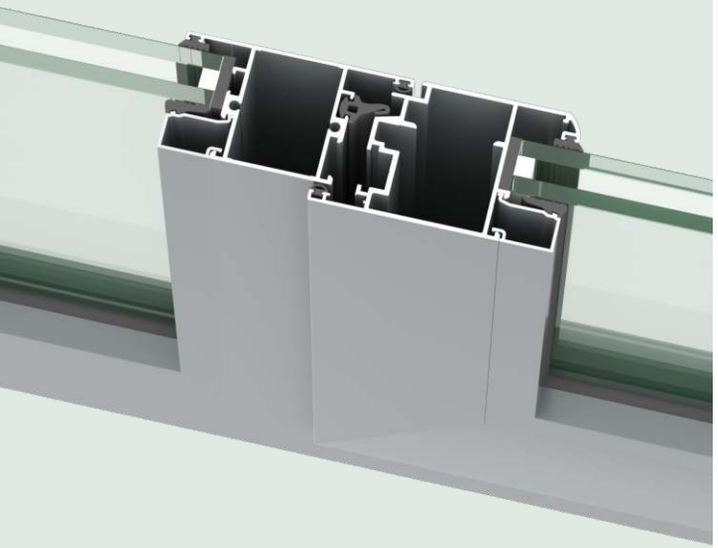

TILT&SLIDE
WINDOWS

FEATURES

Frame Depth	: 50mm
Locking Type	: Single&Multipoint Lock with Handle
Glass Range	: 5 mm to 38mm
Openable Sight Line	: 142 mm
Fix Sight Line	: 74 mm
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 6mm (Sealing with Gasket)
Window Height (Max.)	: 2440 mm
Hardware	: SCHLEGEL GIESSE



MULLION
SECTION NO. : 914774
Weight / Mtr : 1.235



FRAME
SECTION NO. : 914775
Weight / Mtr : 1.080

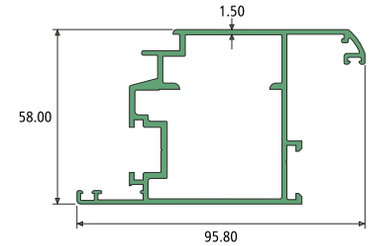

INSIDE OP. SHUTTER
SECTION NO. : 992109
Weight / Mtr : 1.540



LAMINATED GLASS CLIP
SECTION NO. : 992095
Weight / Mtr : 0.288



SGU CLIP
SECTION NO. : 914549
Weight / Mtr : 0.305



DGU CLIP
SECTION NO. : 914641
Weight / Mtr : 0.230



DGU CLIP
SECTION NO. : 914868
Weight / Mtr : 0.185



DGU CLIP
SECTION NO. : 992036
Weight / Mtr : 0.193











TILT & SLIDE WINDOW

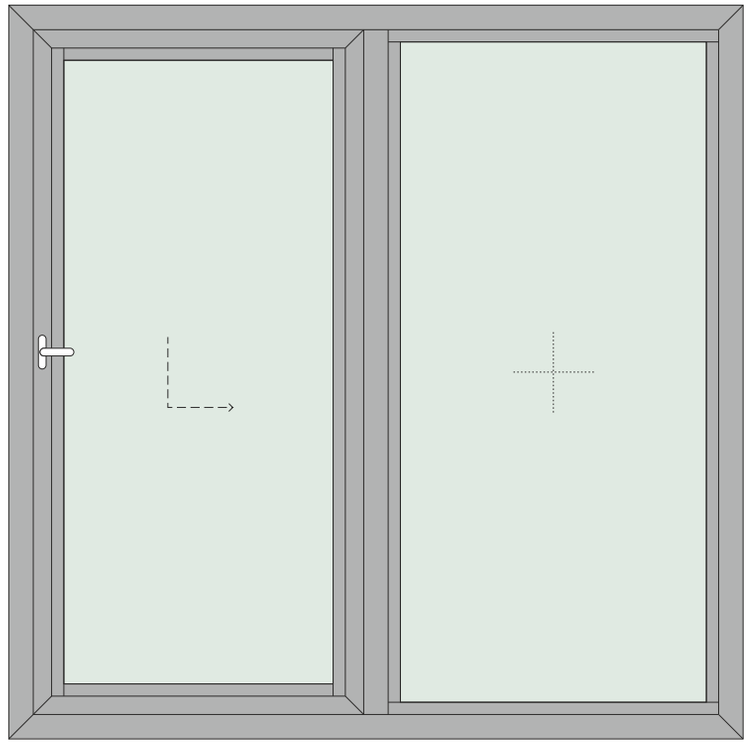





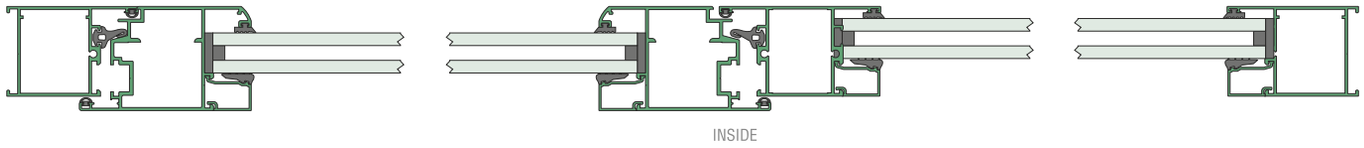

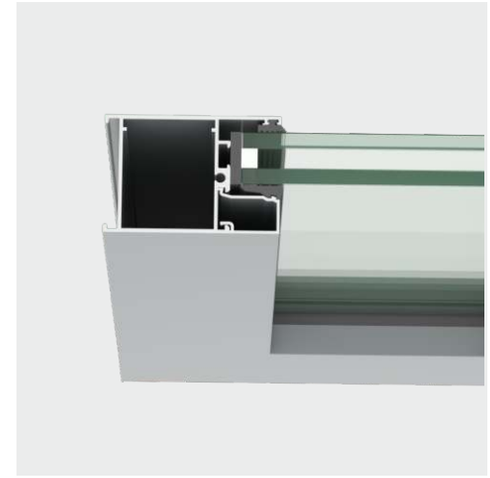

VENTARCH
DOOR & WINDOW SYSTEMS

TILT & TURN WINDOWS

VENTARCH™
DOOR & WINDOW SYSTEMS

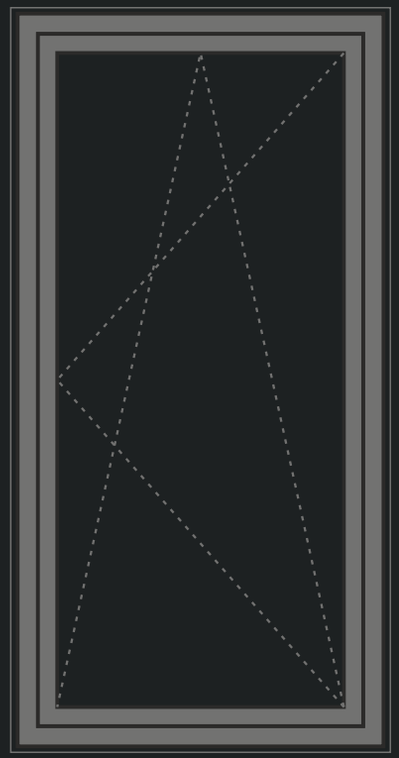

TILT&TURN
WINDOWS

Tilt and Turn windows offer great flexibility to our more discerning clients. It offers full opening akin to casement windows for needs of cleaning and greater access. It also offers greater security by allowing superb ventilation using the tilt option and yet not allowing full access. It has better insulation characteristics than sliding options as well.

50mm

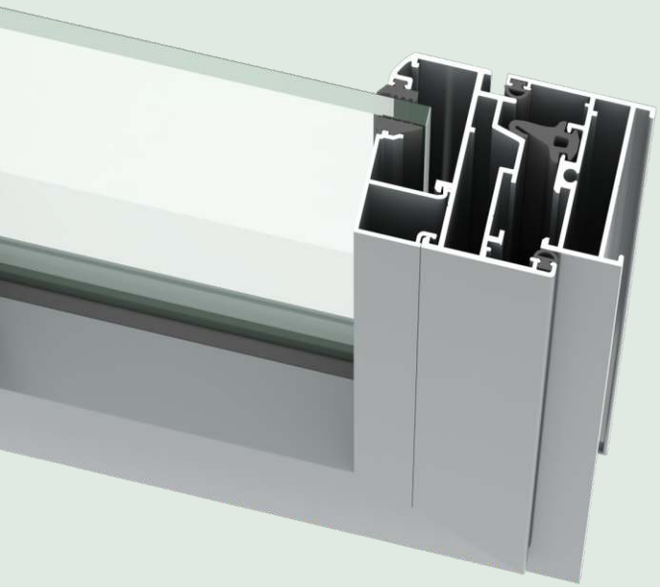

TILT&TURN
WINDOWS

FEATURES

Frame Depth	: 50 mm
Locking Type	: Single&Multipoint Lock with Handle
Glass Range	: 5 mm to 38mm
Openable Sight Line	: 81.0mm
Fix Sight Line	: 46 mm
Corner Details	: 45 degree cut with corner connector
Sealing Overlap	: 6mm (Sealing with Gasket)
Window Height (Max.)	: 1800 mm
Hardware	: SCHLEGEL GIESSE



FRAME
SECTION NO. : 914351
Weight / Mtr : 0.818



INSIDE OP. SHUTTER
SECTION NO. : 914520
Weight / Mtr : 0.955



FRAME
SECTION NO. : 914775
Weight / Mtr : 1.080

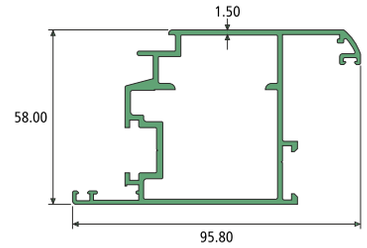

INSIDE OP. SHUTTER
SECTION NO. : 992109
Weight / Mtr : 1.540



LAMINATED GLASS CLIP
SECTION NO. : 992095
Weight / Mtr : 0.288



DGU CLIP
SECTION NO. : 914868
Weight / Mtr : 0.185



SGU CLIP
SECTION NO. : 914549
Weight / Mtr : 0.305



DGU CLIP
SECTION NO. : 992036
Weight / Mtr : 0.193



DGU CLIP
SECTION NO. : 914641
Weight / Mtr : 0.228

TILT & TURN WINDOW

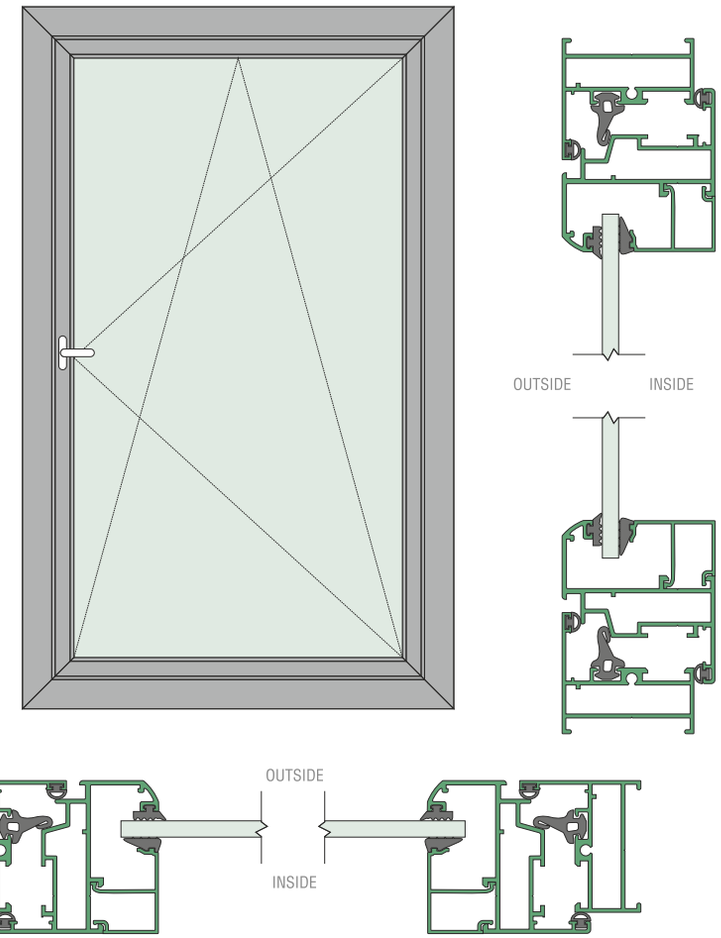

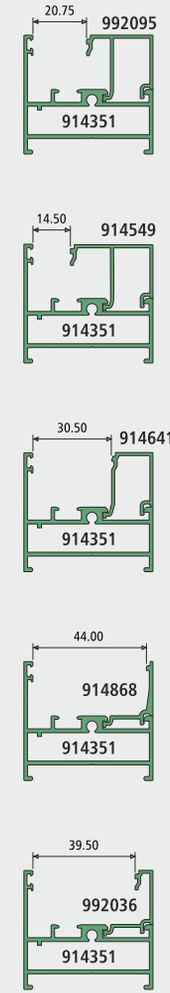

VARIOUS CLIP DETAILS

VENTARCH™
DOOR & WINDOW SYSTEMS

CURTAIN WALL

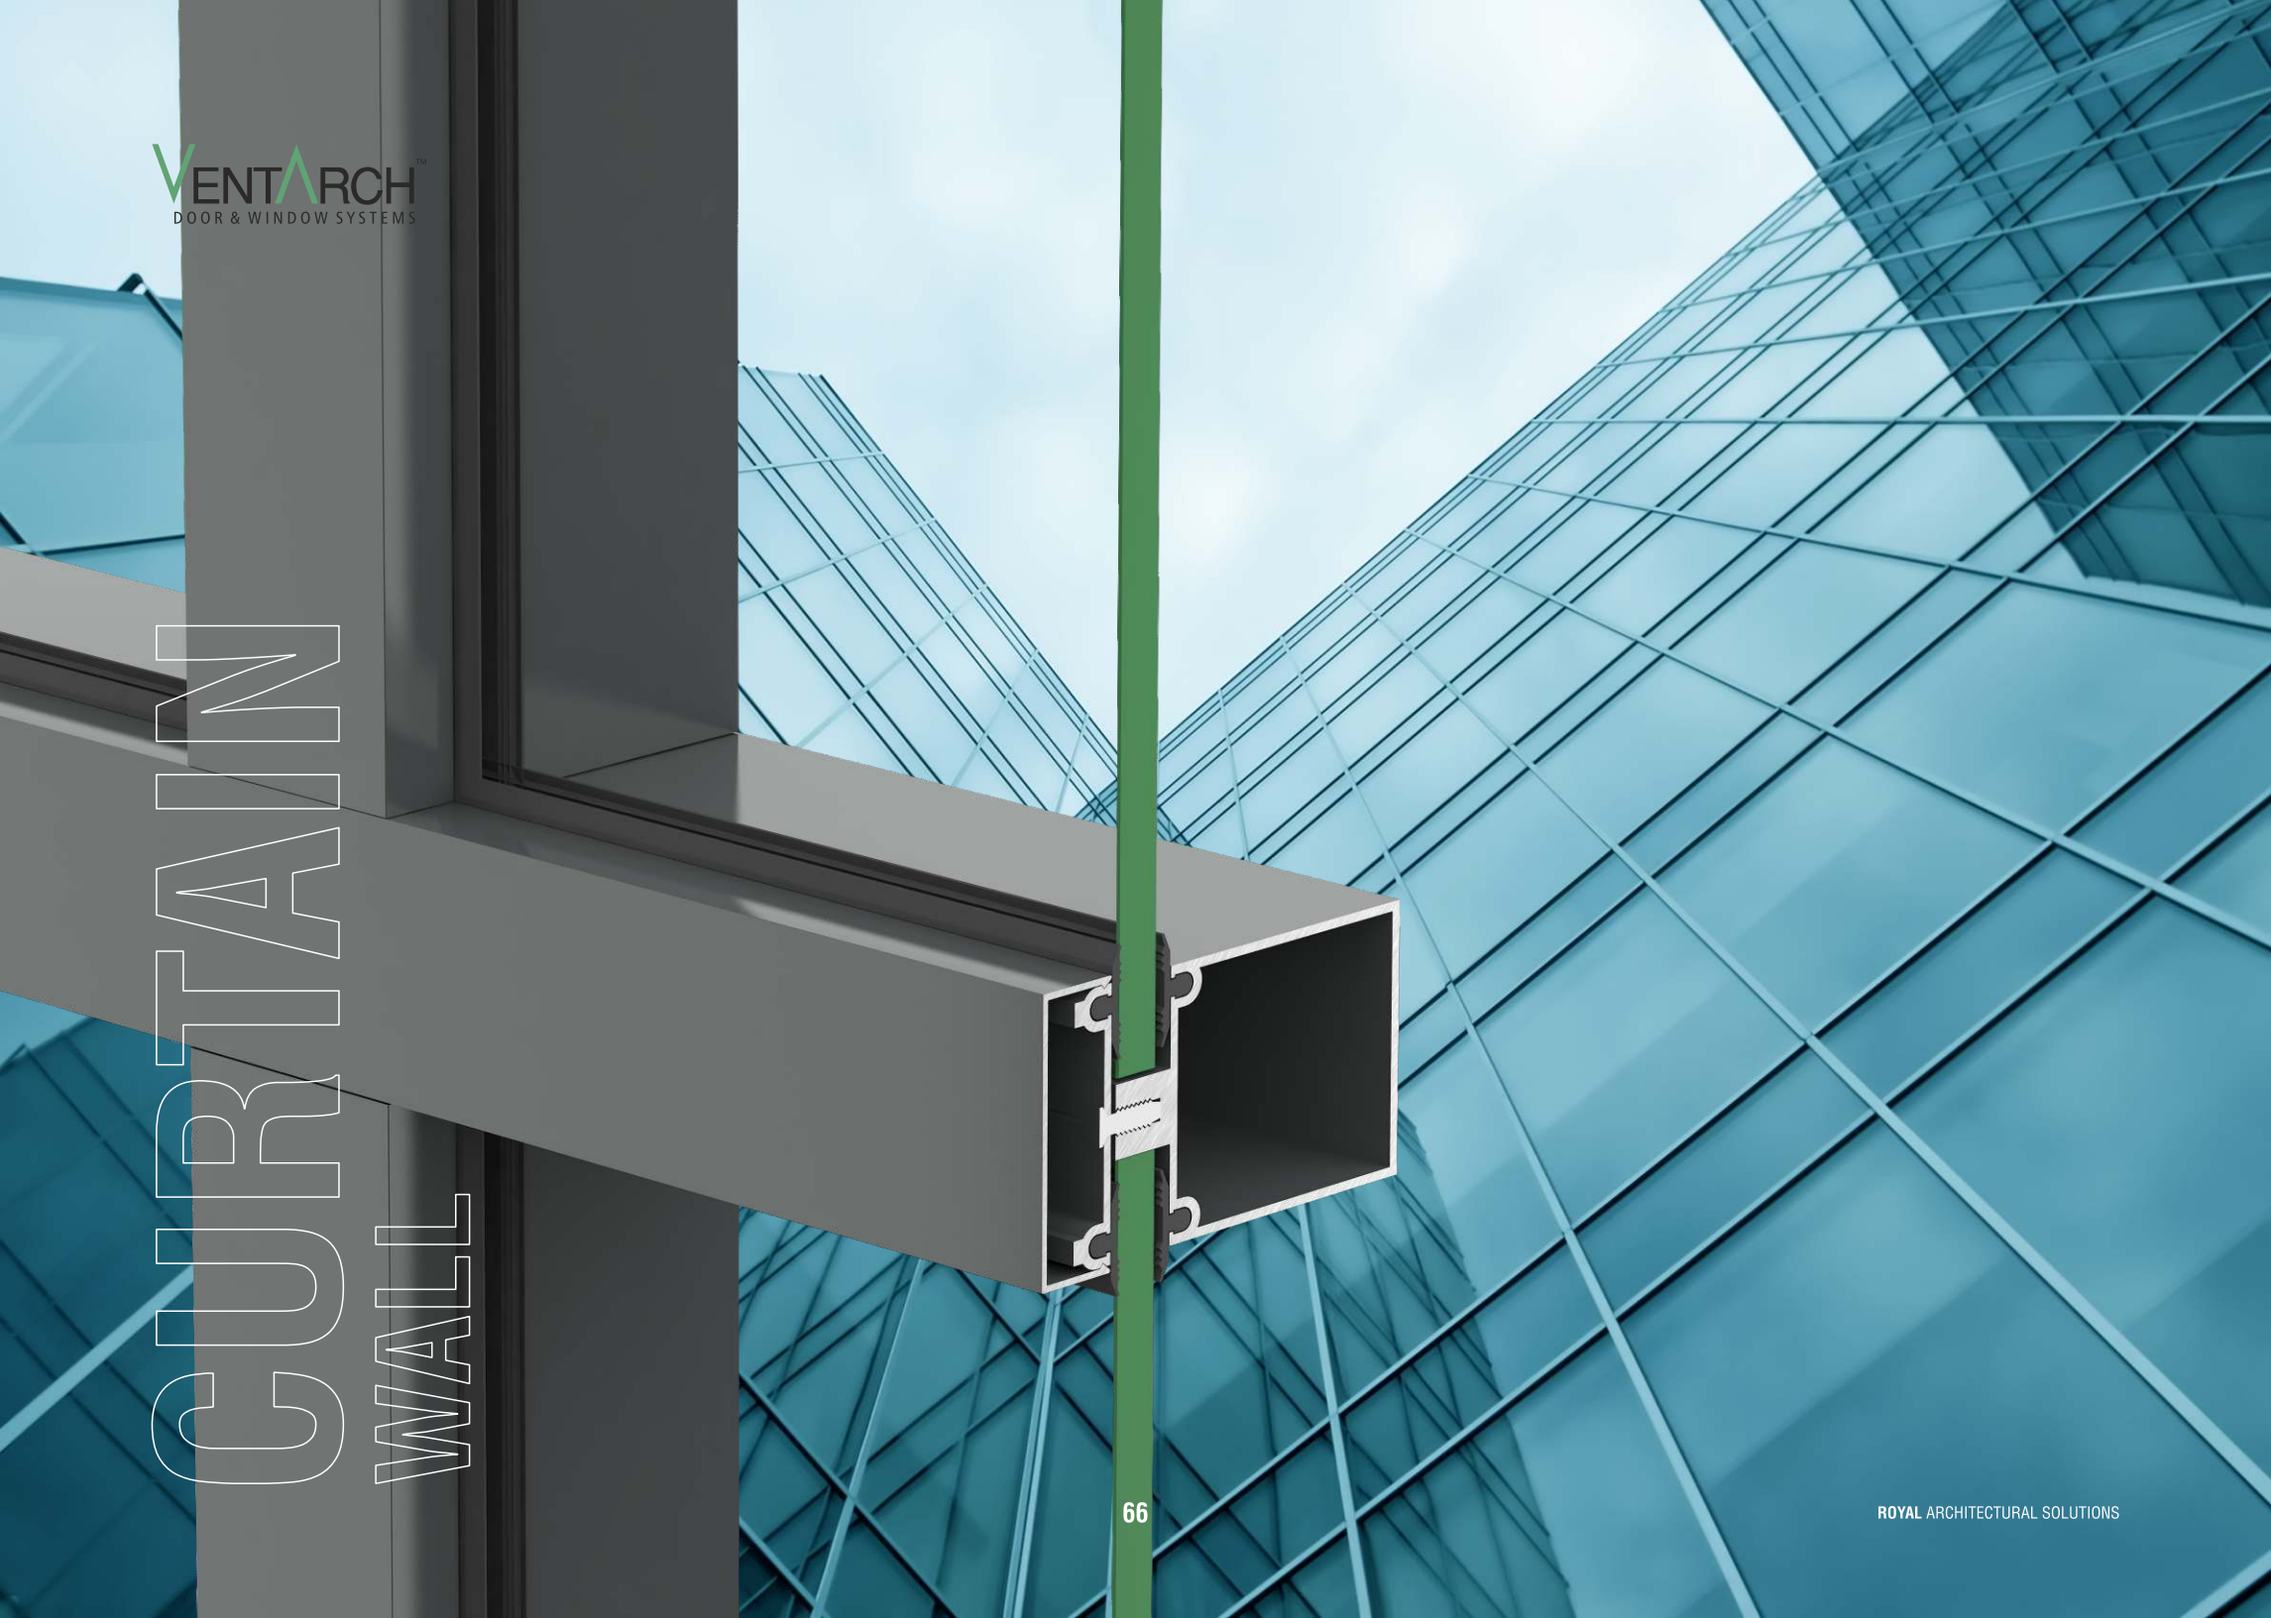

VENTARCH™
DOOR & WINDOW SYSTEMS

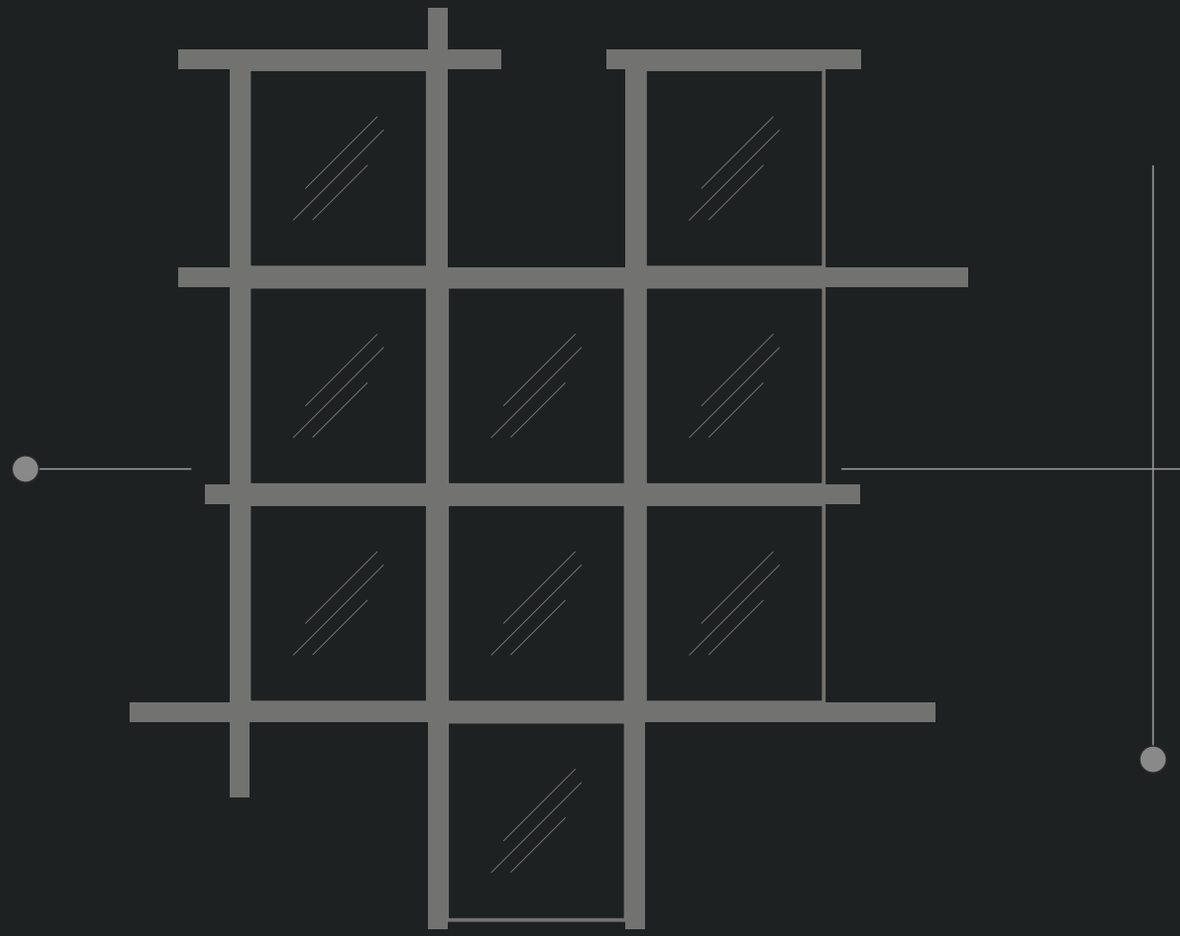

CURTAIN
WALL

Curtain Wall systems. Our systems offer greater flexibility for mating different size profiles. Fully compatible opening options like ventilators and other openings are given, enhancing utility without compromising on the aesthetics. Both SGU and DGU options with world class hardware offer high weather and wind resistance for the system. Higher Glass to frame ratios offer full visibility without compromising on the design characteristics.

45mm | 50mm | 57mm

45mm
CURTAIN WALL

FEATURES

Mullion / Transom Depth	: 45 mm
Glass Range	: 5 mm to 20mm
Window Height (Max.)	: 2440 mm

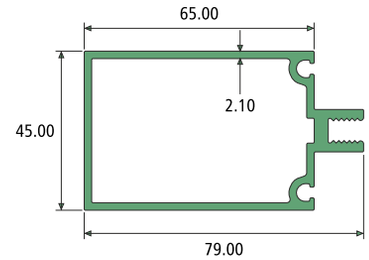

MULLION / TRANSOM
SECTION NO. : 914160
Weight / Mtr : 1.514

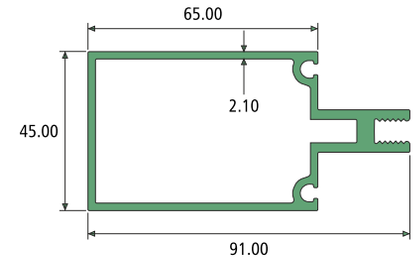

MULLION / TRANSOM
SECTION NO. : 914171
Weight / Mtr : 1.708



COVER CAP
SECTION NO. : 957035
Weight / Mtr : 0.293



PRESSURE PLATE
SECTION NO. : 914104
Weight / Mtr : 0.300

45mm CURTAIN WALL

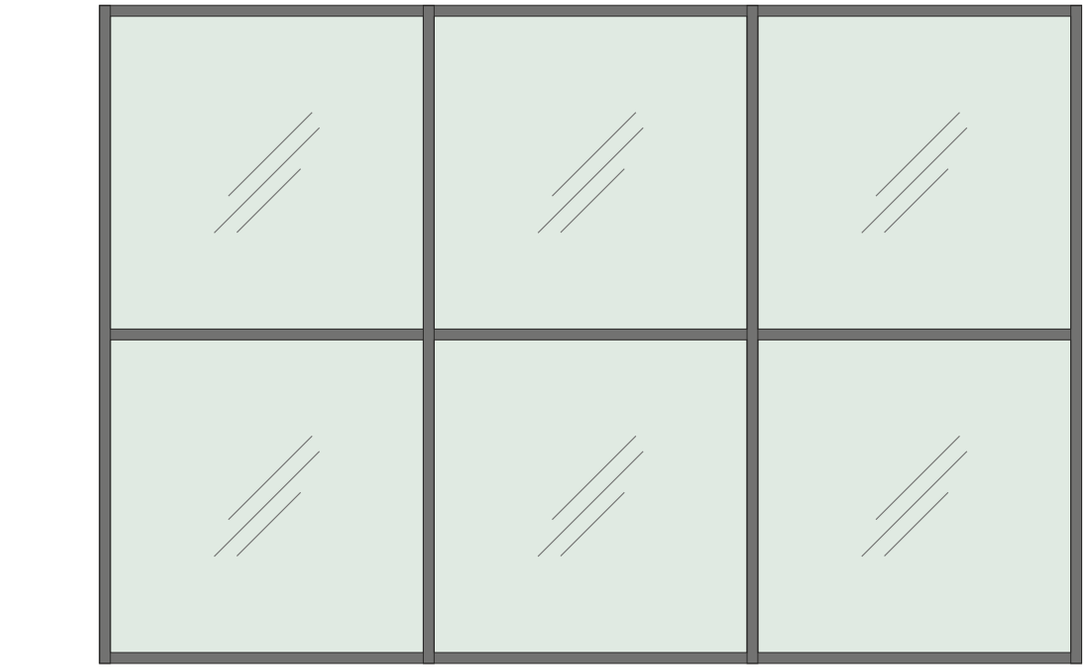

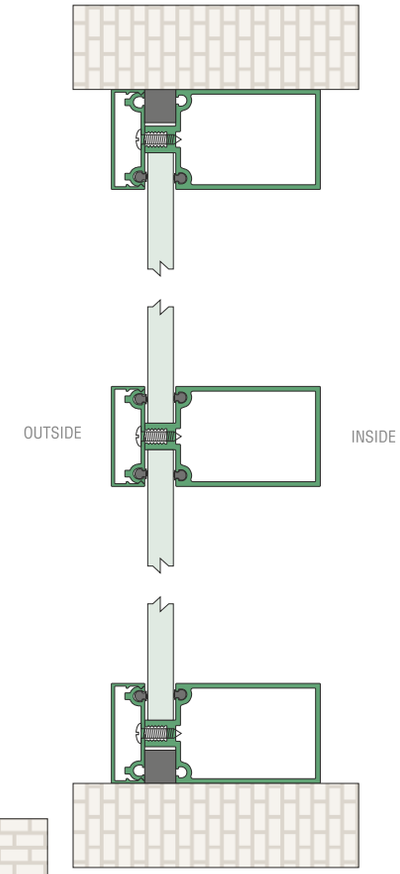

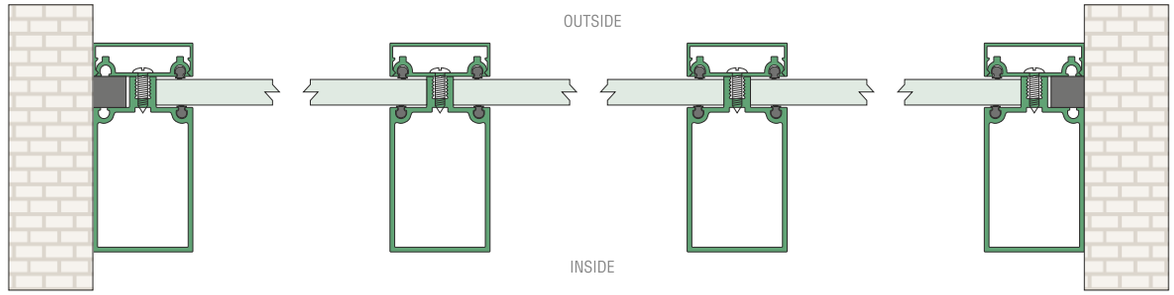

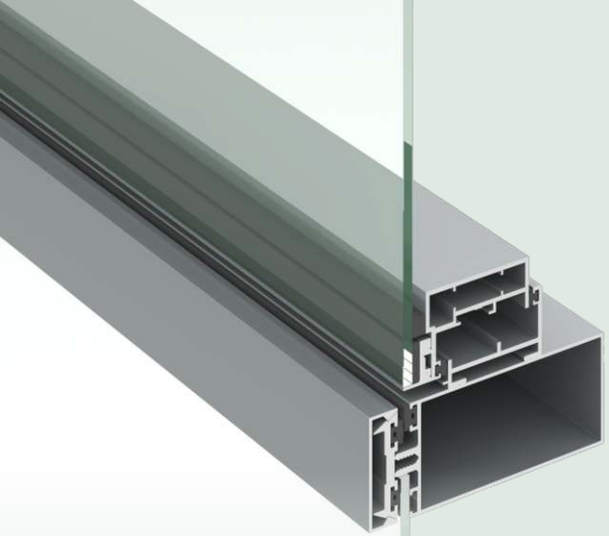

50mm
CURTAIN WALL

FEATURES

Mullion / Transom Depth	: 50 mm
Glass Range	: 5 mm to 24mm
Window Height (Max.)	: 3010 mm
Hardware	: SCHLEGEL GIESSE

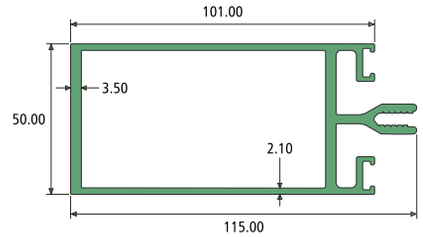

MULLION
SECTION NO. : 551038
Weight / Mtr : 2.505

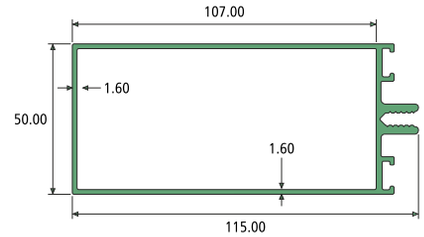

TRANSOM
SECTION NO. : 551037
Weight / Mtr : 1.596



FRAME
SECTION NO. : 992098
Weight / Mtr : 0.616



SHUTTER
SECTION NO. : 992097
Weight / Mtr : 1.106



PRESSURE PLATE
SECTION NO. : 551041
Weight / Mtr : 0.564



COVER PLATE
SECTION NO. : 551042
Weight / Mtr : 0.365



GLASS SUPPORT
SECTION NO. : 992099
Weight / Mtr : 0.219

50mm CURTAIN WALL

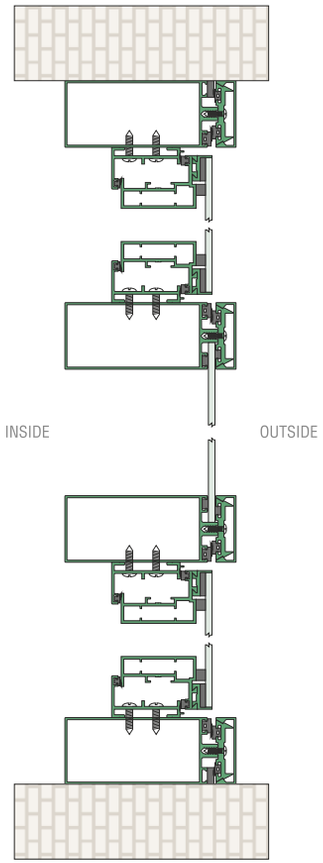

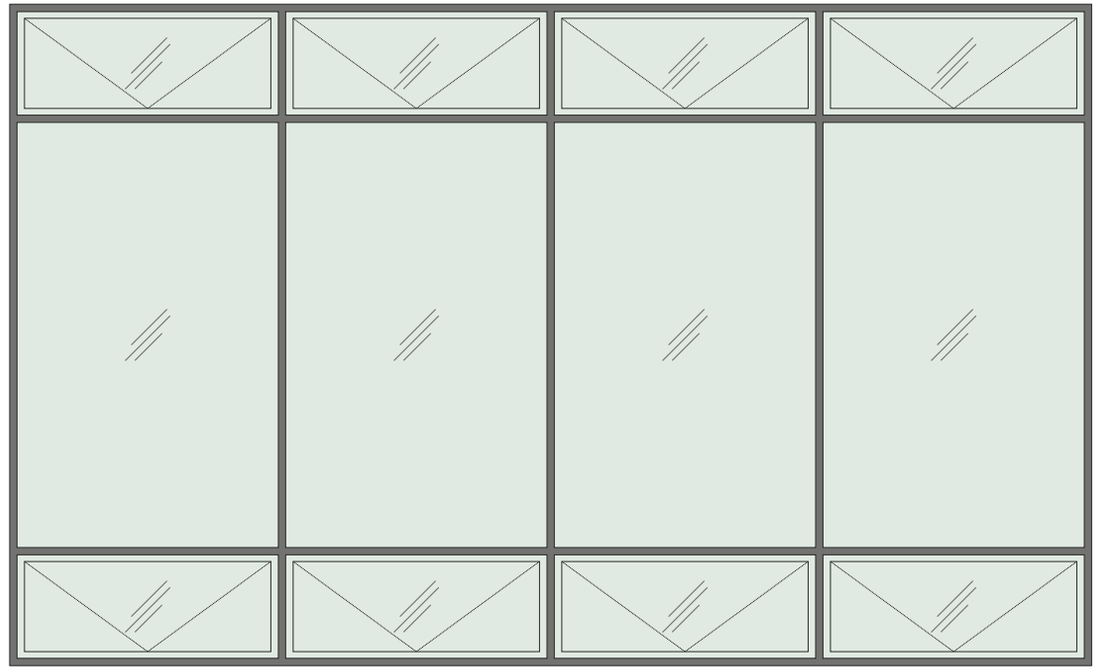

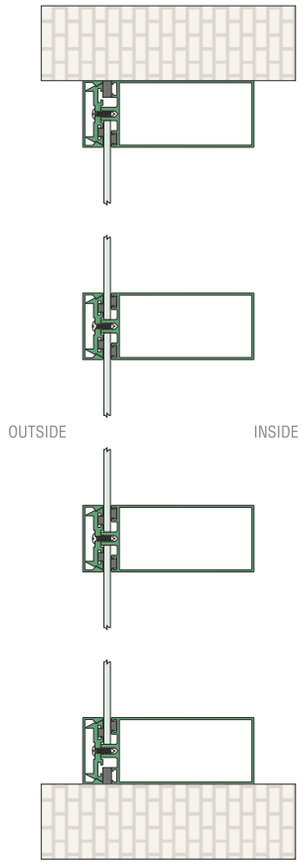

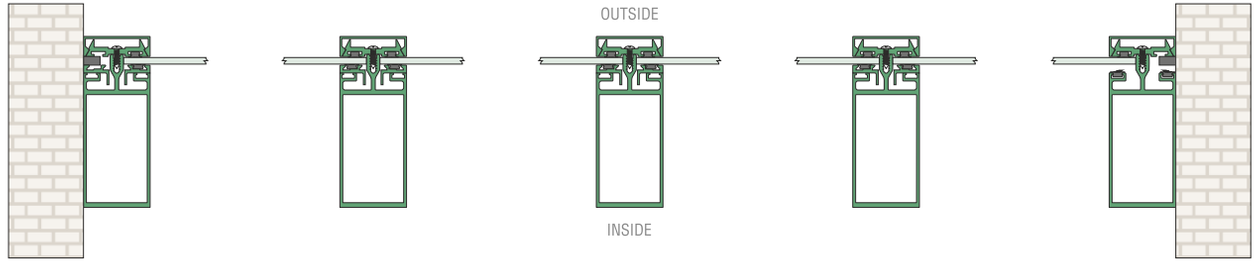

57mm
CURTAIN WALL

FEATURES

Mullion / Transom Depth	: 57 mm
Glass Range	: 5 mm to 20 mm
Window Height (Max.)	: 2440 mm

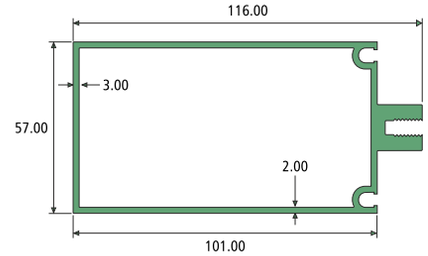

MULLION
SECTION NO. : 551026
Weight / Mtr : 2.173

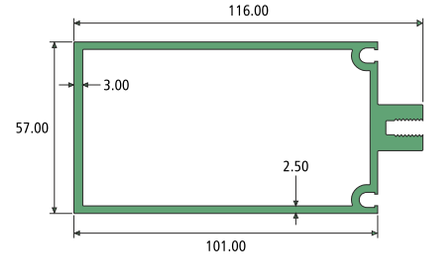

MULLION
SECTION NO. : 551027
Weight / Mtr : 2.641



TRANSOM
SECTION NO. : 812957
Weight / Mtr : 1.787



TRANSON
SECTION NO. : 812958
Weight / Mtr : 1.591



PRESSURE PLATE
SECTION NO. : 812959
Weight / Mtr : 0.439



COVER CAP
SECTION NO. : 812960
Weight / Mtr : 0.321



ADAPTOR
SECTION NO. : 992090
Weight / Mtr : 0.372

57mm CURTAIN WALL

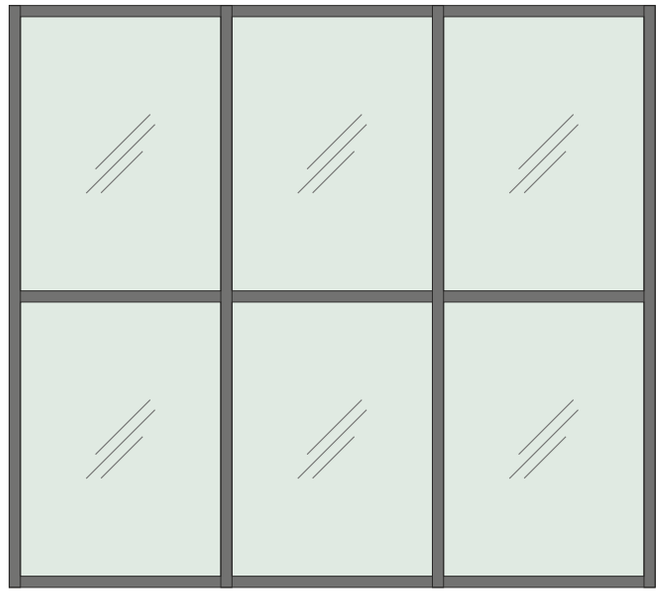

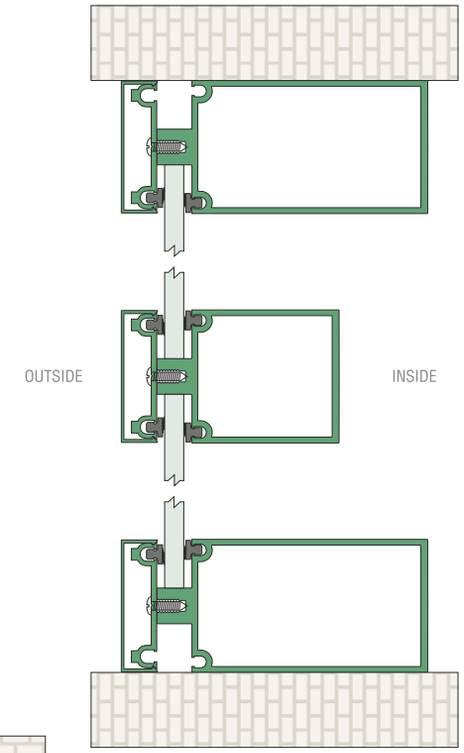

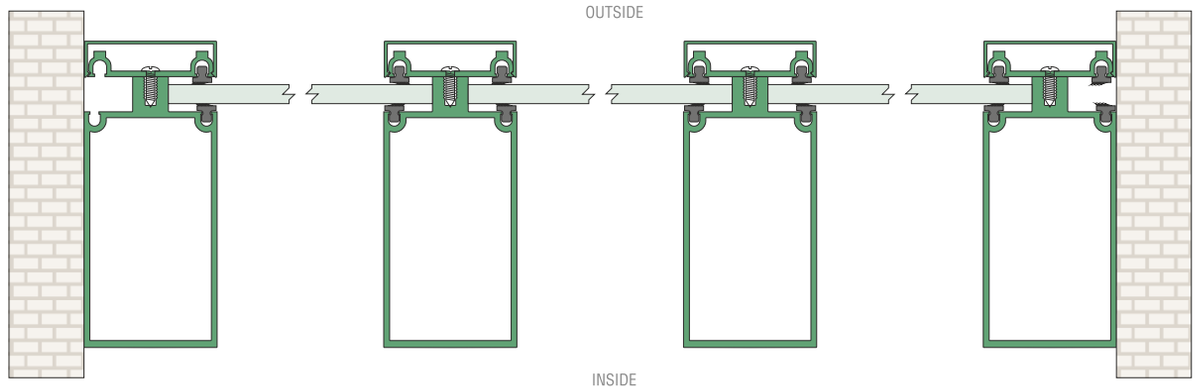

VENTARCH™
DOOR & WINDOW SYSTEMS
SEMI
UNITIZED

VENTARCH™
DOOR & WINDOW SYSTEMS

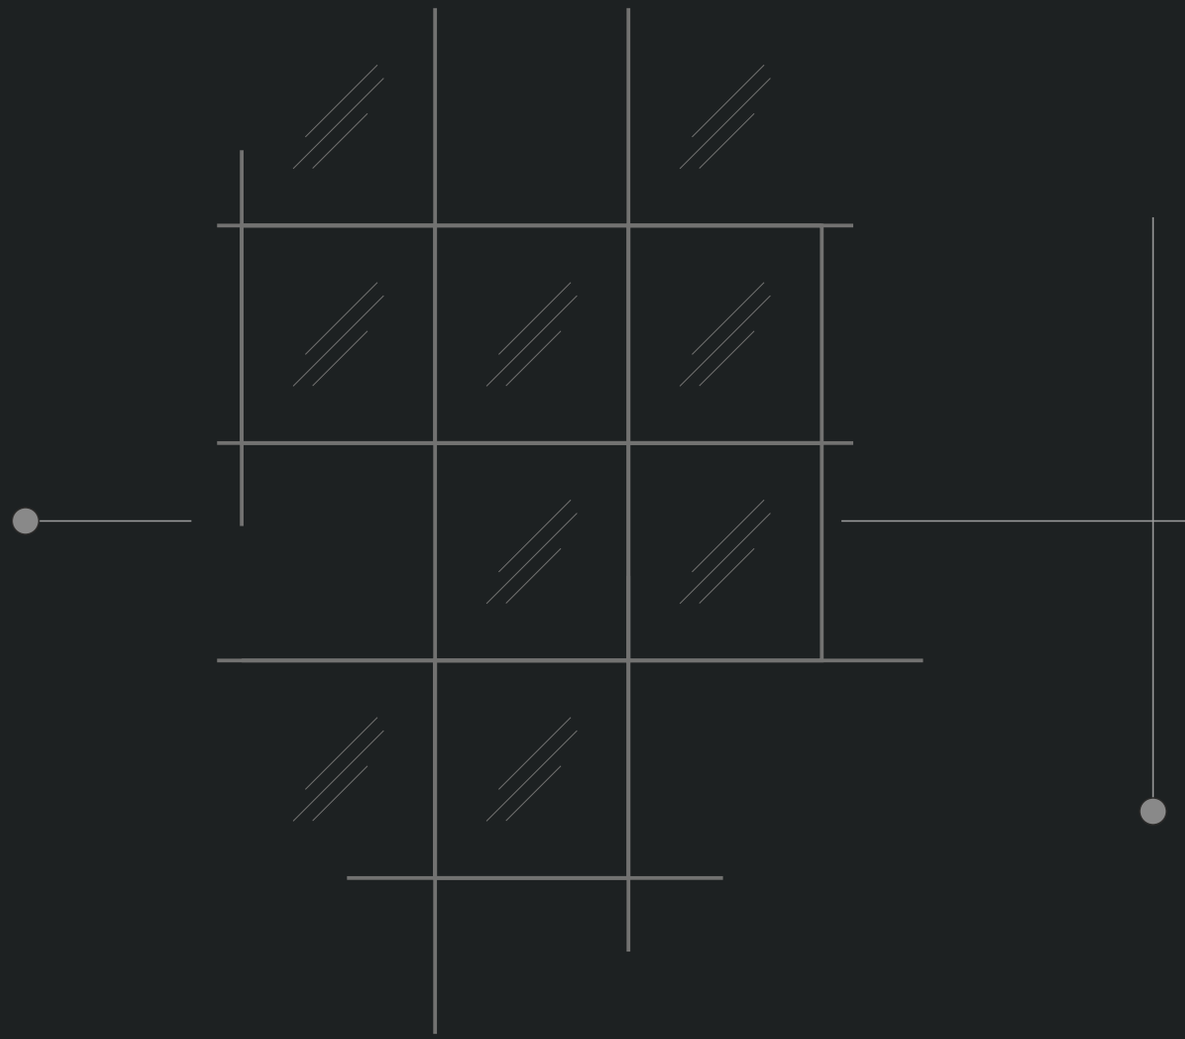

SEMI
UNITIZED

Semi-Unitized Glazing systems offer more flexibility to the fabricators to assemble a large part of their curtain walls off site thereby saving time and cost. They also provide a greater structural efficiency then traditional curtain walls there by reducing the cost further without compromising on glass to frame ratios.

67mm

67mm
SEMI UNITIZED

FEATURES

Mullion / Transom Depth	: 67 mm
Glass Range	: 5 mm to 24mm
Window Height (Max.)	: 3010 mm
Hardware	: SCHLEGEL GIESSE

MULLION
SECTION NO. : 551060
Weight / Mtr : 3.411

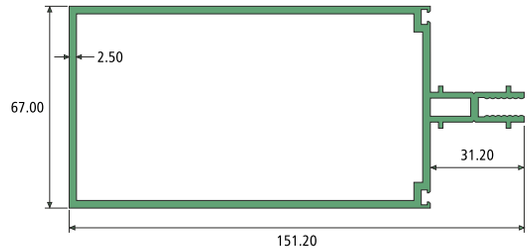

MULLION
SECTION NO. : 551010
Weight / Mtr : 2.896

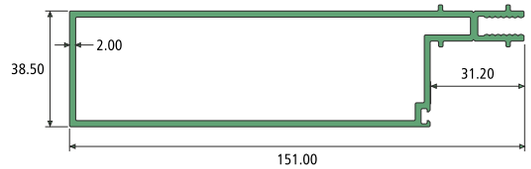

HALF MULLION
SECTION NO. : 551012
Weight / Mtr : 2.061



TRANSOM
SECTION NO. : 551011
Weight / Mtr : 1.659



HALF TRANSOM
SECTION NO. : 819503
Weight / Mtr : 1.294



TOGGLE
SECTION NO. : 968039
Weight / Mtr : 0.240



TOGGLE
SECTION NO. : 992004
Weight / Mtr : 0.230



SGU SASH
SECTION NO. : 967053
Weight / Mtr : 1.020



DGU SASH
SECTION NO. : 967054
Weight / Mtr : 0.792



SASH
SECTION NO. : 992003
Weight / Mtr : 0.470

67mm SEMIUNITIZED WALL

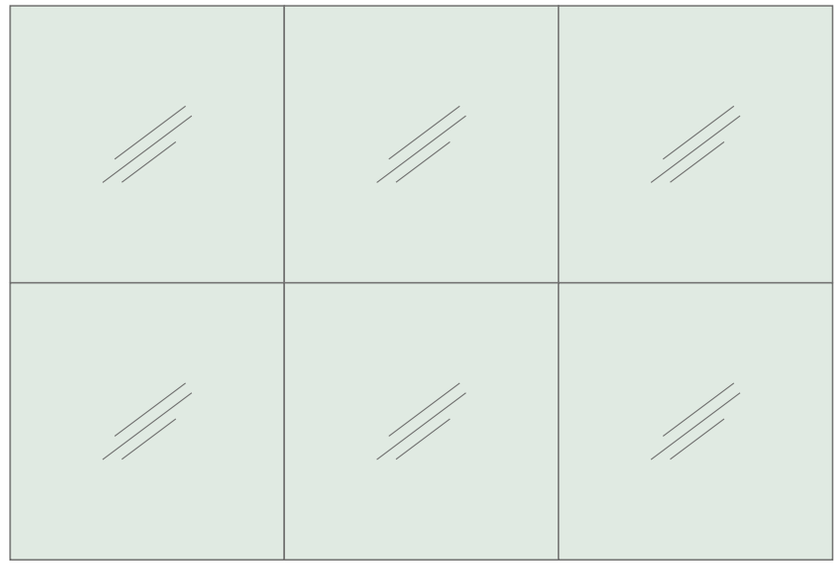

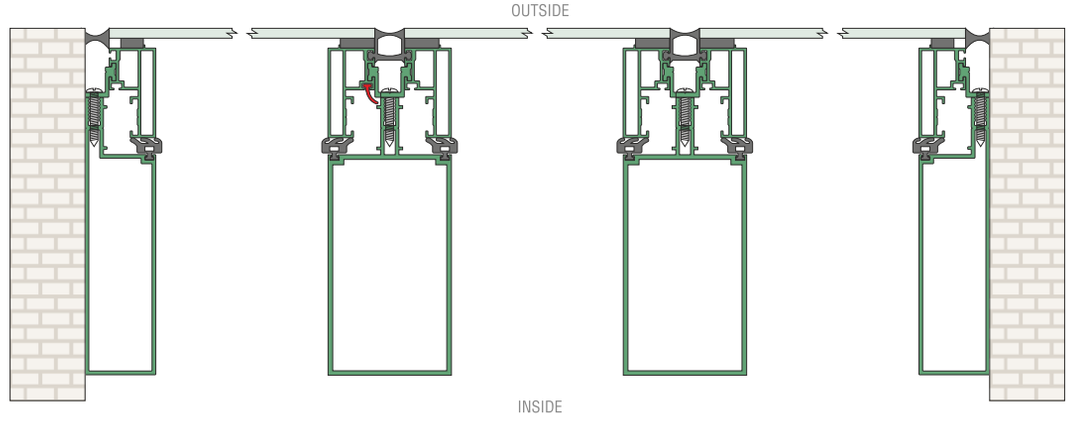

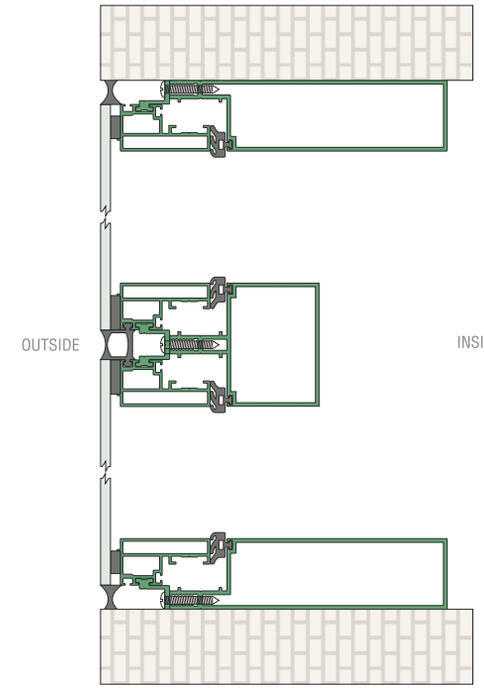

ALU RAIL
ALUMINIUM RAILING SYSTEM

MODEL NO.

ALPS-01

GLASS PARTITION SYSTEM

ULTRA INNOVATIONS

Ahmedabad (Gujarat) INDIA.
Cell : +91-63588 66444 / 99041 01231
80000 75211 / 99250 14573 / 90999 29007
E-mail : info@alurail.in / info@royalarchworld.com
Web : www.alurail.in
Office Tel. : 079 - 48455454

ALU RAIL
ALUMINIUM RAILING SYSTEM

MODEL NO.

ALPS-01

GLASS PARTITION SYSTEM



FIXED PROFILE



DOOR PROFILE



BOTTOM PROFILE



CLIP ON PROFILE



L- GLASS JOINT



T- GLASS JOINT



I - GLASS JOINT

45 X 25MM SINGLE GLASS PARTITION SYSTEM

GLASS THICKNESS : **10.00 mm / 12.00 mm**

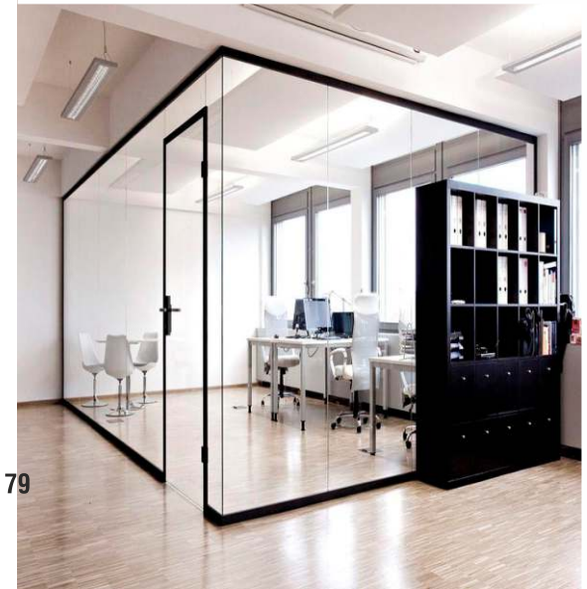

ALU RAIL
ALUMINIUM RAILING SYSTEM

MODEL NO.

ALPS-01

STILE DOOR SYSTEM

MODEL NO.

ALPS-01

STILE DOOR SYSTEM



STILE DOOR - FRAME PROFILE

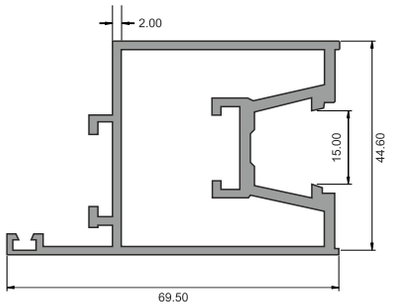

STILE DOOR - SHUTTER PROFILE

GLASS THICKNESS : **10.00 mm / 12.00 mm**

00600
BRIDGE
HINGES

DOOR WEIGHT 3 HINGE
100 Kg. Max.

DOOR WEIGHT 2 HINGE
90 Kg. Max.

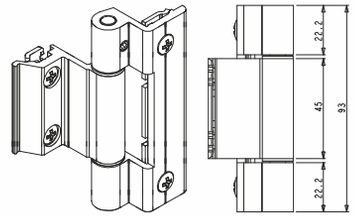

00681
CELERA XL
HINGES

DOOR WEIGHT 3 HINGE
120 Kg. Max.

DOOR WEIGHT 2 HINGE
100 Kg. Max.



00598
FLASH XXL
HINGE

00599
COVER FOR XXL
HINGE

DOOR WEIGHT 3 HINGE
180 Kg. Max.

DOOR WEIGHT 2 HINGE
160 Kg. Max.

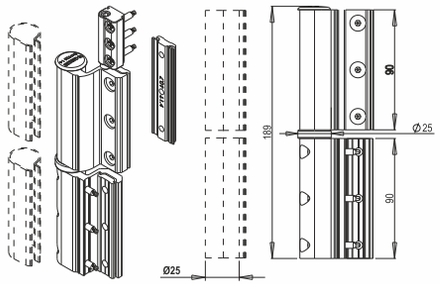



GASKET 001



GASKET 002



L - CONNECTOR

SCHLEGELGIESSE
MADE FOR THE FUTURE

Royal Architectural Solutions

Head Office :
Office No. 310, 31Five Building, Near MATRIX, Corporate Road, Makarba,
Ahmedabad-380015 (Gujarat) India. | Phone : +91-79-48455454
E:mail : info@royalarchworld.com | website : www.royalarchworld.com

Mumbai Office :
Gala No. 33, Gami Industrial Estate, C-39-A,
South Central Road, TTC Industrial Area, M.I.D.C. Pawne,
Navi Mumbai - 400705, (Maharashtra) India. | Phone : +91-22-49625454

www.royalarchworld.com

Royal Architectural Solutions

Head Office :
Office No. 310, 31Five Building, Near MATRIX, Corporate Road, Makarba,
Ahmedabad-380015 (Gujarat) India. | Phone : +91-79-48455454
E:mail : info@royalarchworld.com

Mumbai Office :
Gala No. 33, First Floor, Gami Industrial Estate, C-39-A,
South Central Road, TTC Industrial Area, M.I.D.C. Pawne,
Navi Mumbai - 400705, (Maharashtra) India. | Phone : +91-22-49625454
E:mail : mumbai@royalarchworld.com

Website : www.royalarchworld.com

3DXDesignstudio