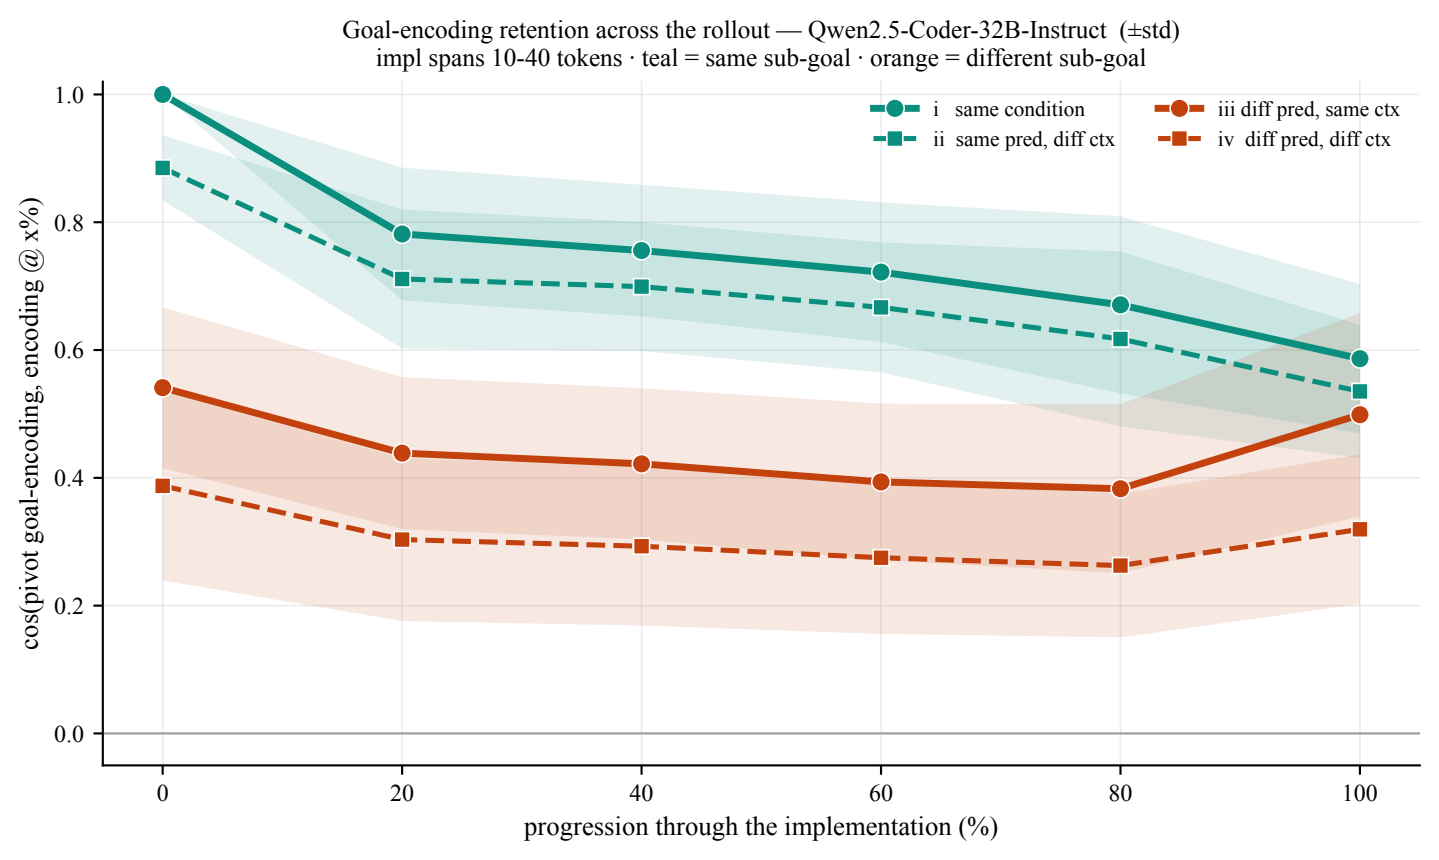
Goal-encoding retention across the rollout — Qwen2.5-Coder-32B-Instruct (±std)
impl spans 10-40 tokens · teal = same sub-goal · orange = different sub-goal
i same condition
ii same pred, diff ctx
iii diff pred, same ctx
iv diff pred, diff ctx
cos(pivot goal-encoding, encoding @ x%)
1.0
0.8
0.6
0.4
0.2
0.0
0
20
40
60
80
100
progression through the implementation (%)