

The future environmental impact of irrigated agriculture is grossly underestimated

Arnald Puy, Samuele Lo Piano and Andrea Saltelli

Contents

1 Preliminary steps	2
2 Scaling relationships	3
2.1 Irrigated area versus population size	3
2.2 Irrigated area versus population density	5
2.3 Plot irrigated area versus population size / population density	6
2.4 Irrigated area versus water withdrawal / water requirement	6
2.5 Plot irrigated area versus water withdrawal / water requirement	11
3 Uncertainty in irrigated areas	13
4 Presence of outliers	18
5 Estimation of the model parameters	19
5.1 Irrigated area baseline values (Y_0)	19
5.2 Growth rate between population and irrigated area (β), irrigated area and water required for irrigation (ϕ , δ), and noise (ε)	22
5.3 Population baseline values (N)	26
5.4 Population growth rates (r)	27
5.5 Cropland available (K)	34
5.6 Water available (W_a)	35
6 Creation of the sample matrix	35
7 The model	40
8 Uncertainty analysis	41
9 Sensitivity analysis	49
9.1 Scatterplots	49
9.2 Sobol' indices	55
10 Session information	59

1 Preliminary steps

```
# PRELIMINARY STEPS -----

# Before starting the analysis, we define a function to load all R
# packages required in one go, and load them. We then create a function
# to read in all the spreadsheets of the excel file with the data
# needed for the analysis, and read in the data. Finally, we cast a
# function to define the theme of the plots that will be created in
# this work.

# Define function to read in all required libraries in one go:
loadPackages <- function(x) {
  for(i in x) {
    if(!require(i, character.only = TRUE)) {
      install.packages(i, dependencies = TRUE)
      library(i, character.only = TRUE)
    }
  }
}

# Load all required libraries:
loadPackages(c("data.table", "fitdistrplus", "fGarch", "readxl", "countrycode",
               "scales", "tidyverse", "cowplot", "mvoutlier", "complanrob",
               "randtoolbox", "robustbase", "parallel", "smatr", "boot",
               "doParallel", "sensitivity", "wesanderson",
               "grid", "gridExtra", "NbClust"))

# install and load sensobol 0.2.1
PackageURL <- "https://cran.r-project.org/src/contrib/Archive/sensobol/sensobol_0.2.1.tar.gz"
install.packages(PackageURL, repos=NULL, type="source")
library(sensobol)

# Set checkpoint

dir.create(".checkpoint")
library("checkpoint")

checkpoint("2020-03-11",
          R.version = "3.6.1",
          checkpointLocation = getwd())

# Define function to read in all excel spreadsheets in one go:
readAll <- function(name, tibble = FALSE) {
  sheets <- excel_sheets(name)
  df <- lapply(sheets, function(y) read_excel(name,
                                              sheet = y))
}
```

```

if(!tibble) df <- lapply(df, as.data.frame)
names(df) <- sheets
df
}

# Read in all excel spreadsheets:
df <- readAll("full.dataset2.xlsx") %>%
  lapply(., function(x) mutate_if(x, is.character, as.factor))

# Redefine column names for population.estimate spreadsheet
colnames(df$population.estimate) <- c("Estimate", "Continent", "Codes",
                                       paste0("Year.", 2015:2100))

# Create function for custom plot themes
theme_AP <- function() {
  theme_bw() +
    theme(aspect.ratio = 1,
          panel.grid.major = element_blank(),
          panel.grid.minor = element_blank(),
          legend.background = element_rect(fill = "transparent",
                                           color = NA),
          legend.key = element_rect(fill = "transparent",
                                     color = NA))
}

```

2 Scaling relationships

2.1 Irrigated area versus population size

```

# PREPARE DATASETS -----

# Prepare population dataset
pop <- df$pop %>%
  # Select population between 1999-2012 to
  # get the mean and concur with (mean) values
  # for irrigated areas attested by Meier et al.
  # between 1999-2012
  select(Continent, Country, Year.1999:Year.2012) %>%
  gather(Year, Population, Year.1999:Year.2012) %>%
  # Multiply to get actual population
  mutate_at(vars(Population), funs(. * 1000)) %>%
  separate(., Year, into = c("dummy", "Year")) %>%
  mutate_at(vars(Year), funs(as.numeric)) %>%
  select(-dummy)

# Obtain number codes for each country to ease merging
# with irrigated areas at the country level

```

```

pop$Codes <- countrycode(pop$Country, origin = "country.name",
                          destination = "un")

# Create temporal list of data frame splitted by Dataset
temp <- df$meier %>%
  gather(Dataset, Area.irrigated, Meier.et.al.2018:Thenkabail.et.al.2009) %>%
  split(., .$Dataset)

# MERGE EACH DATASET WITH CORRESPONDING POPULATION VALUES -----

df.meier <- list()

for(i in names(temp)) {
  if(i == "Thenkabail.et.al.2009") {
    # Merge with population from 1999
    df.meier[[i]] <- pop %>%
      filter(Year == 1999) %>%
      inner_join(., temp[[i]],
                 by = c("Continent", "Country", "Codes"))
  }
  if(i == "Salmon.et.al.2015") {
    # Merge with population from 2005
    df.meier[[i]] <- pop %>%
      filter(Year == 2005) %>%
      inner_join(., temp[[i]],
                 by = c("Continent", "Country", "Codes"))
  }
  if(i == "Siebert.et.al.2013") {
    df.meier[[i]] <- pop %>%
      # Merge with mean population values 2000-2008
      spread(., Year, Population) %>%
      select(Continent, Country, `2000`:`2008`) %>%
      gather(Year, Population, `2000`:`2008`) %>%
      group_by(Country, Continent) %>%
      summarise(Population = mean(Population)) %>%
      mutate(Year = "2000.2008") %>%
      inner_join(., temp[[i]],
                 by = c("Continent", "Country"))
  } else {
    # For Meier et al.2018, Aquastat and FAOSTAT
    df.meier[[i]] <- pop %>%
      # Merge with mean population values 1999-2012
      group_by(Country, Continent) %>%
      summarise(Population = mean(Population)) %>%
      # Add dummy year column
      mutate(Year = "1999.2012") %>%

```

```

      inner_join(., temp[[i]],
                 by = c("Continent", "Country"))
    }
  }

# Create dataset

cols <- c("Population", "Area.irrigated")

df.meier <- df.meier %>%
  rbindlist() %>%
  .[, .(Country, Continent, Codes,
        Area.irrigated, Population, Dataset)] %>%
  # Drop countries with no irrigated area
  .[!Area.irrigated == 0] %>%
  # Drop Oceania due to small sample size
  .[!Continent == "Oceania"] %>%
  .[, (cols) := .SD / 10^6, .SDcols = (cols)]

```

2.2 Irrigated area versus population density

```

# PLOT IRRIGATED AREAS AGAINST POPULATION DENSITY MEASURES -----

# Read in dataset
density.population <- fread("density_population.csv")

# Rename variables
density.population <- density.population[, Variable := ifelse(Variable %in%
                                                                "Total area of the country (exc.
                                                                water)", "Area.country",
                                                                "Area.cultivated")]

# Reduce dataset
density.population <- density.population[, c(2, 4, 5) := NULL]

# Spread
dens <- spread(density.population, Variable, Value)

cols <- c("Population", "Area.irrigated")

# Plot
inner_join(df.meier, dens, by = "Country") %>%
  data.table() %>%
  .[, `Area cultivable` := Population / ((Area.cultivated * 1000) / 10^6)] %>%
  .[, `Area country` := Population / ((Area.country * 1000) / 10^6)] %>%
  gather(parameter, value, `Area cultivable`:`Area country`) %>%
  ggplot(., aes(value, Area.irrigated,
                color = Continent)) +
  geom_point() +

```

```

facet_grid(Dataset~parameter) +
labs(x = "Population density (M/Mha)",
     y = "Irrigated area (Mha)") +
scale_x_log10(labels = trans_format("log10", math_format(10^.x))) +
scale_y_log10(labels = trans_format("log10", math_format(10^.x))) +
theme_bw() +
theme(legend.position = "top",
      panel.grid.major = element_blank(),
      panel.grid.minor = element_blank(),
      legend.background = element_rect(fill = "transparent",
                                       color = NA),
      legend.key = element_rect(fill = "transparent",
                                color = NA))

```

2.3 Plot irrigated area versus population size / population density

```

# PLOT SCATTER PLOT OF IRRIGATED AREA AND POPULATION -----

df.meier %>%
  ggplot(., aes(Population, Area.irrigated,
               color = Continent)) +
  geom_point() +
  facet_wrap(~Dataset) +
  labs(x = "Population (M)",
       y = "Irrigated area (Mha)") +
  scale_x_log10(labels = trans_format("log10", math_format(10^.x))) +
  scale_y_log10(labels = trans_format("log10", math_format(10^.x))) +
  theme_AP() +
  theme(legend.position = "top")

```

2.4 Irrigated area versus water withdrawal / water requirement

```

# READ IN AQUASTAT DATA SET -----

aquastat <- fread("aquastat.csv",
                 nrows = 3562)

# ARRANGE AQUASTAT DATA SET -----

aquastat <- setnames(aquastat, c("Area", "Variable Name"),
                    c("Country", "Variable"))

cols <- c("Country", "Variable")

aquastat <- aquastat[, (cols):= lapply(.SD, factor), .SDcols = cols] %>%
  .[, Variable:= fct_recode(Variable, "Water.withdrawal" = "Irrigation water withdrawal",
                          "Water.requirement" = "Irrigation water requirement")] %>%

```

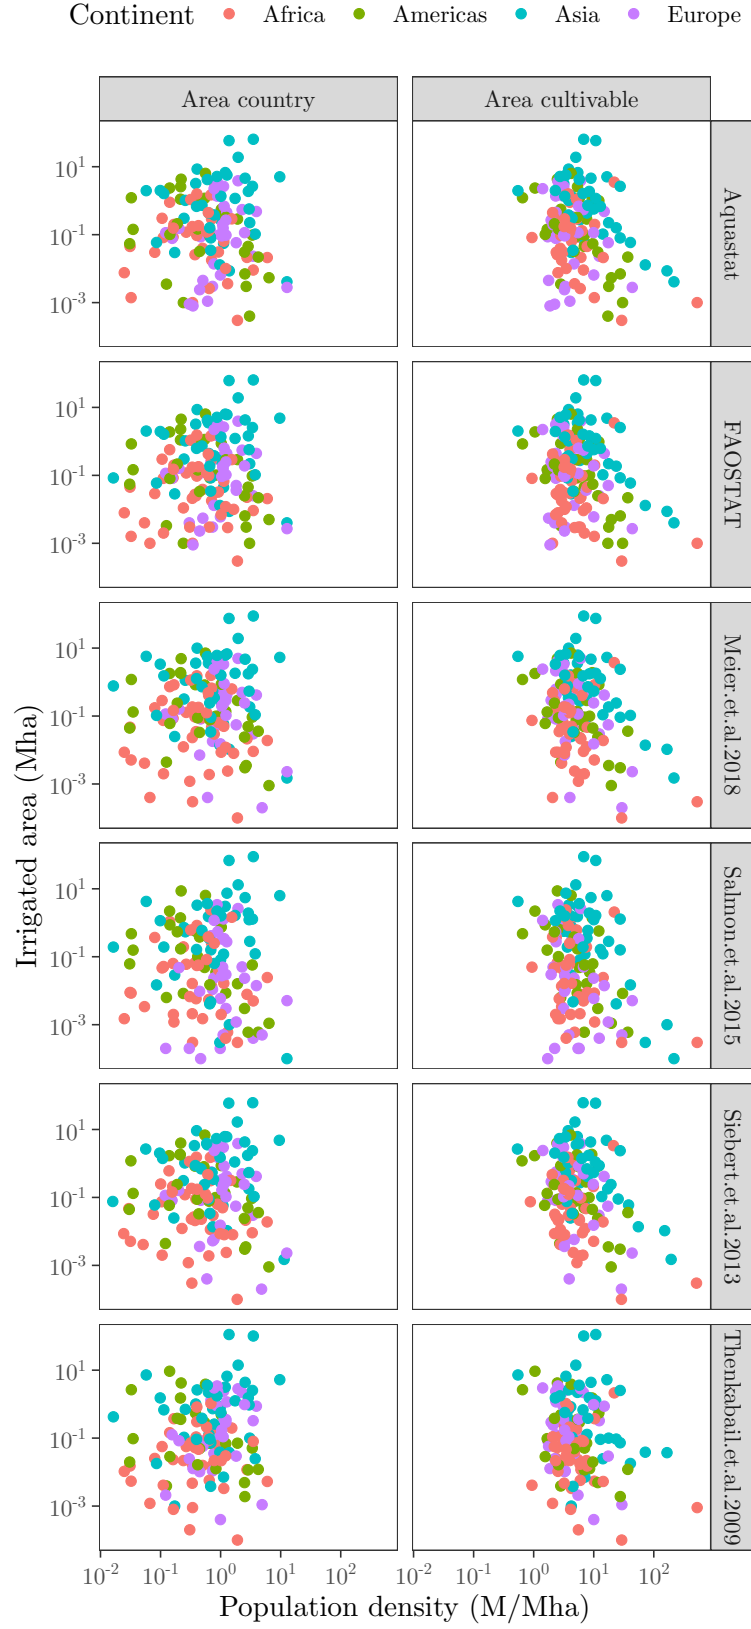


Figure 1: Scatter plots of measures of population density against irrigated areas.

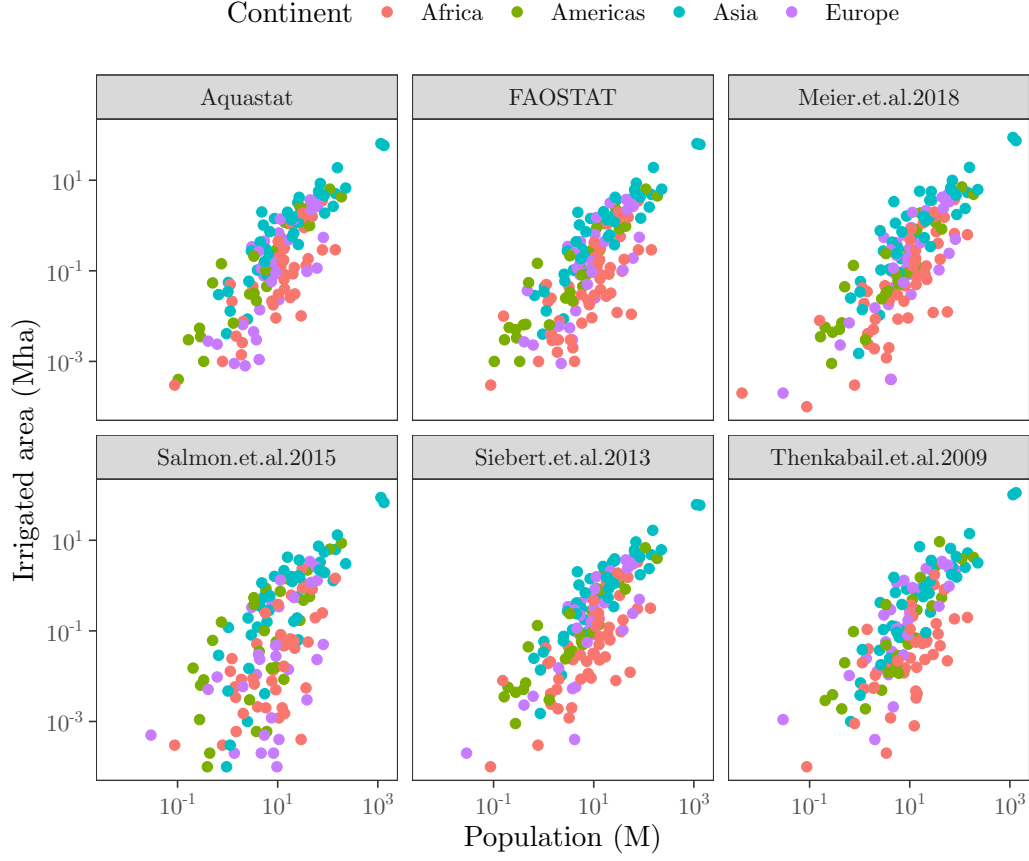


Figure 2: Scatter plots of irrigated areas against population. The strip label indicates the data set used to plot the values for irrigated areas [@FAO2016b; @FAO2017a; @Meier2018; @Salmon2015; @Siebert2013; @Thenkabail2009]. All those data sets have been compiled and studied by @Meier2018. The population data was retrieved from the @UnitedNations2017c.


```

.[Variable == "Water.withdrawal" | Variable == "Water.requirement",
.(Country, Variable, Year, Value)] %>%
.[!c(Year <= 1999 | Year >= 2012)] # Retain only years 1999-2012

# FUNCTIONS TO CODE -----

getCodes <- function(x) countrycode(x, origin = "country.name", destination = "un")
getContinent <- function(x) countrycode(x, origin = "country.name", destination = "continent")
getCountry <- function(x) countrycode(x, origin = "un", destination = "country.name")

addAll <- function(dt, dataset) {
  if(is.data.table(dt) == FALSE) {
    setDT(dt)
  }
  dt[, Codes:= lapply(.SD, getCodes), .SDcols = "Country"] %>%
  .[, Continent:= lapply(.SD, getContinent), .SDcols = "Country"] %>%
  .[, Country:= lapply(.SD, getCountry), .SDcols = "Codes"] %>%
  .[, Dataset:= dataset]
}

# CODE COUNTRY AND CONTINENT -----

aquastat <- addAll(aquastat, "Aquastat")

aquastat.dt <- spread(aquastat, Variable, Value)[
  !c(Year <= 1999 | Year >= 2012) # Retain only years 1999-2012
]

# READ IN TABLE 4 DATA SET -----

table4 <- fread("table_4.csv",
  skip = 3,
  nrow = 167) %>%
.[, c(2, 5, 7):= NULL]

# CODE COUNTRY AND CONTINENT -----

table4.dt <- addAll(table4, "Table.4") %>%
.[!Continent == "Oceania"] %>%
.[, .(Country, Year, Codes, Continent, Dataset, Water.requirement, Water.withdrawal)] %>%
.[!c(Year <= 1999 | Year >= 2012)] # Retain only years 1999-2012

# MERGE AQUASTAT AND TABLE 4 DATASETS -----

water.dt <- rbind(aquastat.dt, table4.dt) %>%
melt(., measure.vars = c("Water.requirement", "Water.withdrawal")) %>%
.[, .(Max = max(value, na.rm = TRUE),
  Min = min(value, na.rm = TRUE)),

```

```

by = .(Continent, variable, Country)]

## Warning in gmax(value, na.rm = TRUE): No non-missing values found in at
## least one group. Returning '-Inf' for such groups to be consistent with
## base

## Warning in gmin(value, na.rm = TRUE): No non-missing values found in at
## least one group. Returning 'Inf' for such groups to be consistent with base
# Transform Inf values in NA
is.na(water.dt) <- do.call(cbind,lapply(water.dt,
                                         is.infinite))

# READ IN MEIER ET AL. DATASET -----

meier.dt <- df$meier %>%
  data.table() %>%
  .(!Continent == "Oceania") %>%
  .[, (4:9) := lapply(.SD, function(x) x / 10^6), .SDcols = (4:9)]

# CODE COUNTRY AND CONTINENT -----

meier.dt <- addAll(meier.dt, "Meier")[, Dataset:= NULL]

## Warning in countrycode(x, origin = "country.name", destination = "un"): Some values were not
# CREATE FINAL DATASET -----

dt_water <- melt(water.dt, measure.vars = c("Max", "Min"),
                 variable.name = "Stat") %>%
  .[, .(Value = mean(value, na.rm = TRUE)),
    by = .(Continent, variable, Country)] %>%
  .[meier.dt, on = c("Country", "Continent")] %>%
  .(!variable %in% NA) %>% # Remove rows in variable with NA
melt(., measure.vars = c(6:11),
     variable.name = "Dataset",
     value.name = "Area.irrigated") %>%
  .[, Dataset:= factor(Dataset, levels = c("Aquastat", "FAOSTAT", "Meier.et.al.2018",
                                           "Salmon.et.al.2015", "Siebert.et.al.2013",
                                           "Thenkabail.et.al.2009"))]

dt.full <- dt_water[variable == "Water.requirement"] %>%
  .[df.meier, on = c("Continent", "Country", "Dataset", "Codes", "Area.irrigated")] %>%
  setnames(., "Value", "Water") %>%
  .[, .(Continent, Country, Codes, Dataset, Area.irrigated, Population, Water)]

```


2.5 Plot irrigated area versus water withdrawal / water requirement

```
# PLOT WATER VARIABLES AGAINST IRRIGATED AREAS -----  
  
ggplot(dt_water, aes(Area.irrigated, Value,  
                     color = Continent)) +  
  geom_point() +  
  scale_x_log10(labels = trans_format("log10", math_format(10^.x))) +  
  scale_y_log10(labels = trans_format("log10", math_format(10^.x))) +  
  labs(x = "Area irrigated (Mha)",  
       y = expression(Km3/yr)) +  
  facet_grid(Dataset ~ variable) +  
  theme_bw() +  
  theme(legend.position = "top",  
        panel.grid.major = element_blank(),  
        panel.grid.minor = element_blank(),  
        legend.background = element_rect(fill = "transparent",  
                                           color = NA),  
        legend.key = element_rect(fill = "transparent",  
                                   color = NA))
```

```
## Warning: Transformation introduced infinite values in continuous x-axis
```

```
## Warning: Transformation introduced infinite values in continuous y-axis
```

```
## Warning: Removed 113 rows containing missing values (geom_point).
```

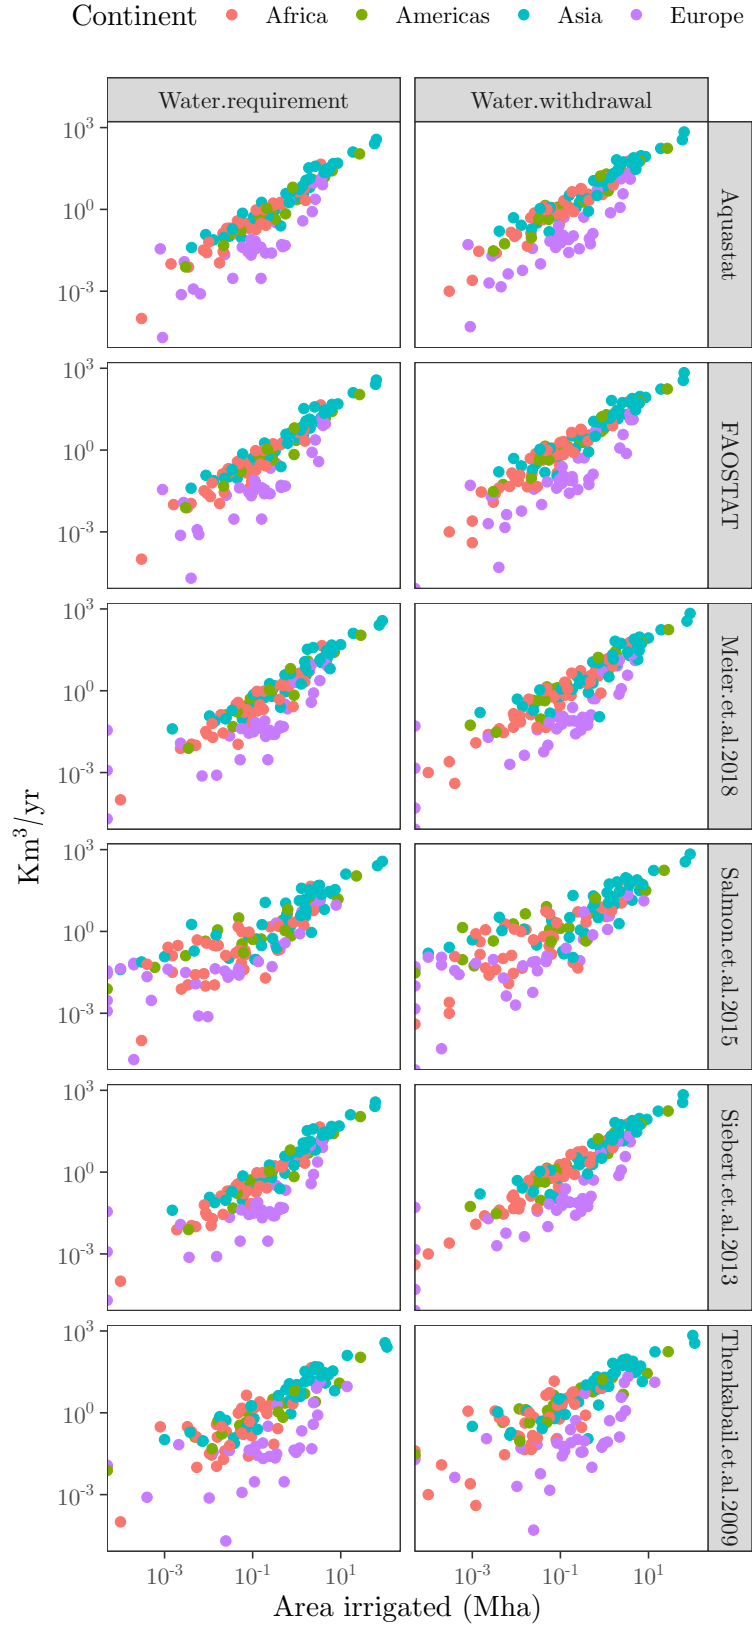

3 Uncertainty in irrigated areas

```
# PLOT DIFFERENCES IN THE MEASUREMENT OF IRRIGATED AREAS
# AS A FUNCTION OF DATASET (CONTINENTAL) (Figure 2) -----

# Create data frame with total irrigated areas per dataset
total <- df$meier %>%
  filter(!Continent == "Oceania") %>%
  gather(Dataset, Value, Meier.et.al.2018:Thenkabail.et.al.2009) %>%
  group_by(Dataset) %>%
  summarise(Total = sum(Value, na.rm = T) / 10^6) %>%
  data.frame()

# Bar plot with continental and total irrigated areas per dataset
df$meier %>%
  gather(Dataset, Value, Meier.et.al.2018:Thenkabail.et.al.2009) %>%
  filter(!Continent == "Oceania") %>%
  group_by(Continent, Dataset) %>%
  summarise(Total = sum(Value, na.rm = T) / 10^6) %>%
  ggplot(., aes(Continent, Total)) +
  geom_bar(stat = "identity") +
  geom_text(data = total, aes(label = paste("Total: ",
                                           round(Total, digits = 2),
                                           " Mha",
                                           sep = "")),
            group = Dataset),
          x = 4,
          y = 160,
          inherit.aes = FALSE,
          size = 3) +
  scale_y_continuous(breaks = pretty_breaks(n = 2)) +
  coord_flip() +
  labs(x = "Continent",
       y = "Irrigated area (Mha)") +
  facet_wrap(~Dataset) +
  theme_bw() +
  theme(aspect.ratio = 1,
        panel.grid.major = element_blank(),
        panel.grid.minor = element_blank())

# DIFFERENCES IN THE MEASUREMENT OF IRRIGATED AREAS
# AS A FUNCTION OF DATASET (COUNTRY) -----

temp <- df$meier %>%
  gather(Dataset, Value, 4:ncol()) %>%
  filter(!c(Value == 0 |
            Continent == "Oceania")) %>%
  mutate(Country = fct_recode(Country,
```

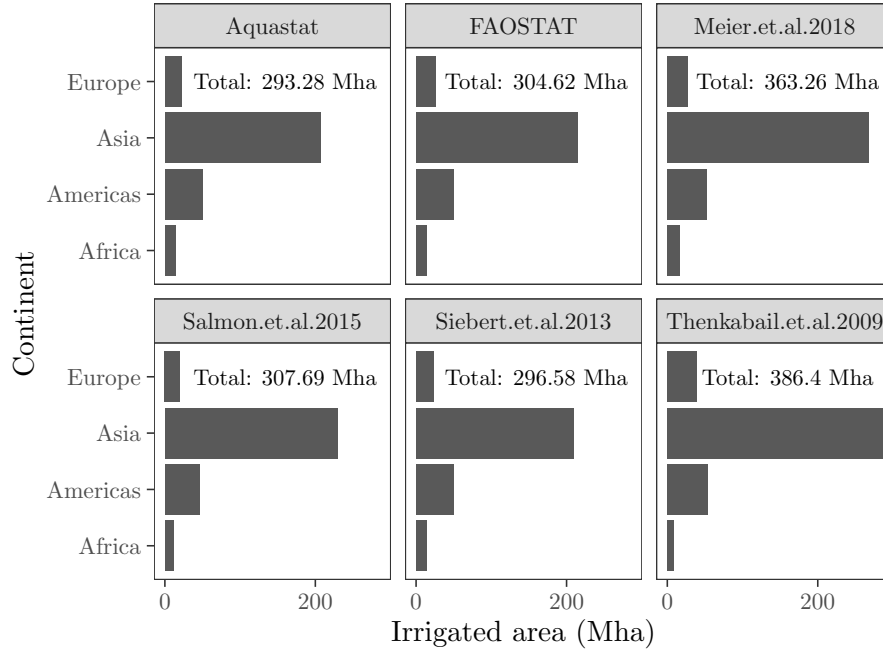


Figure 3: The extension of irrigation documented by different authors and institutions. FAO (2016) and FAOSTAT (FAO 2017) provide official values based on national surveys, census and statistics. Siebert et al. (2013) merges FAOSTAT and Aquastat values with independent maps and remote sensing imagery. Salmon et al. (2015) integrates national and subnational surveys with remote sensing and gridded climate data sets. Thenkabail et al. (2009) relies on remote sensing, Google Earth, and ground control points. Meier, Zabel, and Mauser (2018) downscales the map by Siebert et al. (2013) and uses multi-temporal normalized difference vegetation indexes with agricultural suitability data. The data was retrieved from Meier, Zabel, and Mauser (2018).

```

      "Congo" = "Democratic Republic of the Congo",
      "Tanzania" = "United Republic of Tanzania",
      "Iran" = "Iran (Islamic Republic of)",
      "Korea (DPR)" = "Korea, Democratic People's Republic of",
      "Lao" = "Lao People's Democratic Republic",
      "Macedonia" = "The former Yugoslav Republic of Macedonia"))) %>%
mutate_at(vars(Value), funs(. / 10^6)) %>%
droplevels() %>%
split(., .$Continent)

gg <- list()
for(i in seq(temp)) {
  gg[[i]] <- ggplot(temp[[i]], aes(reorder(Country, Value), Value)) +
    geom_point(stat = "identity", aes(color = Dataset)) +
    scale_y_log10( breaks = trans_breaks("log10", function(x) 10^x),
                  labels = trans_format("log10", math_format(10^.x))) +
    coord_flip() +
    scale_color_manual(name = "Dataset",
                      labels = c("Aquastat", "FAOSTAT", "Thenkabail et al. 2009",
                                "Siebert et al. 2013", "Salmon et al. 2015",
                                "Meier et al. 2018"),
                      values = c("yellowgreen", "seagreen4", "magenta3",
                                "sienna3", "turquoise2", "khaki3")) +
    labs(y = "Irrigated area (Mha)",
         x = "") +
    facet_wrap(~Continent,
              scales = "free_y") +
    theme_bw() +
    theme(panel.grid.major = element_blank(),
          panel.grid.minor = element_blank(),
          legend.position = "none",
          plot.margin = margin(t = -4.5,
                               unit = "cm"))
}

# Extract legend
legend <- get_legend(gg[[1]] + theme(legend.position = "top"))

# PLOT FOR AFRICA AND THE AMERICAS -----

first <- plot_grid(gg[[1]], gg[[2]], ncol = 2)
plot_grid(legend, first, ncol = 1)

# PLOT FOR ASIA AND EUROPE -----

second <- plot_grid(gg[[3]], gg[[4]], ncol = 2)
plot_grid(legend, second, ncol = 1)

```



Figure 4: Extension of irrigation at the country level. The data was retrieved from Meier, Zabel, and Mauser (2018).



Figure 5: Extension of irrigation at the country level. The data was retrieved from Meier, Zabel, and Mauser (2018).

4 Presence of outliers

```
# CHECK WHETHER THERE ARE OUTLIERS IN AREA.IRRIGATED VS. POPULATION
# AND AREA.IRRIGATED VS WATER REQUIRED FOR IRRIGATION -----

# Create datasets
temp <- dt_water[variable == "Water.requirement"] %>%
  .[df.meier, on = c("Continent", "Country", "Dataset", "Codes", "Area.irrigated")] %>%
  mutate_at(vars(Area.irrigated, Population, Value), funs(log10)) %>%
  data.table()

# Calculate Mahalanobis distances (robust and classic) for each
# continent and dataset

cols <- c("Population", "Area.irrigated")

temp1 <- temp[, dd.plot(.SD), .SDcols = cols, by = .(Continent, Dataset)] %>%
  .[, Class:= "Population"]

temp2 <- temp %>%
  na.omit() %>%
  .[, dd.plot(.SD), .SDcols = c("Value", "Area.irrigated"),
    by = .(Continent, Dataset)] %>%
  .[, Class:= "Water"]

out <- rbind(temp1, temp2)

# Extract number of outliers per continent and dataset
out.n <- out[, .(Outliers = sum(outliers == TRUE)),
  by = .(Continent, Dataset, Class)] %>%
  .[order(Continent)]

# Extract maximum values for Mahalanobis distances
# (robust and classic)
out.md <- out[, .(max.Mahalanobis.classic = max(md.cla),
  max.Mahalanobis.robust = max(md.rob)),
  by = .(Dataset, Continent, Class)]

# Merge both datasets
out.df <- out.n[out.md, on = c("Dataset", "Continent", "Class")] %>%
  .[order(Continent)]

# EXPORT OUTLIERS DATASET -----

fwrite(out.df, "out.df.csv")

# ARRANGE TO PLOT RESULTS -----
```

```

temp <- out %>%
  split(., .$Class)

gg <- list()
for(i in names(temp)) {
  gg[[i]] <- ggplot(temp[[i]], aes(md.cla, md.rob,
                                   color = outliers)) +

    geom_point() +
    scale_colour_manual(name = "Outlier",
                        values = setNames(c("black", "red"),
                                           c(FALSE, TRUE))) +

    facet_grid(Dataset~Continent) +
    labs(x = "Mahalanobis distance",
         y = "Robust distance") +
    theme_AP() +
    theme(legend.position = "top")
}

# PLOT MAHALANOBIS DISTANCES FOR AREA IRRIGATED VERSUS POPULATION -----

plot(gg[["Population"]])

# PLOT MAHALANOBIS DISTANCES FOR AREA IRRIGATED VERSUS
# IRRIGATION WATER REQUIREMENT -----

plot(gg[["Water"]])

```

5 Estimation of the model parameters

5.1 Irrigated area baseline values (Y_0)

```

# CALCULATE FOR EACH CONTINENT THE MAXIMUM AND MINIMUM
# EXTENSION OF IRRIGATED AREAS -----

total.area.irrigated <- df$meier %>%
  data.table() %>%
  melt(., measure.vars = c(4:9),
       variable.name = "Dataset",
       value.name = "Value") %>%
  .[, Value:= Value / 10 ^6] %>%
  .[, .(Total = sum(Value, na.rm = T)), .(Dataset, Continent)] %>%
  .[, .(min = min(Total), max = max(Total)), Continent] %>%
  .[!Continent == "Oceania"] %>%
  split(., .$Continent, drop = TRUE)

```

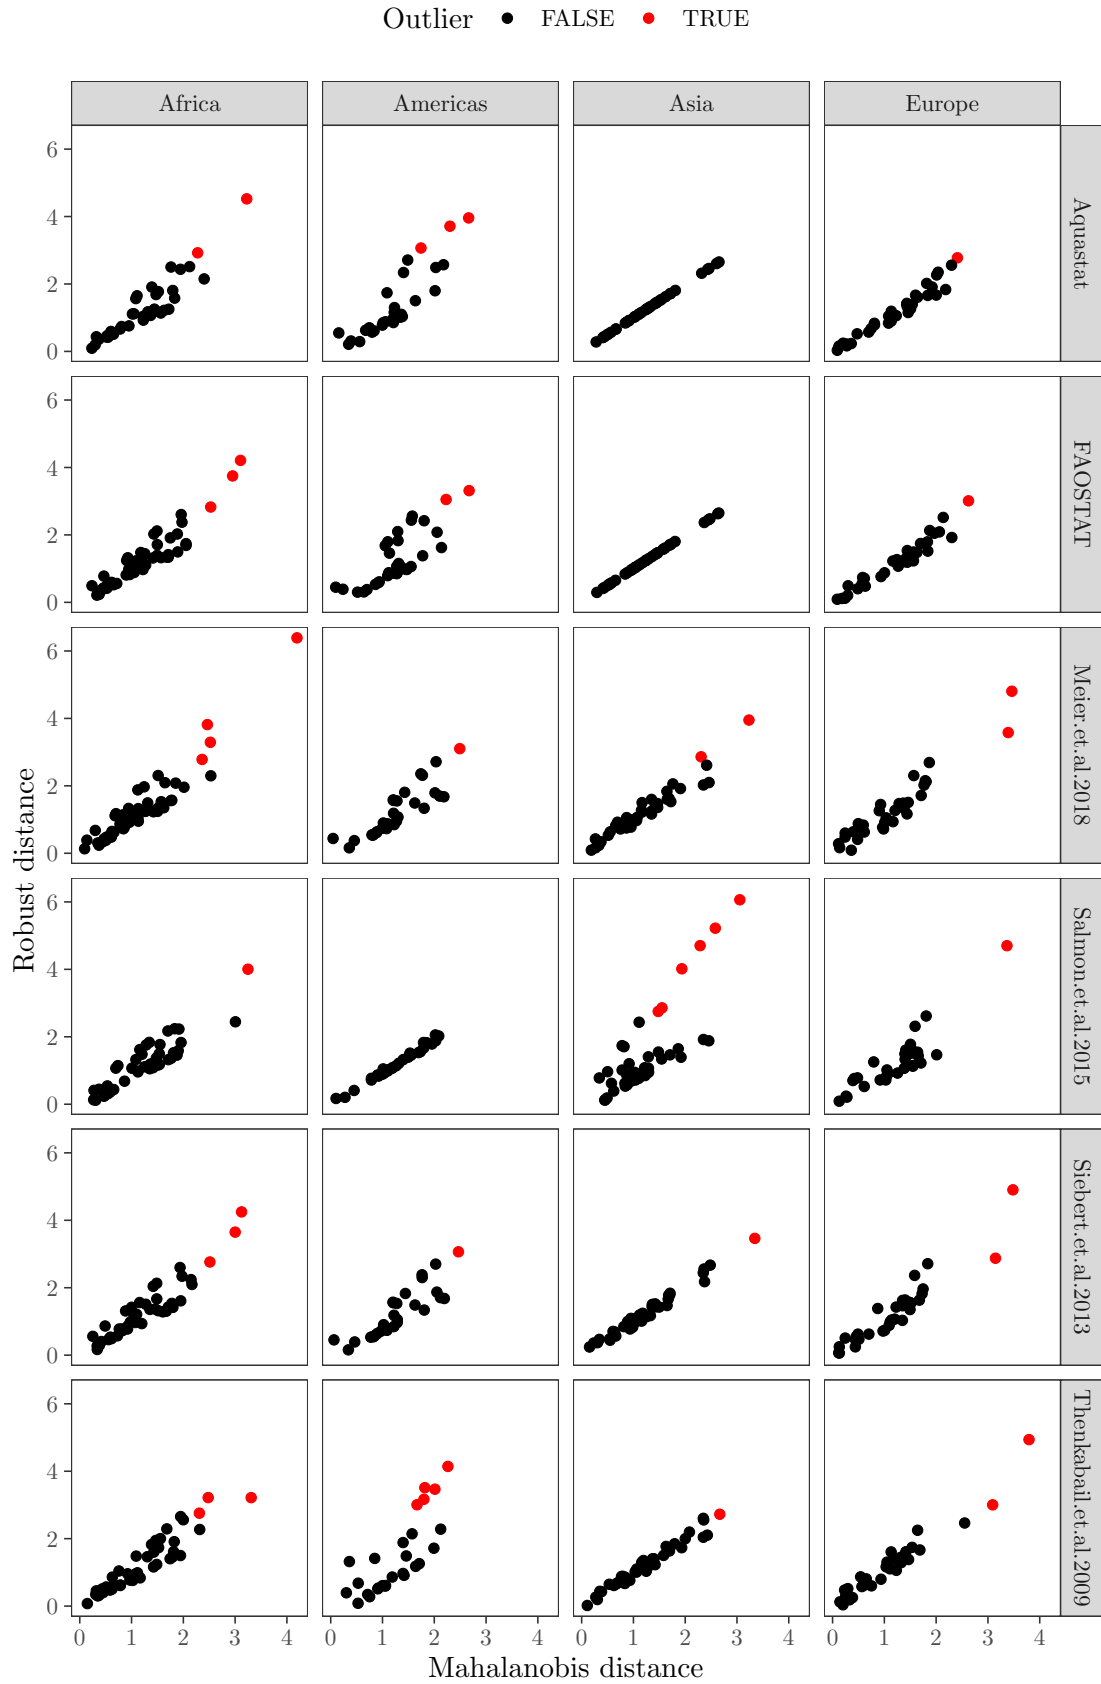


Figure 6: Scatter plot of Mahalanobis vs Robust distances.

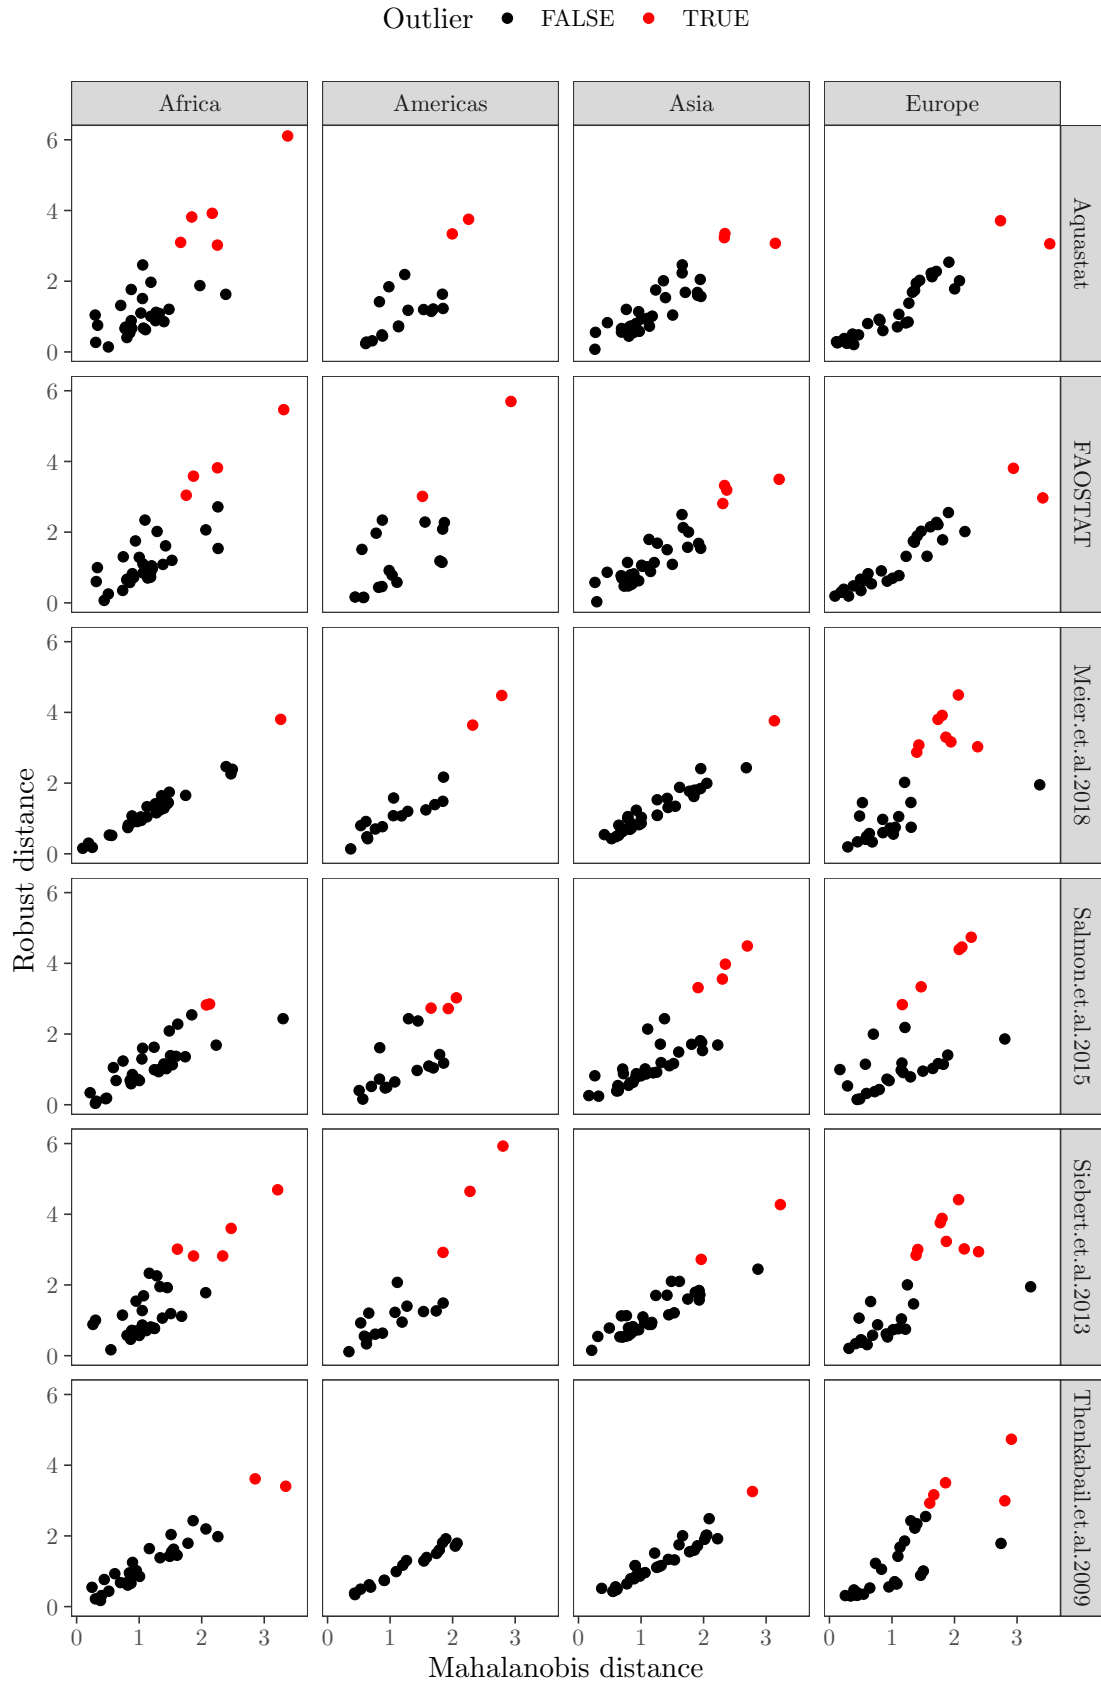


Figure 7: Scatter plot of Mahalanobis vs Robust distances.

5.2 Growth rate between population and irrigated area (β), irrigated area and water required for irrigation (ϕ , δ), and noise (ε)

```
# DEFINE NUMBER OF BOOTSTRAP REPLICAS -----
```

```
R <- 5000
```

```
# OLS REGRESSIONS: ALPHA, BETA AND DELTA -----
```

```
# Create bootstrap function for non-robust OLS
```

```
boot.ols <- function(formula, x, i) {
```

```
  d <- x[i, ]
```

```
  # Bootstrap slope
```

```
  fit <- lm(formula, data = d)
```

```
  out <- coef(fit)
```

```
  return(out)
```

```
}
```

```
# t1: alpha ols nonrob
```

```
# t2: beta ols nonrob
```

```
# Bootstrap alpha and beta
```

```
dt.regressions <- dt.full %>%
```

```
  .[, -2] %>%
```

```
  mutate_at(vars(Population, Area.irrigated, Water), funs(log10)) %>%
```

```
  data.table()
```

```
## Warning: funs() is soft deprecated as of dplyr 0.8.0
```

```
## Please use a list of either functions or lambdas:
```

```
##
```

```
##   # Simple named list:
```

```
##   list(mean = mean, median = median)
```

```
##
```

```
##   # Auto named with `tibble::lst()`:
```

```
##   tibble::lst(mean, median)
```

```
##
```

```
##   # Using lambdas
```

```
##   list(~ mean(., trim = .2), ~ median(., na.rm = TRUE))
```

```
## This warning is displayed once per session.
```

```
# Regular/Robust regressions
```

```
olsB <- dt.regressions[, # Regular OLS regressions
```

```
  .(pop = list(boot(.SD,
```

```
    statistic = boot.ols,
```

```
    R = R,
```

```
    formula = Area.irrigated ~ Population,
```

```
    parallel = "multicore",
```

```
    ncpus = floor(detectCores() * 0.75))),
```

```
  water = list(boot(.SD,
```

```
    statistic = boot.ols,
```

```

R = R,
formula = Water ~ Area.irrigated,
parallel = "multicore",
ncpus = floor(detectCores() * 0.75))),
  # Robust OLS regressions
  popR = list(lmrob(Area.irrigated ~ Population)),
  waterR = list(lmrob(Water ~ Area.irrigated))),
by = .(Continent, Dataset)]

# Extract alpha and beta for OLS non robust (population)
ols.nonrobust.pop <- olsB[, "All" := list(lapply(.SD, function(x)
  map(x, "t"))), .SDcols = "pop", .(Continent, Dataset)) %>%
  .[, .("Alpha" = lapply(All, function(x) lapply(x, function(y) y[, 1])),
    "Beta" = lapply(All, function(x) lapply(x, function(y) y[, 2]))),
    .(Continent, Dataset)) %>%
  .[, lapply(.SD, unlist), .SDcols = c("Alpha", "Beta"), .(Continent, Dataset)) %>%
  .[, Regression := "OLS"] %>%
  .[, Robust := "NO"]

# Extract phi and delta for OLS non robust (water)
ols.nonrobust.water <- olsB[, "All" := list(lapply(.SD, function(x)
  map(x, "t"))), .SDcols = "water", .(Continent, Dataset)) %>%
  .[, .("Phi" = lapply(All, function(x) lapply(x, function(y) y[, 1])),
    "Delta" = lapply(All, function(x) lapply(x, function(y) y[, 2]))),
    .(Continent, Dataset)) %>%
  .[, lapply(.SD, unlist), .SDcols = c("Phi", "Delta"), .(Continent, Dataset)) %>%
  .[, Regression := "OLS"] %>%
  .[, Robust := "NO"]

# OLS REGRESSIONS ROBUST: ALPHA, BETA AND DELTA -----

# Create cluster of 4 CPUS to speed up the bootstrapping

# Bootstrap OLS robust
olsR <- olsB[, .(popRob = lapply(popR, function(x) bootcoefs(x,
  R = R,
  method = "frb",
  ncpus = floor(detectCores() * 0.75),
  waterRob = lapply(waterR, function(x) bootcoefs(x,
  R = R,
  method = "frb",
  ncpus = floor(detectCores() *

.(Continent, Dataset)]

# Extract alpha and beta for OLS robust (population)
ols.robust.pop <- olsR[, "Allpop" := list(lapply(.SD, function(x)
  lapply(x, function(y) y[["bootres"]]))),

```

```

        .SDcols = "popRob", .(Continent, Dataset)] %>%
.[, "temp" := list(lapply(.SD, function(x)
  lapply(x, function(y) lapply(y, function(z) z[["t"]])))),
  .SDcols = "Allpop", .(Continent, Dataset)] %>%
.[, .("Alpha" = lapply(temp, function(x)
  lapply(x, function(y) lapply(y, function(z) z[, 1]))),
  "Beta" = lapply(temp, function(x)
    lapply(x, function(y) lapply(y, function(z) z[, 2])))) ,
  .(Continent, Dataset)] %>%
.[, lapply(.SD, unlist), .SDcols = c("Alpha", "Beta"), .(Continent, Dataset)] %>%
.[, Regression := "OLS"] %>%
.[, Robust := "YES"]

# Extract phi and delta for OLS robust (water)
ols.robust.water <- olsR[, "Allwater" := list(lapply(.SD, function(x)
  lapply(x, function(y) y[["bootres"]]))),
  .SDcols = "waterRob", .(Continent, Dataset)] %>%
.[, "temp" := list(lapply(.SD, function(x)
  lapply(x, function(y) lapply(y, function(z) z[["t"]])))),
  .SDcols = "Allwater", .(Continent, Dataset)] %>%
.[, .("Phi" = lapply(temp, function(x)
  lapply(x, function(y) lapply(y, function(z) z[, 1]))),
  "Delta" = lapply(temp, function(x)
    lapply(x, function(y) lapply(y, function(z) z[, 2])))) ,
  .(Continent, Dataset)] %>%
.[, lapply(.SD, unlist), .SDcols = c("Phi", "Delta"), .(Continent, Dataset)] %>%
.[, Regression := "OLS"] %>%
.[, Robust := "YES"]

# SMA REGRESSIONS: ALPHA AND BETA -----

# Create bootstrap function for robust and non-robust SMA
boot.sma <- function(formula, x, i) {
  d <- x[i, ]
  # Bootstrap coefficients (non-robust)
  fit1 <- sma(formula, data = d, method = "SMA")
  # Bootstrap coefficients (robust)
  fit2 <- sma(formula, data = d, method = "SMA", robust = TRUE)
  coef1 <- coef(fit1)
  coef2 <- coef(fit2)
  all <- c(coef1, coef2)
  return(all)
}
# t1: alpha sma nonrob
# t2: beta sma nonrob
# t3: alpha sma rob
# t4: beta sma rob

```



```

# Bootstrap alpha and beta
smaB <- dt.regressions[, list(list(boot(.SD,
                                statistic = boot.sma,
                                R = R,
                                formula = Area.irrigated ~ Population,
                                parallel = "multicore",
                                ncpus = floor(detectCores() * 0.75))),
                        .(Continent, Dataset))

# EXTRACT ALPHA AND BETA ROBUST SMA -----

# Extract alpha and beta SMA (non-robust)
sma.nonrobust.pop <- smaB[, "All":= list(lapply(V1, function(x) x["t"]))] %>%
  .[, list("Alpha" = lapply(All, function(x) lapply(x, function(y) y[, 1])),
          "Beta" = lapply(All, function(x) lapply(x, function(y) y[, 2]))),
    .(Continent, Dataset)] %>%
  .[, lapply(.SD, unlist), .SDcols = c("Alpha", "Beta"), .(Continent, Dataset)] %>%
  .[, Regression:= "SMA"] %>%
  .[, Robust:= "NO"]

# Extract alpha and beta SMA (robust)
sma.robust.pop <- smaB[, "All":= list(lapply(V1, function(x) x["t"]))] %>%
  .[, list("Alpha" = lapply(All, function(x) lapply(x, function(y) y[, 3])),
          "Beta" = lapply(All, function(x) lapply(x, function(y) y[, 4]))),
    .(Continent, Dataset)] %>%
  .[, lapply(.SD, unlist), .SDcols = c("Alpha", "Beta"), .(Continent, Dataset)] %>%
  .[, Regression:= "SMA"] %>%
  .[, Robust:= "YES"]

fwrite(sma.nonrobust.pop, "sma.nonrobust.pop.csv")
fwrite(sma.robust.pop, "sma.robust.pop.csv")

# CREATE FINAL DATA SETS WITH ALL BOOTSTRAP SAMPLES -----

# For beta and alpha
boot.samples.pop <- rbind(ols.nonrobust.pop,
                        ols.robust.pop,
                        sma.nonrobust.pop,
                        sma.robust.pop) %>%
  .[order(Continent, Dataset)]

# For delta
boot.samples.water <- rbind(ols.nonrobust.water,
                          ols.robust.water) %>%
  .[order(Continent, Dataset)]

# EXPORT BOOTSTRAP SAMPLES -----

```

```

fwrite(boot.samples.pop, "boot.samples.pop.csv")
fwrite(boot.samples.water, "boot.samples.water.csv")

# PREDICT ALPHA FROM BETA -----

# Predict Alpha from Beta
summary.beta.alpha <- boot.samples.pop %>%
  lm(.$Alpha ~ .$Beta,
    data = .)

# Get intercept, slope and epsilon values
Intercept <- coef(summary.beta.alpha)[[1]]
Slope <- coef(summary.beta.alpha)[[2]]
Epsilon <- summary(summary.beta.alpha)$sigma %>%
  .^2

# CREATE THE LOOKUP TABLE -----

# Create vector to change columns
col_names <- c("Continent", "Dataset", "Regression", "Robust")
col_names2 <- col_names[!col_names %in% "Regression"]

# Create lookup table: population
lookup.pop <- boot.samples.pop[order(Beta), .SD, col_names] %>%
  .[, ID:= 1:.N, col_names] %>%
  .[, index:= paste(Continent, Dataset, Regression, Robust, ID, sep = "_")]

setkey(lookup.pop, index)

# Create lookup table: water
lookup.water <- boot.samples.water[order(Delta), .SD, col_names2] %>%
  .[, ID:= 1:.N, col_names2] %>%
  .[, index:= paste(Continent, Dataset, Robust, ID, sep = "_")]

setkey(lookup.water, index)

# EXPORT BOOTSTRAP SAMPLES TO CSV -----

fwrite(lookup.pop, "lookup.pop.csv")
fwrite(lookup.water, "lookup.water.csv")

```

5.3 Population baseline values (N)

```

# CREATE DATA FRAME WITH POPULATION BASELINE VALUES -----

# Prepare population values between 1999-2015
temp <- df$population %>%
  # Filter out Oceania

```

```

filter(!Continent == "Oceania") %>%
select(Continent, Codes, Estimate, Year.1999:Year.2012) %>%
gather(Year, Population, Year.1999:Year.2012) %>%
mutate(Continent = fct_recode(Continent,
                             "Americas" = "S.America",
                             "Americas" = "N.America")) %>%

group_by(Continent, Year, Estimate) %>%
summarise(Population = sum(Population)) %>%
# Multiply by 1000 to get original population values
mutate_at(vars(Population), funs(. * 103)) %>%
separate(., Year,
         into = c("dummy", "Year")) %>%
# Drop dummy columns
mutate_at(vars(Year), funs(as.numeric)) %>%
mutate(t = 2050 - Year) %>%
rename(N = Population) %>%
select(Continent, t, N)

# Create population lookup dataset
population <- setDT(temp)[order(Continent)] %>%
.[, index:= paste(Continent, t, sep = "_")] %>%
# To get million population
.[, N:= N / 106] %>%
.[, .(N, index)]

setkey(population, index)
fwrite(population, "population.csv")

```

5.4 Population growth rates (r)

```

# DEFINE POPULATION GROWTH RATES DISTRIBUTIONS -----

# Prepare data frame with growth rates 2015-2050
df.rate1 <- df$growth.rate.estimate %>%
select(Continent, Estimate, Year.2015.2020:Year.2045.2050) %>%
gather(Period, Value, Year.2015.2020:Year.2045.2050) %>%
# Unite population growth rates for N.America and S.America,
# and consider both regions as one (Americas)
mutate(Continent = fct_recode(Continent,
                             "Americas" = "S.America",
                             "Americas" = "N.America")) %>%

# Exclude Oceania
filter(!Continent == "Oceania")

# Prepare data frame with growth rates 2000-2015
df.rate2 <- df$growth.rate %>%
select(Continent, Year.2000.2005:Year.2010.2015) %>%

```

```

gather(Period, Value, Year.2000.2005:Year.2010.2015) %>%
mutate(Continent = fct_recode(Continent,
                             "Americas" = "S.America",
                             "Americas" = "N.America")) %>%

# Exclude Oceania
filter(!Continent == "Oceania")

# Create population growth rates data frame
df.rate <- bind_rows(df.rate1, df.rate2) %>%
# Add constant (+5) to growth rate values to
# allow fitting distributions later on
mutate_at(vars(Value), funs(. + 5)) %>%
split(., .$Continent, drop = TRUE)

# Describe growth rates of continents with a distribution

# Fit possible distributions according to histograms
distr.norm <- lapply(df.rate, function(x) fitdist(x$Value, "norm"))
distr.logis <- lapply(df.rate, function(x) fitdist(x$Value, "logis",
                                                  method = "mme"))
distr.weib <- lapply(df.rate, function(x) fitdist(x$Value, "weibull"))

# Define function to plot
plotDistr <- function(x,...) {
  funs <- c(denscomp, qqcomp, cdfcomp, ppcomp)
  lapply(funs, function(f) f(list(x,...),
                              legendtext = plot.legend))
}

# Plot distributions and fits (Figures 9-12)
par(mfrow = c(2, 2),
    oma = c(0, 0, 2, 0))


plot.legend <- c("Normal", "Logistic", "Weibull")

for(i in names(distr.norm)) {
  gg <- plotDistr(distr.norm[[i]],
                 distr.logis[[i]],
                 distr.weib[[i]])
  title(names(distr.norm[i]), outer = TRUE)
  print(gg)
}


```

Africa


Histogram and theoretical density

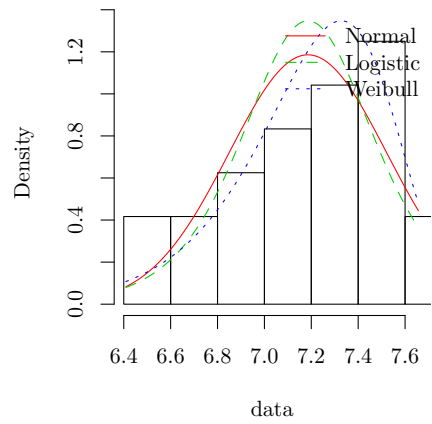


Q-Q plot

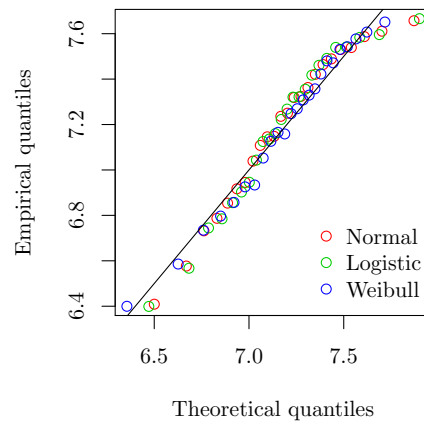

Empirical and theoretical CDFs

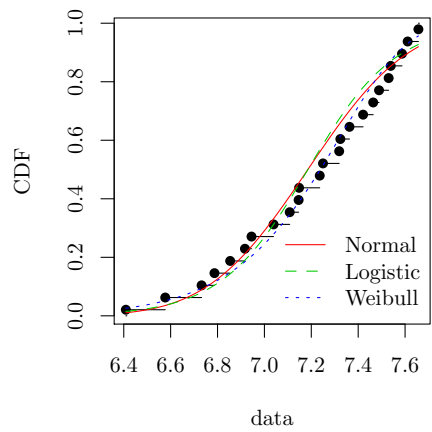


P-P plot

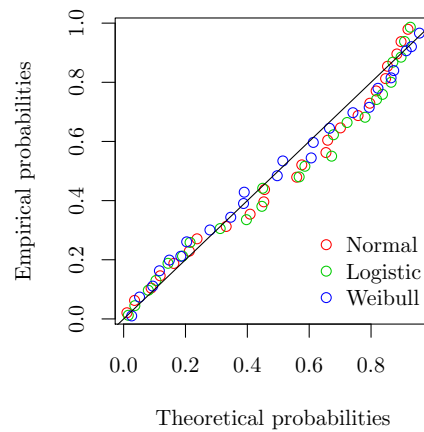


```
## [[1]]
## NULL
##
## [[2]]
## NULL
##
## [[3]]
## NULL
##
## [[4]]
## NULL
```

Asia


Histogram and theoretical density

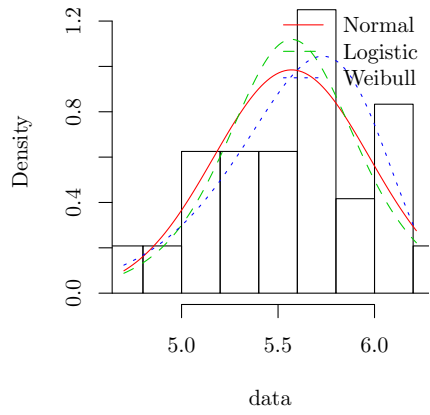


Q-Q plot

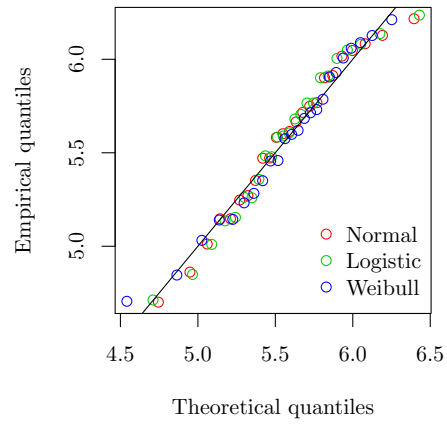

Empirical and theoretical CDFs

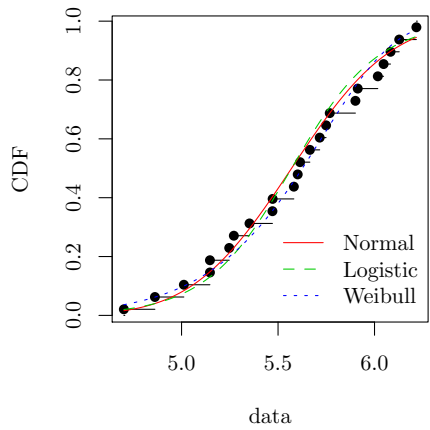


P-P plot

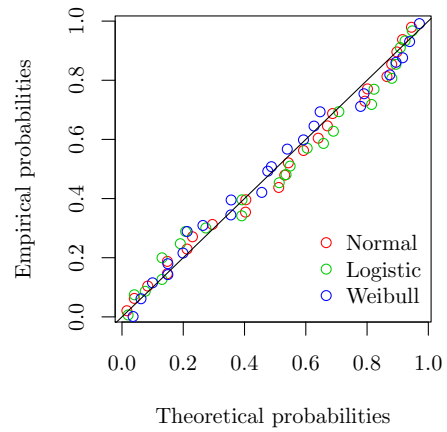


```
## [[1]]
## NULL
##
## [[2]]
## NULL
##
## [[3]]
## NULL
##
## [[4]]
## NULL
```

Europe


Histogram and theoretical density

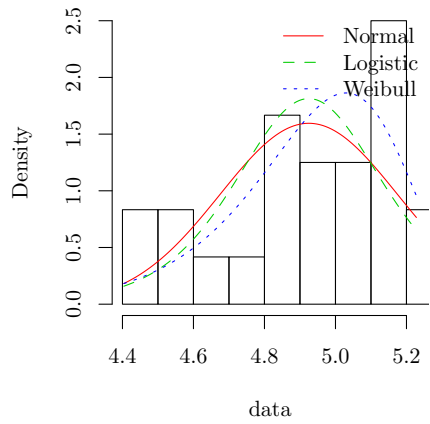


Q-Q plot

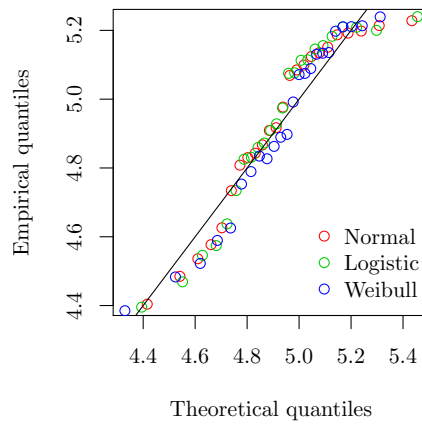

Empirical and theoretical CDFs

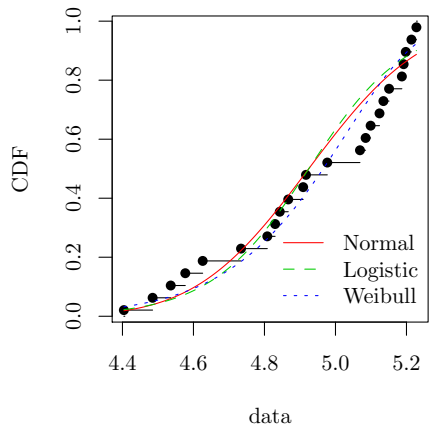


P-P plot

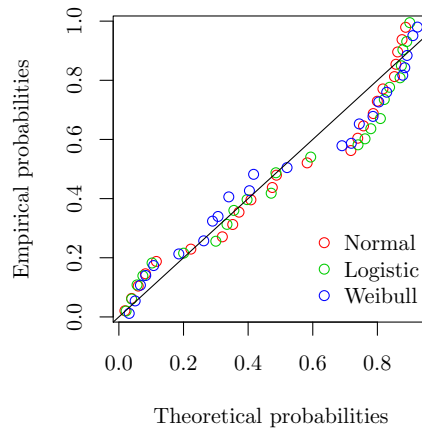


```
## [[1]]
## NULL
##
## [[2]]
## NULL
##
## [[3]]
## NULL
##
## [[4]]
## NULL
```

Americas


Histogram and theoretical density

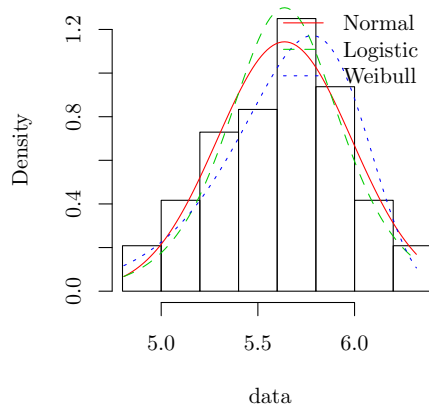


Q-Q plot

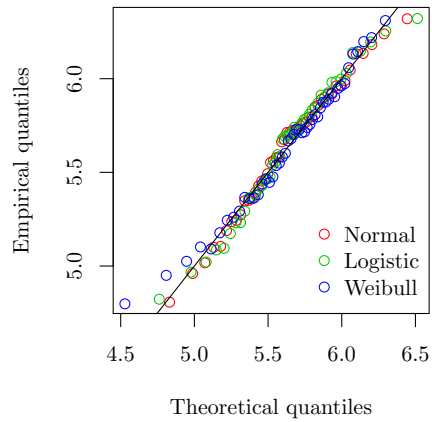

Empirical and theoretical CDFs

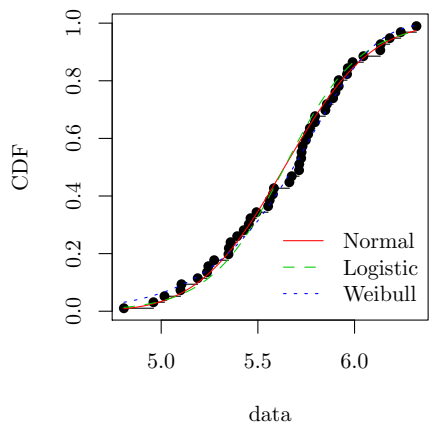

P-P plot

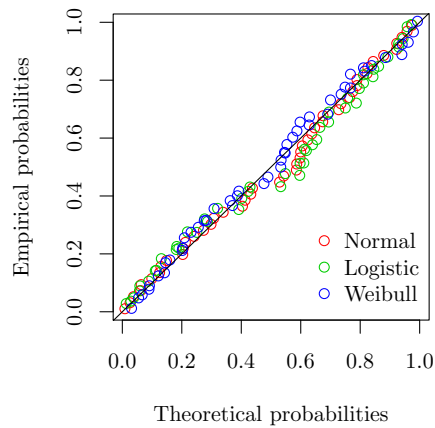

```
## [[1]]
## NULL
##
## [[2]]
## NULL
##
## [[3]]
## NULL
##
## [[4]]
## NULL
```

```
# Create function to assess whether a normal, a logistic or a
# weibull distribution better fits the data
```

```
bic.aic <- function(x, y) {
  df <- x %>%
    map(y) %>%
```



```

data.frame() %>%
  t() %>%
  data.frame() %>%
  rownames_to_column(., var = "Continent")
return(df)
}

```

Assess via BIC

```

bic.aic(x = distr.norm,
        y = "bic") %>%
  rename(Normal = ".") %>%
  inner_join(., bic.aic(x = distr.logis,
                       y = "bic"),
            by = "Continent") %>%
  rename(Logistic = ".") %>%
  inner_join(., bic.aic(x = distr.weib,
                       y = "bic"),
            by = "Continent") %>%
  rename>Weibull = ".") %>%
  mutate(Model = "BIC")

```

```

##   Continent   Normal Logistic Weibull Model
## 1   Africa 22.176234 23.640107 19.532196   BIC
## 2    Asia 31.092193 32.688151 30.187821   BIC
## 3  Europe  7.928691  9.946661  4.671153   BIC
## 4 Americas 42.877046 45.162335 42.951730   BIC

```

The distributions that better fit the data are the following:

Africa: Weibull distribution

Asia: Weibull distribution

Europe: Weibull distribution

Americas: Normal distribution

Create data frame with original growth rate values

```

df.rate.nrm <- bind_rows(df.rate1, df.rate2) %>%
  # Divide growth rates per 100 because it is in percentage
  mutate_at(vars(Value), funs(. / 100)) %>%
  split(., .$Continent, drop = TRUE)

```

Fit a normal distribution as we will need the fit for the Americas

```

distr.norm2 <- lapply(df.rate.nrm, function(x) fitdist(x$Value, "norm"))

```

List with the parameters for the distribution of growth rates

```

growth.rate.distr <- list(distr.weib$Africa$estimate,
                          distr.weib$Asia$estimate,
                          distr.weib$Europe$estimate,
                          distr.norm2$Americas$estimate)

```

```
# Name the slots of the list
names(growth.rate.distr) <- c("Africa", "Asia", "Europe", "Americas")
```

5.5 Cropland available (K)

```
# INTEGRATE CROPLAND AVAILABLE WITH MODEL OUTPUT UNCERTAINTY -----

# Prepare dataset by Zhang: create continental frame
df.zhang <- df$zhang.land.available %>%
  # Transform km2 to ha
  mutate_at(vars(Mkm2, Baseline), funs(. * 100)) %>%
  group_by(Continent, Estimation, Baseline) %>%
  summarise(Min = min(Mkm2),
            Max = max(Mkm2)) %>%
  # Conditional mutation: create column filled with
  # either the minimum value (if both projections decrease)
  # or the maximum value (if both projections increase)
  mutate(Value = ifelse(Max < Baseline, Min, Max)) %>%
  data.frame() %>%
  filter(!Continent == "World") %>%
  mutate(Continent = fct_recode(Continent,
                                "Asia" = "China",
                                "Asia" = "India",
                                "Americas" = "US",
                                "Americas" = "S.America",
                                "Europe" = "Russia"))

# Prepare dataset by Zhang: calculate min and max values
temp <- df.zhang %>%
  select(Continent, Estimation, Min, Max) %>%
  split(., list(.$Continent, .$Estimation),
        drop = TRUE) %>%
  lapply(., function(x) {
    x$min <- sum(x$Min)
    x$max <- sum(x$Max)
    return(x[1, 5:6])
  })

# Create final data set by Zhang to plot
cropland.1 <- temp %>%
  map(data.frame) %>%
  rbindlist(., idcol = "Continent") %>%
  separate(., col = Continent,
            into = c("Continent", "Estimation"))

cropland <- cropland.1 %>%
```

```
gather(Parameter, Value, min:max) %>%
group_by(Continent) %>%
summarise(min = min(Value),
           max = max(Value)) %>%
split(., .$Continent)
```

5.6 Water available (W_a)

```
# DEFINE DISTRIBUTIONS FOR THE TOTAL WATER AVAILABLE -----

# Read in dataset (# 109 m3/yr (It is already in km3)
water.availability <- fread("aquastat_water.csv",
                           nrows = 182)[, .(Country, Value)]

# Get the codes and the continents
addAll(water.availability, "Aquastat")
```

```
## Warning in countrycode(x, origin = "country.name", destination = "un"): Some values were not found
```

```
## Warning in countrycode(x, origin = "country.name", destination = "continent"): Some values were not found
```

```
# Compute 20% uncertainty
water.availability.dt <- water.availability[!Continent == "Oceania"] %>%
  .[, sum(Value, na.rm = TRUE), Continent] %>%
  .[, uncertainty:= round(V1 * 0.20, digits = 0)] %>%
  .[, lower:= round(V1 - uncertainty, digits = 0)] %>%
  .[, upper:= round(V1 + uncertainty, digits = 0)] %>%
split(., .$Continent)
```

6 Creation of the sample matrix

```
# CREATE THE SAMPLE MATRIX -----

# Create a vector with the name of the columns
parameters <- c("X1", "X2", "X3", "X4", "W1", "W3", "W4", "r",
               "gamma", "Y0", "epsilon", "t", "K", "W_a", "eta")

# Obtain number of parameters
k <- length(parameters)

# Select sample size
n <- 2 ^ 13

# Create vector with the continents
Continents <- c("Africa", "Americas", "Asia", "Europe")

# Create an A, B and AB matrices for each continent
```

```

AB <- lapply(Continents, function(Continents)
  sobol_matrices(n = n, k = k) %>%
    data.table())

# Name the slots, each is a continent
names(AB) <- Continents

# Name the columns
AB <- lapply(AB, setnames, parameters)

# CREATE THE SAMPLE MATRICES FOR THE CLUSTERED PARAMETERS -----

# Create vectors with the name of the parameters within each cluster
irrigation <- match(c("X1", "Y0", "W1", "W_a", "eta"), parameters)
population2 <- match(c("r", "gamma"), parameters)
model <- match(c("X2", "X3", "X4", "W3", "W4", "epsilon"), parameters)

# Create an A, B and AB matrices for the clustered parameters; retrieve
# only the AB

AB.cluster <- lapply(Continents, function(Continents)
  sobol_matrices(n = n,
    k = k,
    cluster = list(irrigation, population2, model))) %>%
  lapply(., function(x) x[((2*n) + 1):nrow(x), ]) %>%
  lapply(., data.table)

# Name the slots, each is a continent
names(AB.cluster) <- Continents

# Name the columns
AB.cluster <- lapply(AB.cluster, setnames, parameters)

# Merge the sample matrix and the sample matrix of the
# clustered parameters

for(i in names(AB)) {
  AB[[i]] <- rbind(AB[[i]], AB.cluster[[i]])
}

# CHECK NUMBER OF BOOTSTRAP SAMPLES OF BETA, DELTA, ETC. -----

N.boot <- boot.samples.pop[, .(N = .N),
  .(Continent, Dataset, Regression, Robust)] %>%
  .[, N] %>%
  .[1]

```

```
print(N.boot)
```

```
## [1] 5000
```

```
# TRANSFORM THE SAMPLE MATRIX -----
```

```
# Create function to transform the parameters that
```

```
# have the same distribution in all continents
```

```
transform.sobol <- function(X) {
```

```
  X[, X1:= floor(X1 * (6-1+1)) + 1][, X1:= ifelse(X1 == 1, "Aquastat",  
                                                    ifelse(X1 == 2, "FAOSTAT",  
                                                    ifelse(X1 == 3, "Siebert.et.al.2013",  
                                                    ifelse(X1 == 4, "Meier.et.al.2013",  
                                                    ifelse(X1 == 5, "Salmon  
                                                    "Thenkabail.et.al.2013"))
```

```
  X[, X2:= floor(X2 * (2-1+1)) + 1][, X2:= ifelse(X2==1, "OLS", "SMA")]
```

```
  X[, X3:= floor(X3 * (2-1+1)) + 1][, X3:= ifelse(X3==1, "YES", "NO")]
```

```
  X[, X4:= floor(X4 * (N.boot - 1)) + 1]
```

```
  X[, W1:= floor(W1 * (6-1+1)) + 1][, W1:= ifelse(W1 == 1, "Aquastat",  
                                                    ifelse(W1 == 2, "FAOSTAT",  
                                                    ifelse(W1 == 3, "Siebert.et.al.2013",  
                                                    ifelse(W1 == 4, "Meier.et.al.2013",  
                                                    ifelse(W1 == 5, "Salmon  
                                                    "Thenkabail.et.al.2013"))
```

```
  X[, W3:= floor(W3 * (2-1+1)) + 1][, W3:= ifelse(W3==1, "YES", "NO")]
```

```
  X[, W4:= floor(W4 * (N.boot - 1)) + 1]
```

```
  X[, gamma:= 0.02 * qnorm(gamma) + 1]
```

```
  X[, epsilon:= Epsilon * qnorm(epsilon) + 0]
```

```
  X[, t:= floor(t * (51-38 + 1)) + 38]
```

```
  X[, eta:= qunif(eta, min = 0.2, max = 0.5)]
```

```
  return(X)
```

```
}
```

```
AB <- lapply(AB, transform.sobol)
```

```
# Transform the parameters with their appropriate distributions
```

```
transform.sobol.continents <- function(AB) {
```

```
  for(i in names(AB)) {
```

```
    if(i == "Africa") {
```

```
      # Weibull distribution, subtract the constant and divide by 100
```

```
      # because original values were in percentage
```

```
      AB[[i]][, r:= (growth.rate.distr$Africa[[2]] *  
                    (-log(1 - r)) ^ (1/growth.rate.distr$Africa[[1]])  
                    -5) / 100]
```

```
      # Uniform distribution
```

```
      AB[[i]][, Y0:= Y0 *  
                    (total.area.irrigated$Africa$max-total.area.irrigated$Africa$min) +  
                    total.area.irrigated$Africa$min]
```

```

# Uniform distribution
AB[[i]][, K:= K * (cropland$Africa$max-cropland$Africa$min) +
               cropland$Africa$min]
# Uniform distribution
AB[[i]][, W_a:= qunif(W_a, min = water.availability.dt$Africa$lower,
                      max = water.availability.dt$Africa$upper)]
}
if(i == "Asia") {
  # Weibull distribution, subtract the constant and divide by 100
  # because original values were in percentage
  AB[[i]][, r:= (growth.rate.distr$Asia[[2]] *
                 (-log(1 - r)) ^ (1/growth.rate.distr$Asia[[1]])
                 -5) / 100]
  # Uniform distribution
  AB[[i]][, Y0:= Y0 *
               (total.area.irrigated$Asia$max-total.area.irrigated$Asia$min) +
               total.area.irrigated$Asia$min]
  # Uniform distribution
  AB[[i]][, K:= K * (cropland$Asia$max-cropland$Asia$min) +
               cropland$Asia$min]
  # Uniform distribution
  AB[[i]][, W_a:= qunif(W_a, min = water.availability.dt$Asia$lower,
                      max = water.availability.dt$Asia$upper)]
}
if(i == "Americas") {
  # Normal distribution
  AB[[i]][, r:= (growth.rate.distr$Americas[[2]] *
                 qnorm(r) + growth.rate.distr$Americas[[1]])]
  # Uniform distribution
  AB[[i]][, Y0:= Y0 *
               (total.area.irrigated$Americas$max-total.area.irrigated$Americas$min) +
               total.area.irrigated$Americas$min]
  # Uniform distribution
  AB[[i]][, K:= K * (cropland$Americas$max-cropland$Americas$min) +
               cropland$Americas$min]
  # Uniform distribution
  AB[[i]][, W_a:= qunif(W_a, min = water.availability.dt$Americas$lower,
                      max = water.availability.dt$Americas$upper)]
}
if(i == "Europe") {
  # Weibull distribution, subtract the constant and divide by 100
  # because original values were in percentage
  AB[[i]][, r:= (growth.rate.distr$Europe[[2]] *
                 (-log(1 - r)) ^ (1/growth.rate.distr$Europe[[1]])
                 -5) / 100]
  # Uniform distribution
  AB[[i]][, Y0:= Y0 *

```

```

        (total.area.irrigated$Europe$max-total.area.irrigated$Europe$min) +
        total.area.irrigated$Europe$min]
# Uniform distribution
AB[[i]][, K:= K * (cropland$Europe$max-cropland$Europe$min) +
        cropland$Europe$min]
# Uniform distribution
AB[[i]][, W_a:= qunif(W_a, min = water.availability.dt$Europe$lower,
        max = water.availability.dt$Europe$upper)]
    }
}
return(AB)
}

AB <- transform.sobol.continents(AB)

```

```

# WRITE FINAL DATA TABLE -----

```

```

final.dt <- rbindlist(AB, idcol = "Continent")

```

```

# EXPORT FINAL DATA TABLE -----

```

```

fwrite(final.dt, "final.dt.csv")
print(final.dt)

```

```

##          Continent          X1  X2  X3  X4          W1  W3
##    1:  Africa      Meier.et.al.2018 SMA  NO 2500      Meier.et.al.2018  NO
##    2:  Africa      Salmon.et.al.2015 OLS  NO 1250      Salmon.et.al.2015 YES
##    3:  Africa          FAOSTAT SMA YES 3750          FAOSTAT  NO
##    4:  Africa      Siebert.et.al.2013 OLS  NO  625  Thenkabail.et.al.2009  NO
##    5:  Africa  Thenkabail.et.al.2009 SMA YES 3125      Siebert.et.al.2013 YES
##    ---
## 655356:  Europe          FAOSTAT SMA  NO 2108      Meier.et.al.2018  NO
## 655357:  Europe      Salmon.et.al.2015 OLS YES 4607          Aquastat YES
## 655358:  Europe      Meier.et.al.2018 OLS  NO 3357      Siebert.et.al.2013 YES
## 655359:  Europe          Aquastat SMA YES  858  Thenkabail.et.al.2009  NO
## 655360:  Europe          Aquastat OLS  NO 2929          Aquastat YES
##          W4          r      gamma          Y0      epsilon  t          K          W_a
##    1: 2500  0.0223856397 1.0000000 12.45665  0.00000000 45  959.5000 3928.000
##    2: 3750  0.0200542303 0.9865102 14.41732 -0.10091222 48  836.7500 4321.000
##    3: 1250  0.0242778499 1.0134898 10.49597  0.10091222 41 1082.2500 3535.000
##    4:  625  0.0233272313 0.9769930 15.39766 -0.04767249 46  775.3750 3731.500
##    5: 3125  0.0180808545 1.0063728 11.47631  0.17210685 39 1020.8750 4517.500
##    ---
## 655356: 2754  0.0027597864 1.0273708 29.46116  0.22417742 50  532.7272 7562.571
## 655357:  255 -0.0005653362 0.9956767 20.12086 -0.02525218 43  646.2272 6247.571
## 655358: 4004  0.0008055022 1.0084916 24.79101 -0.13525793 40  589.4772 5590.071
## 655359: 1505 -0.0023882049 0.9804716 34.13131  0.07122428 47  702.9772 6905.071
## 655360: 2774 -0.0000585892 0.9966771 22.71931  0.13667622 45  524.0124 6412.107

```

```
##          eta
##      1: 0.3500000
##      2: 0.2750000
##      3: 0.4250000
##      4: 0.3875000
##      5: 0.2375000
##      ---
## 655356: 0.2558472
## 655357: 0.4058472
## 655358: 0.3308472
## 655359: 0.4808472
## 655360: 0.4321228
```

7 The model

```
# DEFINE THE MODEL -----
model <- function(X) {
  # Extract beta
  Beta <- lookup.pop[.(paste0(X[, 1:5], collapse = "_"))[, Beta]
  # Select population
  N <- population[.(paste0(X[, c("Continent", "t")], collapse = "_"))] %>%
    .[, N]
  # Extract phi and delta
  tmp <- lookup.water[.(paste0(X[, c(1, 6:8)], collapse = "_"))]
  Phi <- tmp[, Phi]
  Delta <- tmp[, Delta]
  # COMPUTE THE MODEL -----
  Y <- X[, Y0] + 10 ^ (Intercept + Slope * Beta + X[, epsilon]) *
    ((N ^ (1 - X[, gamma]) + X[, r] * X[, t] * (1 - X[, gamma])) ^
      (Beta / (1 - X[, gamma])) - N ^ Beta)
  # Compute how much water will we need to irrigate Y
  w <- (10 ^ Phi) * Y ^ Delta
  # Compute how much water we have
  # available for irrigation -----
  w_i <- X[, W_a] * X[, eta]
  # Compute the total extension that can
  # be irrigated with the water
  # we have available for irrigation -----
  Y.max <- (w_i / 10 ^ Phi) ^ (1 / Delta)
  # Constrain
  if(Y > X[, K]) {
    Y <- X[, K]
  }
  if(Y < 0) {
    Y <- X[, Y0]
  }
}
```



```

if(Y > Y.max) {
  Y <- Y.max
  if(Y < X[, Y0]) {
    Y <- X[, Y0]
  }
}
return(c(Beta, N, Phi, Delta, w, w_i, Y.max, Y))
}

# RUN MODEL USING PARALLEL COMPUTING -----

# Define parallel computing
cl <- makeCluster(floor(detectCores() * 0.75))
registerDoParallel(cl)

# Run model in parallel
Y <- foreach(i=1:nrow(final.dt),
             .packages = c("dplyr", "data.table")) %dopar%
{
  model(final.dt[i])
}

# Stop parallel cluster
stopCluster(cl)

# ADD MODEL OUTPUT -----

model.output <- c("Beta", "N", "Phi", "Delta", "w", "w_i", "Y.max", "Y")

full.dt <- cbind(final.dt, data.table(do.call(rbind, Y))) %>%
  setnames(., paste("V", 1:length(model.output), sep = ""), model.output)

# Select the A and B matrix only (for uncertainty analysis)
AB.dt <- full.dt[, .SD[1:(n * 2)], Continent]

# EXPORT MODEL OUTPUT -----

fwrite(full.dt, "full.dt.csv")

# EXPORT AB MATRICES -----

fwrite(AB.dt, "AB.dt.csv")

```

8 Uncertainty analysis

```

# COMPUTE QUANTILES -----

# Check number and proportion of negative model output values

```

```

AB.dt[, .(negative.runs = sum(Y < 0),
        proportion = sum(Y < 0) / .N),
        Continent]

##      Continent negative.runs proportion
## 1:      Africa              0         0
## 2:    Americas              0         0
## 3:         Asia              0         0
## 4:      Europe              0         0

# Compute quantiles
quant <- AB.dt[Y > 0] %>%
  group_by(Continent) %>%
  do(data.frame(t(quantile(.$Y,
                        probs = c(0.005, 0.01, 0.025, 0.975, 0.99, 0.995, 1),
                        na.rm = TRUE))))

# Print the quantiles
print(quant)

## # A tibble: 4 x 8
## # Groups:   Continent [4]
##   Continent X0.5.   X1.  X2.5. X97.5.  X99. X99.5. X100.
##   <chr>      <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
## 1 Africa    15.3  17.1  20.4  775.  946. 1057. 1204.
## 2 Americas  42.8  45.4  48.1  157.  212.  254. 1186.
## 3 Asia     128. 165.  201.  714.  794.  831.  889.
## 4 Europe    1.64  2.98  6.94  77.4 126.  171.  635.

# COMPUTE QUANTILES AT THE GLOBAL LEVEL -----

projections <- df$projections %>%
  select(Study, `2050`, Group) %>%
  na.omit()

# Assess uncertainty at the global level
global.uncertainty <- AB.dt %>%
  .[, .(Y, Continent)] %>%
  split(., .$Continent) %>%
  lapply(., function(x) x[, Y]) %>%
  do.call("cbind", .) %>%
  data.table() %>%
  .[, Total:= rowSums(.)]

# Calculate the 2.5 and the 97.5 quantiles
global.quantile <- quantile(global.uncertainty$Total,
                           probs = c(0.005, 0.01, 0.025, 0.975, 0.99, 0.995, 1),
                           na.rm = TRUE) %>%
  t() %>%

```

```

data.frame()

# Print quantiles of the global uncertainty
print(global.quantile)

##      X0.5.      X1.      X2.5.      X97.5.      X99.      X99.5.      X100.
## 1 271.0602 295.1169 320.1247 1462.064 1737.895 1928.275 2918.227

# READ PROJECTIONS OF IRRIGATED AREAS AT THE CONTINENTAL LEVEL -----

irrigated_area_2050 <- fread("irrigated_area_2050.csv")[, World:= NULL]
irrigated_area_2050_dt <- melt(irrigated_area_2050,
                              measure.vars = c("Africa", "Americas", "Europe", "Asia"),
                              variable.name = "Continent")

## Warning in melt.data.table(irrigated_area_2050, measure.vars = c("Africa", :
## 'measure.vars' [Africa, Americas, Europe, Asia] are not all of the same type. By
## order of hierarchy, the molten data value column will be of type 'double'. All
## measure variables not of type 'double' will be coerced too. Check DETAILS in ?
## melt.data.table for more on coercion.

# Get minimum and maximum
prove <- irrigated_area_2050_dt[, .(min = min(value, na.rm = TRUE),
      max = max(value, na.rm = TRUE)),
      Continent]

# Proportion of model runs covered by current projections (min and max)
sapply(Continents, function(x) AB.dt[Continent == x,
      sum(Y >= prove[Continent == x, min] &
      Y<= prove[Continent == x, max]) / .N])

##      Africa  Americas      Asia      Europe
## 0.1422729 0.5689697 0.2826538 0.6565552

# Proportion of model runs larger than the maximum value projected
sapply(Continents, function(x) AB.dt[Continent == x,
      sum(Y >= prove[Continent == x, max]) / .N])

##      Africa  Americas      Asia      Europe
## 0.8572388 0.4268188 0.7078247 0.2045898

# PLOT UNCERTAINTY -----

# Continental level
a <- AB.dt %>%
  .[Y > 10^0] %>%
  ggplot(., aes(Y)) +
  geom_rect(data = quant,
            aes(xmin = X2.5.,
                xmax = X97.5.,

```

```

        ymin = -Inf,
        ymax = Inf,
        group = Continent),
    fill = "green",
    color = "darkgreen",
    alpha = 0.1,
    inherit.aes = FALSE) +
geom_rect(data = cropland.1,
    aes(xmin = min,
        xmax = max,
        ymin = -Inf,
        ymax = Inf,
        group = Continent,
        fill = Estimation),
    color = "black",
    alpha = 0.7,
    inherit.aes = FALSE) +
scale_fill_discrete(guide = FALSE) +
geom_histogram() +
geom_vline(data = irrigated_area_2050_dt,
    aes(xintercept = value,
        colour = Study),
    lty = 2,
    size = 1) +
labs(x = "Area irrigated 2050 (Mha)",
    y = "Counts") +
facet_wrap(~Continent,
    ncol = 1,
    scales = "free_y") +
scale_x_log10(labels = trans_format("log10", math_format(10^.x))) +
scale_y_continuous(breaks = pretty_breaks(n = 2)) +
theme_bw() +
theme(legend.position = "none",
    panel.grid.major = element_blank(),
    panel.grid.minor = element_blank(),
    legend.background = element_rect(fill = "transparent",
        color = NA),
    legend.key = element_rect(fill = "transparent",
        color = NA))

# Global level
b <- global.uncertainty %>%
ggplot(., aes(Total)) +
geom_rect(data = global.quantile,
    aes(xmin = X2.5,
        xmax = X97.5,
        ymin = -Inf,

```

```

      ymax = Inf),
      fill = "green",
      color = "darkgreen",
      alpha = 0.1,
      inherit.aes = FALSE) +
geom_histogram() +
geom_vline(data = projections,
           aes(xintercept = `2050`,
              colour = Study),
           lty = 2,
           size = 1) +
scale_color_discrete(labels = c("Alcamo et al. 2005",
                                "Alcamo et al. 2007",
                                "Alexandratos and \n Bruinsma 2012",
                                "Fischer et al. 2007",
                                "Molden 2007")) +
labs(x = "Area irrigated 2050 (Mha)",
     y = "",
     color = "Projection") +
scale_x_log10(labels = trans_format("log10", math_format(10^.x)),
              breaks = trans_breaks("log10", function(x) 10^x),
              # Limit the x axis for better visualization
              limits = c(200, 4300)) +
theme_bw() +
theme(legend.position = "none",
      panel.grid.major = element_blank(),
      panel.grid.minor = element_blank(),
      legend.background = element_rect(fill = "transparent",
                                       color = "white"),
      legend.key = element_rect(fill = "transparent",
                                color = NA))

legend <- get_legend(a + theme(legend.position = "top") +
                    guides(colour = guide_legend(nrow = 3,
                                                  byrow = TRUE)))

```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

```
## Warning: Removed 8 rows containing missing values (geom_vline).
```

```

bottom <- plot_grid(a, b,
                   ncol = 2,
                   labels = "AUTO",
                   align = "hv")

```


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

```
## Warning: Removed 8 rows containing missing values (geom_vline).
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

```
## Warning: Removed 17 rows containing non-finite values (stat_bin).
## Warning: Removed 2 rows containing missing values (geom_bar).
## Warning: Graphs cannot be horizontally aligned unless the axis parameter is set.
## Placing graphs unaligned.
```

```
plot_grid(legend, bottom,
  labels = c("", ""),
  ncol = 1,
  align = "",
  rel_heights = c(0.3, 1))
```

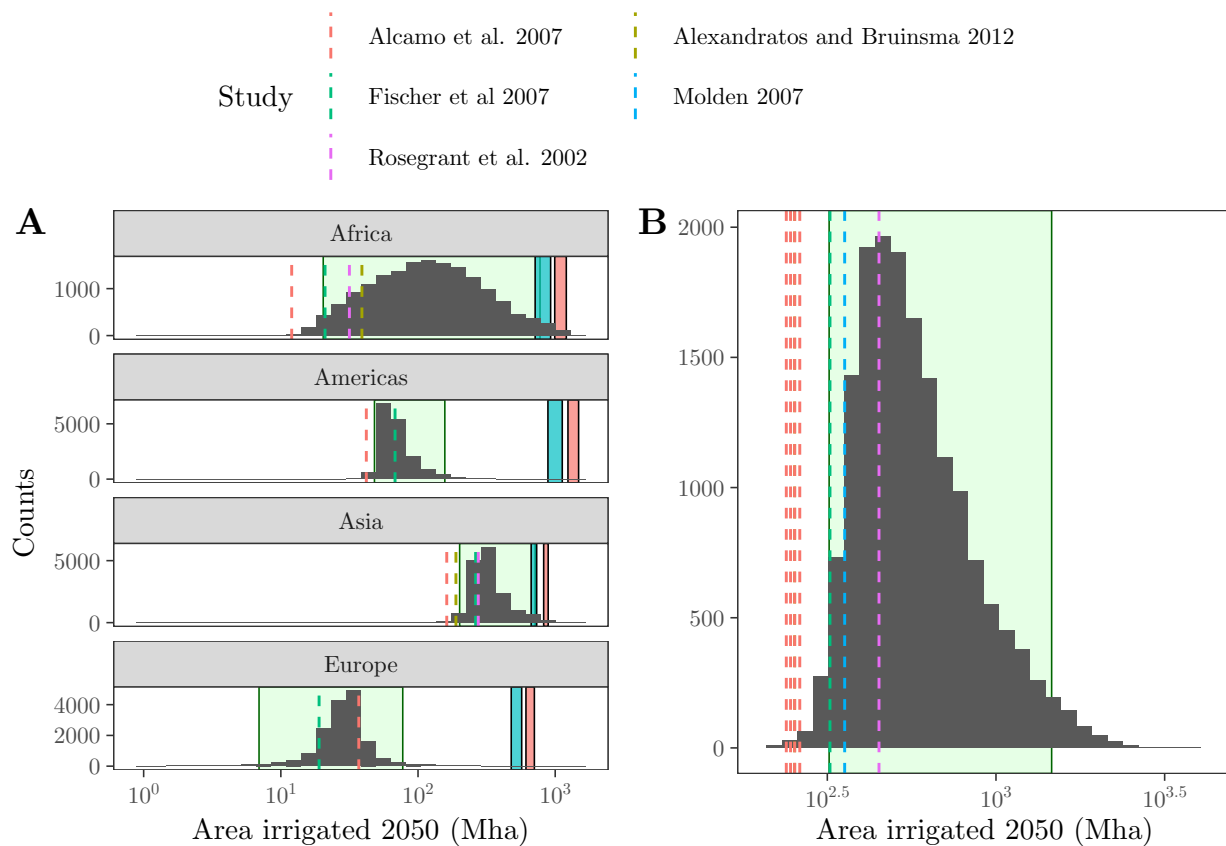






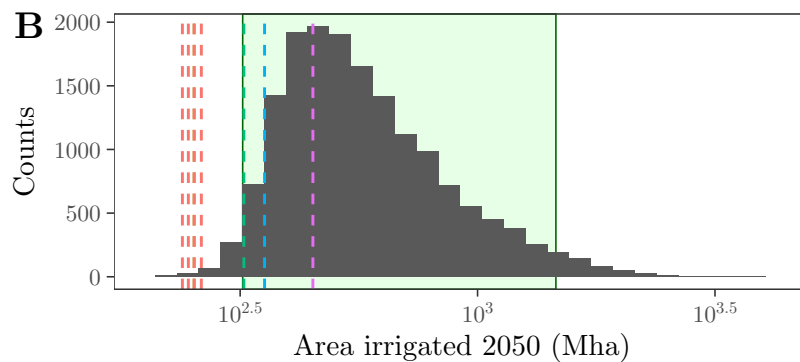
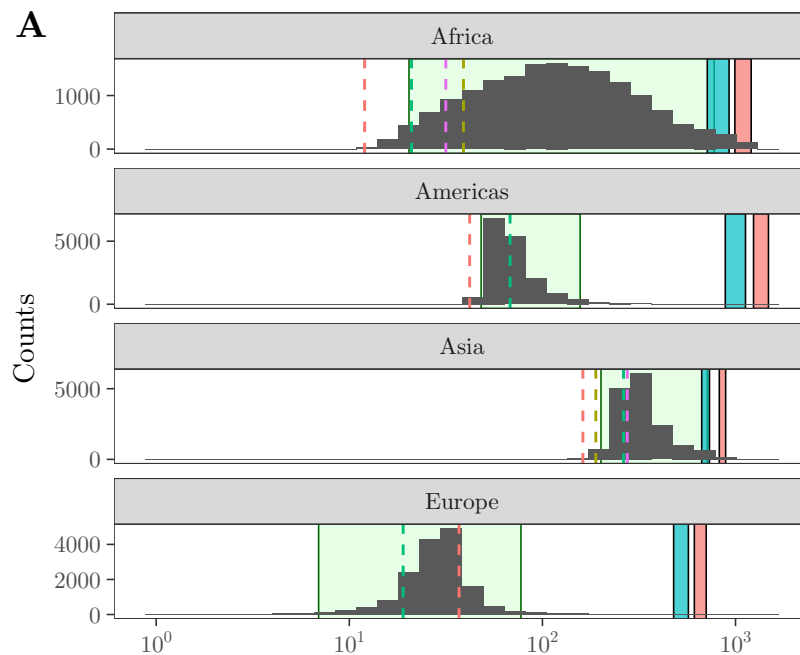
```
bottom <- plot_grid(a + labs(x = "", y = "Counts"),
  b + labs(x = "Area irrigated 2050 (Mha)", y = "Counts"),
  ncol = 1,
  labels = "AUTO",
  align = "hv",
  rel_heights = c(1, 0.53))
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
## Warning: Removed 8 rows containing missing values (geom_vline).
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
## Warning: Removed 17 rows containing non-finite values (stat_bin).
```

```
## Warning: Removed 2 rows containing missing values (geom_bar).
## Warning: Graphs cannot be horizontally aligned unless the axis parameter is set.
## Placing graphs unaligned.
```

```
plot_grid(legend, bottom,
  labels = c("", ""),
  ncol = 1,
  align = "",
  rel_heights = c(0.2, 1))
```

		Alcamo et al. 2007		Alexandratos and Bruinsma 2012
Study		Fischer et al 2007		Molden 2007
		Rosegrant et al. 2002		




```
b +theme(plot.margin = margin(l = 0, unit = "cm"))
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

```
## Warning: Removed 17 rows containing non-finite values (stat_bin).
```

```
## Warning: Removed 2 rows containing missing values (geom_bar).
```

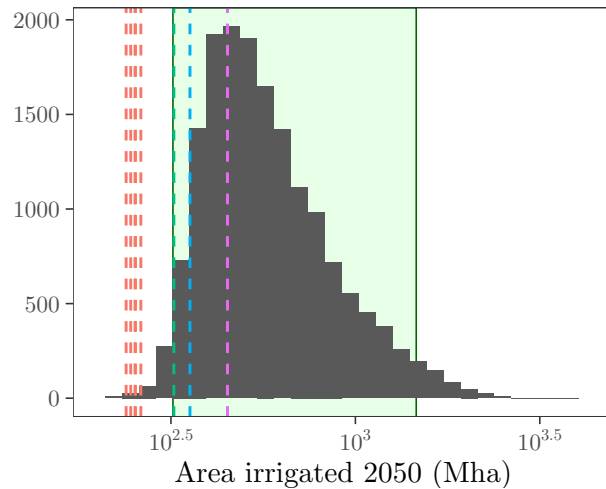

```
# EXPORT GLOBAL UNCERTAINTY -----
```

```
fwrite(global.uncertainty, "global.uncertainty.csv")
```

```
# UNCERTAINTY STATISTICS -----
```

```
# How many model runs hit K?
```

```
AB.dt[, sum((Y == K) / .N) * 100, Continent]
```

```
##      Continent      V1
## 1:    Africa 2.062988281
## 2:  Americas 0.006103516
## 3:     Asia 2.612304688
## 4:    Europe 0.030517578
```

```
# Compare the global projection to previous projections
```

```
global.uncertainty[, .(N = .N,
  larger.Alcamo.2007 = sum((Total > 262) / .N) * 100,
  larger.FAO = sum((Total > 322) / .N) * 100,
  larger.Molden = sum((Total > 450) / .N) * 100,
  much.larger.Molden = sum((Total > 675) / .N) * 100,
  twice.Molden = sum((Total > 900) / .N) * 100,
  less.100 = sum((Total < 10^2) / .N) * 100)]
```

```
##      N larger.Alcamo.2007 larger.FAO larger.Molden much.larger.Molden
## 1: 16384      99.62158    97.36938    69.48853      29.73022
##      twice.Molden less.100
## 1:    13.94653 0.01220703
```


9 Sensitivity analysis

9.1 Scatterplots

```
# ARRANGE SCATTERPLOTS OF PARAMETERS VS MODEL OUTPUT -----

# Function to recode some parameters to allow plotting
code_columns <- function(x) {
  dt <- ifelse(x == "Aquastat", 1,
              ifelse(x == "FAOSTAT", 2,
                    ifelse(x == "Siebert.et.al.2013", 3,
                          ifelse(x == "Meier.et.al.2018", 4,
                                ifelse(x == "Salmon.et.al.2015", 5, 6))))))
  return(dt)
}

code_columns2 <- function(x) ifelse(x == "YES", 1, 2)

# Vector with renamed parameters for better plotting
parameters.renamed <- c("X1", "X2", "X3", "X4", "W1", "W3", "W4", "r", "$\\gamma$",
                        "Y0", "$\\epsilon$", "t", "K", "Wa", "$\\eta$")

# Create temporary data table to plot
tmp <- cbind(AB.dt[, .(Continent)], AB.dt[, ..parameters], AB.dt[, .(Y)])

# Update columns and arrange
# Update columns to allow plotting of scatterplots
col_names <- c("X1", "W1")
col_names2 <- c("X3", "W3")
tmp <- tmp[, (col_names):= lapply(.SD, code_columns), .SDcols = col_names]
tmp <- tmp[, (col_names2):= lapply(.SD, code_columns2), .SDcols = col_names2]
tmp <- tmp[, X2:= ifelse(X2 == "OLS", 1, 2)]

tmp2 <- gather(tmp, Parameters, Values, X1:eta) %>%
  split(., .$Continent)

# PLOT SCATTERPLOTS OF PARAMETERS VS MODEL OUTPUT -----

gg <- list()
for(i in names(tmp2)) {
  gg[[i]] <- ggplot(tmp2[[i]], aes(Values, Y)) +
    geom_hex() +
    scale_x_continuous(breaks = pretty_breaks(n = 3)) +
    scale_fill_gradient(breaks = pretty_breaks(n = 2)) +
    scale_y_log10() +
    scale_alpha(guide = "none") +
    labs(x = "Values",
         y = "Area irrigated 2050 (Mha)") +

```


```

facet_wrap(~Parameters,
           scales = "free_x",
           ncol = 3,
           labeller = label_parsed) +
theme_bw() +
theme(panel.grid.major = element_blank(),
      panel.grid.minor = element_blank(),
      legend.background = element_rect(fill = "transparent",
                                       color = NA),
      legend.key = element_rect(fill = "transparent",
                                color = NA),
      legend.position = "top") +
ggtitle(names(tmp2[i]))
}

gg[[1]]


```

Africa

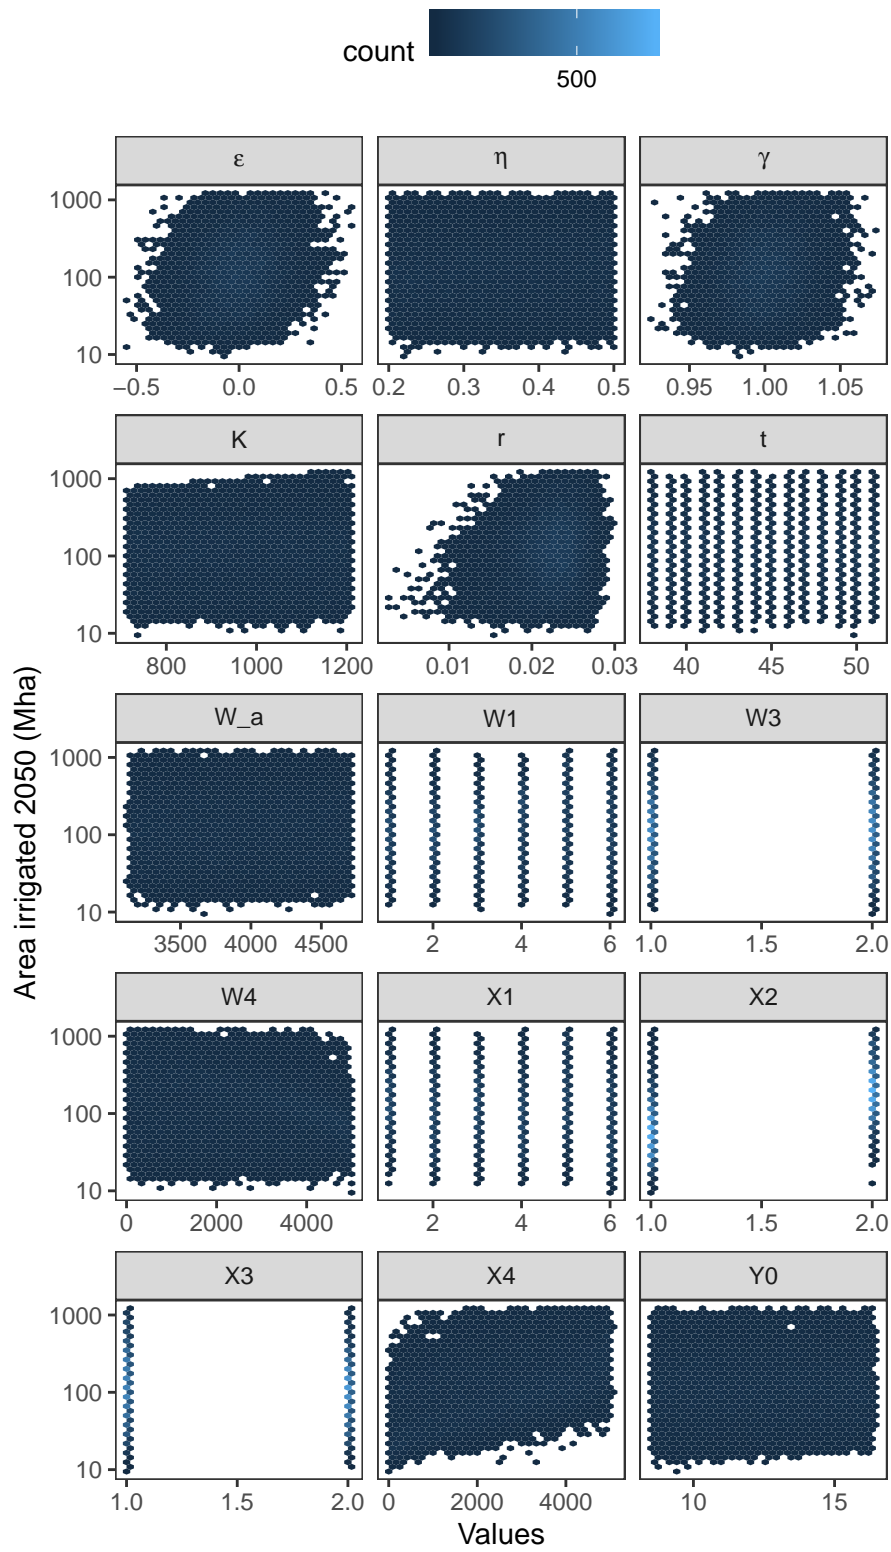


gg[[2]]

Americas

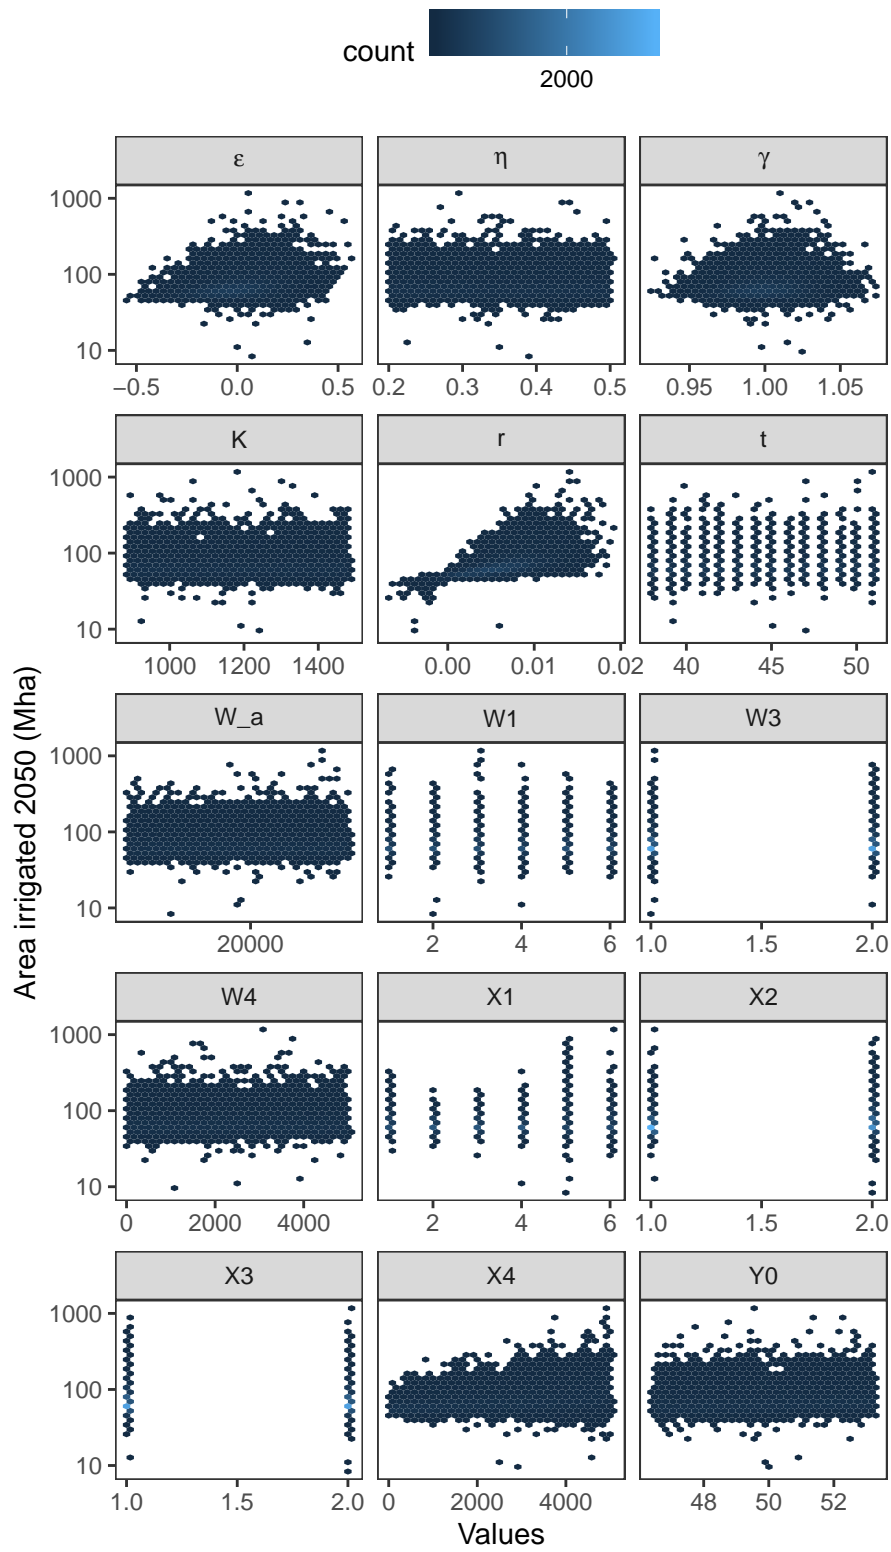


```
gg[[3]]
```

Asia

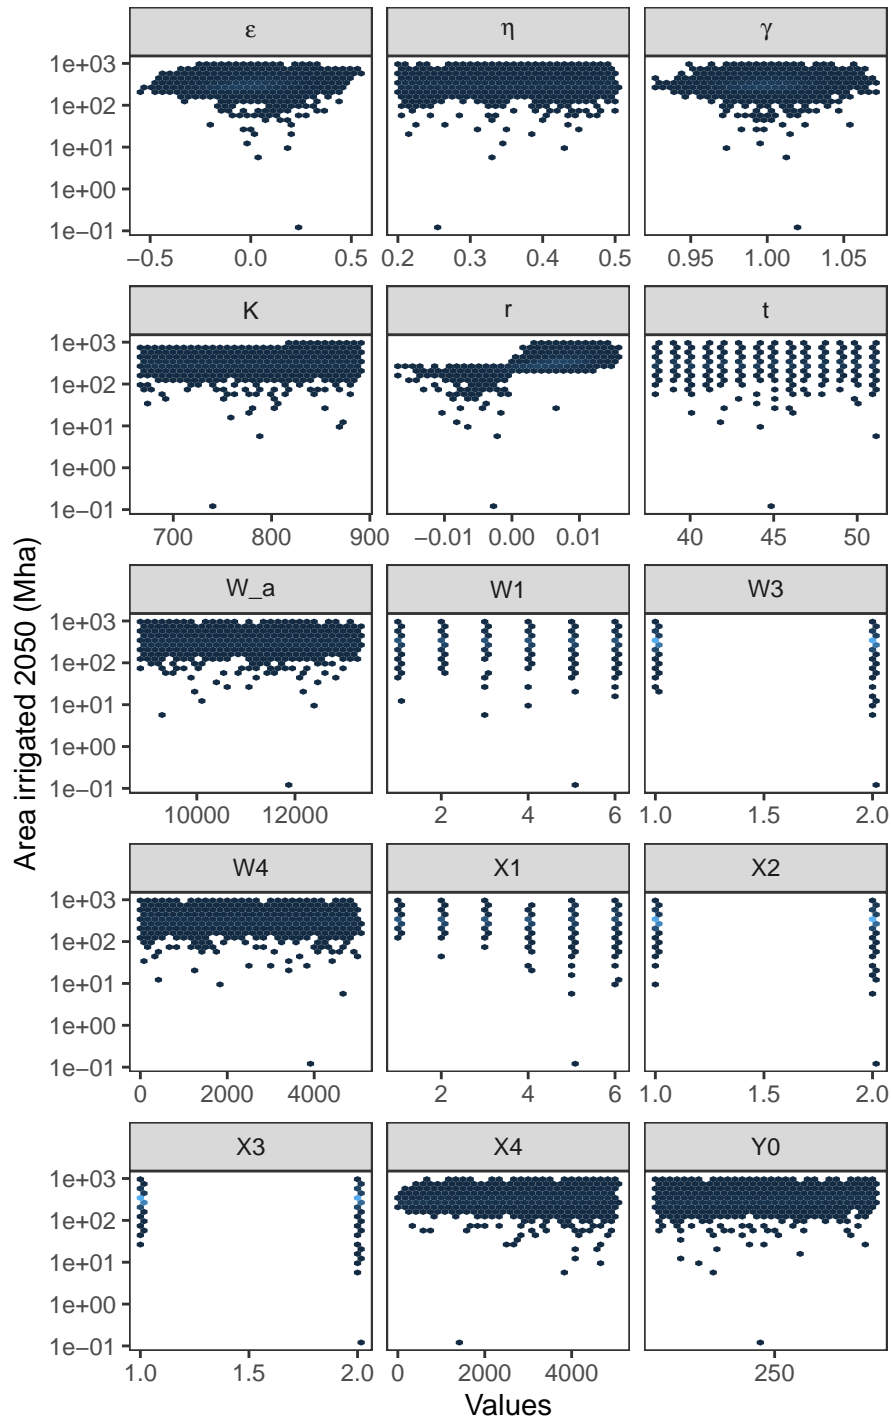

```
gg[[4]]
```

Europe

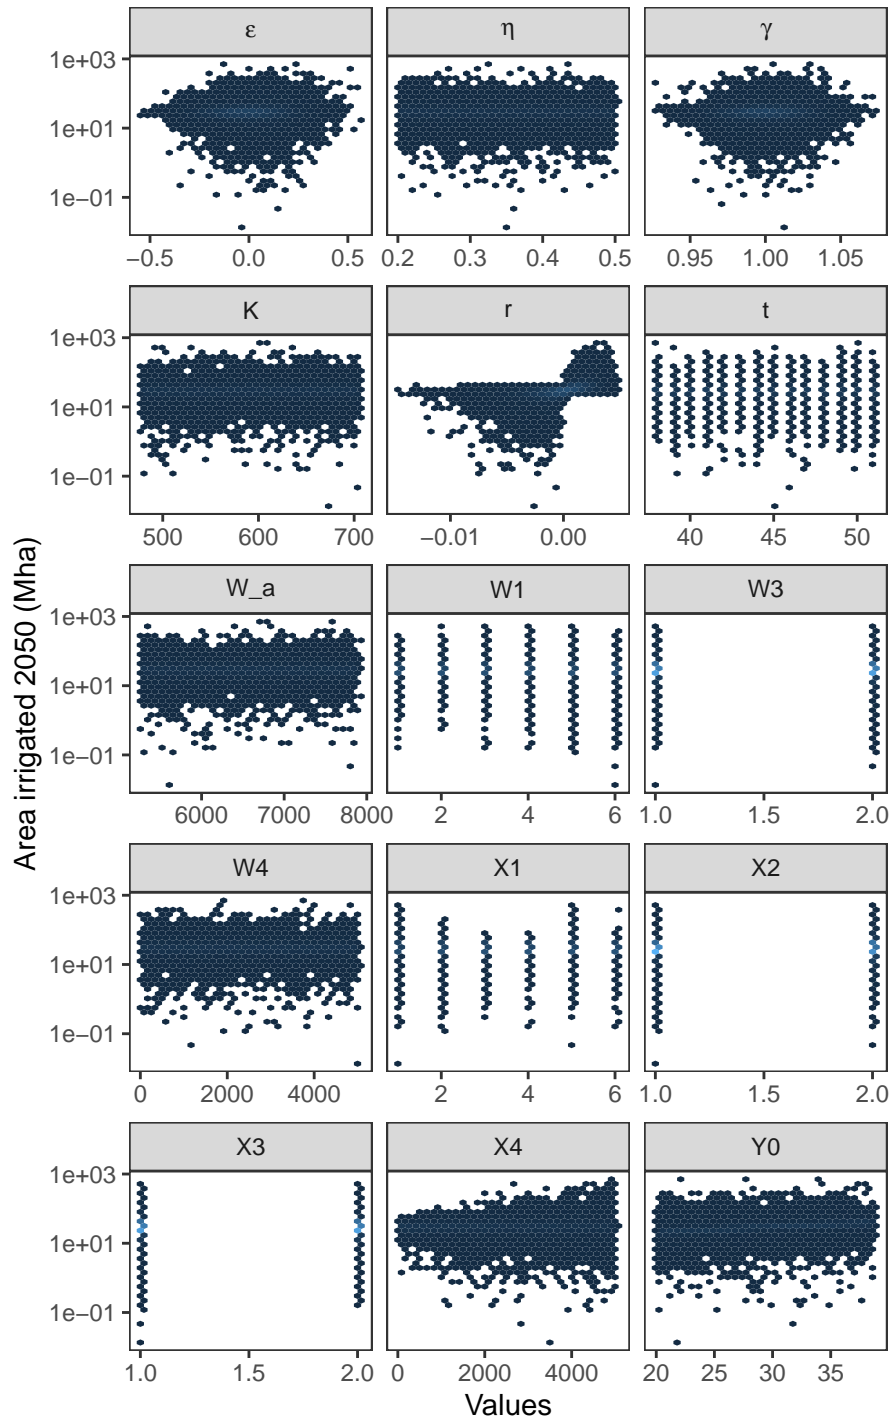

9.2 Sobol' indices

```
# SETTING FOR SOBOL' INDICES -----

# Set the number of bootstraps
R <- 1000

# Set the confidence interval method
type <- "norm"

# Set the confidence interval
conf <- 0.95

# Create vector with the name of the clusters
cluster <- c("Irrigation", "Population", "Model")

# COMPUTE SOBOL' INDICES -----

# Compute Sobol' indices
out <- full.dt[, sobol_indices(Y,
                                params = c(parameters.renamed, cluster),
                                type = "saltelli",
                                R = R,
                                n = n,
                                parallel = "multicore",
                                ncpus = floor(detectCores() * 0.75)),
                                by = Continent]

# SOBOL' CONFIDENCE INTERVALS -----

# Compute confidence intervals
tmp <- split(out, out$Continent)
out.ci <- list()
for(i in names(tmp)) {
  out.ci[[i]] <- sobol_ci(tmp[[i]],
                          params = c(parameters.renamed, cluster),
                          type = type,
                          conf = conf)
}

# SOBOL' INDICES OF A DUMMY PARAMETER -----

# For the model parameters
out.dummy <- full.dt[, .SD[1:(n * (k + 2))], Continent] %>%
  .[, sobol_dummy(Y,
                  params = parameters.renamed,
                  R = R,
                  n = n,
                  parallel = "multicore",
```

```

        ncpus = floor(detectCores() * 0.5)),
    by = Continent]

# Compute confidence intervals
tmp.dummy <- split(out.dummy, out.dummy$Continent)
out.dummy.ci <- list()
for(i in names(tmp.dummy)) {
    out.dummy.ci[[i]] <- sobol_ci_dummy(tmp.dummy[[i]],
                                       type = type,
                                       conf = conf)
}
out.dummy.ci2 <- rbindlist(out.dummy.ci, idcol = "Continent")

# For the clusters of parameters
tmp1 <- full.dt[, .SD[1:(2 * n)], Continent] %>%
    split(., .$Continent)

tmp2 <- full.dt[full.dt[, tail(.I, length(cluster) * n), by = Continent]$V1, ] %>%
    split(., .$Continent)

for(i in names(tmp1)) {
    tmp1[[i]] <- rbind(tmp1[[i]], tmp2[[i]])
}
out.dummy.cluster <- rbindlist(tmp1) %>%
    .[, sobol_dummy(Y,
                   params = cluster,
                   R = R,
                   n = n,
                   parallel = "multicore",
                   ncpus = floor(detectCores() * 0.5)),
    by = Continent]

# Compute confidence intervals
tmp.dummy <- split(out.dummy.cluster, out.dummy.cluster$Continent)
out.dummy.cluster.ci <- list()
for(i in names(tmp.dummy)) {
    out.dummy.cluster.ci[[i]] <- sobol_ci_dummy(tmp.dummy[[i]],
                                               type = type,
                                               conf = conf)
}

out.dummy.cluster.ci2 <- rbindlist(out.dummy.cluster.ci, idcol = "Continent")

# EXPORT SOBOLE' INDICES -----

sobol.ci <- rbindlist(out.ci, idcol = "Continent")
fwrite(sobol.ci, "sobol.ci.csv")

```



```

# PREPARE PLOT SOBOL' INDICES -----

# Plot Sobol' indices of parameters
a <- rbindlist(out.ci, idcol = "Continent") %>%
  .[!parameters %in% cluster] %>%
  plot_sobol(., type = 1, dummy = out.dummy.ci2) +
  scale_y_continuous(breaks = pretty_breaks(n = 3)) +
  facet_wrap(~Continent, ncol = 1) +
  labs(y = "Sobol' indices",
       x = "" )

# Plot Sobol' indices of clusters of parameters
b <- rbindlist(out.ci, idcol = "Continent") %>%
  .[parameters %in% cluster] %>%
  plot_sobol(., type = 1, dummy = out.dummy.cluster.ci2) +
  scale_y_continuous(breaks = pretty_breaks(n = 3)) +
  facet_wrap(~Continent, ncol = 1) +
  labs(x = "",
       y = "")

# Merge both plots
bottom <- plot_grid(a + theme(legend.position="none"),
                    b + theme(legend.position="none"),
                    ncol = 2,
                    labels = "AUTO",
                    rel_widths = c(2, 1.1))


# Extract legend
legend <- get_legend(a + theme(legend.direction = "horizontal",
                                legend.justification="center" ,
                                legend.box.just = "top"))

# PLOT SOBOL' INDICES -----

# Merge legend and a and b
plot_grid(legend,
          bottom,
          ncol = 1,
          rel_heights = c(0.15, 1))

```


Sobol' indices ■ S_i ■ S_{T_i}

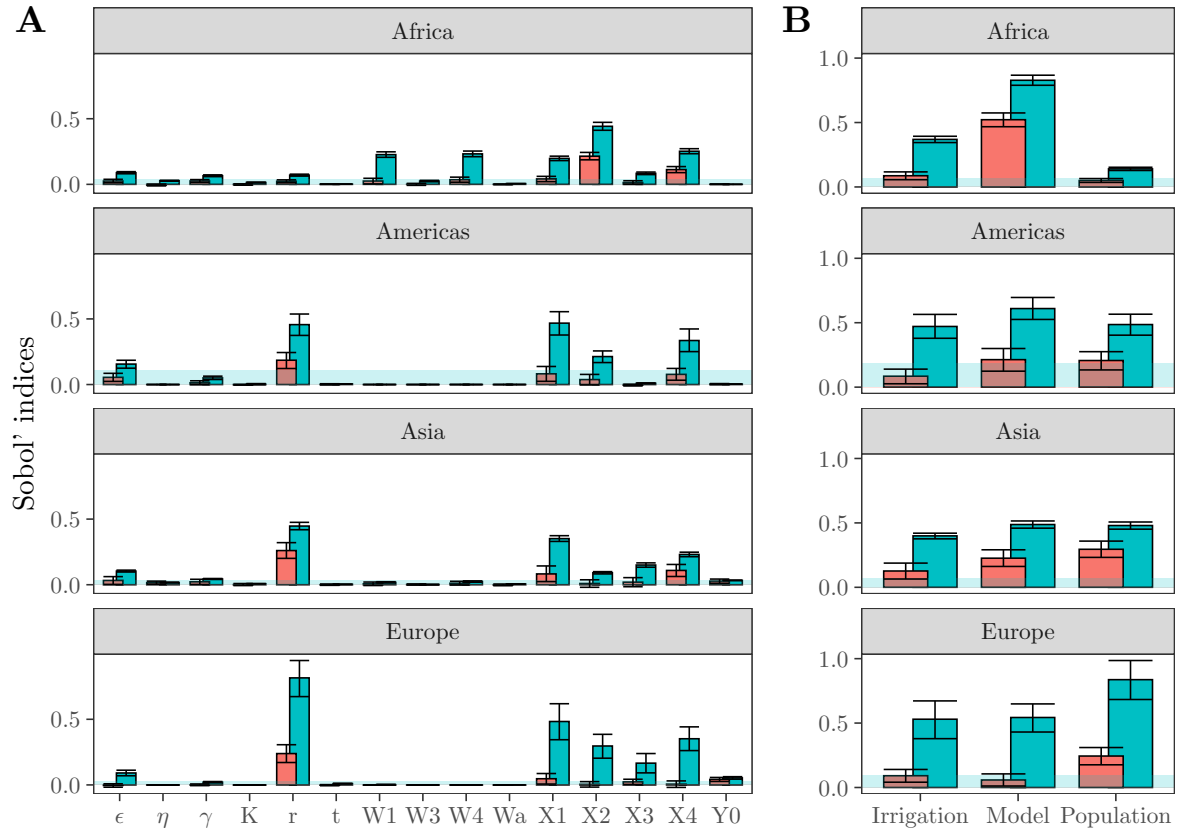

```
# Merge both plots
bottom <- plot_grid(a + theme(legend.position="none",
                             axis.text.x = element_text(size = 7.2)),
                   b + theme(legend.position="none",
                             axis.text.x = element_text(size = 7.2)),
                   ncol = 2,
                   labels = "AUTO",
                   rel_widths = c(2, 1.1))

plot_grid(legend,
          bottom,
          ncol = 1,
          rel_heights = c(0.15, 1))
```

Sobol' indices ■ S_i ■ S_{T_i}

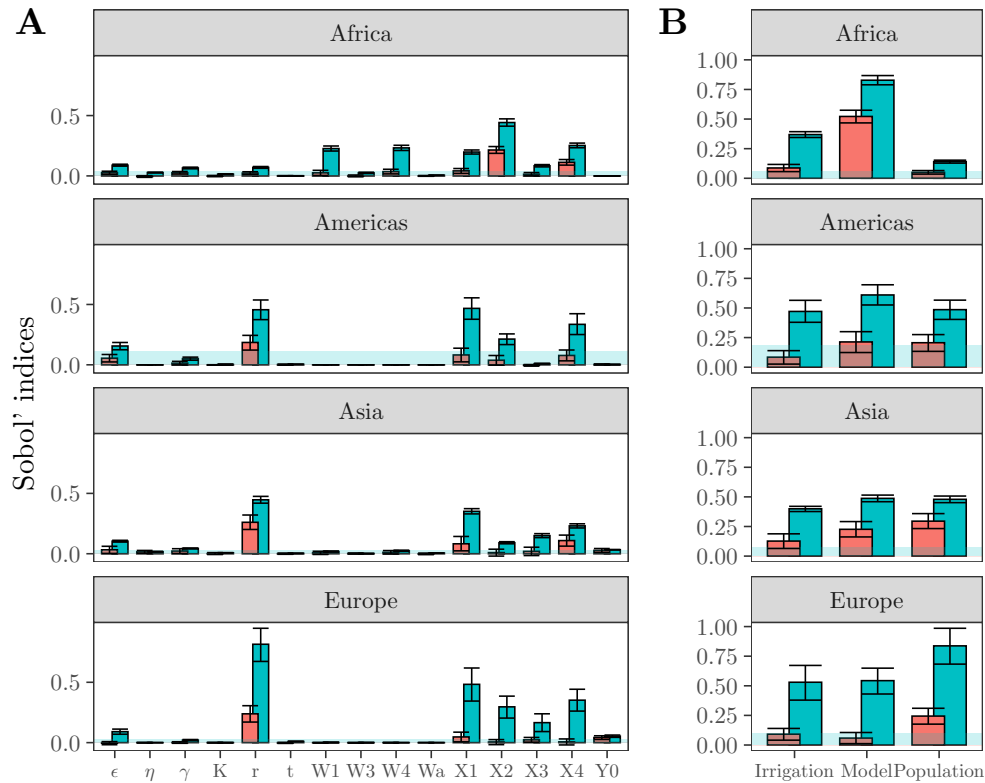

CHECK SUM OF SI INDICES -----

```
sobol.ci[parameters %in% c("Irrigation", "Population", "Model")] %>%
  .[sensitivity == "Si"] %>%
  .[, sum(original), Continent]
```

```
## Continent V1
## 1: Africa 0.6589796
## 2: Americas 0.5045465
## 3: Asia 0.6479309
## 4: Europe 0.3940395
```

10 Session information

SESSION INFORMATION -----

```
sessionInfo()

## R version 3.6.1 (2019-07-05)
## Platform: x86_64-apple-darwin15.6.0 (64-bit)
## Running under: macOS Catalina 10.15.3
##
## Matrix products: default
```

```

## BLAS:    /Library/Frameworks/R.framework/Versions/3.6/Resources/lib/libRblas.0.dylib
## LAPACK:  /Library/Frameworks/R.framework/Versions/3.6/Resources/lib/libRlapack.dylib
##
## locale:
## [1] en_US.UTF-8/en_US.UTF-8/en_US.UTF-8/C/en_US.UTF-8/en_US.UTF-8
##
## attached base packages:
## [1] grid      parallel  stats      graphics  grDevices  utils      datasets
## [8] methods   base
##
## other attached packages:
## [1] checkpoint_0.4.8      sensobol_0.2.1      NbClust_3.0
## [4] gridExtra_2.3         wesanderson_0.3.6   sensitivity_1.17.0
## [7] doParallel_1.0.15     iterators_1.0.12    foreach_1.4.7
## [10] boot_1.3-24           smatr_3.4-8         robustbase_0.93-5
## [13] randtoolbox_1.30.0    rngWELL_0.10-6      complmrob_0.7.0
## [16] mvoutlier_2.0.9       sgeostat_1.0-27     cowplot_1.0.0
## [19] forcats_0.4.0         stringr_1.4.0       dplyr_0.8.3
## [22] purrr_0.3.3           readr_1.3.1         tidyr_1.0.0
## [25] tibble_2.1.3          ggplot2_3.2.1       tidyverse_1.3.0
## [28] scales_1.1.0          countrycode_1.1.0   readxl_1.3.1
## [31] fGarch_3042.83.1      fBasics_3042.89     timeSeries_3042.102
## [34] timeDate_3043.102     fitdistrplus_1.0-14 npsurv_0.4-0
## [37] lsei_1.2-0            survival_3.1-8      MASS_7.3-51.5
## [40] data.table_1.12.8
##
## loaded via a namespace (and not attached):
## [1] backports_1.1.5      plyr_1.8.5          lazyeval_0.2.2
## [4] sp_1.3-2             splines_3.6.1       digest_0.6.23
## [7] htmltools_0.4.0      fansi_0.4.1         magrittr_1.5
## [10] cluster_2.1.0        openxlsx_4.1.4      tikzDevice_0.12.3
## [13] modelr_0.1.5         colorspace_1.4-1    rvest_0.3.5
## [16] rrcov_1.5-2          haven_2.2.0         xfun_0.12
## [19] crayon_1.3.4         jsonlite_1.6        zeallot_0.1.0
## [22] zoo_1.8-7            glue_1.3.1          gtable_0.3.0
## [25] car_3.0-6            kernlab_0.9-29      prabclus_2.3-2
## [28] DEoptimR_1.0-8       abind_1.4-5         VIM_4.8.0
## [31] mvtnorm_1.0-12       DBI_1.1.0           GGally_1.4.0
## [34] bibtex_0.4.2.2       Rcpp_1.0.3          sROC_0.1-2
## [37] laeken_0.5.0         foreign_0.8-75      mclust_5.4.5
## [40] stats4_3.6.1         vcd_1.4-5           truncnorm_1.0-8
## [43] httr_1.4.1          RColorBrewer_1.1-2  fpc_2.2-4
## [46] modeltools_0.2-22    spatial_7.3-11      farver_2.0.3
## [49] pkgconfig_2.0.3      reshape_0.8.8       NADA_1.6-1
## [52] flexmix_2.3-15       nnet_7.3-12         dbplyr_1.4.2
## [55] labeling_0.3         tidyselect_0.2.5    rlang_0.4.2
## [58] munsell_0.5.0        cellranger_1.1.0    tools_3.6.1
## [61] cli_2.0.1           generics_0.0.2      ranger_0.12.1

```

```
## [64] pls_2.7-2          broom_0.5.3          evaluate_0.14
## [67] cvTools_0.3.2      yaml_2.2.0           knitr_1.28
## [70] fs_1.3.1           filehash_2.4-2       zip_2.0.4
## [73] nlme_3.1-143       xml2_1.2.2           compiler_3.6.1
## [76] rstudioapi_0.10    curl_4.3             e1071_1.7-3
## [79] zCompositions_1.3.3-1 reprex_0.3.0         robCompositions_2.2.0
## [82] pcaPP_1.9-73       stringi_1.4.5        lattice_0.20-38
## [85] Matrix_1.2-18      vctrs_0.2.1          pillar_1.4.3
## [88] lifecycle_0.1.0    Rdpack_0.11-1        lmtest_0.9-37
## [91] gbRd_0.4-11        R6_2.4.1             rio_0.5.16
## [94] codetools_0.2-16   assertthat_0.2.1     withr_2.1.2
## [97] diptest_0.75-7     hms_0.5.3            class_7.3-15
## [100] rmarkdown_2.1      carData_3.0-3        lubridate_1.7.4
## [103] tinytex_0.19
```

FAO. 2016. “AQUASTAT website.” Food; Agriculture Organization of the United Nations. <http://www.fao.org/nr/water/aquastat/didyouknow/index3.stm>.

———. 2017. “FAOSTAT database.” Rome. <http://www.fao.org/faostat/en/>.

Meier, J., F. Zabel, and W. Mauser. 2018. “A global approach to estimate irrigated areas . A comparison between different data and statistics.” *Hydrology and Earth System Sciences* 22 (2): 1119–33. <https://doi.org/10.5194/hess-22-1119-2018>.

Salmon, J.M., M. A. Friedl, S. Frolking, D. Wisser, and E. M. Douglas. 2015. “Global rain-fed, irrigated, and paddy croplands: A new high resolution map derived from remote sensing, crop inventories and climate data.” *International Journal of Applied Earth Observation and Geoinformation* 38. Elsevier B.V.: 321–34. <https://doi.org/10.1016/j.jag.2015.01.014>.

Siebert, S., V. Henrich, K. Frenken, and J. Burke. 2013. “Update of the digital global map of irrigation areas to version 5.” Rome: Rheinische Friedrich-Wilhelms-University; Food; Agriculture Organization of the United Nations.

Thenkabail, P. S., C. M. Biradar, P. Noojipady, V. Dheeravath, Y. Li, M. Velpuri, M. Gumma, et al. 2009. “Global irrigated area map (GIAM), derived from remote sensing, for the end of the last millennium.” *International Journal of Remote Sensing* 30 (14): 3679–3733. <https://doi.org/10.1080/01431160802698919>.