

# Arnav Agrawal Lab 7 and 8

## Lab 7

### Question 1

Count the number of words in a sentence.

```
// Arnav Agrawal
// 200905200
// Lab 7
// Question 1
// Count the number of words in a sentence.

#include <stdio.h>
#include<string.h>
int main()
{
    printf("Arnav Agrawal\n");
    printf("200905200\n");
    printf("Section M - 20\n");

    char str[50];
    int i = 0, count = 1;
    printf("Enter sentence\n");
    gets(str);

    while (str[i] != '\0')
    {
        if ((str[i] == ' ' && str[i + 1] != ' '))
            count++;
        i++;
    }
    printf("no of words=%d", count);
    return 0;
}
```

```

// Arnav Agrawal
// 200905200
// Lab 7
// Question 1
// Count the number of words in a sentence.

#include <stdio.h>
#include <string.h>
int main()
{
    printf("Arnav Agrawal\n");
    printf("200905200\n");
    printf("Section M - 20\n");

    char str[50];
    int i = 0, count = 1;
    printf("Enter sentence\n");
    gets(str);

    while (str[i] != '\0')
    {
        if ((str[i] == ' ' && str[i + 1] != ' '))
            count++;
        i++;
    }
    printf("no of words=%d", count);
    return 0;
}

```

```

"C:\Users\Arnav Agrawal\Desktop\code.exe"
Arnav Agrawal
200905200
Section M - 20
Enter sentence
my name is arnav
no of words=4
Process returned 0 (0x0)   execution time : 5.432 s
Press any key to continue.

```

# Lab 7

## Question 2


**Input a string and toggle the case of every character in the input string.**

```
// Arnav Agrawal
// 200905200
// Lab 7
// Question 2
// Input a string and toggle the case of every character in the input string.
#include <stdio.h>
#include <string.h>
int main()
{
    printf("Arnav Agrawal\n");
    printf("200905200\n");
    printf("Section M - 20\n");
    char str[100];
    int i;
    printf("Enter the string\n");
    gets(str);
    for (i = 0; str[i] != '\0'; i++)
    {
        if (str[i] >= 'A' && str[i] <= 'Z')
            str[i] += 32;
        else if (str[i] >= 'a' && str[i] <= 'z')
            str[i] -= 32;
    }
    printf("\n the modified string is: \n");
    puts(str);
    return 0;
}
```

```

// Arnab Agrawal
// 200905200
// Lab 7
// Question 2
// Input a string and toggle the case of every character in the input string.
#include <stdio.h>
#include <string.h>
int main()
{
    printf("Arnab Agrawal\n");
    printf("200905200\n");
    printf("Section M - 20\n");
    char str[100];
    int i;
    printf("Enter the string\n");
    gets(str);
    for (i = 0; str[i] != '\0'; i++)
    {
        if (str[i] >= 'A' && str[i] <= 'Z')
            str[i] += 32;
        else if (str[i] >= 'a' && str[i] <= 'z')
            str[i] -= 32;
    }
    printf("\n the modified string is: \n");
    puts(str);
    return 0;
}

```

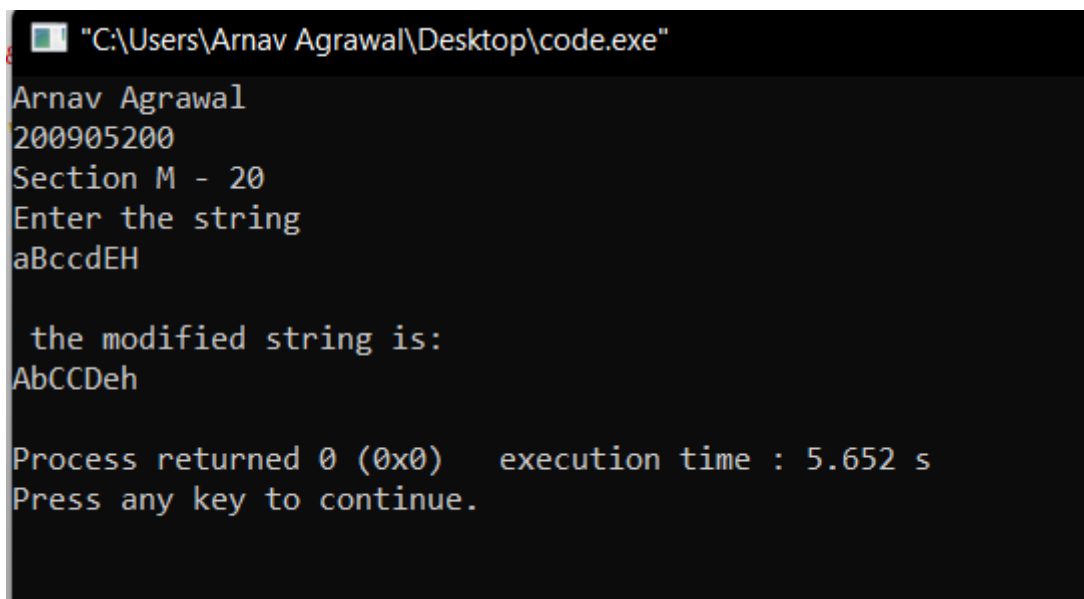

```

"C:\Users\Arnab Agrawal\Desktop\code.exe"
Arnab Agrawal
200905200
Section M - 20
Enter the string
aBccdEH

the modified string is:
AbCCDeh

Process returned 0 (0x0)   execution time : 5.652 s
Press any key to continue.

```

## Lab 7

### Question 3

## Arrange 'n' names in alphabetical order (hint: use string handling function-strcpy)

```
// Arnav Agrawal
// 200905200
// Lab 7
// Question 3
// Arrange 'n' names in alphabetical order (hint: use string handling function-strcpy)
#include <stdio.h>
#include <string.h>
int main()
{
    printf("Arnav Agrawal\n");
    printf("200905200\n");
    printf("Section M - 20\n");
    char name[50][50], temp[25];
    int n, i, j;

    printf("Input number of strings :");
    scanf("%d", &n);

    printf("Input the %d Strings :\n", n);
    for (i = 0; i <= n; i++)
    {

        fgets(name[i], sizeof name, stdin);
    }

    for (i = 1; i <= n; i++)
        for (j = 0; j <= n - i; j++)
            if (strcmp(name[j], name[j + 1]) > 0)
            {
                strcpy(temp, name[j]);
                strcpy(name[j], name[j + 1]);
                strcpy(name[j + 1], temp);
            }
    printf("The strings appears after sorting :\n");
    for (i = 0; i <= n; i++)
        printf("%s\n", name[i]);
    return 0;
}
```

```

// Arnav Agrawal
// 200905200
// Lab 7
// Question 4
// Arrange 'n' names in alphabetical order (hint: use string handling function-strcpy)
#include <stdio.h>
int main()
{
    printf("Arnav Agrawal\n");
    printf("200905200\n");
    printf("Section M - 20\n");
    char name[50][50], temp[25];
    int n, i, j;

    printf("Sorts the strings of an array using bubble sort :\n");
    printf("Input number of strings :");
    scanf("%d", &n);

    printf("Input the %d Strings :\n", n);
    for (i = 0; i <= n; i++)
    {
        fgets(name[i], sizeof name, stdin);
    }

    for (i = 1; i <= n; i++)
        for (j = 0; j <= n - i; j++)
            if (strcmp(name[j], name[j + 1]) > 0)
            {
                strcpy(temp, name[j]);
                strcpy(name[j], name[j + 1]);
                strcpy(name[j + 1], temp);
            }
    printf("The strings appears after sorting :\n");
    for (i = 0; i <= n; i++)
        printf("%s\n", name[i]);
    return 0;
}

```

```
"C:\Users\Arnav Agrawal\Desktop\code.exe"
Arnav Agrawal
200905200
Section M - 20
Sorts the strings of an array using bubble sort :
Input number of strings :4
Input the 4 Strings :
Python
Ruby
Java
Javascript
The strings appears after sorting :

Java

Javascript

Python

Ruby

Process returned 0 (0x0)   execution time : 18.748 s
Press any key to continue.
```

## Lab 7

### Question 4

**Write a function Largest to find the maximum of a given list of numbers. Also write a main program to read N numbers and find the largest among them using this function.**

```
// Arnav Agrawal
// 200905200
// Lab 7
// Question 4
// Write a function Largest to find the maximum of a given list of numbers. Also write
// a main program to read N numbers and find the largest among them using this
// function.
#include <stdio.h>
```

```

int largest(int arr[], int num)
{
    int i = 0;
    int max = arr[0];
    for (i = 0; i < num; i++)
    {
        if (arr[i] > max)
            max = arr[i];
    }
    return max;
}

int main()
{
    printf("Arnav Agrawal\n");
    printf("200905200\n");
    printf("Section M - 20\n");

    int arr[100];
    int i, num;
    printf("Enter the total numbers in the list: \n");
    scanf("%d", &num);
    printf("Enter the numbers now:\n");
    for (i = 0; i < num; i++)
        scanf("%d", &arr[i]);
    printf("Largest in given array is %d", largest(arr, num));
    return 0;
}

```



```

// Arnav Agrawal
// 200905200
// Lab 8
// Question 2
// Write a function Largest to find the maximum of a given list of
// a main program to read N numbers and find the largest among them
// function.
#include <stdio.h>

int largest(int arr[], int num)
{
    int i = 0;
    int max = arr[0];
    for (i = 0; i < num; i++)
    {
        if (arr[i] > max)
            max = arr[i];
    }
    return max;
}

int main()
{
    printf("Arnav Agrawal\n");
    printf("200905200\n");
    printf("Section M - 20\n");

    int arr[100];
    int i, num;
    printf("Enter the total numbers in the list: \n");
    scanf("%d", &num);
    printf("Enter the numbers now:\n");
    for (i = 0; i < num; i++)
        scanf("%d", &arr[i]);
    printf("Largest in given array is %d", largest(arr, num));
    return 0;
}

```

```
"C:\Users\Arnav Agrawal\Desktop\code.exe"
Arnav Agrawal
200905200
Section M - 20
Enter the total numbers in the list:
6
Enter the numbers now:
1
2
3
4
5
6
Largest in given array is 6
Process returned 0 (0x0)   execution time : 6.057 s
Press any key to continue.
```

## Lab 7

### Question 5

**Write a function CornerSum which takes as a parameter, no. of rows and no. of columns of a matrix and returns the sum of the elements in the four corners of the matrix. Write a main function to test the function.**

```
// Arnav Agrawal
// 200905200
// Lab 7
// Question 5
// Write a function CornerSum which takes as a parameter, no. of rows and no. of
// columns of a matrix and returns the sum of the elements in the four corners of the
// matrix. Write a main function to test the function.
#include <stdio.h>
int CornerSum(int[][100], int, int);

int main()
{
    printf("Arnav Agrawal\n");
    printf("200905200\n");
    printf("Section M - 20\n");

    int a[100][100], temp[100][100];
```

```

int n, m;
printf("Enter the number of rows & columns of the array:\n");
scanf("%d%d", &m, &n);
printf("Enter the elements of the array:\n");
for (int i = 0; i < m; i++)
{
    for (int j = 0; j < n; j++)
        scanf("%d", &a[i][j]);
}
printf("\nThe matrix is:\n");
for (int i = 0; i < m; i++)
{
    for (int j = 0; j < n; j++)
    {
        temp[i][j] = a[i][j];
        printf("%d\t", temp[i][j]);
    }
    printf("\n");
}
int res = CornerSum(a, m, n);
printf("The sum of corner elements is %d.", res);
return 0;
}
int CornerSum(int a[][100], int m, int n)
{
    int sum = 0;
    sum = a[0][0] + a[0][n - 1] + a[m - 1][n - 1] + a[m - 1][0];
    return sum;
}

```

```

// matrix. Write a main function to test the function.
#include <stdio.h>
int CornerSum(int[][100], int, int);

int main()
{
    printf("Arnav Agrawal\n");
    printf("200905200\n");
    printf("Section M - 20\n");

    int a[100][100], temp[100][100];
    int n, m;
    printf("Enter the number of rows & columns of the array:\n");
    scanf("%d%d", &m, &n);
    printf("Enter the elements of the array:\n");
    for (int i = 0; i < m; i++)
    {
        for (int j = 0; j < n; j++)
            scanf("%d", &a[i][j]);
    }
    printf("\nThe matrix is:\n");
    for (int i = 0; i < m; i++)
    {
        for (int j = 0; j < n; j++)
        {
            temp[i][j] = a[i][j];
            printf("%d\t", temp[i][j]);
        }
        printf("\n");
    }
    int res = CornerSum(a, m, n);
    printf("The sum of corner elements is %d.", res);
    return 0;
}

int CornerSum(int a[][100], int m, int n)
{
    int sum = 0;
    sum = a[0][0] + a[0][n - 1] + a[m - 1][n - 1] + a[m - 1][0];
    return sum;
}

```

```
"C:\Users\Arnav Agrawal\Desktop\code.exe"
Arnav Agrawal
200905200
Section M - 20
Enter the number of rows & columns of the array:
3 3
Enter the elements of the array:
1 2 3 4 5 6 7 8 9

The matrix is:
1      2      3
4      5      6
7      8      9
The sum of corner elements is 20.
Process returned 0 (0x0)   execution time : 11.005 s
Press any key to continue.
```