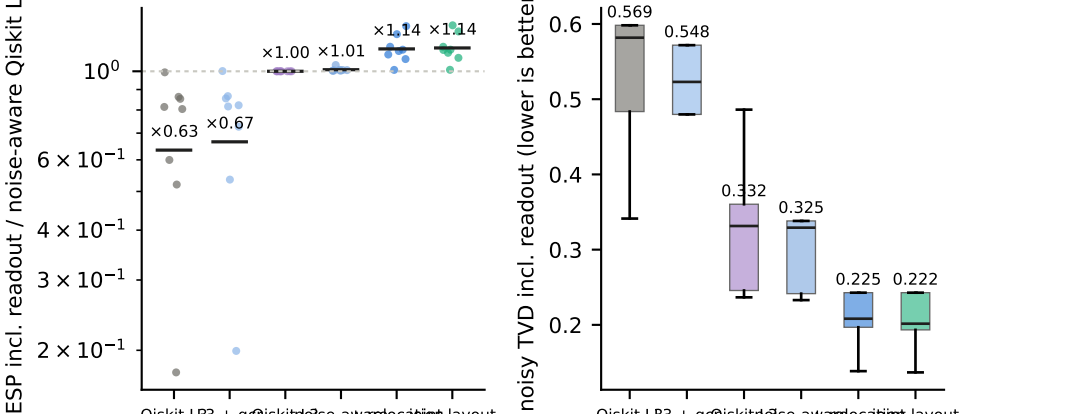
(a) estimated success probability (8 circuits)
(b) noisy simulation, FakeTorino (5 circuits ≤ 8 qubits)
ESP incl. readout / noise-aware Qiskit L3
noisy TVD incl. readout (lower is better)
×0.63
×0.67
×1.00
×1.01
×1.14
×1.14
0.569
0.548
0.332
0.325
0.225
0.222
Qiskit L3
3 + qcr
Qiskit noise-aware
L3 + noise-aware + qcr
allocation
joint layout (qcr)