



Hasso Plattner Institute for Digital Engineering


Bachelor's Thesis

Supporting Iterative Development of Voice Interfaces using a Domain Specific Language

Unterstützen iterativer Entwicklung von Sprachassistenten durch eine
domänenspezifische Sprache

Arne Zerndt

arne.zerndt@student.hpi.de

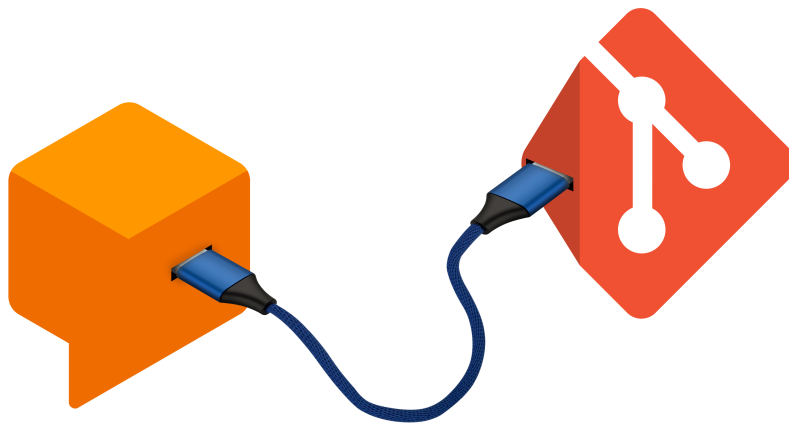

Supervised by Prof. Dr. Holger Giese
System Analysis and Modeling Group

Potsdam, June 25, 2019

Abstract (English)

This thesis seeks to address a current lack of version control systems for voice interface configurations. Instead of designing a new version control system for voice interface configurations, here a different solution is chosen. The voice interface configuration is adapted to fit into existing version control systems. This is done by designing a domain specific language to describe the configuration of a voice interface in a text based way. The voice interface technology chosen to demonstrate this solution is Google Dialogflow. The version control system chosen to focus on is Git, using Github. For evaluation an experiment with 5 test cases was conducted comparing the domain specific language with the existing technology. The results show a clear benefit in three of four criteria outlined while maintaining parity in the fourth.

Abstract (Deutsch)

Diese Bachelorarbeit widmet sich einem derzeit bestehenden Mangel an Versionskontrollsystemen für Sprach-Interfaces. Anstatt aber ein neues Versionskontrollsystem für Sprach-Interfaces zu bauen, wird hier eine andere Lösung gewählt. Ein Sprach-Interface wird so adaptiert, dass es mit bestehenden Versionskontrollsystemen kompatibel ist. Zu diesem Zweck wird eine domänenspezifische Sprache entwickelt, die ein Sprach-Interface auf eine textbasierte Art spezifiziert. Um diese Lösung zu demonstrieren, wurde die Sprach-Interface-Technologie Dialogflow gewählt, in Verbindung mit dem Versionskontrollsystem Git. Für die Evaluation wurde ein Experiment mit 5 Testszenarien durchgeführt, in dem die domänenspezifische Sprache mit der existierenden Technologie verglichen wurde. Die Ergebnisse zeigen einen klaren Vorteil durch die Nutzung der DSL bei drei von vier zuvor spezifizierten Kriterien, ohne Verlust beim vierten Kriterium.

Contents

Table of Contents	V
1. Introduction	1
2. Status Quo	2
2.1. Voice Interfaces	2
2.2. Version Control	2
2.3. Lack of Solution	3
3. Problem Statement	4
4. Approach	6
4.1. Choosing a Direction	6
4.1.1. Version Control System	6
4.1.2. Git with exported JSON files	6
4.1.3. Domain Specific Language	6
4.2. DSL Engineering	7
4.2.1. What is a DSL?	7
4.2.2. Requirements for the DSL	7
4.2.3. Design Decisions	7
4.2.4. Usage	10
4.2.5. Dynamic Entity Control	10
4.3. Target Group	11
5. Evaluation	12
5.1. Length	12
5.2. Diff Size	14
5.3. Readability	16
5.4. Automatic compilation and update	19
5.5. Concessions and Drawbacks	19
6. Summary and further Work	22
Bibliography	23
A. Declaration of Authorship	24
B. DSL Code of Test Agents	25
B.1. RoomTemperature Agent	25
B.2. MusicPlayer Agent	26

B.3. Calendar Agent	27
B.4. JokeBot Agent	27
B.5. QuoteBot Agent	28
C. Examples of Diffs created from Test Agents	30
C.1. RoomTemperature Agent	30
D. Test Case Data and Averages	31
D.1. Line Length of Test Agents	31
D.2. Diff Size of Changes to each Test Agent	31
E. DSL Grammar	32
F. DSL Code Generator	36
G. JSON Version of a Test Agent	43
G.1. RoomTemperature Agent	43
G.1.1. Agent	43
G.1.2. Entities	43
G.1.3. Intents	44
G.2. Test Agents 2-5	47
H. Examples of Diffs created from Test Agent JSON files	48
H.1. RoomTemperature Agent	48
H.2. Test Agents 2-5	51

1 | Introduction

The following Bachelor thesis is part of the "Ask your Repository!" Bachelor project.¹

In this thesis, I will demonstrate a possible solution for the issue of synchronizing development on voice interfaces with that of application code by checking voice interface configuration into version control alongside the code it corresponds to. The focus will be on allowing the use of existing version control systems for voice interface configurations.

To approach this goal, I have designed a Domain Specific Language (DSL) to describe the configuration of a voice interface in a text-based but still abstract and intuitive way.

I will focus on development using Google Dialogflow as it is the most widely used tool [Sta]; it is also what my Bachelor team is using in our project.²

I propose that by designing a DSL that can be used to configure a Dialogflow agent in a way that is text based and can be managed by version control systems like Git - but that is intuitive to use for a developer familiar with the Dialogflow web interface - development on voice interfaces can be simplified. Also, development teams in the future will be able to work on voice assistants in the same way that they are used to when working with code. This opens up the entirety of code based tools which exist for making development more streamlined for voice interfaces, while keeping the robustness of code which can be saved in version control.

In chapter 2, I will explain the current situation in regard to voice interface technology and version control. Afterwards, in chapter 3, I will specify the problem I am trying to solve in the thesis. Chapter 4 will focus on finding a solution to the above mentioned problem, and on the specific solution I built a prototype for. Going into more detail, chapter 4.2 will show how I used Xtext to create a grammar and code generator for configuring Google Dialogflow agents. This grammar was used to provide syntax highlighting and validation in Eclipse DSL; the output of the code generator is a valid voice interface configuration in its JSON representation, ready to be imported into Google Dialogflow. Lastly in chapter 5, I will evaluate the success of the prototype by comparing it to an alternative way of checking voice interfaces into source control.

¹<https://hpi.de/giese/lehre/bachelorprojekte/ask-your-repository.html>

²The code for my DSL can be found here: <https://github.com/arne-z/BachelorThesis> and an implementation for the voice assistant in our bachelor project using the DSL can be found here: <https://github.com/hpi-sam/ask-your-repository-dialogflow-adapter/tree/agent-config-with-dsl>

2 | Status Quo

2.1. Voice Interfaces

Voice interfaces, voice assistants, and chat bots are increasingly popular technologies [OK19, page 8] that are experimented with and used by every major player in the technology market [Cha18b]. To keep up with this trend, developers either need to be able to build their own voice interfaces or integrate with an existing system of which there are many [Alt19] and of which Google Assistant and Amazon Alexa are the most relevant; this can be seen in a survey Microsoft conducted this year on the popularity of voice assistants [OK19, page 9]. Currently, depending on whether you are developing for Google Assistant or Alexa, designing a voice interface for one of these systems usually entails working with either Google Dialogflow or Amazon Lex. These are powerful tools which enable developers or domain specialists to quickly and easily design a voice interface. These tools are interacted with through a website which provides a graphical editor for the configuration of the voice interface.

2.2. Version Control

While the web interface makes initial setup of the voice interface easier for a single domain expert or developer, new difficulties arise when a team of developers is working on a voice interface in an iterative fashion. It becomes crucial for the team to manage versions and track changes to the interface along with the changes to the application the interface is supporting.

As Martin Charles states in the text accompanying his Dialogflow CLI community tool [Cha18a, page 1]:

DialogFlow stores intents and entities outside of source control. This makes rollbacks and keeping track of history difficult.

The state of the art solution for managing iterative work in development teams is Git. On GitHub alone there are more than 190 million Git repositories at present as can be seen by looking at [Gitb]. Git provides functionalities for saving snapshots of specific iteration in your project and handling the problems that come up in iterative work. These problems are:

- merging work done by multiple users
- ensuring that a stable version of a project is saved while developers are working on more experimental changes
- giving the team the ability to easily track and revert changes that have been made.

The issue that arises is that the above mentioned technologies are not compatible and the configuration of a voice interface can easily get out of sync with the changes made to the application and managed in Git.

2.3. Lack of Solution

A solution like this has not been built for Dialogflow, most likely because voice interface tools like Amazon Lex or Google Dialogflow are a newer development, with Dialogflow having only existed in its current fashion since its acquisition by Google at the end of 2016 [Huf16] and the Dialogflow V2 API that I am using, and that was necessary for the success of this project currently being in Beta stage. The V2 API is generally available since 17 April 2018 [Imr18] and “V1 of Dialogflow’s API will be deprecated on October 23, 2019” [Dia]. Dialogflow is currently still transitioning to the use of the new V2 API. It is the V2 API that makes this project possible because it includes the agent management APIs used for exporting, importing, and updating of Dialogflow agents ¹ using the JSON format.

¹Agent is what Google calls a specific voice interface.

3 | Problem Statement

As stated before, currently there is no version control system for Dialogflow agents. This is problematic because when designing a voice interface, it is necessary to make iterative changes, so the voice interface can evolve alongside the application it supports. This can lead to issues in a number of different situation, and causes voice interface developers to miss out on the advantages modern software development gains from using Git.

- When starting work on a new feature a new branch is created. This is done so that changes, which might not work right away, are contained to this branch and can be merged into the main application at a later time. If this feature requires changes to the voice interface, a problem may arise, because the voice interface has no mechanism for branching.
- Once experimental changes on a feature branch advance to a point where they are meant to be included in the master branch, code can simply be merged from one branch to another. The changes to a voice interface configuration however cannot be included in a pull request.
- When working on a product it is generally considered to be “best practice” to have code that should be merged into the master branch from a feature branch reviewed by at least one or two other developers to make sure that it is working as expected and does not have any obvious flaws. This cannot be done for changes to a voice interface.
- When working in a team, it is not always possible to remain aware of all the changes team members have made. Source code that is managed in Git automatically creates a history of all changes, which is highly valuable to the developers. This type of history does not exist for the voice interface configuration.
- Open source development is an important part of today’s development landscape. Since voice interfaces are not usually checked into source control alongside application code, open source development of voice interfaces or applications that use voice interfaces is stifled. In addition, open source projects can be forked by other developers and can be improved by many developers in an iterative fashion. This is another advantage that voice interfaces are currently lacking.

When working on a Dialogflow agent, one can save a version of the configuration and then continue as a draft, but Dialogflow assumes that you will only ever have one draft at a time. Versions are also designed in a linear fashion with no way to merge changes from multiple versions. This is obviously nowhere near the depth of features that are necessary in version control and all of these features are already provided for normal code by using the current state of the art version control system, Git.

In summary the problem is that there is no sufficient version control system that is compatible with Dialogflow.

4 | Approach

4.1. Choosing a Direction

4.1.1. Version Control System

Since there is no version control system that is compatible with Dialogflow, the obvious solution might be to build a new version control system that is compatible with Dialogflow. This has been done before for other technologies. An example of this would be the Open-source Version Control System for Machine Learning Projects that evolved from the neccessity of specialized version control for machine learning models and data sets.[[Pet](#)] I decided against this approach for multiple reasons I will describe below.

Firstly, I believe that it will be hard to get developers to move from an established tool like Git; I assume that developers would not choose to give up feature rich support that exists for Git (Github, Gitlab, Bitbucket to only name a few). Secondly, using a specific version control system that is developed to allow compatibility with Dialogflow, it would be hard to also maintain compatibility with other tools.

Therefore, instead of trying and failing to develop a competing standard to Git, I decided to make use of a workaround that is possible with Dialogflow.

4.1.2. Git with exported JSON files

It is possible to export a folder with a JSON representation of an agent and save this in Git. This solves some of the issues mentioned in chapter 3, but an agent's JSON representation is not intended for readability by humans, and neither is it meant for direct editing. This makes certain aspects of the workflows I described above much harder, e.g. conducting a code review, since it is difficult to read the changes to the JSON files describing the agent's configuration.

4.1.3. Domain Specific Language

While trying to solve the problems mentioned so far, it became obvious that a solution to these problems would require configuring an agent in a format that is compatible with text based tools like Git but that also maintains or even enhances upon the maintainability and readability of Google Dialogflow configuration in the web interface. For this purpose, I designed a domain specific language (DSL) in order to create a text-based notation (DSL code) for the configuration of an agent.

4.2. DSL Engineering

4.2.1. What is a DSL?

DSL stands for domain specific language. In contrast to a GPL (general purpose language) a DSL is a smaller and more narrow programming language, and oftentimes is not Turing complete. The advantage of a DSL comes in the form of concise syntax, that is streamlined for one specific purpose. While a GPL has to allow the developer to be able to build quite literally anything within the constraints of the language, the DSL makes no such claims but can instead provide shortcuts for the few things that it is able to do. (Compare chapter 2 in [Voe13].)

The DSL prototype I built consists of two main parts.

Firstly, there is a grammar which defines all possible combinations of words that can be used to write in this language. Specifying this grammar allows the developer to have live IDE support including syntax validation while writing DSL code.

The second part I built is a code generator.

This generator compiles DSL code into a collection of JSON files in a format accepted by the Google API. It allows the developer to automatically generate a working Dialogflow agent from their DSL code.

4.2.2. Requirements for the DSL

In order to provide a tangible benefit, the DSL must fulfill a number of requirements:

- It needs to be significantly shorter than the JSON representation of an agent.
- It needs to create smaller diffs¹ than the JSON representation when making changes.
- It needs to be more readable than the JSON representation.
- A user needs to be able to automatically compile and update an agent on the web from DSL code.

During the process of my work it became clear that solving the above mentioned problems made it necessary to find solutions for every one of these requirements.

4.2.3. Design Decisions

I wanted the DSL code to read naturally for a developer used to the Dialogflow interface. In order to achieve this, I tried to closely mimic the structure of the web interface in my DSL code.


In order to show this, I will walk you through an example agent I created for testing purposes. The agent is a very simple controller for regulating the air conditioning in a room. It listens to the user and sends their requests to a server. Throughout the four steps of this example, I will follow a pattern of first showing how a developer would set up an agent on the Dialogflow website, followed by showing how to do the same in DSL code.

¹A diff refers to the sum of changed lines in a change.

Step 1: Creating an Agent

First a developer needs to create a new agent. To do so, they click on "create agent", and enter the agent's name and language as seen in Figure 4.1. To achieve the same effect, in DSL code, a developer would enter the following:

```
Agent TestAgent_RoomTemperature
  language en
```

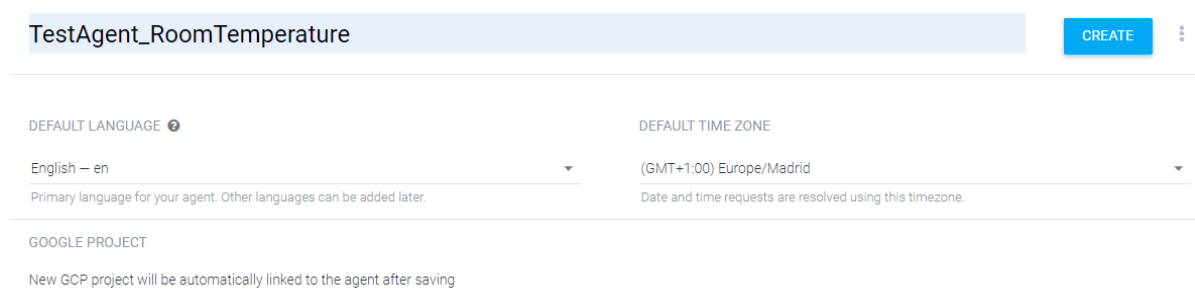

The screenshot shows the Dialogflow 'CREATE' interface. At the top, the agent name 'TestAgent_RoomTemperature' is entered in a light blue box, followed by a 'CREATE' button and a three-dot menu. Below this, there are two dropdown menus: 'DEFAULT LANGUAGE' set to 'English - en' and 'DEFAULT TIME ZONE' set to '(GMT+1:00) Europe/Madrid'. A note under the language dropdown states 'Primary language for your agent. Other languages can be added later.' and a note under the time zone dropdown states 'Date and time requests are resolved using this timezone.' At the bottom, it says 'GOOGLE PROJECT' and 'New GCP project will be automatically linked to the agent after saving'.

Figure 4.1. – Creating an agent on Dialogflow.

Step 2: Setting an Entity-Type

In the next step, an entity-type needs to be created to allow to intuitively turn on and off the air conditioning. In Dialogflow this is achieved by filling in the form seen in Figure 4.2. In DSL code the same can be done by writing the following:

```
Agent TestAgent_RoomTemperature
  language en

  Type ACState
    values
      "On" ("Active" "Enabled" "On"),
      "Off" ("Inactive" "Disabled" "Off")
    auto_expand
```

ACState SAVE

☒ Define synonyms ☒ Allow automated expansion

Separate synonyms by pressing the enter, tab or ; key.

On	On, Active, Enabled
Off	Off, Inactive, Disabled
Enter reference value	Enter synonym
Click here to edit entry	
Click here to edit entry	

Figure 4.2. – Creating an entity-type on Dialogflow.

Step 3: Setting a Webhook

For the agent to actually affect an air conditioner in the real world, it needs to send the user's request to a webserver. To do so, a webhook is enabled in Dialogflow by filling in the form as seen in Figure 4.3. In DSL code the same can be achieved:

```
Agent TestAgent_RoomTemperature
  language en

Webhook
  active
  url "https://fake.ac_controller.com/vi_webhook"

Type ACState
  values
    "Off" ("Inactive" "Disabled" "Off"),
    "On" ("Active" "Enabled" "On")
  auto_expand
```

Webhook ENABLED

Your web service will receive a POST request from Dialogflow in the form of the response to a user query matched by intents with webhook enabled. Be sure that your web service meets all the [webhook requirements](#) specific to the API version enabled in this agent.

URL*

BASIC AUTH

HEADERS

[Add header](#)

SMALL TALK

Figure 4.3. – Setting a webhook on Dialogflow.

Step 4: Writing an Intent

The last and most vital step is to create an intent that the agent can understand. This is done on the website by filling in the form seen in Figure 4.4 and can alternatively be achieved in DSL code as follows:

```
Agent TestAgent_RoomTemperature
  language en

  Webhook
    active
    url "https://fake.ac_controller.com/vi_webhook"

  Type ACState
    values
      "Off" ("Inactive" "Disabled" "Off"),
      "On" ("Active" "Enabled" "On")
    auto_expand

  Intent SwitchAC
    parameters
      state ACState (required prompts "Did you want the AC turned On or Off?")
    trained with phrase
      "Turn" state "the AC",
      "Set the AC to" state,
      "Set the air conditioner to" state,
      "I want the AC turned" state,
      "Make sure the AC is" state
    webhook_fullfillment
```

4.2.4. Usage

When developing with the DSL I designed, in order to update the Dialogflow agent on the web, you run the compiler for the DSL using the DSL code as input; the output will be a full JSON representation of the Dialogflow agent which can be sent to the Dialogflow V2API. The V2API allows you to update the online version of your agent using the JSON files. For this you can either use the Dialogflow-Cli tool [Charles2018] the Dialogflow community has built, or build your own script like I have done so far.

4.2.5. Dynamic Entity Control

In our Bachelor project we have some entity types that are dynamically updated via the Dialogflow API in order to stay up to date with our production database. For example, we have the team entity type, that is populated with the names of teams that are signed up to our service. This allows a user to select his team via the voice assistant. Since teams are created and deleted by the users, we need to update the entity type while the service is deployed. This makes it impossible to have a list of all teams written down in the DSL code to send to the

SwitchAC SAVE

Contexts ?

Events ?

Training phrases ? Search training phrases

“ Add user expression G

“ Turn **state** the AC

“ Set the AC to **state**

“ Set the air conditioner to **state**

“ I want the AC turned **state**

“ Make sure the AC is **state**

Action and parameters

Enter action name

REQUIRED ?	PARAMETER NAME ?	ENTITY ?	VALUE	IS LIST ?	PROMPTS ?
<input checked="" type="checkbox"/>	state	@ACState	\$state	<input type="checkbox"/>	Did you want th...
<input type="checkbox"/>	Enter name	Enter entity	Enter value	<input type="checkbox"/>	—

[+ New parameter](#)

Figure 4.4. – Setting up an intent on Dialogflow.

server. To make this possible I added the keyword “dynamic” for an entity type in the DSL I designed. This keyword allows the developer to have the type exist in the DSL and be valid for syntax validation - but not have any JSON files generated for it, so as not to overwrite an entity type that is dynamically set on Dialogflow via the API.

4.3. Target Group

If you are a small group under time pressure, and you do not need to maintain the agent throughout it’s co-evolution with your application, continuing to use the Dialogflow web interface will be simpler than adopting this DSL.

However, this DSL is directed at teams of developers who will be working on an agent for an extended time, and for whom using version control is a neccessity. I expect that the group of developers who will be most interested in this DSL will be those, who are currently using the approach of saving the JSON version of their agent in source control. These developers, will see advantages in multiple points that I will discuss in the next chapter.

5 | Evaluation

In the following chapter I will evaluate the performance of my DSL-prototype. Testing and evaluation has been done by myself by referring back to the requirements I stated earlier in chapter four. A future larger scale survey would be welcome but was not part of this evaluation. The categories I used for evaluation were:

- length
- diff size
- readability
- automatic compilation and update

In the following sections I will talk about each of these categories and how the DSL prototype compares to the existing technology referring to each of them.

5.1. Length

In order to provide a tangible benefit, the DSL code must be significantly shorter than the JSON representation. Coming back to the agent used in chapter four, I can show that the DSL code for that agent is exactly 23 lines long, three of which are left blank for better readability (see section B.1). The JSON version for this same agent, however, comes in at exactly 200 lines (see section G.1) meaning it is almost ten times as long. This is a trend that continues accross all my test cases, as can be seen in Figure 5.1.

This demonstrates that the DSL code for an agent is significantly shorter than the JSON version which saves the developer valuable time, e.g. when conducting a code review. This is a large benefit in and of itself, but it is amplified by the following point.

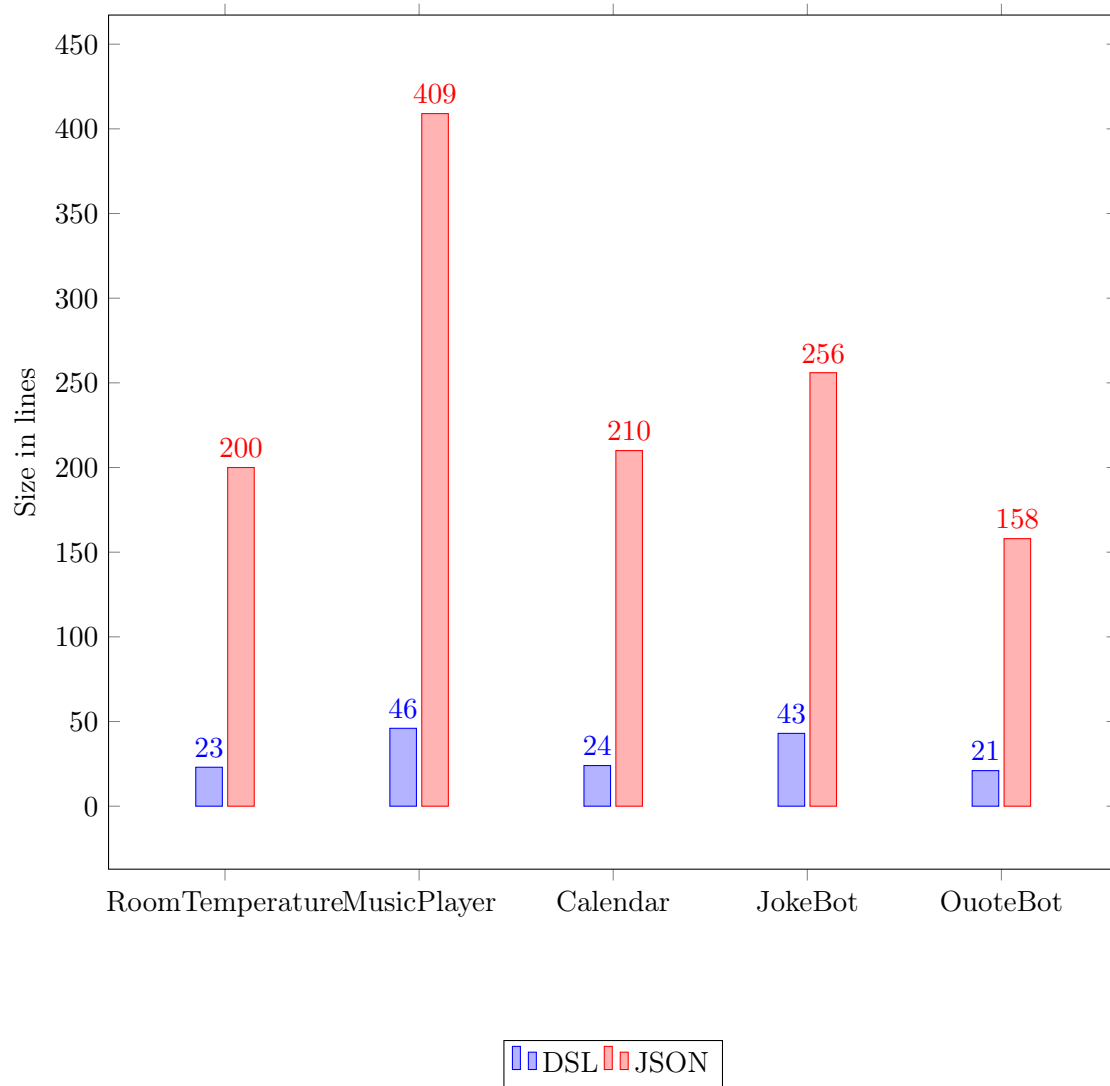


Figure 5.1. – Difference in configuration size.

5.2. Diff Size

In order to provide a tangible benefit, the DSL code must create smaller diffs¹ than the JSON representation when making changes.

Using the air conditioning example again, when making a change - in this case adding more training phrases to an agent to allow additional functionality - the diff size shows a large difference between DSL code and JSON version. In this specific example, the DSL code has a diff of 7 lines (as seen in section C.1) and the JSON version one of 124 lines (see section H.1). An overview of all test cases is given in Figure 5.2.

It is also noteworthy that the DSL code causes less unintended diffs, as some elements of the JSON - like generated Unique Identifiers - can cause diffs that are unrelated to any intentional changes by the developer (as seen in section H.1).

¹A diff refers to the sum of changed lines in a change.

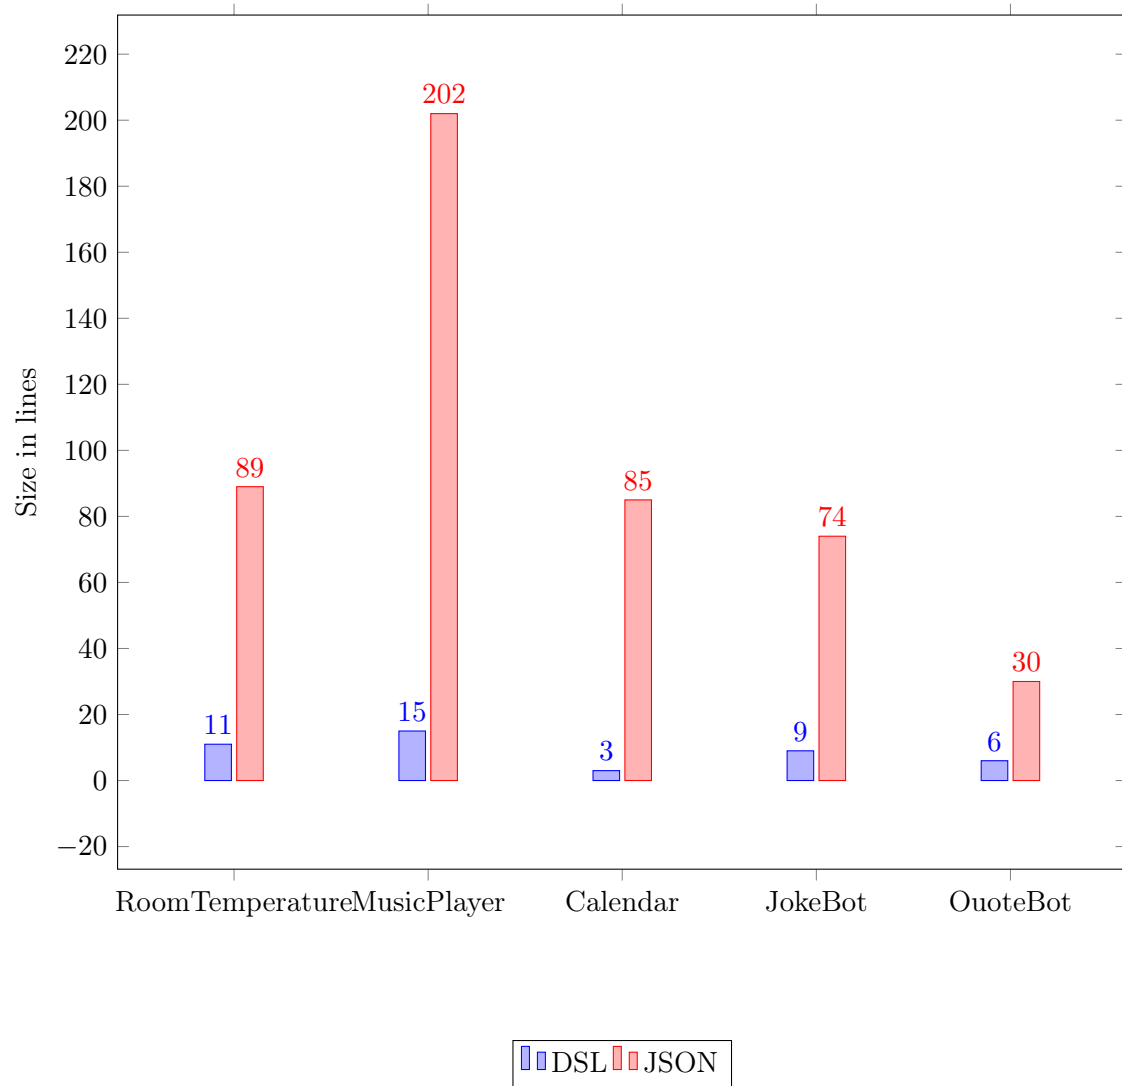


Figure 5.2. – Difference in diff size.

5.3. Readability

While length is an objective criterion, readability is innately more subjective, as it relates to how well a developer will be able to understand a piece of code.

For this comparison I will focus on five criteria; the first three are reworded from developer Egon Elbre's article "The psychology of code readability" [Elb18]; the last two are based on my own observations.

- Cohesive pieces of code, conveying one idea at a time.
- Descriptive - but not overly long - names and keywords.
- Using idioms from natural language.
- Indentation and whitespace.
- Leaving out unnecessary values.

Cohesive pieces of code, conveying one idea at a time.

The following piece of JSON configuration defines a single training phrase for the SwitchAC intent, from the same example used above. The intent itself, is not defined in the same file, since training phrases are kept in a separate file in the JSON configuration.

```
{
  "id": "ed813a56-e6e9-4bce-b0ed-dca488102333",
  "data": [
    {
      "text": "Turn ",
      "userDefined": false
    },
    {
      "text": "state ",
      "alias": "state",
      "meta": "@ACState",
      "userDefined": true
    },
    {
      "text": "the AC ",
      "userDefined": false
    }
  ],
  "isTemplate": false,
  "count": 0,
  "updated": 1560083189
},
```

This is equivalent to the following line found in my SwitchAC example:

```
trained with phrase
  "Turn" state "the AC"
```

As can clearly be seen, the JSON configuration is more intended for automatic parsing, than for human readability. It is also limited by the key value, and stringly typed nature of the configuration in JSON format. In my DSL, the training phrase can easily be traced back to it's intent, which is defined only three lines above in this example.

Descriptive - but not overly long - names and keywords.

When designing the syntax for my DSL, I tried - whenever possible - to use syntax, that reads close to a normal sentence in natural language. This is why a developer writes:

```
trained with file
  "filename"
```

in order to include a file with pre-generated training phrases. A reader can immediately understand what the otherwise not always recognizable filename refers to. For the same reason, a new entity-type is defined with the keyword "Type" followed by the name of the newly defined type. The same is true for an intent, using "Intent".

In contrast, the JSON example I showed above contains keys with names like "data" for a training phrase, "meta" for the type a parameter corresponds to, and the "isTemplate" key which is always set to false, because it is deprecated.

Using idioms from natural language.

The JSON representation is modeled after the structure of a Javascript object, and is meant to accurately describe objects and their attributes in computer programs. It does not use idioms from natural language to attempt intuitive understanding of an agent's behaviour. A specific advantage of the DSL version is that I am able to design the DSL so that agent behaviour is conveyed intuitively.

A specific example worth mentioning here is the definition of a fallback intent, which is an intent only used if no other intent can match the user's utterance. In the JSON representation a fallback intent is only different from a regular intent by a boolean value at the very bottom of the intent description:

```
"fallbackIntent": true,
```

This works perfectly fine if the intention is for the file to be parsed by a computer, but for human readability the way the Dialogflow website handles this is much more beneficial. On the website a fallback intent is visually distinguished from normal intents and is created with a separate button. For the DSL version I decided that a fallback intent should be defined as follows:

```
fallback Intent DefaultFallbackIntent
    response
        "I didn\u0027t get that. Can you say it again?"
        "I missed what you said. What was that?"
        "Sorry, could you say that again?"
        "Sorry, can you say that again?"
        "Can you say that again?"
        "Sorry, I didn\u0027t get that. Can you rephrase?"
        "Sorry, what was that?"
        "One more time?"
        "What was that?"
        "Say that one more time?"
        "I didn\u0027t get that. Can you repeat?"
        "I missed that, say that again?"
    action 'input.unknown'
```

This example is the default fallback intent that every agent on the Dialogflow website is created with. Note that the definition begins with *fallback Intent* instead of *Intent*. This immediately makes it clear to the reader that this intent should be read as a fallback and not as a regular intent.

Indentation and whitespace.

An additional benefit for readability is the ability to separate a program into meaningful paragraphs. An example for this is, when an intent is described and the line both above and below the intent is left empty, to visually separate it from e.g. another intent described before.

As a further project, but not possible in the scope of this thesis, an automatic linting and formatting tool for the DSL could be considered. Similar tools have been developed for general programming languages numerous times with a very popular example being Black for Python [Pyt] and numerous other examples existing [Gita].

Leaving out unnecessary values.

One of the most important ways of reducing clutter in the agent configuration and reducing the configuration's size, is to leave out unnecessary values like unchanged default values and empty values. If an agent does not have a description, the JSON representation will carry the following line.

```
"description": "",
```

Instead, the DSL version simply will not have a line concerning the description, since it is not changed from its default value of being an empty string. The same is done for a large number of settings that a user is able to change in DSL code but that have a default value in Dialogflow and need not be displayed in DSL code if the default value is not changed.

5.4. Automatic compilation and update

A developer needs to be able to automatically compile and update an agent on the web from DSL code. The compiler created alongside this prototype² is able to automatically generate the JSON representation of an agent from DSL code. Alongside this, I have written a script that automatically sends the resulting JSON files to the Dialogflow website. This can be used in continuous integration setups like CircleCI [Cir] to automatically keep the online version of a Dialogflow agent up to date with the most current version of the DSL code in source control.

Below you can see an example of the CircleCI job configuration that I set up for the prototype in our Bachelor project.³

```
deploy_agent:
  docker:
    - image: circleci/openjdk:latest-node
  steps:
    - checkout
    - run: >
      wget -O ./dfc_compiler.jar
      https://github.com/arne-z/BachelorThesis/releases/...
    - run: yarn install
    - run: java -jar ./dfc_compiler.jar ./Agent/Tobito.dfc
    - run: echo $GOOGLE_CERT_FILE_64 | base64 --decode > ./googleKey.json
    - run: >
      node ./utility/importAgent.js
      --dir ./src-gen
      --key ./googleKey.json
      --pid projects/newagent-bdb60
```

The above configuration starts a docker image with Java and Node installed - Java is required for the DSL compiler, Node for the import script - and checks out the most recent version of our project from source control. It then downloads the DSL compiler from my github repository and runs the compiler targeting the .dfc file containing the DSL code for our project's agent. It then runs the importAgent script that will send the JSONs generated by the compiler to the Dialogflow API.

This setup allows a "hands free" approach to developing for Dialogflow, where all the developer has to do is change the DSL code and once that is pushed to Git, the Dialogflow agent is updated automatically.

5.5. Concessions and Drawbacks

Working with the DSL instead of Dialogflow directly comes with some drawbacks, as I had to make certain concessions during development. These concessions can be divided into four

²<https://github.com/arne-z/BachelorThesis/releases>

³The full configuration set up by our Bachelor project team can be found here.

<https://github.com/hpi-sam/ask-your-repository-dialogflow-adapter/blob/agent-config-with-dsl/.circleci/config.yml>

categories.

Design choicess differing from the Dialogflow website.

As I stated before, I attempted to stay as close to the Dialogflow website as possible, but there are some elements of the website that do not lend themselves to being translated into a text based configuration.

The way parameters are entered in Dialogflow is an interesting example of this, as is shown in Figure 4.4. Translating this to a text based interface with the requirement of live syntax validation, it became neccessary to enter the parameters allowed in training phrases before defining the phrases. Similarly, Dialogflow switched from what is called *template mode*, where a training phrase would be described as: "Turn state the AC", to what is called *example mode*, which means the phrase would be: "Turn on the AC" - with the "on" being annotated to show that it is meant to represent a number of possible values. In order to translate this to a text based interface, I considered a solution that would have looked as follows:

```
intent SampleIntent
  trained with phrase
    "Turn {on : state} the AC"
```

I eventually decided against this, as I perceived this solution to make both writing and reading of the training phrases unneccessarily difficult. Instead I decided to continue using the template format for the DSL as seen below:

```
intent SampleIntent
  trained with phrase
    "Turn" state "the AC"
```

The Difficulty of Deciding on Defaults.

A large part of what makes both the web interface and the DSL easier to work with than the JSON files, is that here a user can assume all the defaults to be reasonable. When first creating a new Dialogflow agent, all the default settings are already set for you to start working with. I found that for my tool I was able to use the same defaults that the website uses, so that the same workflow of creating an agent arrives at the same results on the website and in the DSL.

This lead to a bit of a problem when it came to the two default intents that a Dialogflow agent is created with, the "Default Fallback Intent" and the "Default Welcome Intent".

I considered adding these default intents during compilation, unless the user specifically disabled this, but I found that to be too unintuitive. On the Dialogflow website a user can always see the list of intents in the agent, including these two default intents on the intents panel, but in a text based interface the user cannot easily be informed of the default intents existing in the background. Instead, I decided that only the intents described in the user's code should be in the compiled agent.

My plan is to add a shortcut for enabling the default intents via a `use_default_intents` flag, so that the user can easily use the default intents, and anyone reading the code will still know these intents are enabled.

Unsupported Dialogflow Features

Dialogflow is a large project, much bigger in scope than this thesis, so it was immediately apparent that my prototype would not be able to support all of the features and settings that are available in Dialogflow. Instead I selected the features that were necessary to support development in my Bachelor project. This means that some projects might be unable to use this prototype, as they rely on features that are not supported.

6 | Summary and further Work

It was my self set task for this Bachelor thesis to find a solution for shortcomings in available version control for Dialogflow agents. In order to accomplish this, I built a prototype of a DSL for describing Dialogflow agents. When starting this project my assumption was, that there should and could be a solution for using version control with a Dialogflow agent that is simpler, shorter, and more readable than saving the JSON configuration of the agent in source control. This solution is aimed at teams of developers working longer term on maintaining an agent throughout it's coevolution with their application. I arrived at this solution because, for the very beginning, I wanted to find a way for developers to work with dialogflow without leaving their familiar way of working. In order to build this DSL, I had to design a grammar to describe the syntax possible in the language and build a code generator using this grammar to generate JSON files. In order to test and evaluate this prototype, I designed multiple test cases in each of which I compared the performance of the prototype with that of the established way of saving the agent configuration using JSON files. In result, I have found that the DSL provides a measurable improvement in both the size of agent configurations and the size of diffs created by changes to the configuration - to be more precise: a 87.15% reduction in size and a 88.9% reduction in diff size on average respectively (see Appendix D) - while also improving readability and almost entirely maintaining the ease of updating the agent's online version. Teams working with this tool will find that it offers benefits in regard to teamwork, learning, consistency, and keeping track of their version history. The code for my prototype is available online, free and open source.

There are a number of questions still unanswered and as I meantioned multiple times above some improvements to the DSL are still possible. Some of these further projects one could consider are:

- A larger survey for better evaluation of long term benefits to teams working with this tool.
- Finding out wether it is possible to use a DSL like this to create agents in a uniform language for both Dialogflow and Amazon Lex.
- Build a production ready tool from the prototype that achieves full feature parity with the dialogflow web interface.
- Build a generator for DSL code from Dialogflow JSON exports, to help teams reduce the cost of switching to the DSL solution.

For the nearest future my tool will help my Bachelor project team, with working on our own Dialogflow agent.

Bibliography

- [Alt19] Alternativeto. *Dialogflow Alternatives and Similar Websites and Apps*. 2019. URL: <https://alternativeto.net/software/api-ai/> (visited on 06/23/2019).
- [Cha18a] Martin Charles. *dialogflow-cli*. 2018. URL: <https://github.com/0xcaff/dialogflow-cli>.
- [Cha18b] BRAIN [BRN.AI] White Label Chatbots. *Chatbot Report 2018: Global Trends and Analysis*. 2018. URL: <https://chatbotsmagazine.com/chatbot-report-2018-global-trends-and-analysis-4d8bbe4d924b> (visited on 06/21/2019).
- [Cir] CircleCI. *CircleCI*. URL: <https://circleci.com/> (visited on 06/23/2019).
- [Dia] Dialogflow. *Migrate from API V1 to API V2*. URL: <https://dialogflow.com/docs/reference/v1-v2-migration-guide> (visited on 06/21/2019).
- [Elb18] Egon Elbre. *Psychology of Code Readability*. 2018. URL: <https://medium.com/@egonelbre/psychology-of-code-readability-d23b1ff1258a> (visited on 06/14/2019).
- [Gita] Github. *#codeformatter github*. URL: <https://github.com/topics/codeformatter> (visited on 06/21/2019).
- [Gitb] Github. *Github Repository ID:191000000*. URL: <https://api.github.com/repositories?since=191000000> (visited on 06/23/2019).
- [Huf16] Scott Huffman. *Making Conversational Interfaces Easier to Build*. 2016. URL: <https://developers.googleblog.com/2016/09/making-conversational-interfaces-easier-to-build.html> (visited on 06/21/2019).
- [Imr18] Daniel Imrie-Situnayake. *Dialogflow API V2 and Enterprise Edition are now generally available*. 2018. URL: <https://blog.dialogflow.com/post/v2-and-enterprise-edition-generally-available/> (visited on 06/21/2019).
- [OK19] Christi Olson and Kelli Kemery. *Voice Report*. Tech. rep. 2019, p. 44.
- [Pet] Dmitry Petrov. *Open-source Version Control System for Machine Learning Projects*. URL: <https://dvc.org/> (visited on 06/23/2019).
- [Pyt] Python. *Black The Uncompromising Code Formatter*. URL: <https://github.com/python/black>.
- [Sta] Stackshare. *Amazon Lex vs Dialogflow*. URL: <https://stackshare.io/stackups/amazon-lex-vs-dialogflow> (visited on 06/14/2019).
- [Voe13] Markus Voelter. *Introduction to DSLs*. 2013. ISBN: 978-1481218580. URL: <http://voelter.de/dslbook/markusvoelter-dslengineering-1.0.pdf>.

A | Declaration of Authorship

Declaration

I hereby declare that the thesis submitted is my own unaided work and that I did not use any other sources and aids than those referenced.

Eidesstattliche Erklärung

Ich erkläre hiermit, dass ich die vorliegende Arbeit selbstständig verfasst und dafür keine anderen als die genannten Quellen und Hilfsmittel verwendet habe.

Potsdam, den 25. Juni 2019

Arne Zerndt

B | DSL Code of Test Agents

The following examples are in some cases formatted differently from the way they were during my tests, leading to slightly differing line numbers. They were reformatted to fit into the printed version. Original files can be found on my GitHub.¹

B.1. RoomTemperature Agent

```
Agent TestAgent_RoomTemperature
  language en

Webhook
  active
  url "https://fake.ac_controller.com/vi_webhook"

Type ACState
  values
    "Off" ("Inactive" "Disabled" "Off"),
    "On" ("Active" "Enabled" "On")
  auto_expand

Intent SwitchAC
  parameters
    state ACState (required prompts
      "Did you want the AC turned On or Off?")
  trained with phrase
    "Turn" state "the AC",
    "Set the AC to" state,
    "Set the air conditioner to" state,
    "I want the AC turned" state,
    "Make sure the AC is" state
  webhook_fullfillment
```

¹https://github.com/arne-z/BachelorThesis/tree/master/dsl_code

B.2. MusicPlayer Agent

Agent MusicPlayer

language en

Webhook

active

url "https://fake.music_controller.com/vi_webhook"

Intent PlaySong

parameters

Artist music_artist

Genre music_genre

Title any

trained with phrase

"Play a " Genre "song",

"Play some" Genre,

"Play a song by "Artist,

"Play" Title "by" Artist,

"Play" Title,

"Play a random song"

webhook_fullfillment

Intent StopMusic

action "StopMusic"

trained with phrase

"Pause",

"Stop",

"Quiet",

"Stop the Music"

webhook_fullfillment

Intent VolUp

action "VolUp"

trained with phrase

"Louder",

"More Volume",

"Too quiet",

"Volume Up"

webhook_fullfillment

Intent VolDown

action "VolDown"

trained with phrase

"Lower Volume",

"Too loud",

"Volume Down"

webhook_fullfillment

B.3. Calendar Agent

Agent Calendar
language en

Webhook
active
url "https://fake.calendar_controller.com/vi_webhook"

Type Entry
values
"Appointment",
"Reminder",
"Event"
auto_expand

Intent AddEntry
parameters
Entry Entry
Time date_time (required prompts "For when should I
enter that entry?")
Title any (required prompts "What should I call the entry?")
trained with phrase
"Add a new" Entry "for" Time,
"Add a new" Entry,
"Add a" Entry "at" Time Title
webhook_fullfillment

B.4. JokeBot Agent

Agent JokeBot
language en

Webhook
active
url "https://fake.rate_my_jokes.com/vi_webhook"

Intent DadJoke
contexts
output joke
trained with phrase
"Tell me a Dad joke",
"Do you know any stupid jokes?",
"Do you know any dad jokes?"
response
"What is brown and sticky? ... A stick."
"My wife is really mad at the fact that I have no
sense of direction. So I packed up my stuff and right."
"I bought some shoes from a drug dealer. I don't know what

```
    he laced them with, but I was tripping all day!"
    "Why can't you hear a pterodactyl go to the bathroom?
    Because the pee is silent."
```

```
Intent RateJokePositive
  contexts
    input joke
  action "ratePositive"
  trained with phrase
    "Wow that was funny",
    "That was awesome",
    "I liked that joke"
  response
    "Glad you liked it."
  webhook_fullfillment
```

```
Intent RateJokeNegative
  contexts
    input joke
  action "rateNegative"
  trained with phrase
    "Bad joke",
    "Don't tell that joke again",
    "Thanks, I hate it."
  response
    "Well that's your loss, I like the Joke."
  webhook_fullfillment
```

B.5. QuoteBot Agent

```
Agent QuoteBot
  language en
```

```
Intent OscarWildeQuote
  trained with phrase
    "Tell me a quote by Oscar Wilde",
    "What would Oscar Wilde say"
  response
    "To live is the rarest thing in the world.
    Most people exist, that is all."
    "Only dull people are brilliant at breakfast."
    "I think God, in creating man,
    somewhat overestimated his ability."
    "Democracy means simply the bludgeoning of the people
    by the people for the people."
```

```
Intent EinsteinQuote
  trained with phrase
    "Tell me a quote by Albert Einstein",
```

```
"What would Einstein say"
response
"Two things are infinite: the universe and
  human stupidity; and I'm not sure about the universe."
"If you can't explain it to a six year old,
  you don't understand it yourself."
"Never memorize something that you can look up."
```

C | Examples of Diffs created from Test Agents

C.1. RoomTemperature Agent

```
@@ -26,9 +26,14 @@ Agent TestAgent_RoomTemperature
  Intent ChangeTemperature
    parameters
      temp temperature (required prompts "What temperature
        would you like the AC set to?")
+    point time
  trained with phrase
    "Set the AC to" temp,
    "Set the air conditioner to" temp,
    "I want the AC turned to" temp,
-    "Make sure the AC is at" temp
+    "Make sure the AC is at" temp,
+    "Set the AC to" temp "at" point,
+    "Set the air conditioner to" temp "at" point,
+    "I want the AC turned to" temp "at" point,
+    "Make sure the AC is at" temp "at" point
  webhook_fullfillment
```

D | Test Case Data and Averages

7

D.1. Line Length of Test Agents

TestCase	DSL	JSON	Factor	Reduction in %
1	23	200	8,70	88,50%
2	46	409	8,89	88,75%
3	24	210	8,75	88,57%
4	43	256	5,95	83,20%
5	21	158	7,52	86,71%
Average	-	-	7,96	87,15%

D.2. Diff Size of Changes to each Test Agent

TestCase	DSL	JSON	Factor	Reduction in %
1	11	89	8,09	87,64%
2	15	202	13,47	92,57%
3	3	85	28,33	96,47%
4	9	74	8,22	87,84%
5	6	30	5,00	80,00%
Average	-	-	12,62	88,90%

E | DSL Grammar

```
grammar org.xtext.DialogflowConfig
    with org.eclipse.xtext.common.Terminals

generate dialogflowConfig "http://www.xtext.org/DialogflowConfig"

Agent:
    'Agent' name=ID
    'language' language=Language
    (('description' description=STRING)?
    & ('version' version=VERSION)?
    & ('ml_classification_threshold' mlMinConfidence=DOUBLE)?
    & webhook=Webhook?
    & interactionLogs?='disable_logs'?
    & stackdriverLogs?='log_to_google_cloud'?
    & isPublic?='public'?
    & noHybridMatchMode?='no_hybrid_match_mode'?)
    elements+=AbstractElement*;

terminal DOUBLE:
    INT '.' INT;

terminal VERSION:
    INT '.' INT '.' INT;

AbstractElement:
    Intent | EntityType;

Intent:
    fallback?='fallback'?
    'Intent' name=ID
    ('contexts'
    ('input' inputContexts+=InputContext+)?
    ('output' affectedContexts+=OutputContext+)?)?
    & ('parameters' parameters+=Parameter+)?
    & (('trained' 'with' 'phrase' trainingPhrases+=TrainingPhrase
        (',' trainingPhrases+=TrainingPhrase)*)
    | ('trained' 'with' 'file' file=STRING))?)
    & ('response' responses+=STRING+)?
```

```
& ( 'action' action=STRING)?
& ( 'events' events+=STRING+)?
& webHookFulfillment?='webhook_fullfillment'?
& webHookForSlotFilling?='webhook_slot_filling'?
& disable_ml?='disable_ml'?
& end?='end_of_conversation'?;

InputContext:
  name=ID;

OutputContext:
  name=ID ( 'lifespan' lifespan=INT)?;

TrainingPhrase:
  data+=AbstractWord+;

AbstractWord:
  Text | customToken;

Text:
  text=STRING;

customToken:
  param=[Parameter];

Parameter:
  name=ID
  ( type=[EntityType] | builtInType=BuiltInType)
  ( '('
  ( required?='required'?
  & ( 'prompts' prompts+=STRING+)?
  & list?='list'? )
  ')')?;

EntityType:
  'Type' name=ID
  ( dynamic?='dynamic' |
  'values' values+=Entity ( ',' values+=Entity)*)
  & isOverridable?='overridable'?
  & isEnum?='enum'?
  & automatedExpansion?='auto_expand'?
  & allowFuzzyExtraction?='fuzzy_extract'?;

Entity:
  name=STRING
  ( '(' synonyms+=STRING* ')' )?;

Webhook:
  'Webhook'
  available?='active'?
```

```
( 'url' url=STRING)
( 'headers' headers+=Header+)?;
```

```
Header:
  key=STRING ':' value=STRING;
```

```
enum Language:
  en |
  de |
  fr |
  es |
  da |
  hi |
  id |
  it |
  ja |
  ko |
  ni |
  pl |
  pt |
  ru |
  sv |
  th |
  tr |
  uk;
```

```
enum BuiltInType:
  date_time
  | date
  | date_period
  | time
  | time_period
  | number
  | cardinal
  | ordinal
  | number_integer
  | number_sequence
  | flight_number
  | unit_area
  | unit_currency
  | unit_length
  | unit_speed
  | unit_volume
  | unit_weight
  | unit_information
  | percentage
  | temperature
  | duration
  | age
  | currency_name
```



```
| unit_area_name  
| unit_length_name  
| unit_speed_name  
| unit_volume_name  
| unit_weight_name  
| unit_information_name  
| address  
| zip_code  
| geo_capital  
| geo_country  
| geo_country_code  
| geo_city  
| geo_state  
| place_attraction  
| airport  
| location  
| email  
| phone_number  
| given_name  
| last_name  
| person  
| music_artist  
| music_genre  
| color  
| language  
| any  
| url;
```

F | DSL Code Generator

This file is written in Xtend a Java based language for implementing code generators. It uses some characters that are not supported outside of xtend, which denote the beginning or end of a code block inside of a string. I have replaced each of these characters with a `#` below.

```
/*
 * generated by Xtext 2.16.0
 */
package org.xtext.generator

import java.io.FileNotFoundException
import java.util.Date
import java.util.UUID
import org.eclipse.emf.ecore.resource.Resource
import org.eclipse.xtext.generator.AbstractGenerator
import org.eclipse.xtext.generator.IFileSystemAccess2
import org.eclipse.xtext.generator.IGeneratorContext
import org.xtext.dialogflowConfig.Parameter
import org.xtext.dialogflowConfig.impl.AgentImpl
import org.xtext.dialogflowConfig.impl.EntityTypeImpl
import org.xtext.dialogflowConfig.impl.IntentImpl
import org.xtext.dialogflowConfig.impl.TextImpl
import org.xtext.dialogflowConfig.impl.customTokenImpl

/**
 * Generates code from your model files on save.
 *
 * See https://www.eclipse.org/Xtext/documentation/303\_runtime\_concepts.html#code-generation
 */
class DialogflowConfigGenerator extends AbstractGenerator {

    override void doGenerate(Resource resource ,
        IFileSystemAccess2 fsa , IGeneratorContext context) {
        // .dfc file can only contain one Agent.
        val agent = resource.contents.filter(AgentImpl).get(0)

        val intents = agent.elements.filter(IntentImpl)
        val entityTypees = agent.elements.filter(EntityTypeImpl)
```

```
generateAgentFile(fsa , agent)

generatePackageFile(fsa , agent)

for (intent : intents) {
    generateIntentFile(fsa , agent , intent)
    generateIntentUsersaysFile(fsa , agent , intent)
}

for (entityType : entityTypes) {
    generateEntityFile(fsa , agent , entityType)
    generateEntityUsersaysFile(fsa , agent , entityType)
}
}

protected def void generatePackageFile(IFileSystemAccess2 fsa ,
    AgentImpl agent) {
    fsa.generateFile(''#agent.name#/package.json'', '')
    {
        "version": #IF agent.version != null ##
            agent.version##ELSE#"1.0.0"#ENDIF#
    }
    '')
}

protected def void generateAgentFile(IFileSystemAccess2 fsa ,
    AgentImpl agent) {
    fsa.generateFile(
        ''#agent.name#/agent.json'',
        '',
        {
            "description": "#IF agent.description
                != null##agent.description##ENDIF#",
            "language": "#agent.language#",
            "disableInteractionLogs": #agent.interactionLogs#,
            "disableStackdriverLogs": #!agent.stackdriverLogs#,
            #IF agent.webhook != null#
            "webhook": {
                #IF agent.webhook.url != null#
                "url": "#agent.webhook.url#",
                #ENDIF#
                #IF !agent.webhook.headers.empty#
                "headers": {
                    #FOR header: agent.webhook.headers#
                    #IF header
                        != agent.webhook.headers.get(0)#,#ENDIF#
                    "#header.key#": "#header.value#"
                    #ENDFOR#
                },
                #ENDIF#
            }
        }
    )
}
```

```
        "available": #agent.webhook.available#,
        "useForDomains": false ,
        "cloudFunctionsEnabled": false ,
        "cloudFunctionsInitialized": false
    },
#ENDIF#
    "isPublic": #agent.isPublic#,
    "customClassifierMode": #IF
        agent.noHybridMatchMode#"use.instead"#
        ELSE#"use.after"#ENDIF#,
    "mlMinConfidence": #IF agent.mlMinConfidence
        != null# #agent.mlMinConfidence# #ELSE# 0.3 #ENDIF#,
    "onePlatformApiVersion": "v2"
},
},
)
}

protected def void generateEntityUsersaysFile(IFFileSystemAccess2 fsa ,
    AgentImpl agent, EntityTypeImpl entityType) {
    if(entityType.dynamic) return;
    fsa.generateFile(
        '''#agent.name#/entities/#entityType.name
        #_entries_#agent.language#.json ''' ,
        ,,,
        [
            #FOR entity : entityType.values#
            #IF entity != entityType.values.get(0)#,#ENDIF#
            {
                "value": "#entity.name#",
                #IF entity.synonyms.isEmpty#
                "synonyms": [
                    "#entity.name#"
                ]
                #ELSE#
                "synonyms": [
                    #FOR synonym : entity.synonyms#
                    #IF synonym != entity.synonyms.get(0)#,#ENDIF#
                    "#synonym#"
                ]
                #ENDFOR#
            }
            #ENDIF#
        ]
        ,,,
    )
}
```

```
protected def void generateEntityFile(IFFileSystemAccess2 fsa ,
```

```
AgentImpl agent, EntityTypeImpl entityType) {
    if(entityType.dynamic) return;
    fsa.generateFile(
        '''#agent.name#/entities/#entityType.name#.json''',
        ,,
        {
            "id": "#UUID.randomUUID()#",
            "name": "#entityType.name#",
            "isOverridable": #entityType.isOverridable#,
            "isEnum": #entityType.isEnum#,
            "automatedExpansion": #entityType.automatedExpansion#,
            "allowFuzzyExtraction": #entityType.allowFuzzyExtraction#
        },
        ,,
    )
}

protected def void generateIntentUsersaysFile(
    IFileSystemAccess2 fsa, AgentImpl agent, IntentImpl intent) {
    if (!intent.trainingPhrases.empty) {
        fsa.generateFile(
            '''#agent.name#/intents/#intent.name
            #_usersays_#agent.language#.json''',
            ,,
            [
                #FOR phrase : intent.trainingPhrases#
                #IF phrase != intent.trainingPhrases.get(0)#,#ENDIF#
                {
                    "id": "#UUID.randomUUID()#",
                    "data": [
                        #FOR datum: phrase.data#
                        #IF datum != phrase.data.get(0)#,#ENDIF#
                        #IF datum instanceof customTokenImpl#
                        #IF datum.param.type != null#
                        {
                            "text": "#datum.param.name# ",
                            "alias": "#datum.param.name#",
                            "meta": "@#datum.param.type.name#",
                            "userDefined": true
                        }
                        #ELSE#
                        {
                            "text": "#datum.param.name# ",
                            "alias": "#datum.param.name#",
                            "meta": "@sys.#
                                datum.param.builtInType.toString().replace('_', '-')#",
                            "userDefined": true
                        }
                        #ENDIF#
                        #ELSEIF datum instanceof TextImpl#
```

```
        {
            "text": "#datum.text# ",
            "userDefined": false
        }
        #ENDIF#
    #ENDFOR#
    ],
    "isTemplate": false ,
    "count": 0,
    "updated": #new Date().time/1000#
    }
    #ENDFOR#
    ]
    ,,,
)
} else if (intent.file != null) {
    try {
        fsa.generateFile(
            '''#agent.name#/intents/#intent.name#_usersays_#
            agent.language#.json''' ,
            fsa.readTextFile('' '../#intent.file#''')
        )
    } catch (FileNotFoundException e) {
        return
    }
}
}

private static final class Param {
    String datatype;
    String name;
    String value;
}

protected def Param getParamTypeName(Parameter param) {
    var obj = new Param();
    if (param.type != null) {
        obj.datatype = "@" + param.type.name
    } else {
        obj.datatype = '@sys.' +
            param.builtInType.toString().replace('_', '-');
    }
    obj.name = param.name;
    obj.value = '$' + param.name;
    return obj;
}

protected def void generateIntentFile(IFileSystemAccess2 fsa ,
    AgentImpl agent, IntentImpl intent) {
    fsa.generateFile(
```

```
'''#agent.name#/intents/#intent.name#.json''' ,
'''
{
  "id": "#UUID.randomUUID()#",
  "name": "#intent.name#",
  "auto": #!intent.disable_ml#,
  "contexts": [
    #FOR context : intent.inputContexts#
    #IF context != intent.inputContexts.get(0)#,#ENDIF#
    "#context.name#"
  #ENDFOR#
  ],
  "responses": [
    {
      "resetContexts": false ,
      #IF intent.action != null#
      "action": "#intent.action#",
      #ENDIF#
      "affectedContexts": [
        #FOR context : intent.affectedContexts#
        #IF context != intent.affectedContexts.get(0)
        #,#ENDIF#
        {
          "name": "#context.name#",
          "parameters": {},
          "lifespan": #if(context.lifespan > 0)
            {context.lifespan} else {5}#
        }
      #ENDFOR#
    ],
    "parameters": [
      #FOR param : intent.parameters#
      #IF param != intent.parameters.get(0)#,#ENDIF#
      {
        "id": "#UUID.randomUUID()#",
        "required": #param.required#,
        "dataType": "#getParamTypeName(param).datatype#",
        "name": "#getParamTypeName(param).name#",
        "value": "#getParamTypeName(param).value#",
        #FOR prompt: param.prompts#
        "prompts": [
          {
            "lang": "#agent.language#",
            "value": "#prompt#"
          }
        ],
        #ENDFOR#
        "isList": #param.list#
      }
    #ENDFOR#
  ]
}
```

```
    ],
    #IF !intent.responses.empty#
    "messages": [
        {
            "type": 0,
            "lang": "#agent.language#",
            "speech":
            [
                #FOR response : intent.responses#
                #IF response != intent.responses.get(0)#,#ENDIF#
                "#response#"
            ]
        }
    ],
    #ENDIF#
    "defaultResponsePlatforms": {},
    "speech": []
}
],
"priority": 500000,
"webhookUsed": #intent.webHookFulfillment#,
"webhookForSlotFilling": #intent.webHookForSlotFilling#,
"lastUpdate": #new Date().time/1000#,
"fallbackIntent": false,
"events": [
    #FOR event : intent.events#
    #IF event != intent.events.get(0)#,#ENDIF#
    {
        "name": "#event#"
    }
    #ENDIF#
]
},
},
),
}
```


G | JSON Version of a Test Agent

G.1. RoomTemperature Agent

G.1.1. Agent

agent.json

```
{
  "description": "",
  "language": "en",
  "disableInteractionLogs": false,
  "disableStackdriverLogs": true,
  "webhook": {
    "url": "https://fake.ac_controller.com/vi_webhook",
    "available": true,
    "useForDomains": false,
    "cloudFunctionsEnabled": false,
    "cloudFunctionsInitialized": false
  },
  "isPublic": false,
  "customClassifierMode": "use.after",
  "mlMinConfidence": 0.3,
  "onePlatformApiVersion": "v2"
}
```

package.json

```
{
  "version": "1.0.0"
}
```

G.1.2. Entities

ACState.json

```
{
  "id": "31b65f06-3c68-4335-bedb-7eed2c98404d",
  "name": "ACState",
  "isOverridable": false,
}
```

```
"isEnum": false ,
"automatedExpansion": true ,
"allowFuzzyExtraction": false
}
```

ACState_entries_en.json

```
[
  {
    "value": "Off",
    "synonyms": [
      "Inactive",
      "Disabled",
      "Off"
    ]
  },
  {
    "value": "On",
    "synonyms": [
      "Active",
      "Enabled",
      "On"
    ]
  }
]
```

G.1.3. Intents

SwitchAC.json

```
{
  "id": "1b3f96d9-3e41-4ccc-95be-601237d1d20d",
  "name": "SwitchAC",
  "auto": true,
  "contexts": [],
  "responses": [
    {
      "resetContexts": false,
      "affectedContexts": [],
      "parameters": [
        {
          "id": "9a814870-de5f-4547-ab9a-42ef2fd73040",
          "required": true,
          "dataType": "@ACState",
          "name": "state",
          "value": "$state",
          "prompts": [
            {
              "lang": "en",
              "value": "Did you want the AC turned On or Off?"
            }
          ]
        }
      ]
    }
  ]
}
```

```
        }
      ],
      "isList": false
    }
  ],
  "defaultResponsePlatforms": {},
  "speech": []
}
},
"priority": 500000,
"webhookUsed": true,
"webhookForSlotFilling": false,
"lastUpdate": 1560426984,
"fallbackIntent": false,
"events": []
}
```

SwitchAC_usersays_en.json

```
[
  {
    "id": "3269ba06-10da-4003-ba29-dd2348642a86",
    "data": [
      {
        "text": "Turn ",
        "userDefined": false
      },
      {
        "text": "state ",
        "alias": "state",
        "meta": "@ACState",
        "userDefined": true
      },
      {
        "text": "the AC ",
        "userDefined": false
      }
    ],
    "isTemplate": false,
    "count": 0,
    "updated": 1560426984
  },
  {
    "id": "dd84e278-63a9-4e84-afc6-b183463ee671",
    "data": [
      {
        "text": "Set the AC to ",
        "userDefined": false
      },
      {

```

```
    "text": "state ",
    "alias": "state",
    "meta": "@ACState",
    "userDefined": true
  }
],
"isTemplate": false ,
"count": 0,
"updated": 1560426984
},
{
  "id": "d013f09a-738d-4898-931d-bebcc61e67df",
  "data": [
    {
      "text": "Set the air conditioner to ",
      "userDefined": false
    },
    {
      "text": "state ",
      "alias": "state",
      "meta": "@ACState",
      "userDefined": true
    }
  ],
  "isTemplate": false ,
  "count": 0,
  "updated": 1560426984
},
{
  "id": "6363fec0-0da7-406f-a000-b6c46ab72a35",
  "data": [
    {
      "text": "I want the AC turned ",
      "userDefined": false
    },
    {
      "text": "state ",
      "alias": "state",
      "meta": "@ACState",
      "userDefined": true
    }
  ],
  "isTemplate": false ,
  "count": 0,
  "updated": 1560426984
},
{
  "id": "71975954-724f-4217-a333-0ba53ad5394e",
  "data": [
    {
```

```
    "text": "Make sure the AC is ",
    "userDefined": false
  },
  {
    "text": "state ",
    "alias": "state",
    "meta": "@ACState",
    "userDefined": true
  }
],
"isTemplate": false,
"count": 0,
"updated": 1560426984
}
```

G.2. Test Agents 2-5

The other four test agents are not printed here to prevent the appendix from becoming too long. They can be found on my GitHub instead. ¹

¹<https://github.com/arne-z/BachelorThesis/tree/5100ed5f712fb93a079af095e1dcd6c159cfe68f/TestAgents>

H | Examples of Diffs created from Test Agent JSON files

H.1. RoomTemperature Agent

```
— a/TestCase01_RoomTemperature/DialogflowExport/intents/ChangeTemperature.j
+++ b/TestCase01_RoomTemperature/DialogflowExport/intents/ChangeTemperature.j
@@ -21,6 +21,14 @@
    }
    ],
    "isList": false
+   },
+   {
+     "id": "3f53e160-18ac-4318-99a8-5f84581bb045",
+     "required": false,
+     "dataType": "@sys.time",
+     "name": "point",
+     "value": "$point",
+     "isList": false
+   }
  ],
  "messages": [],

— a/TestCase01_RoomTemperature/DialogflowExport/intents/ChangeTemperature_u
+++ b/TestCase01_RoomTemperature/DialogflowExport/intents/ChangeTemperature_u
@@ -1,9 +1,9 @@
  [
    {
-     "id": "e7dbd110-0604-476f-a997-5d90932ef9df",
+     "id": "46e61317-0882-4cb8-999b-2b5042cc27cf",
      "data": [
        {
-       "text": "Make sure the AC is at ",
+       "text": "Set the air conditioner to ",
        "userDefined": false
      },
    },
  ],
@@ -17,10 +17,10 @@
  "count": 0
```

```

    },
    {
-   "id": "1f80dd19-9fd9-4276-bbac-024bbf74b2f3",
+   "id": "62839ba2-4045-490d-8bc8-c74ff6a761cb",
    "data": [
        {
-       "text": "I want the AC turned to ",
+       "text": "Set the AC to ",
        "userDefined": false
        },
        {
@@ -28,6 +28,16 @@
        "alias": "temp",
        "meta": "@sys.temperature",
        "userDefined": true
+    },
+    {
+        "text": " at ",
+        "userDefined": false
+    },
+    {
+        "text": "point",
+        "alias": "point",
+        "meta": "@sys.time",
+        "userDefined": true
+    }
    ],
    "isTemplate": false,
@@ -45,11 +55,109 @@
    "alias": "temp",
    "meta": "@sys.temperature",
    "userDefined": true
+ },
+ {
+     "text": " at ",
+     "userDefined": false
+ },
+ {
+     "text": "point",
+     "alias": "point",
+     "meta": "@sys.time",
+     "userDefined": true
+ }
+ ],
+ "isTemplate": false,
+ "count": 0
+ },
+ {
+     "id": "cf3e56d7-7e28-4d61-bea5-20bb052b0aa6",
+     "data": [

```

```

+      {
+        "text": "I want the AC turned to ",
+        "userDefined": false
+      },
+      {
+        "text": "temp",
+        "alias": "temp",
+        "meta": "@sys.temperature",
+        "userDefined": true
+      },
+      {
+        "text": " at ",
+        "userDefined": false
+      },
+      {
+        "text": "point",
+        "alias": "point",
+        "meta": "@sys.time",
+        "userDefined": true
+      }
+    ],
+    "isTemplate": false ,
+    "count": 0
+  },
+  {
+    "id": "0a434408-2e28-4719-b822-855b13df6dee",
+    "data": [
+      {
+        "text": "Make sure the AC is at ",
+        "userDefined": false
+      },
+      {
+        "text": "temp",
+        "alias": "temp",
+        "meta": "@sys.temperature",
+        "userDefined": true
+      },
+      {
+        "text": " at ",
+        "userDefined": false
+      },
+      {
+        "text": "point",
+        "alias": "point",
+        "meta": "@sys.time",
+        "userDefined": true
+      }
+    ],
+    "isTemplate": false ,
+    "count": 0

```



```

+   },
+   {
+     "id": "e7dbd110-0604-476f-a997-5d90932ef9df",
+     "data": [
+       {
+         "text": "Make sure the AC is at ",
+         "userDefined": false
+       },
+       {
+         "text": "temp",
+         "alias": "temp",
+         "meta": "@sys.temperature",
+         "userDefined": true
+       }
+     ],
+     "isTemplate": false,
+     "count": 0
+   },
+   {
+     "id": "1f80dd19-9fd9-4276-bbac-024bbf74b2f3",
+     "data": [
+       {
+         "text": "I want the AC turned to ",
+         "userDefined": false
+       },
+       {
+         "text": "temp",
+         "alias": "temp",
+         "meta": "@sys.temperature",
+         "userDefined": true
+       }
+     ],
+     "isTemplate": false,
+     "count": 1
+   },
+   {
+     "id": "5940a192-1fe4-4849-bea3-aeff5824c916",
+     "data": [

```

H.2. Test Agents 2-5

The diffs created from the other four test agents are not printed here to prevent the appendix from becoming too long. They can be found on my GitHub instead.¹

¹See <https://github.com/arne-z/BachelorThesis/commits/master> all commits that are prefixed with "Test Case".