



Hasso Plattner Institute for Digital Engineering


Bachelor's Thesis

Supporting Iterative Development of Voice Interfaces using a Domain Specific Language

Unterstützen iterativer Entwicklung von Sprachassistenten durch eine
domänenspezifische Sprache

Arne Zerndt

arne.zerndt@student.hpi.de

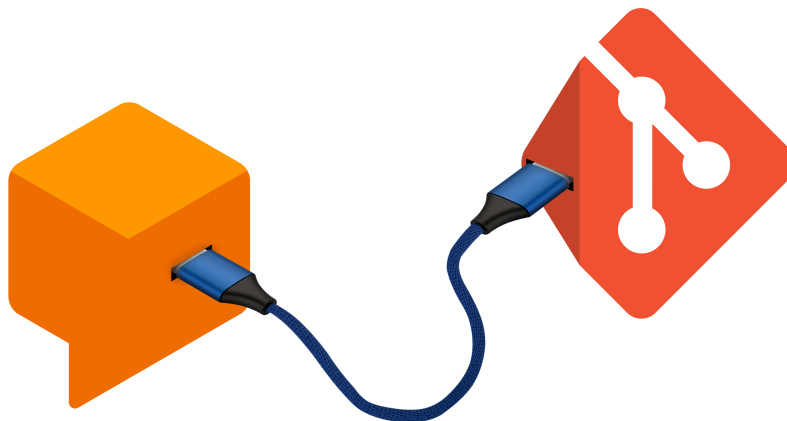

Supervised by Prof. Dr. Holger Giese
System Analysis and Modeling Group

Potsdam, June 19, 2019

1 | Abstract (English)

This thesis seeks to address a current lack of version control systems for voice interface configurations. Instead of designing a new version control system for voice interface configurations, here a different solution is chosen. The voice interface configuration is adapted to fit into existing version control systems. This is done by designing a domain specific language to describe the configuration of a voice interface in a text based way. The voice interface technology chosen to demonstrate this solution is Google Dialogflow. The version control system chosen to focus on is Git, using Github. For evaluation an experiment with 5 test cases was conducted comparing the domain specific language with the existing technology. The results show a clear benefit in three of four criteria outlined while maintaining parity in the fourth.

2 | Abstract (Deutsch)

Diese Bachelorarbeit widmet sich einem derzeit bestehenden mangel an versionscontrollsystemen für stimmliche benutzerschnittstellen. Anstatt aber ein neues versionscontrollsystem für stimmliche benutzerschnittstellen zu bauen wird eine andere lösung gewählt. Eine stimmliche benutzerschnittstelle wird so adaptiert, dass sie mit bestehenden versionscontrollsystemen kompatibel ist. Zu diesem zweck wird eine domänenspezifische sprache entwickelt, die eine stimmliches benutzerschnittstelle auf eine textbasierten art spezifiziert. Um diese lösung zu demonstrieren wurde die sprach interface technologie Dialogflow gewählt, in verbindung mit dem versionscontrollsystem Git. Für die Evaluation wurde ein experiment mit 5 test szenarien durchgeführt, in dem die dömanenspzifische sprache mit der existierenden technologie verglichen wurde. Die ergebnisse zeigen einen klaren gewinn bei drei von vier zuvor spezifizierten kriterien, ohne verlust beim virten kriterium.

Contents

1	Abstract (English)	III
2	Abstract (Deutsch)	IV
	Table of Contents	V
3	Introduction	1
4	Status Quo	2
4.1	Voice Interfaces	2
4.2	Version Control	2
4.3	Previous Work	3
4.4	Lack of Solution	3
5	Problem Statement	4
6	Approach	6
6.1	Choosing a Direction	6
6.1.1	Version Control System	6
6.1.2	Git with exported JSON files	6
6.1.3	Domain Specific Language	6
6.2	DSL Engineering	7
6.2.1	What is a DSL?	7
6.2.2	Requirements for the DSL	7
6.2.3	Design Decisions	7
6.2.4	Concessions and Drawbacks	10
6.2.5	Usage	12
6.3	Target Group	13
7	Evaluation	14
7.1	Length	14
7.2	Readability	16
7.3	Diff size	18
7.4	Automatic compilation and update	19
8	Summary and further Work	20
9	Declaration of Independence	21
	Bibliography	23

3 | Introduction

The following bachelor thesis is part of the "Ask your Repository!" bachelor project.¹

In this thesis, I will demonstrate a possible solution for the issue of synchronizing development on voice interfaces with that of application code by checking voice interface configuration into version control alongside the code it corresponds to. The focus will be on allowing the use of existing version control systems for Voice Interface configurations.

To approach this goal, I have designed a Domain Specific Language (DSL) to describe the configuration of a voice interface in a text-based but still abstract and intuitive way.

I will focus on development using Google Dialogflow as it is the most widely used tool [Stackups]; it is also what my bachelor team is using in our project.

I propose that by designing a DSL that can be used to configure a Dialogflow agent in a way that is text based and can be managed by version control systems like Git - but that still feels seamless to a user and is intuitive to use for a developer familiar with the Dialogflow web interface - development on voice interfaces can be simplified and development teams in the future will be able to work on voice assistants in the same way that they are used to working with code. This opens up the entirety of code based tools which exist for making development more streamlined for the development of voice interfaces, while keeping the robustness of code which can be saved in version control.

In chapter 2, I will explain the current situation in regard to voice interface technology and version control. Afterwards, in Chapter 3, I will then more closely examine the main problem caused by the given situation. Chapter 4 will focus on finding a solution to the above mentioned problem, and on the specific solution, I built a prototype for. Going into more detail, chapter 4.2 will show how I used Xtext to create a grammar and code generator for configuring Google Dialogflow agents. This grammar was used to provide syntax highlighting and validation in Eclipse DSL; the output of the code generator is a valid voice interface configuration in its JSON representation, ready to be imported into Google Dialogflow. Lastly in chapter 5, I will evaluate the success of the prototype by comparing it to an alternative way of checking voice interfaces into source control.

¹<https://hpi.de/giese/lehre/bachelorprojekte/ask-your-repository.html>

4 | Status Quo

4.1 Voice Interfaces

Voice assistants and voice interfaces are increasingly popular technologies that are experimented with and used by every major player in the technology market [citation needed]. To keep up with this trend, developers either need to be able to build their own voice interfaces or integrate with an existing system of which Google Assistant and Amazon Alexa are the most relevant. [citation needed] Currently, depending on whether you are developing for Google Assistant or Alexa, designing a voice interface for one of these systems usually entails working with either Google Dialogflow or Amazon Lex. These are powerful tools which enable developers or domain specialists to quickly and easily design a voice interface. These tools are interacted with through a website which provides a graphical editor for the configuration of the voice interface. Although this makes the initial development of a voice interface easier, it comes with a severe drawback.

4.2 Version Control

While the web interface makes initial setup of the voice interface easier for a single domain expert or developer, new difficulties arise when a team of developers is working on a voice interface in an iterative fashion. It becomes crucial for the team to manage versions and track changes to the interface along with the changes to the application the interface is supporting. [citation needed]

The state of the art solution for managing iterative work in development teams is Git. [citation needed] Git provides a functionality for saving snapshots of specific iteration in your project and handling the problems that come up in iterative work. These problems are:

- merging work done by multiple users
- ensuring that a stable version of a project is saved while developers are working on more experimental changes
- giving the team the ability to easily track and revert changes that have been made.

The issue that arises is that the above mentioned technologies are not compatible and the configuration of a voice interface can easily get out of sync with the changes made to the application and managed in Git. [citation needed]

4.3 Previous Work

Previously, similar issues have been solved for other technologies [citation needed] (cite this, evtl the Evolution control paper or with smt. from here https://scholar.google.de/scholar?hl=de&as_sdt=0%2C5&q=version+control+xml&btnG=) by designing Version control systems that specialize in managing the artifacts those technologies rely on.

4.4 Lack of Solution

A solution like this has not been built for Dialogflow, most likely because voice interface tools like Amazon Lex or Google Dialogflow are a newer development, with Dialogflow having only existed in its current fashion since October 2017 [citation needed] and the Dialogflow V2 API that I am using, and that was necessary for the success of this project is currently in Beta stage. The V2 API is generally available since 17 April 2018 (<https://blog.dialogflow.com/post/v2-and-enterprise-edition-generally-available/> 4.6.2019) And "V1 of Dialogflow's API will be deprecated on October 23, 2019". (<https://dialogflow.com/docs/reference/v1-v2-migration-guide> , 4.6.2019). Dialogflow is currently still transitioning to the use of the new V2 API. It is the V2 API that makes this project possible because it includes the agent management APIs used for exporting, importing, and updating of Dialogflow "agents" (this is what Google calls a specific voice interface) using the JSON format.

5 | Problem Statement

As stated before, currently there is no version control system for Dialogflow agents. This is problematic because when designing a voice interface, it is necessary to make iterative changes, so the voice interface can evolve alongside the application it supports. This can lead to issues in the following workflows that are common in software development: (Reword this to prepare for ALL points below)

- When starting work on a new feature a new branch is created. This is done so that changes, which might not work right away, are contained to this branch and can be merged into the main application at a later time. If this feature requires changes to the voice interface, a problem may arise, because the voice interface has no mechanism for branching.
- Once experimental changes on a feature branch advance to a point where they are meant to be included in the master branch, code can simply be merged from one branch to another. The changes to a voice interface configuration cannot be included in a pull request.
- When working on a product it is generally considered to be “best practice” to have code that should be merged into the master branch from a feature branch reviewed by at least one or two other developers to make sure that it is working as expected and does not have any obvious flaws. This cannot be done for changes to a voice interface.
- When working in a team, it is not always possible to remain aware of all the changes team members have made. Source code that is managed in Git automatically creates a history of all changes, which is highly valuable to the developers. This type of history does not exist for the voice interface configuration.
- Open source development is an important part of today’s development landscape. Since voice interfaces are not usually checked into source control alongside application code, open source development of voice interfaces or applications that use voice interfaces is stifled. In addition, open source projects can be forked by other developers and can be improved by many developers in an iterative fashion. This is another advantage that voice interfaces are currently lacking.

When working on a Dialogflow agent, one can save a version of the configuration and then continue as a draft, but Dialogflow assumes that you will only ever have one draft at a time. Versions are also designed in a linear fashion with no way to merge changes from multiple versions. This is obviously nowhere near the depth of features that are necessary in version control and all of these features are already provided for normal code by using the current state of the art version control system, Git.

In summary the problem is that there is no sufficient version control system that is compatible with Dialogflow.

6 | Approach

6.1 Choosing a Direction

6.1.1 Version Control System

Since there is no version control system that is compatible with Dialogflow the obvious solution might be to build a new version control system that is compatible with Dialogflow. This has been done before for other technologies (cite this, evtl the Evolution control paper or with smt. from here https://scholar.google.de/scholar?hl=de&as_sdt=0%2C5&q=version+control+xml&btnG=) but I decided against this approach for multiple reasons.

Firstly, I believe that it will be hard to get developers to move from an established tool like Git; I assume that developers would not choose to give up feature rich support that exists for Git (Github, Gitlab, Bitbucket to only name a few). Secondly, using a specific version control system that is developed to allow compatibility with Dialogflow, it would be hard to also maintain compatibility with other tools.

Therefore, instead of trying and failing to develop a competing standard to Git, I decided to make use of a workaround that is possible with Dialogflow.

6.1.2 Git with exported JSON files

It is possible to export a folder with a JSON representation of an agent and save this in Git. This solves some of the issues mentioned in chapter X (...), but an agent's JSON representation is not intended for readability by humans, and neither is it meant for direct editing. This makes certain aspects of the workflows I described above much harder, e.g. conducting a code review, since it is difficult to read the changes to the JSON files describing the agent's configuration.

6.1.3 Domain Specific Language

While trying to solve the problems mentioned so far, it became obvious that a solution to these problems would require configuring an agent in a format that is compatible with text based tools like Git but that also maintains or even enhances upon the maintainability and readability of Google Dialogflow configuration in the web interface. For this purpose, I designed a domain specific language (DSL) in order to create a text-based notation (DSL code) for the configuration of an agent.

6.2 DSL Engineering

6.2.1 What is a DSL?

DSL stands for domain specific language. In contrast to a GPL (general purpose language) a DSL is a smaller and more narrow programming language, and oftentimes is not turing complete. The advantage of a DSL comes in the form of concise syntax, that is streamlined for one specific purpose. While a GPL has to allow the user to be able to build quite literally anything within the constraints of the language, the DSL makes no such claims but can instead provide shortcuts for the few things that it is able to do.

The DSL prototype I built consists of two main parts.

Firstly, there is a grammar which defines all possible combinations of words that can be used to write in this language. Specifying this grammar allows the user to have live IDE support including syntax validation while writing DSL code.

The second part I built is a code generator.

This generator compiles DSL code into a collection of JSON files in a format accepted by the Google API. It allows the user to automatically generate a working Dialogflow agent from their DSL code.

6.2.2 Requirements for the DSL

In order to provide a tangible benefit the DSL must fulfill a number of requirements:

- It needs to be significantly shorter than the JSON representation of an agent.
- It needs to be more readable than the JSON representation.
- It needs to create smaller diffs (sum of changed lines) than the JSON representation when making changes.
- A user needs to be able to automatically compile and update an agent on the web from DSL code.

During the process of my work it became clear that solving the above mentioned problems made it necessary to find solutions for every one of these requirements.

6.2.3 Design Decisions


I wanted the DSL code to read naturally for a developer used to the Dialogflow interface. In order to achieve this, I tried to closely mimic the structure of the web interface in my DSL code.

In order to show this, I will walk you through an example agent I created for testing purposes. The agent is a very simple controller for regulating the air conditioning in a room. It listens to the user and sends their requests to a server. Throughout the four steps of this example, I will follow a pattern of first showing how a developer would set up an agent on the Dialogflow website, followed by showing how to do the same in DSL code.

Creating an Agent

First a developer needs to create a new agent. To do so, they click on "create agent", and enter the agent's name and language as seen in Figure 6.1. To achieve the same effect, in DSL code, a developer would enter the following:

```
Agent TestAgent_RoomTemperature
  language en
```

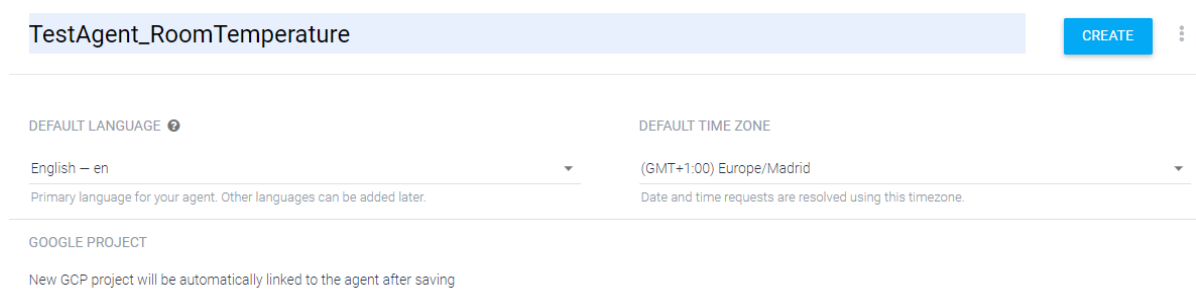

The screenshot shows the Dialogflow console interface for creating a new agent. At the top, the agent name 'TestAgent_RoomTemperature' is entered in a light blue box, followed by a 'CREATE' button and a three-dot menu icon. Below this, there are two dropdown menus: 'DEFAULT LANGUAGE' set to 'English - en' and 'DEFAULT TIME ZONE' set to '(GMT+1:00) Europe/Madrid'. A note under the language dropdown states 'Primary language for your agent. Other languages can be added later.' and a note under the time zone dropdown states 'Date and time requests are resolved using this timezone.' At the bottom, there is a 'GOOGLE PROJECT' section with the text 'New GCP project will be automatically linked to the agent after saving'.

Figure 6.1 – Creating an agent on Dialogflow.

Setting an Entity-Type

In the next step, an entity-type needs to be created to allow to intuitively turn on and off the air conditioning. In Dialogflow this is achieved by filling in the form seen in Figure 6.2. In DSL code the same can be done by writing the following:

```
Agent TestAgent_RoomTemperature
  language en

  Type ACState
    values
      "On" ("Active" "Enabled" "On"),
      "Off" ("Inactive" "Disabled" "Off")
    auto_expand
```

ACState SAVE

☒ Define synonyms ☒ Allow automated expansion

Separate synonyms by pressing the enter, tab or ; key.

On	On, Active, Enabled
Off	Off, Inactive, Disabled
Enter reference value	Enter synonym
Click here to edit entry	
Click here to edit entry	

Figure 6.2 – Creating an entity-type on Dialogflow.

Setting a Webhook

For the agent to actually affect an air conditioner in the real world, it needs to send the user's request to a webserver. To do so, a webhook is enabled in Dialogflow by filling in the form as seen in Figure 6.3. In DSL code the same can be achieved:

```
Agent TestAgent_RoomTemperature
  language en

Webhook
  active
  url "https://fake.ac_controller.com/vi_webhook"

Type ACState
  values
    "Off" ("Inactive" "Disabled" "Off"),
    "On" ("Active" "Enabled" "On")
  auto_expand
```

Webhook ENABLED

Your web service will receive a POST request from Dialogflow in the form of the response to a user query matched by intents with webhook enabled. Be sure that your web service meets all the [webhook requirements](#) specific to the API version enabled in this agent.

URL*

BASIC AUTH

HEADERS

[Add header](#)

SMALL TALK

Figure 6.3 – Setting a webhook on Dialogflow.

Writing an Intent

The last and most vital step is to create an intent that the agent can understand. This is done on the website by filling in the form seen in Figure 6.4 and can alternatively be achieved in DSL code as follows:

```
Agent TestAgent_RoomTemperature
  language en

  Webhook
    active
    url "https://fake.ac_controller.com/vi_webhook"

  Type ACState
    values
      "Off" ("Inactive" "Disabled" "Off"),
      "On" ("Active" "Enabled" "On")
    auto_expand

  Intent SwitchAC
    parameters
      state ACState (required prompts "Did you want the AC turned On or Off?")
    trained with phrase
      "Turn" state "the AC",
      "Set the AC to" state,
      "Set the air conditioner to" state,
      "I want the AC turned" state,
      "Make sure the AC is" state
    webhook_fullfillment
```

Summary

From the above it becomes apparent that the DSL I designed is a viable alternative to using the Web interface. From personal experience I can say, that I can configure an agent more quickly in the DSL code than in the Web interface. However in the following section of this chapter, I will talk about which concessions I had to make and which disadvantages the DSL still has to overcome, for some of which I will offer solutions.

6.2.4 Concessions and Drawbacks

//TODO (I might want to move this to the end of Evaluation, it fits there better.)

Working with the DSL instead of Dialogflow directly comes with some drawbacks, as I had to make certain concessions during development. These concessions separate into three/four categories.

SwitchAC SAVE

Contexts ?

Events ?

Training phrases ? Search training phrases

“ Add user expression G

“ Turn **state** the AC

“ Set the AC to **state**

“ Set the air conditioner to **state**

“ I want the AC turned **state**

“ Make sure the AC is **state**

Action and parameters

Enter action name

REQUIRED ?	PARAMETER NAME ?	ENTITY ?	VALUE	IS LIST ?	PROMPTS ?
<input checked="" type="checkbox"/>	state	@ACState	Sstate	<input type="checkbox"/>	Did you want th...
<input type="checkbox"/>	Enter name	Enter entity	Enter value	<input type="checkbox"/>	—

[+ New parameter](#)

Figure 6.4 – Setting up an intent on Dialogflow.

Design choicess differing from the Dialogflow website.

As I stated before, I attempted to stay as close to the Dialogflow website as possible, but there are some elements of the website that do not lend themselves to translation into a text based configuration.

For one example of this, look at the way parameters are entered in Dialogflow Figure 6.4. Translating this to a text based interface with the requirement of live syntax checking, it became neccessary to enter the parameters allowed in Training phrases before defining the phrases. Simmillarly, Dialogflow switched from what is called Template Mode where a training phrase would be described like the following "Turn state the AC" to what they call example mode, which means the phrase would be "Turn on the AC" with the "on" beeing annotated to show that it is meant to represent a number of possible values. When translating this to a text based interface, I considered a solution that would look as follows:

```
intent SampleIntent
  trained with phrase
    "Turn {on : state} the AC"
```

I eventually decided against this, as I perceived it to make both writing and reading of the training phrases more difficult.

The difficulty of deciding on defaults.

A large part of what makes both the web interface and the DSL easier to work with, is that a user can assume all the defaults to be reasonable. When first creating a new Dialogflow Agent, all the default settings are already set for you to start working with. I found that for my tool I would have to use the same defaults that the website does, so that the same workflow of creating an agent and some intents for it would arrive at the same results on the website and in the DSL. This led to a bit of a problem when it came to the two default intents that a Dialogflow agent is created with. The "Default Fallback Intent" and the "Default Welcome Intent". I considered a solution of adding these default intents during compilation, unless the user set a specific setting in the agent, but I found this to be too unintuitive. On the Dialogflow website a user can always see the list of the intents in the agent, including the two default ones on the Intents panel, but in a text based interface the user cannot easily be informed of the default intents existing in the background. I decided, that only the intents described in the user's code should be in the agent. I plan to, at a later date add a shortcut for using the default intents via a "use_default_intents" flag, so the user can still use the default intents, but they are not hidden from them.

Missing Features

Dialogflow is a large project, much bigger in scope than this Thesis, so it was immediately apparent, that I would not be able to support all of the features and settings that are available in dialogflow. Instead I selected the features that were necessary to support development in my bachelor project. This means, that some projects might be unable to use this prototype, as they rely on features that are not supported.

6.2.5 Usage

//TODO

When you use the tool/compiler that I built, you run this compiler with the input being the DSL code; the output will be a full JSON representation of a Dialogflow agent which can be sent to the Dialogflow V2API. The V2API allows you to update the online version of your agent using the JSON files.

Dynamic Entity Control

//TODO

In our bachelor project we have some entity types that are dynamically updated via the Dialogflow API in order to stay up to date with our production database. For Example, we have the Team entity type, that is populated with the names of teams that are signed up to our service. This allows a user to select his team via the voice assistant. Since Teams are created and deleted by the users, we need to update the entity type while the service is deployed. This makes it impossible to have a list of all Teams written down in the DSL code to send to the

server. Instead it is possible to enter either the keyword “dynamic” for an Entity Type. This allows the user to have the type exist in the DSL and be valid for validation - but not have any JSON files generated for it, so as not to overwrite an entity type that is dynamically set on Dialogflow via the API.

6.3 Target Group

This project is directed at teams of developers who will be working on an agent for an extended time, and for whom using version control is a necessity

If however, you are a small group under time pressure, and you do not need to maintain the agent throughout its co evolution with your application, continuing to use the Dialogflow web interface will simpler.

Developer who will profit from the tool I have designed, will see advantages in the following aspects, mostly by virtue of being able to integrate with Git:

- Teamwork:
Looking up changes by colleagues.
- Learning:
Help avoid repeating mistakes and provide a solution to bugs that were solved before.
- History:
Allow new developers joining the team to get an overview of the project so far and allow important workflows like finding out which version introduced a bug.
- Consistency:
Make code reviews for changes to an agent possible, which reduces bugs and improves code quality [citation needed].

7 | Evaluation

In the following chapter I will evaluate the performance of my DSL-prototype. Testing and evaluation has been done by myself by referring back to the requirements I stated earlier in chapter four. A future larger scale survey would be welcome but was not part of this evaluation. The requirements I used for evaluation were:

- Length
- Readability
- Diff size
- Automatic compilation and update

In the following sections I will talk about each of these requirements and whether and in howfar my prototype can fulfill them.

7.1 Length

In order to provide a tangible benefit the DSL code must be significantly shorter than the JSON representation. Coming back to the agent used in chapter four, I can show that the DSL code for that agent is exactly 23 lines long, while using a large amount of whitespace and linebreaks to support readability.

The JSON version for this same agent, however, comes in at exactly 200 lines as you can see in the appendix. <https://github.com/arne-z/BachelorThesis/commit/d61614158d41d72bb72f28f941718a707d72a5e0> This trend continues accross all my test cases, as you can see in Figure 7.1. This demonstrates, that the DSL code for an agent is significantly shorter than the JSON version. This saves the developer valuable time, e.g. when conducting a code review. Going of numbers from [citation needed](Chris, code reading speed), reading the DSL code instead of the JSON files in the example given above would save a developer more than 50 minutes of code inspection. This is a large benefit in and of itself, but is amplified by the following point.

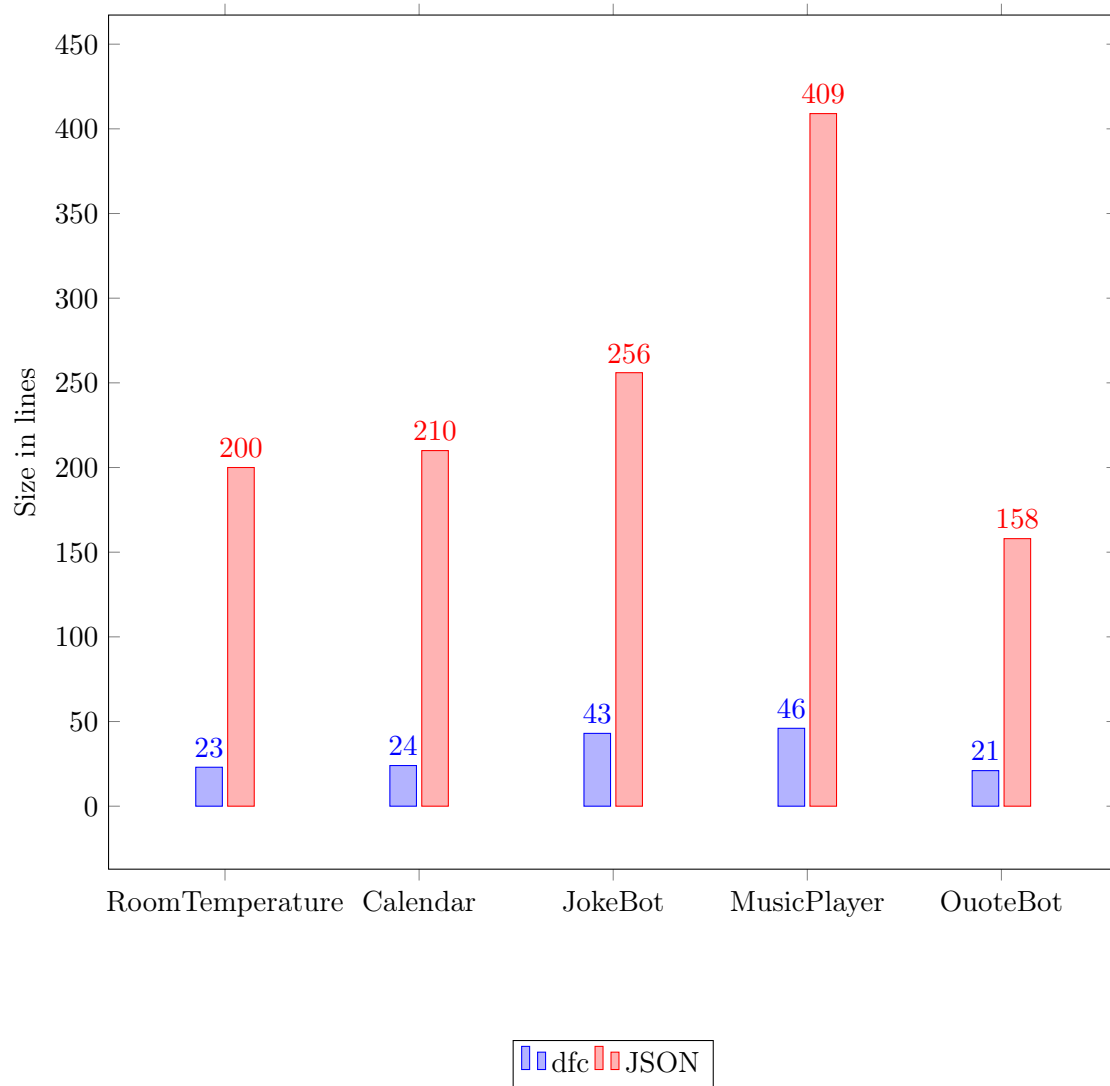


Figure 7.1 – Difference in configuration size.

7.2 Readability

While length is an objective criterion, readability is innately more subjective, as it relates to how well a developer will be able to understand a piece of code.

For this comparison I will focus on five criteria; the first three are reworded from Egon Elbre's "The psychology of code readability" [\[citation needed\]https://medium.com/@egonelbre/psychology-of-code-readability-d23b1ff1258a](https://medium.com/@egonelbre/psychology-of-code-readability-d23b1ff1258a); the last two are based on my own observations.

- Cohesive pieces of code, conveying one idea at a time.
- Descriptive - but not overly long - names and keywords.
- Using idioms from natural language.
- Indentation and whitespace.
- Leaving out unnecessary values.

Cohesive pieces of code, conveying one idea at a time.

The following piece of JSON configuration defines a single training phrase for the SwitchAC intent, from the same example used above. The intent itself, is not defined in the same file, since training phrases are kept in a separate file in the JSON configuration.

```
{
  "id": "ed813a56-e6e9-4bce-b0ed-dca488102333",
  "data": [
    {
      "text": "Turn ",
      "userDefined": false
    },
    {
      "text": "state ",
      "alias": "state",
      "meta": "@ACState",
      "userDefined": true
    },
    {
      "text": "the AC ",
      "userDefined": false
    }
  ],
  "isTemplate": false,
  "count": 0,
  "updated": 1560083189
},
```

This is equivalent to the following line found in my SwitchAC example:

```
trained with phrase
  "Turn" state "the AC"
```

As can clearly be seen, the JSON configuration is more intended for automatic parsing, than for human readability. It is also limited by the key value, and stringly typed nature of the configuration in JSON format. In my DSL, the training phrase can easily be traced back to it's intent, which is defined only three lines above in this example.

Descriptive - but not overly long - names and keywords.

When designing the syntax for my DSL, I tried - whenever possible - to use syntax, that reads close to a normal sentence in natural language. This is why a developer writes:

```
trained with file
  "filename"
```

in order to include a file with pre-generated training phrases. A reader can immediately understand what the otherwise not always recognizable filename refers to. For the same reason, a new entity-type is defined with the keyword "Type" followed by the name of the newly defined type. The same is true for an intent, using "Intent".

In contrast, the JSON example I showed above contains keys with names like "data" for a training phrase, "meta" for the type a parameter corresponds to, and the "isTemplate" key which is always set to false, because it is deprecated.

Using idioms from natural language.

```
//TODO In the JSON representation long jumbles of number and letters
```

Indentation and whitespace.

```
//TODO
```

Leaving out unnecessary values.

```
//TODO
```

Fallback intent example here.

UNFINISHED In order to provide a tangible benefit the DSL code must be more readable than the JSON representation. [citation needed] Definition of readability == undefined Use Chris's study for this. Less code causes better maintainability and faster and easier code reviews.

It's easier to see what is important to notice in the DSL code, than in the much longer JSON representation.

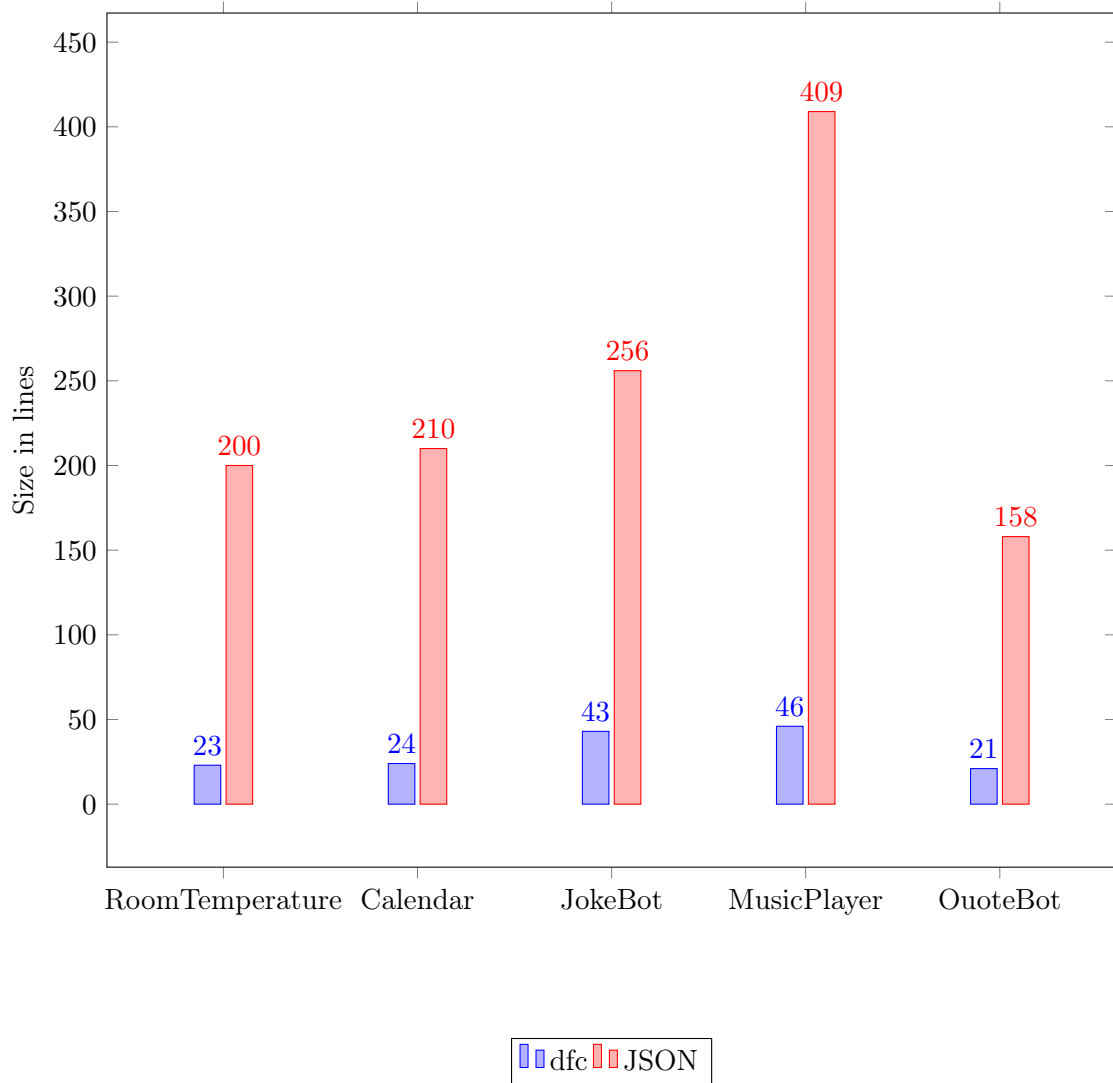


Figure 7.2 – Difference in diff size.

7.3 Diff size

In order to provide a tangible benefit the DSL code must create smaller diffs (sum of changed lines) than the JSON representation when making changes.

Using the air conditioning example again, when making a change - in this case adding more training phrases to an agent to allow additional functionality - the diff size shows a large difference between DSL code and JSON version. In this specific example, the DSL code has a diff of 7 lines¹ and the JSON version one of 124 lines. the other test cases can be see in Figure 7.2.²

Another thing of note, is that the DSL code causes less unintended diffs, as some elements of the JSON - like generated Unique Identifiers - can cause diffs that are unrelated to any intentional changes by the developer.

¹<https://github.com/arne-z/BachelorThesis/commit/559f72d4dd8550d57bef8b42ee34678317e21fcb>

²<https://github.com/arne-z/BachelorThesis/commit/08255f4b1bff5a2bb4bf57319ab37033193429c5>

7.4 Automatic compilation and update

A developer needs to be able to automatically compile and update an agent on the web from DSL code. The compiler created alongside this prototype³ is able to automatically generate the JSON representation of an agent from DSL code. Alongside this, I have written a script that automatically sends the resulting JSON files to the Dialogflow website. This can be used in continuous integration setups like CircleCI⁴ to automatically keep the online version of a Dialogflow agent up to date with the most current version of the DSL code in source control.

Below you can see an example of the CircleCI job configuration that I set up for the prototype in our bachelor project.⁵

```
deploy_agent:
  docker:
    - image: circleci/openjdk:latest-node
  steps:
    - checkout
    - run: >
      wget -O ./dfc_compiler.jar
      https://github.com/arne-z/BachelorThesis/releases/...
    - run: yarn install
    - run: java -jar ./dfc_compiler.jar ./Agent/Tobito.dfc
    - run: echo $GOOGLE_CERT_FILE_64 | base64 --decode > ./googleKey.json
    - run: >
      node ./utility/importAgent.js
      --dir ./src-gen
      --key ./googleKey.json
      --pid projects/newagent-bdb60
```

The above configuration starts a docker image with Java and Node installed - Java is required for the DSL compiler, Node for the import script - and checks out the most recent version of our project from source control. It then downloads the DSL compiler from my github repository and runs the compiler targeting the .dfc file containing the DSL code for our project's agent. It then runs the importAgent script that will send the JSONs generated by the compiler to the Dialogflow API.

This setup allows a "hands free" approach to developing for Dialogflow, where all the developer has to do is change the DSL code and once that is pushed to Git, the Dialogflow agent is updated automatically.

³<https://github.com/arne-z/BachelorThesis/releases>

⁴<https://circleci.com/>

⁵The full configuration set up by our bachelor project team can be found here.

<https://github.com/hpi-sam/ask-your-repository-dialogflow-adapter/blob/agent-config-with-dsl/.circleci/config.yml>

8 | Summary and further Work

It was my self set task for this Bachelor thesis to find a solution for shortcomings in available version control for Dialogflow agents. In oorder to solve this I built a prototype of a DSL for describing Dialogflow agents. My assumption going into this project was, that there shoud and could be a simpler shorter and more readable solution for using version control with a Dialogflow agent than saving the cofiguration of said agent in JSON files. The main Idea was to offer this solution to teams of developers working longer term on maintaining an agent throughout it's coevolution with their application. I arrived at this solution because, for the very beginning, I wanted to find a way for deveoplers to work with dialogflow without leaving their familiar way of working. In order to build this DSL I had to design a grammar to describe the syntax possible in the language and build a code generator using this grammar to generate JSON files. In order to test and evaluate this prototype, I designed multiple test cases in each of which I compared the performance of the prototype with that of the established way of saving the agent configuration using JSON files. In result I have found that the DSL provides a measurable improvement in both the size of agent configurations and the size of diffs created by changes to the configuration, a XXX% reduction in size and a YYY% reduction in diff size respectively, while also improving readability and almost entirely maintaining the ease of updating the agent's online version. Team working with this tool will find that this tool offers benefits in regard to teamwork, learning, cosistency, and keeping track of their version history. The code for my prototype is available online, free and open source.

//TODO more ...

For further projects one could consider:

- A larger survey for better evaluation of long term benefits to teams working with this tool.
- Finding out wether it is possible to use a DSL like this to create agents in a uniform language for both Dialogflow and Amazon Lex.
- Build a producation ready tool from the prototype that achieves full feature parity with the dialogflow web interface.
- Build a generator for DSL code from Dialogflow JSON exports, to helpt teams reduce the cost of switching to the DSL solution.

For the nearest future my tool will help my bachelor project team, with working on our own Dialogflow agent.

9 | Declaration of Independence

//TODO

Bibliography

[Stackups] *Amazon Lex vs. Dialogflow*. URL: <https://stackshare.io/stackups/amazon-lex-vs-dialogflow>.