


Ravaoavy Arnold

L2 DA2I


034i25

1)

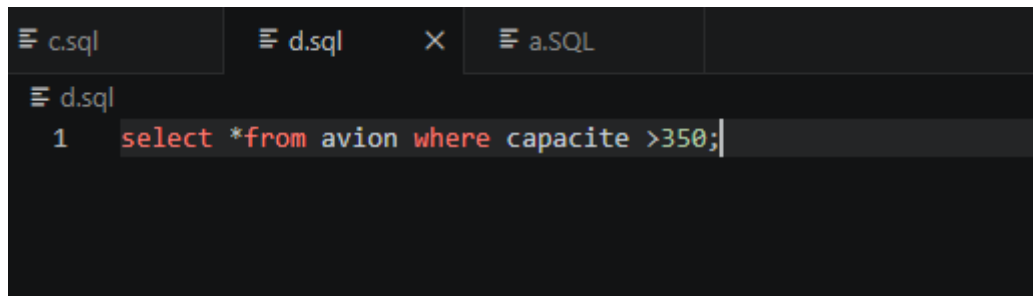


A screenshot of a SQL editor interface. At the top, there are three tabs: 'c.sql', 'd.sql', and 'a.SQL'. The 'd.sql' tab is active. Below the tabs, the editor shows a single line of SQL code: `1 select *from avion where capacite >350;`. The code is color-coded: 'select' is red, '*' is black, 'from' is red, 'avion' is black, 'where' is red, 'capacite' is black, '>350;' is black.

2)

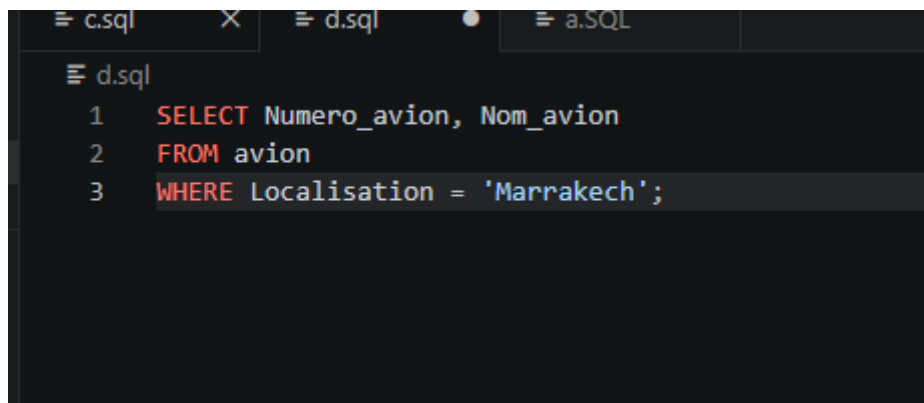

A screenshot of a SQL editor interface. At the top, there are three tabs: 'c.sql', 'd.sql', and 'a.SQL'. The 'd.sql' tab is active. Below the tabs, the editor shows three lines of SQL code: `1 SELECT Numero_avion, Nom_avion`, `2 FROM avion`, and `3 WHERE Localisation = 'Marrakech';`. The code is color-coded: 'SELECT' is red, 'Numero_avion' and 'Nom_avion' are black, 'FROM' is red, 'avion' is black, 'WHERE' is red, 'Localisation' is black, '=' is black, 'Marrakech' is black, and ';' is black.

3)

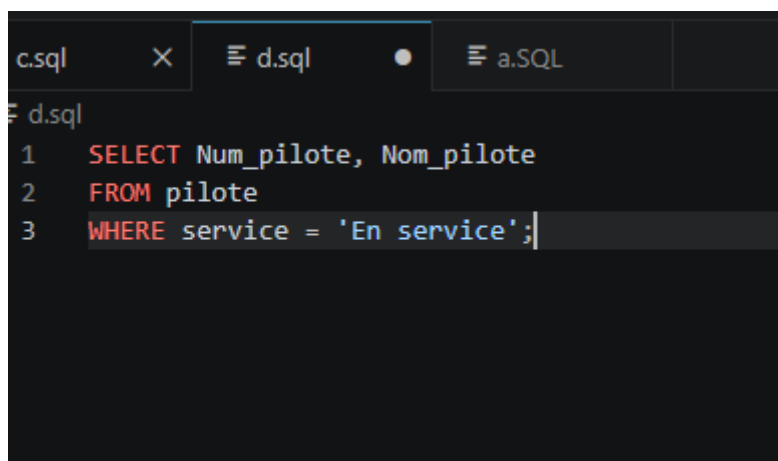

A screenshot of a SQL editor interface. At the top, there are three tabs: 'c.sql', 'd.sql', and 'a.SQL'. The 'd.sql' tab is active. Below the tabs, the editor shows three lines of SQL code: `1 SELECT Num_pilote, Nom_pilote`, `2 FROM pilote`, and `3 WHERE service = 'En service';`. The code is color-coded: 'SELECT' is red, 'Num_pilote' and 'Nom_pilote' are black, 'FROM' is red, 'pilote' is black, 'WHERE' is red, 'service' is black, '=' is black, 'En service' is black, and ';' is black.

4)

```
d.sql
1  SELECT Num_pilote, Nom_pilote
2  FROM pilote
3  WHERE service = 'En service';
```


5)

```
sqlite 2
c.sql d.sql a.SQL
d.sql
1  SELECT Numero_avion, Nom_avion
2  FROM avion
3  WHERE Localisation = 'Marrakech'
4  OR Capacite < 350;
```

6)


```
c.sql x d.sql a.SQL
d.sql
1  SELECT Numero_avion, Nom_avion
2  FROM avion
3  WHERE Localisation = 'Marrakech'
4  OR Capacite < 350;
```

7)

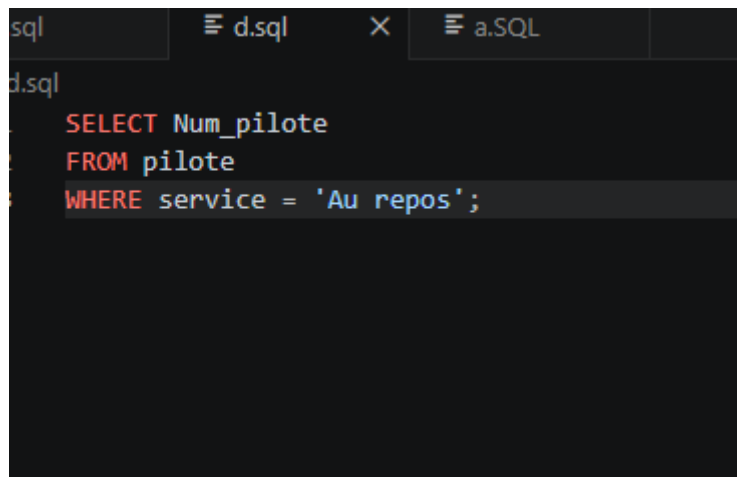


```
sql d.sql a.SQL  
d.sql  
SELECT Num_pilote  
FROM pilote  
WHERE service = 'Au repos';
```

8)

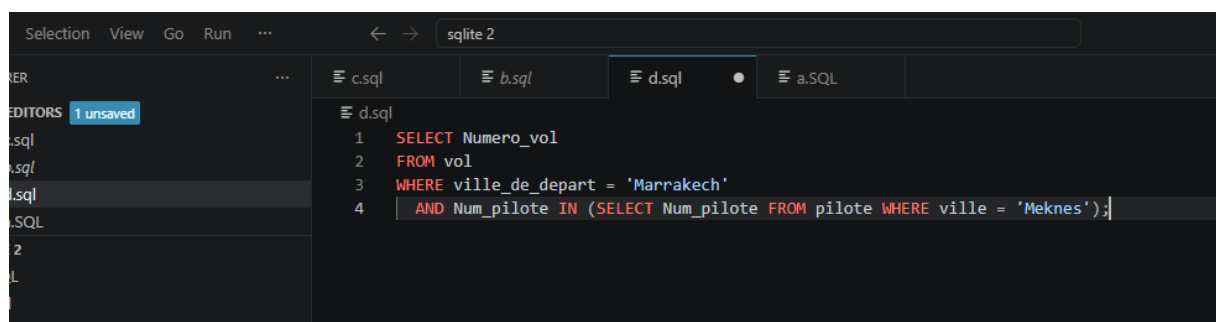


```
Selection View Go Run ... sqlite 2  
c.sql b.sql d.sql a.SQL  
EDITORS 1 unsaved  
d.sql  
1 SELECT Numero_vol  
2 FROM vol  
3 WHERE ville_de_depart = 'Marrakech'  
4 AND Num_pilote IN (SELECT Num_pilote FROM pilote WHERE ville = 'Meknes');
```

9)

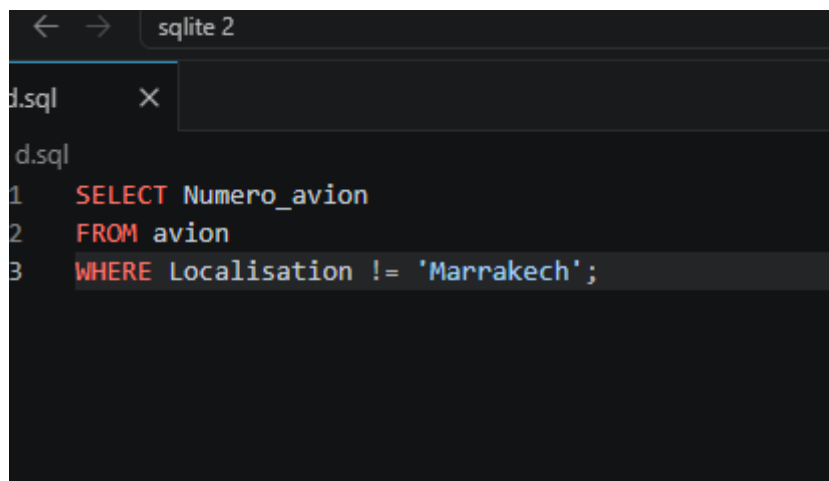

```
sqlite 2  
d.sql  
1 SELECT Numero_avion  
2 FROM avion  
3 WHERE Localisation != 'Marrakech';
```

10)

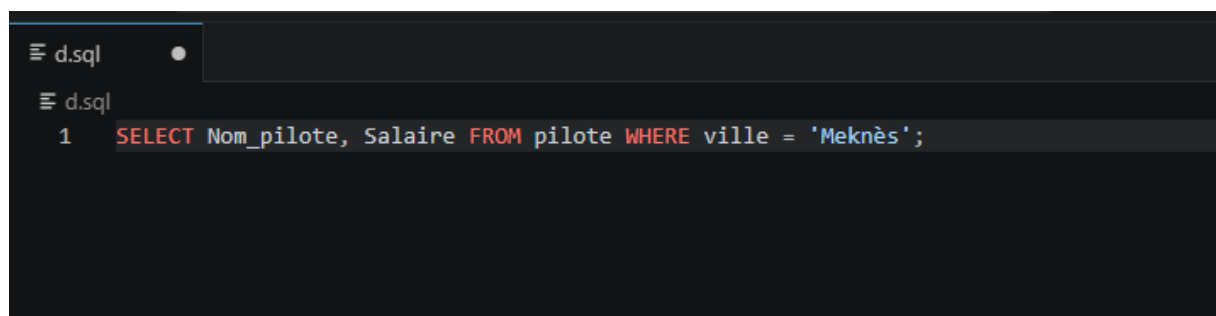

```
d.sql  
d.sql  
1 SELECT Nom_pilote, Salaire FROM pilote WHERE ville = 'Meknès';
```

11)

```
d.sql
d.sql
1 SELECT Nom_pilote, Numero_vol
2 FROM pilote, vol
3 WHERE pilote.Num_pilote = vol.Num_pilote;
```

12)

```
d.sql
d.sql
1 SELECT Nom_pilote, Nom_avion
2 FROM pilote, vol, avion
3 WHERE pilote.Num_pilote = vol.Num_pilote
4 AND vol.Numero_avion = avion.Numero_avion;
```

13)

```
d.sql
d.sql
1 SELECT Numero_vol, ville_de_depart, ville_darrivee, Nom_pilote
2 FROM vol, pilote
3 WHERE vol.Num_pilote = pilote.Num_pilote;
```

14)

```
d.sql
d.sql
1  SELECT DISTINCT Nom_avion
2  FROM avion, vol
3  WHERE avion.Numero_avion = vol.Numero_avion
4  AND vol.ville_de_depart = 'Casablanca';
```

15)

```
d.sql
1  SELECT DISTINCT Nom_pilote
2  FROM pilote, vol, avion
3  WHERE pilote.Num_pilote = vol.Num_pilote
4  AND vol.Numero_avion = avion.Numero_avion
5  AND avion.Capacite > 300;
```

16)

```
sqlite 2
d.sql
1  SELECT Nom_pilote, ville_darrivee
2  FROM pilote, vol
3  WHERE pilote.Num_pilote = vol.Num_pilote;
```

17)

```
d.sql
1  SELECT * FROM pilote, vol, avion
2  WHERE pilote.Num_pilote = vol.Num_pilote
3  AND vol.Numero_avion = avion.Numero_avion;
```

18)

```
d.sql
1  SELECT Nom_pilote
2  FROM pilote
3  WHERE Salaire > (SELECT AVG(Salaire) FROM pilote);
```

19)

```
sqlite L
d.sql x
d.sql
1  SELECT Nom_avion
2  FROM avion
3  WHERE Capacite > (SELECT Capacite FROM avion WHERE Numero_avion = 101);
```

20)

```
d.sql x
d.sql
1  SELECT Nom_pilote
2  FROM pilote
3  WHERE Num_pilote NOT IN (SELECT Num_pilote FROM vol);
4
```

21)

```
d.sql
1  SELECT DISTINCT ville_de_depart
2  FROM vol, pilote
3  WHERE vol.Num_pilote = pilote.Num_pilote
4  AND pilote.ville = 'Marrakech';
```

22)

```
sqlite 2
d.sql
1  CREATE VIEW vue_vols_details AS
2  SELECT Numero_vol, Nom_pilote, Nom_avion
3  FROM vol, pilote, avion
4  WHERE vol.Num_pilote = pilote.Num_pilote
5  AND vol.Numero_avion = avion.Numero_avion;
```

23)

```
d.sql
1  CREATE VIEW pilotes_riches AS
2  SELECT * FROM pilote
3  WHERE Salaire > 15000;
```


24)

```
d.sql
1  SELECT * FROM pilotes_riches;
```

25)

```
d.sql
1  DROP VIEW pilotes_riches;
```


26)

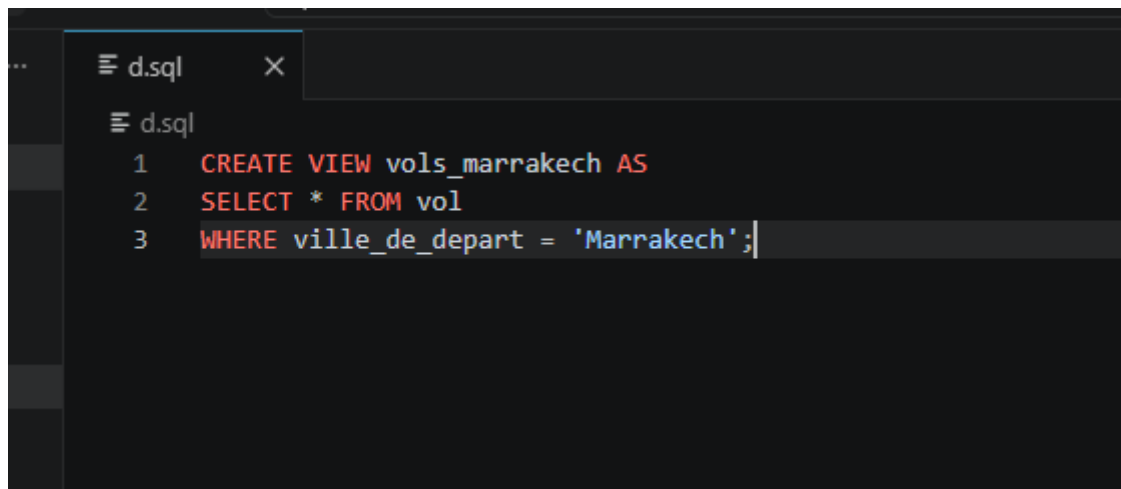

A screenshot of a SQL editor window with a dark theme. The title bar shows 'd.sql' and a close button. The editor contains three lines of SQL code: '1 CREATE VIEW vols_marrakech AS', '2 SELECT * FROM vol', and '3 WHERE ville_de_depart = 'Marrakech';'. The cursor is at the end of the third line.

```
1 CREATE VIEW vols_marrakech AS
2 SELECT * FROM vol
3 WHERE ville_de_depart = 'Marrakech';
```


27)

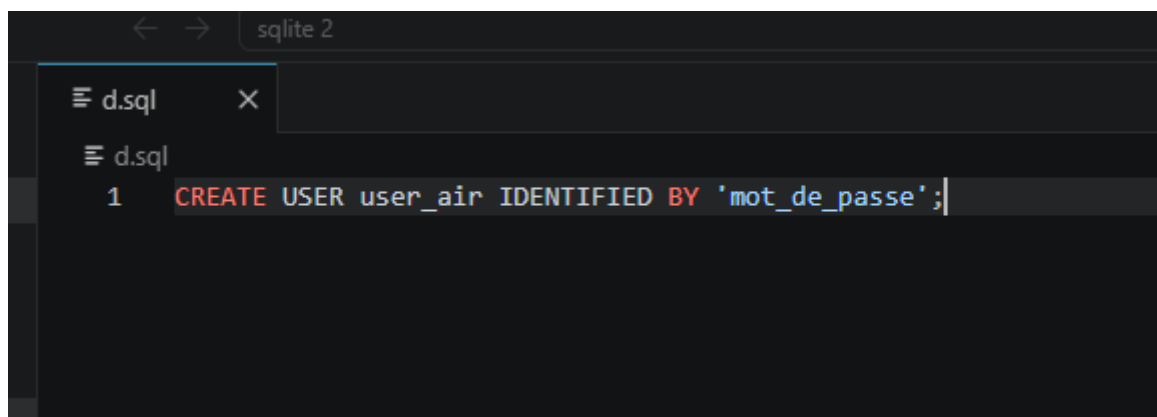

A screenshot of a SQL editor window with a dark theme. The title bar shows 'sqlite 2' and navigation arrows. The editor contains one line of SQL code: '1 CREATE USER user_air IDENTIFIED BY 'mot_de_passe';'. The cursor is at the end of the line.

```
1 CREATE USER user_air IDENTIFIED BY 'mot_de_passe';
```

28)

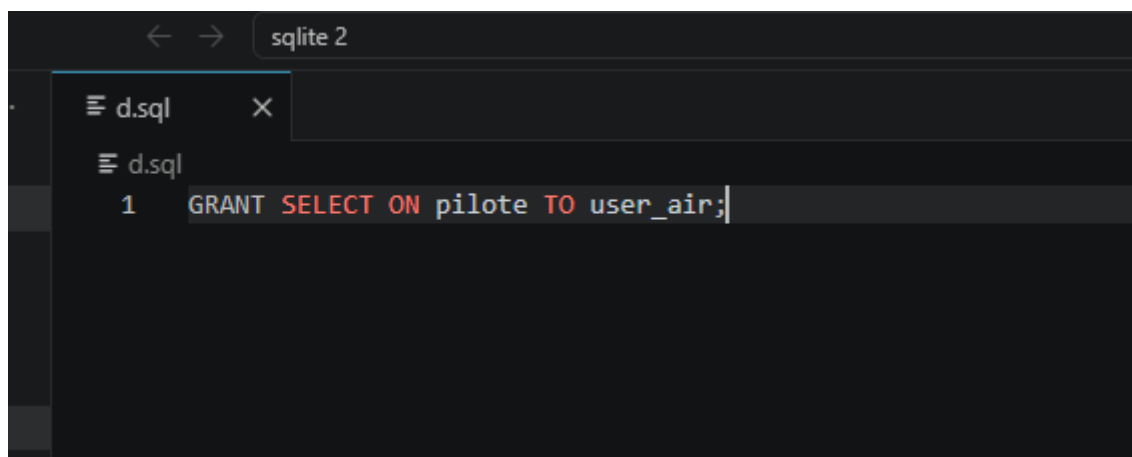

A screenshot of a SQL editor window with a dark theme. The title bar shows 'sqlite 2' and navigation arrows. The editor contains one line of SQL code: '1 GRANT SELECT ON pilote TO user_air;'. The cursor is at the end of the line.

```
1 GRANT SELECT ON pilote TO user_air;
```

29)


```
d.sql
d.sql
1 GRANT INSERT ON vol TO user_air;
```

30)

```
d.sql
d.sql
1 REVOKE DELETE ON avion FROM user_air;
```


31)

```
d.sql
d.sql
1 GRANT ALL PRIVILEGES ON BD_AIR_MAROC.* TO user_air;
```

32)

```
sqlite 2
d.sql
d.sql
1 CREATE ROLE gestion_vol;
2 GRANT SELECT, INSERT, UPDATE ON vol TO gestion_vol;
```

33)

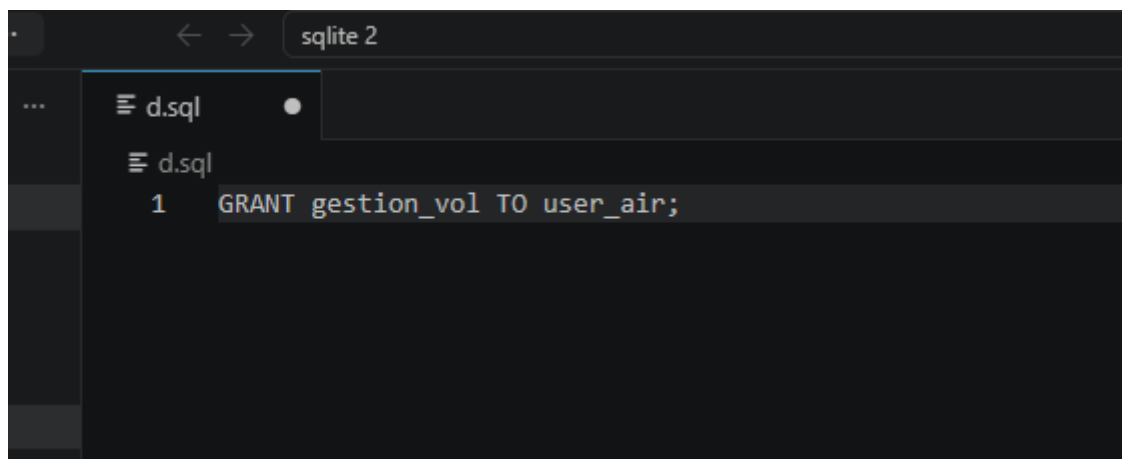

The image shows a screenshot of a SQLite editor window. The title bar at the top reads "sqlite 2". On the left side, there is a file explorer pane showing a directory structure with two files named "d.sql". The first "d.sql" file is selected, and its contents are displayed in the main editor area. The content of the selected file is a single SQL command: "1 GRANT gestion_vol TO user_air;". The command is written in a monospaced font, with "1" at the beginning of the line. The editor has a dark theme with a light gray line number column on the left.

```
1 GRANT gestion_vol TO user_air;
```