In [ ]:
```
DL Expt-3
```

In [1]:
```
import numpy as np
import pandas as pd
import random
import tensorflow as tf
import matplotlib.pyplot as plt
from sklearn.metrics import accuracy_score

from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Flatten, Conv2D, Dense, MaxPooling2D
from tensorflow.keras.optimizers import SGD
from tensorflow.keras.utils import to_categorical
from tensorflow.keras.datasets import mnist
```

In [2]:
```
(X_train, y_train), (X_test, y_test) = mnist.load_data()
```

In [3]:
```
print(X_train.shape)
```

```
(60000, 28, 28)
```

In [4]:
```
X_train[0].min(), X_train[0].max()
```

Out[4]:
```
(0, 255)
```

In [5]:
```
X_train = (X_train - 0.0) / (255.0 - 0.0)
X_test = (X_test - 0.0) / (255.0 - 0.0)
X_train[0].min(), X_train[0].max()
```

Out[5]:
```
(0.0, 1.0)
```

In [6]:
```
def plot_digit(image, digit, plt, i):
    plt.subplot(4, 5, i + 1)
    plt.imshow(image, cmap=plt.get_cmap('gray'))
    plt.title(f"Digit: {digit}")
    plt.xticks([])
    plt.yticks([])
plt.figure(figsize=(16, 10))
for i in range(20):
    plot_digit(X_train[i], y_train[i], plt, i)
plt.show()
```

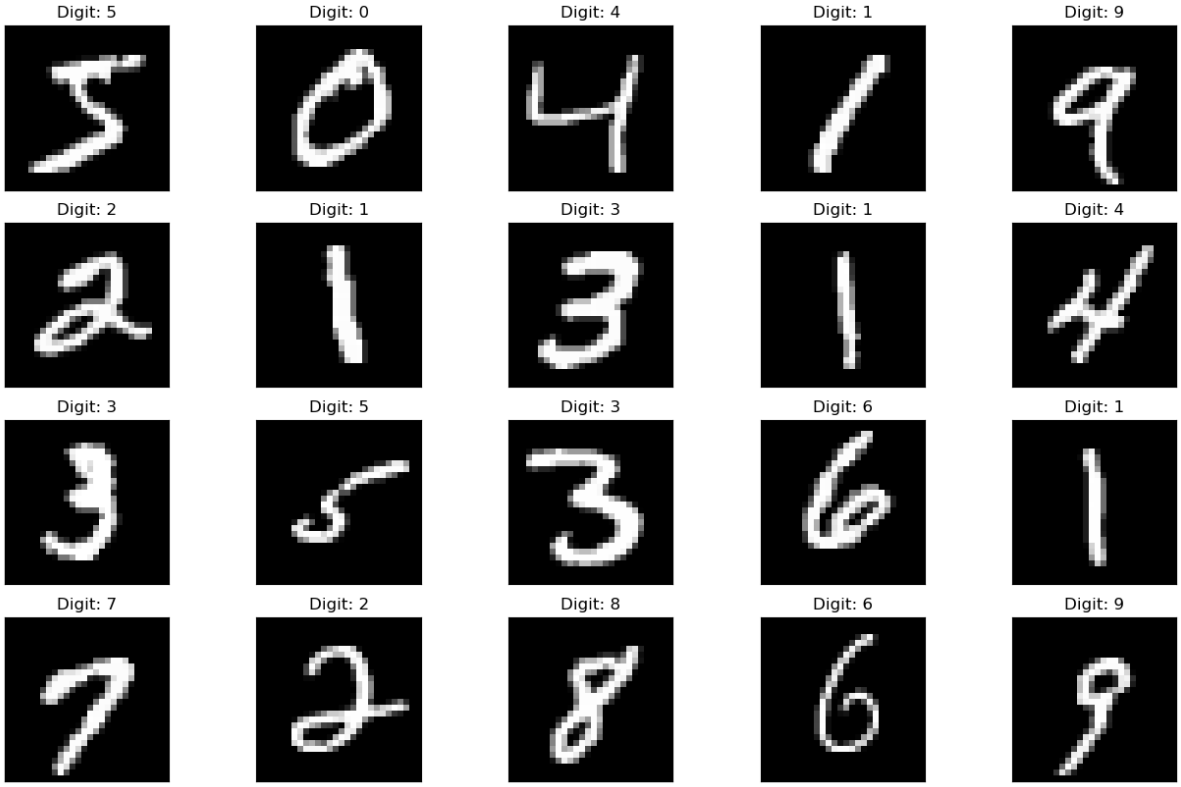

In [7]:
```
X_train = X_train.reshape((X_train.shape + (1,)))
X_test = X_test.reshape((X_test.shape + (1,)))
```

In [8]:
```
y_train[0:20]
```

Out[8]:
```
array([5, 0, 4, 1, 9, 2, 1, 3, 1, 4, 3, 5, 3, 6, 1, 7, 2, 8, 6, 9],
      dtype=uint8)
```

In [9]:
```
model = Sequential([
    Conv2D(32, (3, 3), activation="relu", input_shape=(28, 28, 1)),
    MaxPooling2D((2, 2)),
    Flatten(),
    Dense(100, activation="relu"),
    Dense(10, activation="softmax")
])
```

In [10]:
```
optimizer = SGD(learning_rate=0.01, momentum=0.9)
model.compile(
    optimizer=optimizer,
    loss="sparse_categorical_crossentropy",
    metrics=["accuracy"]
)
model.summary()
```

```
Model: "sequential"
_________________________________________________________________
Layer (type)                 Output Shape              Param #
=================================================================
conv2d (Conv2D)              (None, 26, 26, 32)        320
_________________________________________________________________
max_pooling2d (MaxPooling2D) (None, 13, 13, 32)        0
_________________________________________________________________
flatten (Flatten)            (None, 5408)              0
_________________________________________________________________
dense (Dense)                (None, 100)               540900
_________________________________________________________________
dense_1 (Dense)              (None, 10)                1010
=================================================================
Total params: 542,230
Trainable params: 542,230
Non-trainable params: 0
_________________________________________________________________
```

In [11]:
```
model.fit(X_train, y_train, epochs=10, batch_size=32)
```

```
Epoch 1/10
1875/1875 [==============================] - 13s 7ms/step - loss: 0.2314 - accurac
y: 0.9305
Epoch 2/10
1875/1875 [==============================] - 13s 7ms/step - loss: 0.0747 - accurac
y: 0.9768
Epoch 3/10
1875/1875 [==============================] - 12s 6ms/step - loss: 0.0480 - accurac
y: 0.9855
Epoch 4/10
1875/1875 [==============================] - 13s 7ms/step - loss: 0.0345 - accurac
y: 0.9891
Epoch 5/10
1875/1875 [==============================] - 12s 6ms/step - loss: 0.0248 - accurac
y: 0.9922
Epoch 6/10
1875/1875 [==============================] - 12s 7ms/step - loss: 0.0190 - accurac
y: 0.9941
Epoch 7/10
1875/1875 [==============================] - 13s 7ms/step - loss: 0.0139 - accurac
y: 0.9960
Epoch 8/10
1875/1875 [==============================] - 13s 7ms/step - loss: 0.0105 - accurac
y: 0.9971
Epoch 9/10
1875/1875 [==============================] - 13s 7ms/step - loss: 0.0069 - accurac
y: 0.9986
Epoch 10/10
1875/1875 [==============================] - 13s 7ms/step - loss: 0.0055 - accurac
y: 0.9989
```

Out[11]:
```
<tensorflow.python.keras.callbacks.History at 0x29e06f3d948>
```

In [12]:
```
plt.figure(figsize=(16, 10))
for i in range(20):
    image = random.choice(X_test).squeeze()
    digit = np.argmax(model.predict(image.reshape((1, 28, 28, 1)))[0], axis=-1)
    plot_digit(image, digit, plt, i)
plt.show()
```

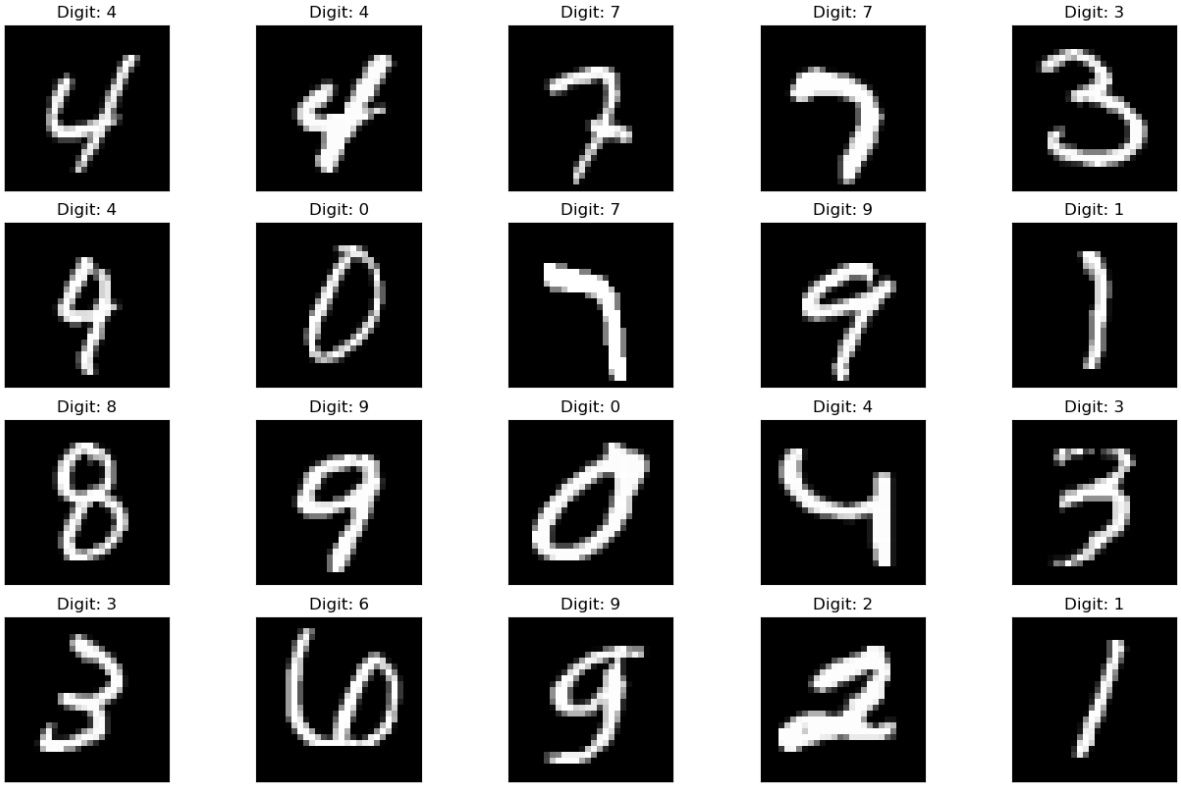

In [13]:
```
predictions = np.argmax(model.predict(X_test), axis=-1)
accuracy_score(y_test, predictions)
```

Out[13]:
```
0.9872
```

In [14]:
```
n=random.randint(0,9999)
plt.imshow(X_test[n])
plt.show()
```

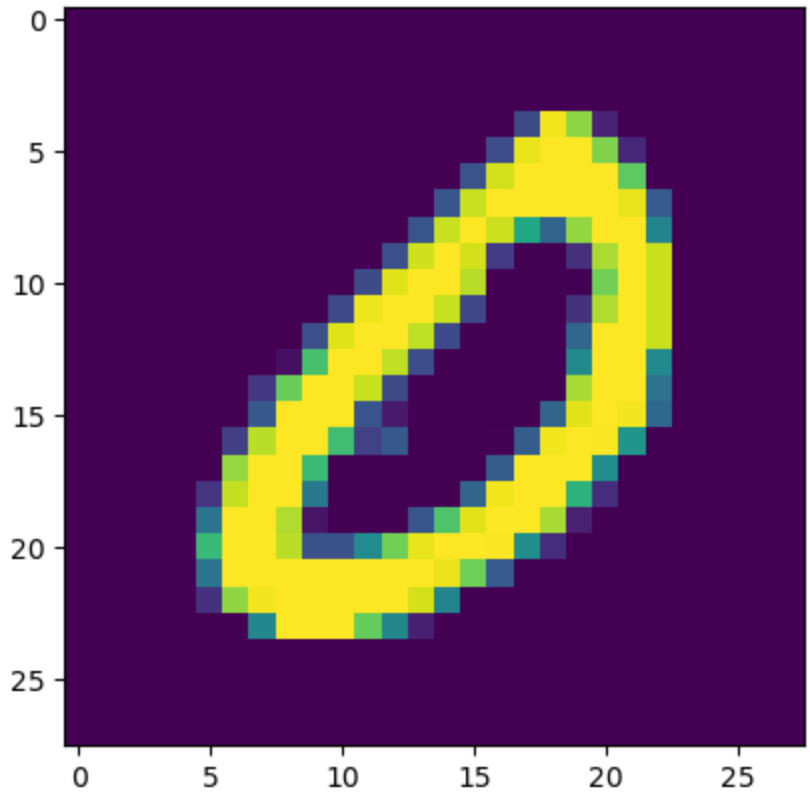

In [15]:
```
predicted_value=model.predict(X_test)
print("Handwritten number in the image is= %d" %np.argmax(predicted_value[n]))
```

```
Handwritten number in the image is= 0
```

In [16]:
```
score = model.evaluate(X_test, y_test, verbose=0)
print('Test loss:', score[0]) #Test loss: 0.0296396646054
print('Test accuracy:', score[1])
```

```
Test loss: 0.04624301567673683
Test accuracy: 0.9872000217437744
```

In [17]:
```
#The implemented CNN model is giving Loss=0.04624301567673683  and
#accuracy: 0.9872000217437744 for test mnist dataset
```