

Affine Loop Optimization Using Modulo Unrolling in Chapel

Aroon Sharma

May 21, 2014

Abstract

Compilation of programs for distributed memory architectures using message passing is a vital task with potential for speedups over existing techniques. The partitioned global address space (PGAS) parallel programming model exposes locality of reference information to the programmer thereby improving programmability and allowing for compile-time performance optimizations. In particular, programs compiled to message passing hardware can improve in performance by aggregating messages and eliminating dynamic locality checks for affine array accesses in the PGAS model.

This paper presents a loop optimization for message passing programs that use affine array accesses in Chapel, a PGAS parallel programming language. Each message in Chapel incurs some non-trivial run time overhead. Therefore, aggregating messages improves performance. The optimization is based on a technique known as modulo unrolling, where the locality of any affine array access can be deduced at compile time if the data is distributed in a cyclic or block cyclic fashion. First pioneered by Barua [1] for tiled architectures, we adapt modulo unrolling to the problem of compiling PGAS languages to message passing architectures. When applied to loops and data distributed cyclically or block cyclically, modulo unrolling can decide when to aggregate messages thereby reducing the overall message count and run time for a particular loop. Compared to other methods, modulo unrolling greatly simplifies the very complex problem of automatic code generation of message passing code from a PGAS language such as Chapel. It also results in substantial performance improvement compared to the unoptimized Chapel compiler.

To implement this optimization in Chapel, we modify the leader and follower iterators in the Cyclic and Block Cyclic data distribution modules. Results were collected that compare the performance of Chapel programs optimized with modulo unrolling with Chapel programs using the existing Chapel data distributions. Data collected for eleven parallel benchmarks on a ten-locale cluster show that on average, modulo unrolling used with Chapel's Cyclic distribution results in 76 percent fewer messages and a 45 percent decrease in runtime. Similarly, modulo unrolling used with Chapel's Block Cyclic distribution results in 72 percent fewer messages and a 52 percent decrease in runtime for data collected for two parallel benchmarks.

1 Introduction

Message passing code generation is a difficult task for an optimizing compiler targeting a distributed memory architecture. These architectures are comprised of independent units of computation called locales, each with its own set of processors, memory, and address space. For programs executed on these architectures, data

is distributed across various locales of the system, and the compiler needs to reason about locality in order to determine whether a data access is remote (requiring a message to another locale to request a data element) or local (requiring no message and accessing the data element on the locale's own memory). Each remote data memory access results in a message with some non-trivial run time overhead, which can drastically slow down a program's execution time. This overhead is caused by latency on the interconnection network and locality checks for each data element. Accessing multiple remote data elements individually results in this run time overhead being incurred multiple times, whereas if they are transferred in bulk the overhead is only incurred once. Therefore, aggregating messages improves performance of message passing codes. In order to transfer remote data elements in bulk, the compiler must be sure that all elements in question are remote before the message is sent.

The vast majority of loops in scientific programs access data using affine array accesses. An affine array access is one that is a linear expression of the loop's index variables. Loops using affine array accesses are special because they exhibit regular access patterns within a data distribution. Compilers can use this information to decide when message aggregation can take place.

This paper presents a loop optimization for message passing code generation based on a technique called modulo unrolling. The optimization can be performed by a compiler to aggregate messages and reduce a program's execution time and communication. Modulo unrolling in its original form, pioneered by [1], was meant to target tiled architectures such as the MIT Raw machine, not distributed memory architectures that use message passing. It has since been modified to apply to such machines in this work. Modulo unrolling used here works by unrolling an affine loop by a factor equal to the number of locales of the machine being utilized by the program. If the arrays used in the loop are distributed cyclically or block cyclically, each array access is guaranteed to reside on a single locale across all iterations of the loop. Using this information, the compiler can then aggregate all remote array accesses that reside on a remote locale into a single message before the loop. If remote array elements are written to during the loop, one message is required to store these elements back to each remote locale after the loop runs.

We demonstrate the modulo unrolling loop optimization in practice by implementing it in Chapel. Chapel is an explicitly parallel programming language developed by Cray Inc. that falls under the Partitioned Global Address Space (PGAS) memory model. Here, a system's memory is abstracted to a single global address space regardless of the hardware architecture and is then logically divided per locale and thread of execution. By doing so, locality of reference can easily be exploited no matter how the system architecture is organized. The Chapel compiler is an open source project used by many in industry and academic settings. The language contains

many high level features such as zippered iteration and array slicing that greatly simplify the implementation of modulo unrolling into the language.

1.1 Chapel's Data Distributions

In this work, we consider three types of data distributions: Block, Cyclic, and Block Cyclic. In a Block distribution, elements of an array are mapped to locales evenly in a dense manner. In a Cyclic distribution, elements of an array are mapped in a round-robin manner across locales. In a Block Cyclic distribution, a blocksize number of elements is allocated to consecutive array indices in a round robin fashion. Figures 1.1 - 3 illustrate these three Chapel distributions for a two-dimensional array. In Figure 2, the array takes a 2 x 2 blocksize parameter.

The choice of data distribution to use for a program boils down to computation and communication efficiency. It has been shown that finding an optimal data distribution for parallel processing applications is an NP-complete problem, even for one or two dimensional arrays [10]. Certain program data access patterns will result in fewer communication calls if the data is distributed in a particular way. For example, many loops in stencil programs that contain nearest neighbor computation will have better communication performance if the data is distributed using a Block distribution. This occurs because on a given loop iteration, the elements accessed are near each other in the array and therefore more likely to reside on the same locale block. Accessing elements on the same block does not require a remote data access and can be done faster. However, programs that access array elements far away from each other will have better communication performance if data is distributed using a Cyclic distribution. Here, a Block distribution is almost guaranteed to have poor performance because the farther away accessed elements are the more likely they are ~~guaranteed~~ to reside on different locales.

A programmer may choose a particular data distribution for reasons unknown to the compiler. These reasons may not even take communication behavior into account. For example, Cyclic and Block Cyclic distributions provide better load balancing of data across locales. **For a given application,** data redistribution may be needed if elements of a data set are inserted or deleted. In particular, algorithms to redistribute data using a new blocksize exist for the Block Cyclic distribution [14, 11]. If an application uses a dynamic data set with elements being appended, a Cyclic or Block Cyclic distribution is superior to Block because new elements are added to the locale that follows the cyclic or block cyclic pattern. For Block, the entire data set would need to be redistributed every time a new element is appended, which can be expensive.

Compatibility with other PGAS languages might be an important consideration for a programmer when selecting a data distribution. Data sets used by Chapel programs and other PGAS programs should use Cyclic or Block Cyclic distributions because other PGAS languages do not support the Block distribution. A programmer would benefit by distributing the same data set using only one scheme so the data would not have to be replicated for different programs.

Therefore, in this work, it is our view that the compiler should not change the programmer's choice of data distribution in order to achieve better runtime and communication performance. The compiler should attempt to perform optimizations based on the data distribution that the programmer specified.

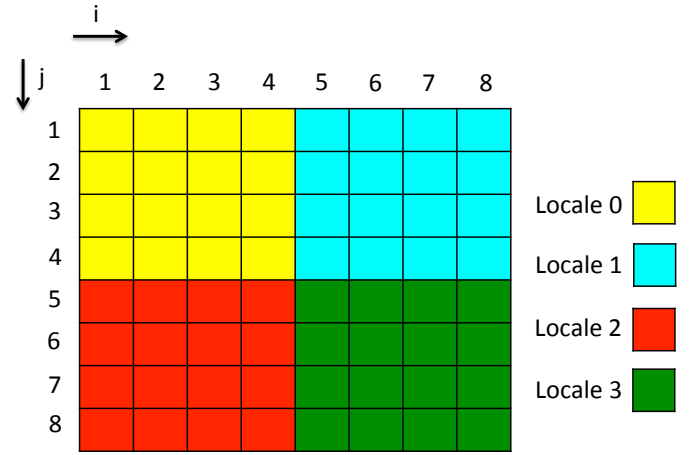


Figure 1: Chapel Block distribution.

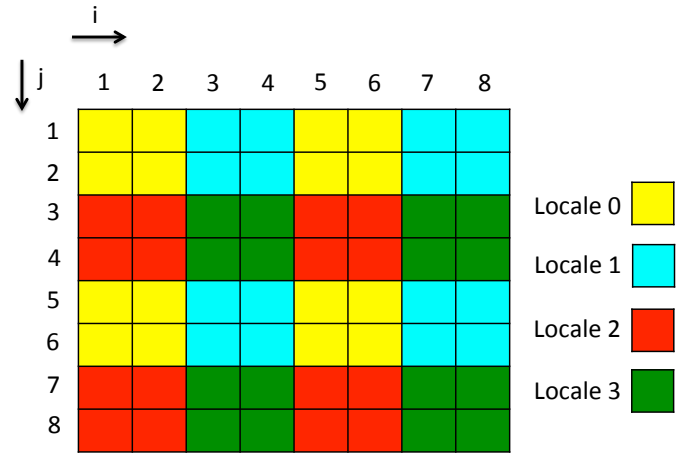


Figure 2: Chapel Block Cyclic distribution with a 2 x 2 blocksize parameter.

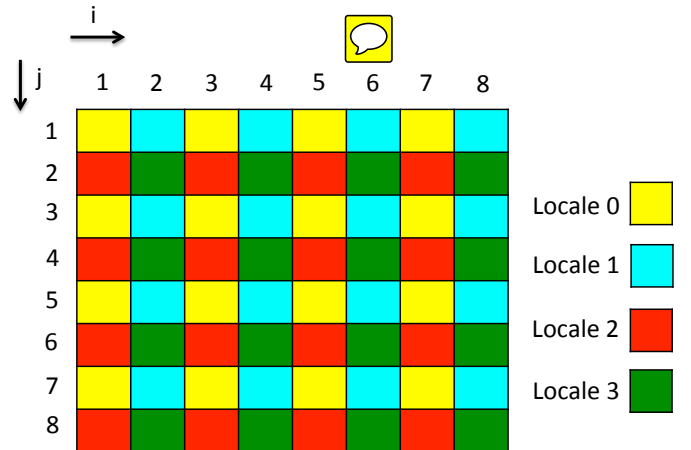


Figure 3: Chapel Cyclic distribution.

```

var n: int = 8;
var LoopSpace = {2..n-1, 2..n-1};

//Jacobi relaxation pass
forall (i,j) in LoopSpace {
  Anew[i,j] = (A[i+1, j] + A[i-1, j] + A[i, j+1] + A[i, j-1])/4.0;
}

//update state of the system after the first relaxation pass
A[LoopSpace] = Anew[LoopSpace];

```

Figure 4: Chapel code for Jacobi computation over an 8 x 8 two dimensional array. Arrays A and A_{new} are distributed with a Cyclic distribution and their declarations are not shown. During each iteration of the loop, the current array element $A_{new}[i, j]$ gets the average of the four adjacent array elements of $A[i, j]$.


2 Related Work

The traditional method of compiler loop optimizations including loop peeling, loop reversal, and loop interchange **has been applied to code generation** for distributed memory multiprocessors [2, 12]. These techniques are useful for discovering parallelism, improving the granularity of parallelism, and improving cache performance. However, Chapel is an explicitly parallel language, and the degree of parallelism is already defined by the programmer. Furthermore, these methods require footprint calculations which are modeled by matrices and need to be intersected with the data distribution in order to provide code generation for message passing machines. Our method does not require any footprint calculations, thereby simplifying code generation.

The polyhedral method is another branch of compiler optimization that seeks to speed up parallel programs on distributed memory architectures [4, 6, 7, 8, 9, 15]. ~~In this method, boundaries are traced for each array use and these are intersected with the program's data distribution. A detailed mathematical framework to express parallelism and find sequences of transformations can occur in one step using this method.~~ However, the method at its core does not compute information for message passing code generation.

Similar work to take advantage of communication aggregation on distributed arrays has already been done in Chapel. In [13], aggregation was applied to improve the communication performance of whole array assignments for Chapel's Block and Cyclic distributions. Our work goes beyond array assignments and is applicable to affine array accesses within parallel loops for Chapel's Cyclic and Block Cyclic distributions. One of the contribution's of [13] included two new bulk communication primitives for Chapel developers, `chpl_comm_gets` and `chpl_comm_puts`. They both rely on the GASNet networking layer, a portion of the Chapel runtime. Modulo unrolling takes advantage of these new communication primitives to perform bulk remote data transfer between locales.


Extensive work has been done with the UPC compiler (another PGAS language) by [5] to improve on communication performance. This method targets fine-grained communication and uses techniques such as redundancy elimination, split-phase communication, and communication coalescing to reduce overall communi-


cation. However, there is no locality analysis that statically determines whether an array access is shared or remote. Our method, modulo unrolling, can determine which accesses are local purely on the affine array access and data distribution. 

3 Motivation for Message Aggregation

In Chapel, a program's data access patterns and the programmer's choice of data distribution greatly influence the program's runtime and communication behavior. There are some situations where programs exhibit predictable patterns of communication that the compiler can detect. In doing so, the compiler can aggregate remote data elements coming from one locale into one local buffer via a single message and then access this local buffer on subsequent iterations of the loop.

For example, consider Chapel code for the Jacobi computation shown in Figure 4, a common stencil operation that computes elements of a two dimensional array as an average of that element's four adjacent neighbors. On each iteration of the loop, five array elements are accessed in an affine manner: the current array element $A_{new}[i, j]$ and its four adjacent neighbors $A[i + 1, j]$, $A[i - 1, j]$, $A[i, j + 1]$, and $A[i, j - 1]$. Naturally, the computation will take place on the locale of $A_{new}[i, j]$, the element being written to. If arrays A and A_{new} are distributed with a Cyclic distribution as shown in Figure 3, then it is guaranteed that $A[i + 1, j]$, $A[i - 1, j]$, $A[i, j + 1]$, and $A[i, j - 1]$ will not reside on the same locale as $A_{new}[i, j]$ **for all iterations of the loop**. These remote elements are transferred over to $A_{new}[i, j]$'s locale in four individual messages during every loop iteration. For large data sets, transferring four elements individually per loop iteration drastically slows down the program because the message overhead is incurred more than once.

Since the data is distributed using a Cyclic distribution, we notice that the data is accessed in the same way every cycle. For example, on iteration (2, 2), $A_{new}[2, 2]$ resides on locale 3, $A[2, 1]$ and $A[2, 3]$ reside on locale 1, and $A[1, 2]$ and $A[3, 2]$ reside on locale 2. If we look at iteration (4, 2) which is an iteration in the next cycle, we see that $A_{new}[4, 2]$ also resides on locale 3, $A[4, 1]$ and $A[4, 3]$ reside on locale 1, and $A[3, 2]$ and $A[5, 2]$ reside on locale 2. We can therefore bring in all remote data elements accessed by iterations where $A_{new}[i, j]$ resides on locale 3 to locale 3 before the loop executes and write them back to locales 1 and 2 after the loop finishes. 

If we focus on locale 3, there will be four buffers containing remote data elements after aggregation has occurred, one for each affine array access in the loop in Figure 4. The first buffer is known conceptually as *buf_north* and will contain the array slice $A[2..7 \text{ by } 2, 1..6 \text{ by } 2]$. The elements in this buffer correspond to all elements produced by the $A[i, j - 1]$ array access over all iterations of the loop in Figure 4 where $A_{new}[i, j]$ also resides on locale 3. Similarly, there are buffers *buf_south*, *buf_east*, and *buf_west* that contain a similar description of elements for array accesses $A[i, j + 1]$, $A[i + 1, j]$, and $A[i - 1, j]$ respectively. Now that a copy of all remote data elements reside on the locale that they are used from, the affine array accesses other than $A_{new}[i, j]$ can be replaced with accesses to the local buffers. After the loop has finished, any buffer elements that have been written to are communicated back to their respective remote locales in their own aggregate messages. This optimization can also be applied to the Block 

Cyclic distribution, as the data access pattern is the same for elements in the same position within a block.

If arrays A and A_{new} are instead distributed using Chapel's Block or Block Cyclic distributions as shown in Figure 1.1 and Figure 2 respectively, the program will only perform remote data accesses on iterations of the loop where element $A_{new}[i, j]$ is on the boundary of a block. As the blocksize increases, the number of remote data accesses for the Jacobi computation decreases. For the Jacobi computation, it is clear that distributing the data using Chapel's Block distribution is the best choice in terms of communication. Executing the program using a Block distribution will result in fewer remote data accesses than when using a Block Cyclic distribution. Similarly, executing the program using a Block Cyclic distribution will result in fewer remote data accesses than when using a Cyclic distribution.

It is important to note that the Block distribution is not the best choice for all programs using affine array accesses. Programs with strided access patterns that use a Block distribution will have poor communication performance because accessed array elements are more likely to reside outside of a block boundary. For these types of programs, a Cyclic or Block Cyclic distribution will perform better.

4 Modulo Unrolling

Modulo unrolling [1] is a bank disambiguation method used in tiled architectures that is applicable to loops with affine array accesses. An affine function of a set of variables is defined as a linear combination of those variables. An affine array access is any array access where each dimension of the array is accessed by an affine function of the loop induction variables. For example, for loop index variables i and j and array A , $A[i + 2j + 3][2j]$ is an affine access, but $A[ij + 4][j^2]$ and $A[2i^2 + 1][ij]$ are not. Modulo unrolling works by unrolling the loop by a factor equal to the number of memory banks on the architecture. If the arrays accessed within the loop are distributed using low-order interleaving (a Cyclic distribution), then after unrolling, each array access will be guaranteed to reside on a single bank for all iterations of the loop. This is achieved with a modest increase of the code size.

To understand modulo unrolling, refer to Figure 5. In Figure 5a there is a code fragment consisting of a sequential **for** loop with a single array access $A[i]$. The array A is distributed over four memory banks using a Cyclic distribution. As is, the array A is not bank disambiguated because accesses of $A[i]$ go to different memory banks on different iterations of the loop. The array access $A[i]$ has bank access patterns 0, 1, 2, 3, 0, 1, 2, 3, ... in successive loop iterations.

A naive approach to achieving bank disambiguation is to fully unroll the loop, as shown in Figure 5b. Here, the original loop is unrolled by a factor of 100. Because each array access is independent of the loop induction variable i , bank disambiguation is achieved trivially. Each array access resides on a single memory bank. However, fully unrolling the loop is not an ideal solution to achieving bank disambiguation because of the large increase in code size. This increase in code size is bounded by the unroll factor, which may be extremely large for loops iterating over large arrays. Fully unrolling the loop may not even be possible for a loop bound that is unknown at compile time.

A more practical approach to achieving bank disambiguation

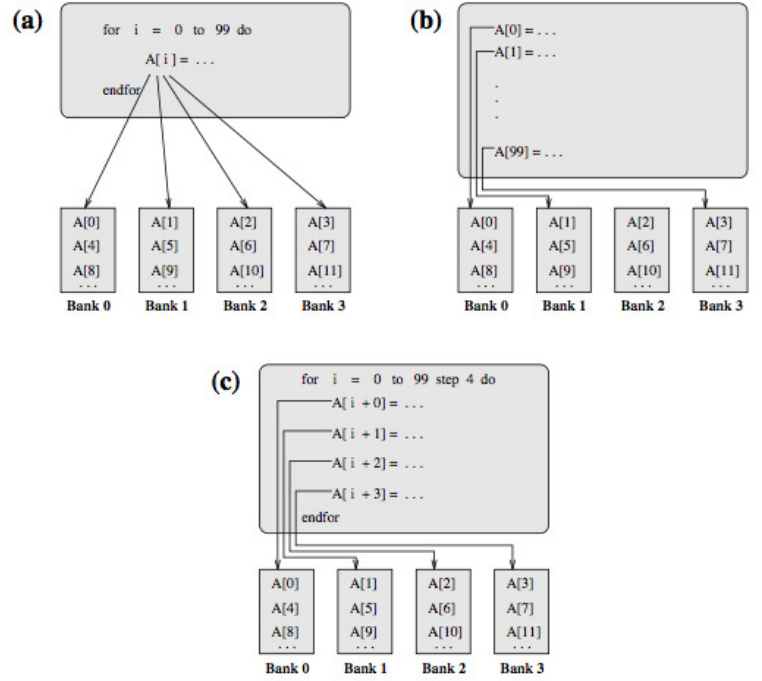


Figure 5: Modulo unrolling example. (a) Original sequential for loop. Array A is distributed using a Cyclic distribution. Each array access maps to a different memory bank on successive loop iterations. (b) Fully unrolled loop. Trivially, each array access maps to a single memory bank because each access only occurs once. This loop dramatically increases the code size for loops traversing through large data sets. (c) Loop transformed using modulo unrolling. The loop is unrolled by a factor equal to the number of memory banks on the architecture. Now each array access is guaranteed to map to a single memory bank for all loop iterations and code size increases only by the loop unroll factor.

without a dramatic increase in code size is to unroll the loop by a factor equal to the number of banks on the architecture. This is shown in Figure 5c and is known as modulo unrolling. Since we have 4 memory banks in this example, we unroll the loop by a factor of 4. Now every array reference in the loop maps to a single memory bank on all iterations of the loop. Specifically, $A[i]$ refers to bank 0, $A[i + 1]$ refers to bank 1, $A[i + 2]$ refers to bank 2, and $A[i + 3]$ refers to bank 3.

Modulo unrolling, as used in [1] provides bank disambiguation and memory parallelism for tiled architectures. That is, after unrolling, each array access can be done in parallel because array accesses map to a different memory banks. However, as we will show, modulo unrolling can also be used to aggregate messages and reduce communication costs in message passing machines.

5 Chapel Zippered Iteration


Iteration is a widely used language feature in the Chapel programming language. Chapel iterators are blocks of code that are similar to functions and methods except that iterators can return multiple values back to the call site with the use of the `yield` keyword instead of `return`. Iterators are commonly used in loops to traverse data structures in a particular fashion. For example, an iterator

`fibonacci(n : int)` might be responsible for yielding the first n Fibonacci numbers. This iterator could then be called in a loop's header to execute iterations 0, 1, 1, 2, 3, and so on. Arrays themselves are iterable in Chapel by default.

Chapel allows multiple iterators of the same size and shape to be iterated through simultaneously. This is known as *zippered iteration* [3]. When zippered iteration is used, **corresponding** iterations are processed together. On each loop iteration, an n -tuple is generated, where n is the number of items in the zippering. The d^{th} component of the tuple generated on loop iteration j is the j^{th} item that would be yielded by iterator d in the zippering. Figure 6 shows an example of zippered iteration used in a Chapel **for** loop.

Zippered iteration can be used with either sequential **for** loops or parallel **forall** loops in Chapel. Parallel zippered iteration is implemented in Chapel using leader-follower semantics. That is, a leader iterator is responsible for creating tasks and dividing up the work to carry out the parallelism. A follower iterator performs the work specified by the leader iterator for each task and generally resembles a serial iterator.

5.1 Chapel Array Slicing

 Chapel supports another useful language feature known as *array slicing*. This feature allows portions of an array to be accessed and modified in a **succinct** fashion. For example, consider two arrays A and B containing indices from 1..10. Suppose we wanted to assign elements $A[6]$, $A[7]$, and $A[8]$ to elements $B[1]$, $B[2]$, and $B[3]$ respectively. We could achieve this in one statement by writing $B[1..3] = A[6..8]$. Here, $A[6..8]$ is a slice of the original array A , and $B[1..3]$ is a slice of the original array B . An array slice can support a range of elements with a stride in some cases. For example, in the previous example, we could have made the assignment $B[1..3] = A[1..6 \text{ by } 2]$. This would have assigned elements $A[1]$, $A[3]$, and $A[5]$ to elements $B[1]$, $B[2]$, and $B[3]$ respectively. Since all array slices in Chapel are arrays themselves, array slices are also iterable.

Together, array slicing and parallel zippered iteration can express any parallel affine loop in Chapel that uses affine array accesses. Each affine array access is replaced with a **corresponding** array slice which produces the same elements as the original loop. Consider the code fragment in Figure 7a. There are two affine array accesses $A[i]$ and $B[i + 2]$ in Figure 7a. The loop is written in a standard way where the loop induction variable i takes on values from 1 to 10. Because the loop is a **forall** loop, loop iterations are not guaranteed to complete in a specific order. This loop assigns elements of array B to A such that the i^{th} element of A is equal to the $(i + 2)^{th}$ element of B after the loop finishes. In Figure 7b, the same loop is written using zippered iteration. The loop induction variable i no longer needs to be specified, and each affine array access has been replaced with an array slice in the zippering of the loop header. It is possible to transform an affine loop in this fashion even when an affine array access has a constant factor multiplied by the loop induction variable. The resulting array slice will contain a stride equal to the constant factor.*


Because any parallel affine loop can be transformed to an equivalent parallel loop that uses zippered iteration, we observe a natural place in the Chapel programming language in which to implement

(a)

```
for (i, f) in zip(1..5, fibonacci(5)) {
  writeln("Fibonacci ", i, " = ", f);
}
```

(b)

```
Fibonacci 1 = 0
Fibonacci 2 = 1
Fibonacci 3 = 1
Fibonacci 4 = 2
Fibonacci 5 = 3
```

Figure 6: (a) Chapel code fragment showing a loop using zippered iteration. A tuple of loop index variables equal to the number of items in the zippering is declared in the loop header. If the variable j corresponds to the current loop iteration, i corresponds to the j^{th} element in the range 1..5, and f corresponds to the j^{th} element in the iterator `fibonacci(5)`. The `zip` keyword tells the loop header which items to iterate over using zippered iteration. (b) Program output of the code fragment in Figure 6a. 


(a)

```
forall i in 1..10 {
  A[i] = B[i+2];
}
```

(b)

```
forall (a,b) in zip(A[1..10], B[3..12]) {
  a = b;
}
```

Figure 7: (a) Original loop written using a single loop induction variable i ranging from 1 to 10. (b) The same loop written using zippered iteration. Instead of a loop induction variable and a range of values to denote the loop bounds, two array slices containing 10 elements each are specified.

 modulo unrolling: the leader and follower iterators of the Cyclic and Block Cyclic distribution.

6 Cyclic Distribution with Modulo Unrolling

Modulo unrolling is implemented in the follower iterator of the Cyclic distribution. Based on the semantics of parallel zippered iteration, the leader iterator will divide up the iterations of the loop across the locales of the machine according to the first item in the zippering. This could mean that some portions of work will not be local to where the computation is taking place. The follower iterator in the Cyclic distribution recognizes whether or not its chunk of work is local or remote. If remote, all of the remote array elements are brought to the present locale in a local buffer using one `chpl_comm.gets` call. Finally, elements of the local buffer are now yielded back to the loop header. A loop body may modify the elements that are yielded to it via zippered iteration. To account for this, the follower iterator compares the element before it was yielded to the element after it was yielded. If any of the elements in the follower's chunk of work were modified, the entire local buffer is stored back to the remote local via one `chpl_comm.puts` call.



* Question by Aaron: Is it true to say that any affine array access can be transformed using the way described here? What if the access was something like $A[2i + 3j]$?

7 Block Cyclic Distribution with Modulo Unrolling

For the Chapel Block Cyclic implementation, both the leader and follower iterators have been modified to support the modulo unrolling optimization. Modulo unrolling by itself is not compatible with the Block Cyclic distribution because consecutive array elements can reside on the same locale, which destroys the static locality information that we were able to use in the Cyclic distribution. The Block Cyclic leader iterator is now modified to choose slices of work such that the new "stride" is equal to the product of the blocksize and the cycle size. This way, when the work is passed to the follower iterator, elements that are in the same position within each block are guaranteed to be on the same locale. The follower iterator of the Block Cyclic distribution can now perform modulo unrolling in the same way as the Cyclic distribution.

8 Results

To demonstrate the effectiveness of modulo unrolling in the Chapel Cyclic and Block Cyclic distributions, we present our results. We have compiled a suite of seventeen parallel benchmarks shown in Figure 8. Each benchmark is written in Chapel and contains loops with affine array accesses that have been transformed to use zippered iteration by hand, as discussed in 5.1. Our suite of benchmarks contains programs with single, double, and triple nested affine loops. Additionally, our benchmark suite contains programs operating on one, two, and three dimensional distributed arrays. Fourteen of the seventeen benchmarks are taken from the Polybench suite of benchmarks and translated from C to Chapel by hand. The stencil9 benchmark was taken from the Chapel source trunk directory. The remaining two benchmarks, pascal and folding, were written by our group. pascal is an additional benchmark other than jacobi1D that is able to test Block Cyclic with modulo unrolling. folding is the only benchmark in our suite that has strided affine array accesses.

To evaluate improvements due to modulo unrolling, we run our benchmarks using Cyclic and Block Cyclic distributions from the 1.8.0 release of the Chapel compiler as well as Cyclic and Block Cyclic distributions that have been modified to perform modulo unrolling, as described in Sections 6 and 7. We measure both runtime and message count for each benchmark.

When evaluating modulo unrolling used with the Block Cyclic distribution, we could only run two benchmarks out of our suite of seventeen because of limitations within the distribution. Many of our benchmarks operate on two or three dimensional arrays and all require array slicing for the modulo unrolling optimization to apply. Both array slicing of multi-dimensional arrays and array slicing containing strides for one-dimensional arrays are not yet supported in the Block Cyclic distribution. Implementing such features remained outside the scope of this work. There was no limitation when evaluating modulo unrolling with the Cyclic distribution, and all seventeen benchmarks were tested.

Figures 9 and 10 compare the normalized runtimes and message counts respectively for the Cyclic distribution and Cyclic distribution with modulo unrolling. For 8 of the 11 benchmarks, we see reductions in runtime when the modulo unrolling optimization is applied. On average, modulo unrolling results in a 45 percent decrease in runtime. For 9 of the 11 benchmarks, we see reductions

Name	Lines of Code	Input Size	Description
2mm	221	128 x 128	2 matrix multiplications ($D=A*B$; $E=C*D$)
fw	153	64 x 64	Floyd-Warshall all-pairs shortest path algorithm
trmm	133	256 x 256	Triangular matrix multiply
correlation	235	512 x 512	Correlation computation
covariance	201	512 x 512	Covariance computation
cholesky	182	256 x 256	Cholesky decomposition
lu	143	256 x 256	LU decomposition
mvt	185	4000	Matrix vector product and transpose
syrk	154	128 x 128	Symmetric rank-k operations
syr2k	160	256 x 256	Symmetric rank-2k operations
fdtd-2d	201	1000 x 1000	2D Finite Different Time Domain Kernel
fdtd-apml	333	128 x 128 x 128	FDTD using Anisotropic Perfectly Matched Layer
jacobi1D	138	10000	1D Jacobi stencil computation
jacobi2D	152	400 x 400	2D Jacobi stencil computation
stencil9†	142	400 x 400	9-point stencil computation
pascal‡	126	100000, 100003	Computation of pascal triangle rows
folding‡	139	50400	Strided sum of consecutive array elements

Figure 8: Benchmark suite. Benchmarks with † are taken from the Chapel Trunk test directory. Benchmarks with ‡ were developed on our own in order to test specific data access patterns.

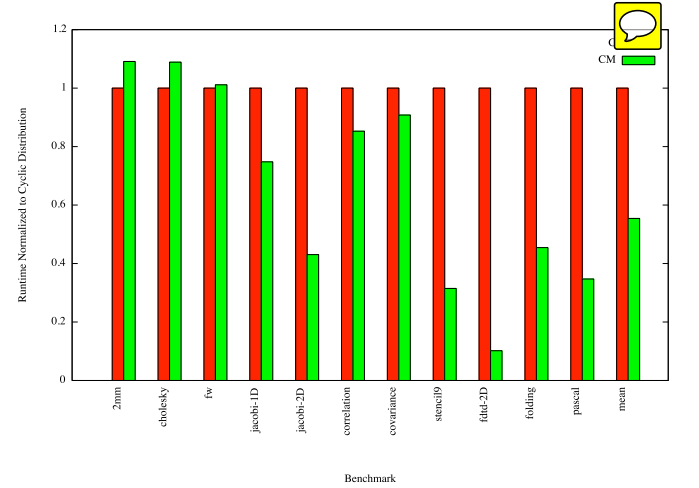


Figure 9: Cyclic runtime.

in message counts when the modulo unrolling optimization is applied. On average, modulo unrolling results in 76 percent fewer messages.

Figures 11 and 12 compare the normalized runtimes and message counts respectively for the Block Cyclic distribution and Block Cyclic distribution with modulo unrolling. For both benchmarks, we see reductions in runtime when the modulo unrolling optimization is applied. On average, modulo unrolling results in a 52 percent decrease in runtime. For both benchmarks, we see reductions in message counts when the modulo unrolling optimization is applied. On average, modulo unrolling results in 72 percent fewer messages.

9 Future Work

As presented, the modulo unrolling optimization can be improved upon in a few ways to achieve even better performance in practice. First, there is currently no limit on the number of array elements that an aggregate message may contain. For applications with extremely large data sets, buffers containing remote data elements

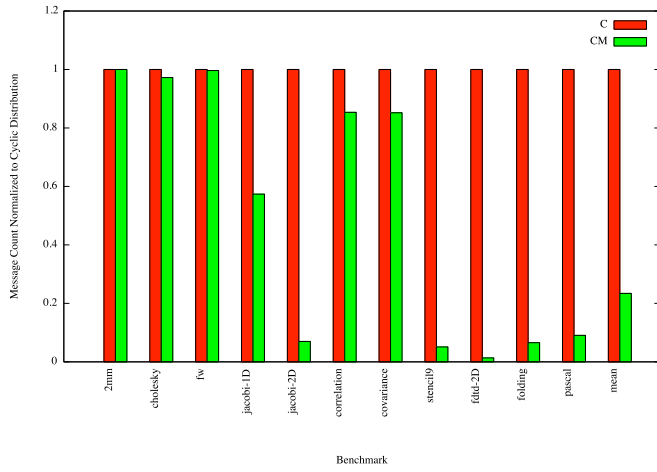


Figure 10: Cyclic message count.

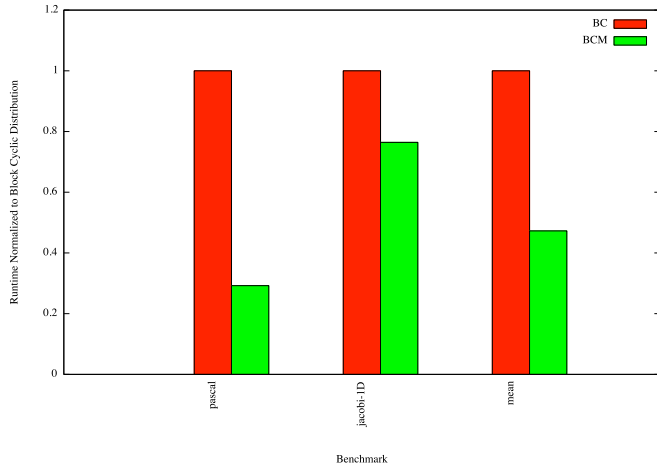


Figure 11: Block Cyclic runtime.

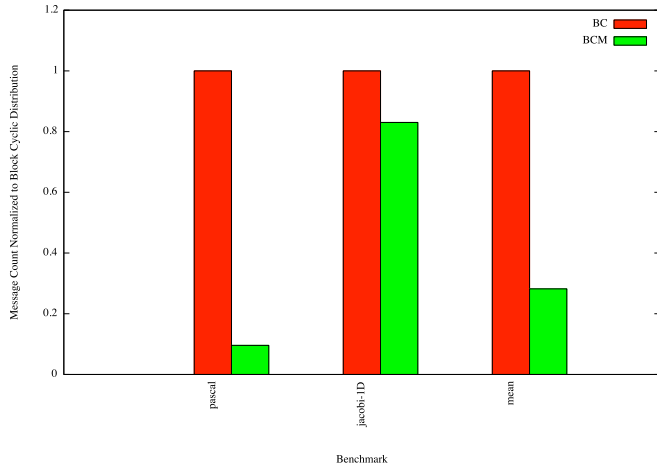


Figure 12: Block Cyclic message count.

may become too large and exceed the memory budget of a particular locale. This may slow down other programs running on the system. To solve this, the modulo unrolling optimization should perform strip mining where the aggregate message is broken down into smaller sections if it contains too many elements in order to conserve memory.

The modulo unrolling optimization currently performs both aggregate reading of remote data elements before the loop and aggregate writing of remote data elements after the loop no matter what the loop body consists of. It is conceivable that some of the yielded elements during zippered iteration will not be read or written to at all during the loop. An improvement to the optimization would be to avoid prefetching elements that are not read in the loop body and to avoid writing back elements that are not written to in the loop body.

References

- [1] R. Barua, W. Lee, S. Amarasinghe, and A. Agarwal. Maps: a compiler-managed memory system for raw machines. In *ACM SIGARCH Computer Architecture News*, volume 27, pages 4–15. IEEE Computer Society, 1999.
- [2] D. Callahan and K. Kennedy. Compiling programs for distributed-memory multiprocessors. *The Journal of Supercomputing*, 2(2):151–169, 1988.
- [3] B. L. Chamberlain, S.-E. Choi, S. J. Deitz, and A. Navarro. User-defined parallel zippered iterators in chapel. 2011.
- [4] D. Chavarría-Miranda and J. Mellor-Crummey. Effective communication coalescing for data-parallel applications. In *Proceedings of the tenth ACM SIGPLAN symposium on Principles and practice of parallel programming*, pages 14–25. ACM, 2005.
- [5] W.-Y. Chen, C. Iancu, and K. Yelick. Communication optimizations for fine-grained upc applications. In *Parallel Architectures and Compilation Techniques, 2005. PACT 2005. 14th International Conference on*, pages 267–278. IEEE, 2005.
- [6] C. Germain and F. Delaplace. Automatic vectorization of communications for data-parallel programs. In *EURO-PAR’95 Parallel Processing*, pages 429–440. Springer, 1995.
- [7] M. Gupta and P. Banerjee. Automatic data partitioning on distributed memory multiprocessors. Technical report, 1991.
- [8] S. K. S. Gupta, S. Kaushik, C.-H. Huang, and P. Sadayappan. Compiling array expressions for efficient execution on distributed-memory machines. *Journal of Parallel and Distributed Computing*, 32(2):155–172, 1996.
- [9] C. Iancu, W. Chen, and K. Yelick. Performance portable optimizations for loops containing communication operations. In *Proceedings of the 22nd annual international conference on Supercomputing*, pages 266–276. ACM, 2008.
- [10] M. E. Mace. *Memory storage patterns in parallel processing*. Kluwer Academic Publishers, 1987.
- [11] L. Prylli and B. Tourancheau. Fast runtime block cyclic data redistribution on multiprocessors. *Journal of Parallel and Distributed Computing*, 45(1):63–72, 1997.

- [12] J. Ramanujam and P. Sadayappan. Compile-time techniques for data distribution in distributed memory machines. *Parallel and Distributed Systems, IEEE Transactions on*, 2(4):472–482, 1991.
- [13] A. Sanz, R. Asenjo, J. López, R. Larrosa, A. Navarro, V. Litvinov, S.-E. Choi, and B. L. Chamberlain. Global data re-allocation via communication aggregation in chapel. In *Computer Architecture and High Performance Computing (SBAC-PAD), 2012 IEEE 24th International Symposium on*, pages 235–242. IEEE, 2012.
- [14] D. W. Walker and S. W. Otto. Redistribution of block-cyclic data distributions using mpi. *Concurrency Practice and Experience*, 8(9):707–728, 1996.
- [15] W.-H. Wei, K.-P. Shih, J.-P. Sheu, et al. Compiling array references with affine functions for data-parallel programs. *J. Inf. Sci. Eng.*, 14(4):695–723, 1998.