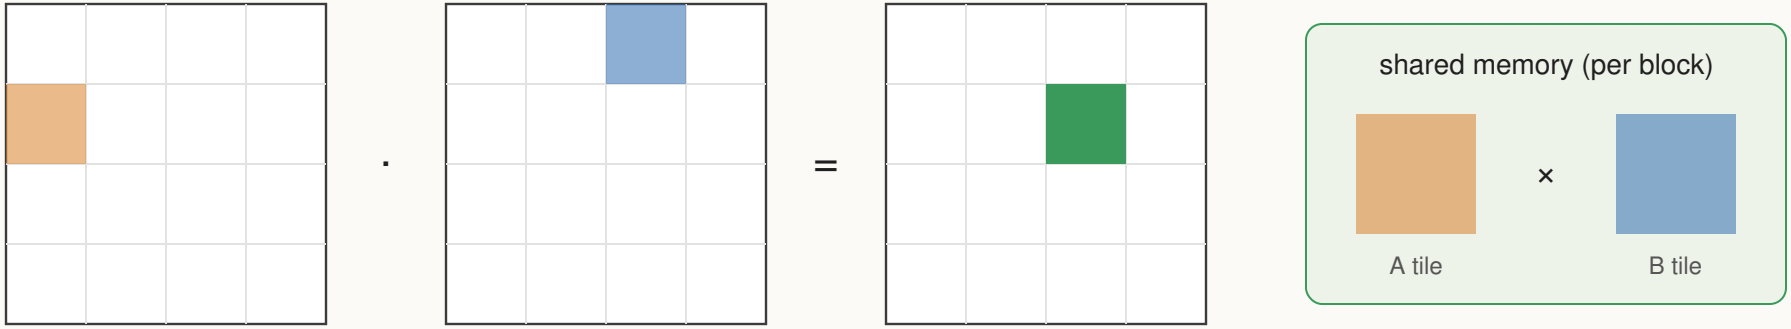

A (rows × inner) B (inner × cols) C: one 16×16 block owns this tile

Each block loads one tile of A and one of B into shared memory, synchronizes, multiplies them, and slides along the inner dimension. Every global value is read once per tile instead of once per multiply: 16× less global traffic.