

Cucumber Report

15-Nov-2023, 10:39:09 pm

Start : Nov 15, 10:39:05.333 pm

End : Nov 15, 10:39:08.887 pm

Duration : 3.554 s

Features

Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 0
SKIPPED - 4




Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Get Started Page</u>	3.554 s	1	0	1	0	4	0	0	4

#	Feature Name	Scenario Name
1	<u>Get Started Page</u>	<u>The User clicks Get Started button on landing page</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Arpita	1	0	1	0	1	0	1	0

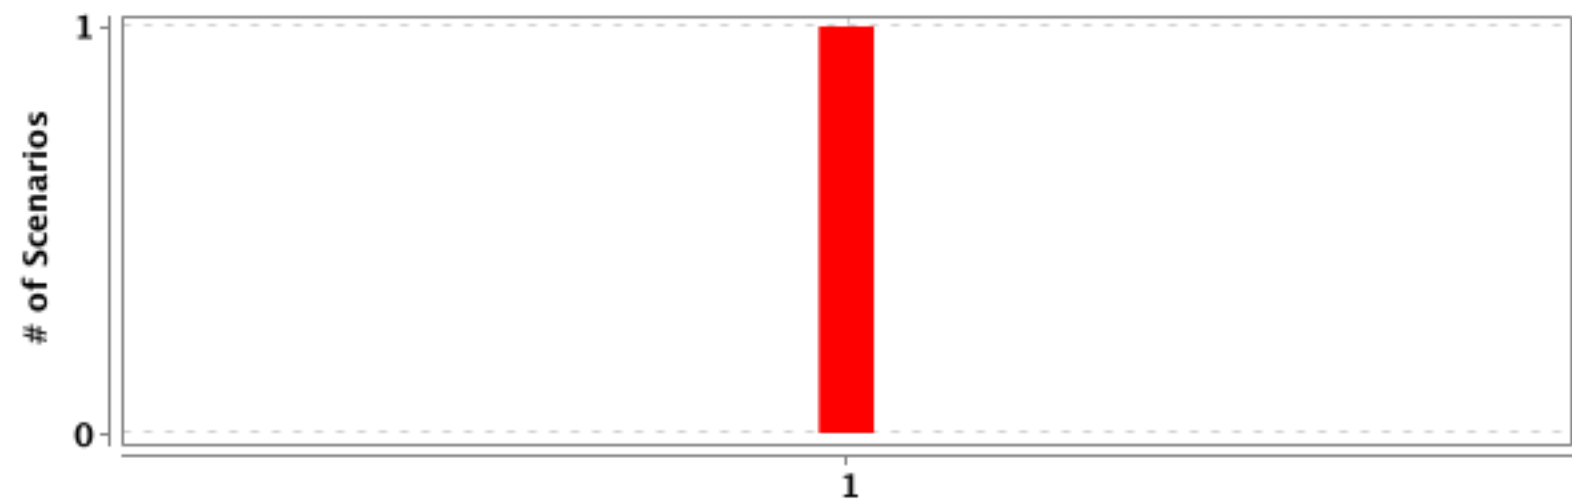



#	Feature Name	T	P	F	S	Duration
1	<u>Get Started Page</u>	1	0	1	0	3.554 s

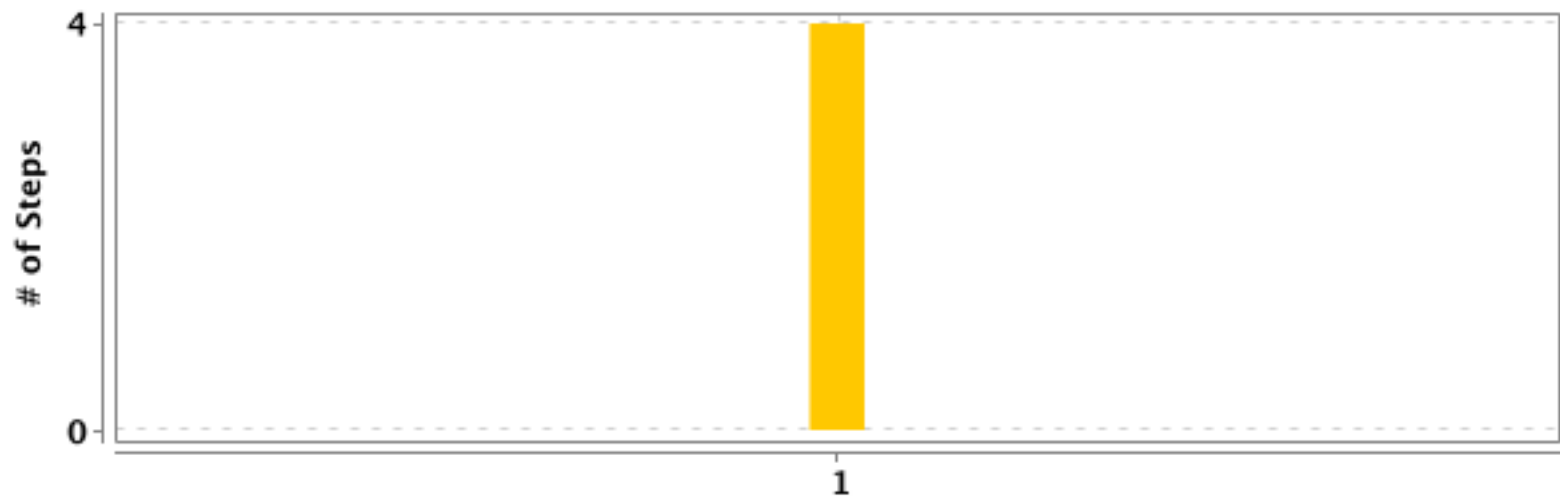



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Get Started Page</u>	<u>The User clicks Get Started button on landing page</u>	4	0	0	4	3.551 s

Get Started Page

FAILED	DURATION - 3.554 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 4 Pass - 0 Fail - 0 Skip - 4	
/ 10:39:05.333 pm // 10:39:08.887 pm /					

The User clicks Get Started button on landing page

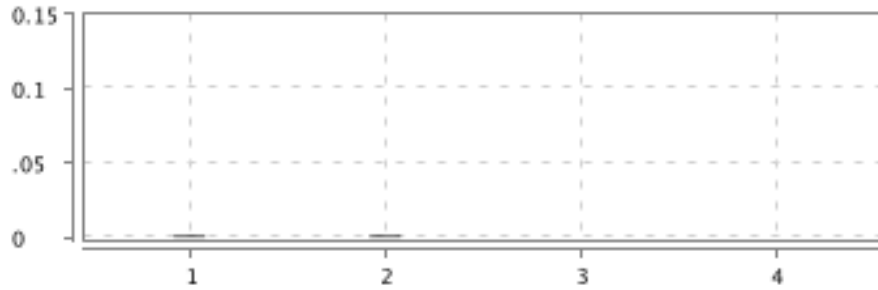FAILED	DURATION - 3.551 s		<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 4</div>	
/ 10:39:05.336 pm // 10:39:08.887 pm /				
Get Started Page				
@Arpita				

#	Step / Hook Details	Status	Duration
	BEFORE - stepDefinitions.Hooks.setUp() org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: unknown error: cannot find msedge binary Host info: host: 'Praveens-MacBook-Pro-2.local', ip: 'fe80:0:0:0:183e:5c2f:91d2:3bba%en0' Build info: version: '4.12.0', revision: '249f2a7d1b*' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '13.5.1', java.version: '20.0.2' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: MicrosoftEdge, ms:edgeOptions: {args: [--remote-allow-origins=*], extensions: []}}]}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:236) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:163) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:108) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:60) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:56)	FAILED	3.531 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:48) at org.openqa.selenium.edge.EdgeDriver.<init>(EdgeDriver.java:44) at stepDefinitions.BaseClass.setDriver(BaseClass.java:52) at Utilities.Helper.<init>(Helper.java:19) at Utilities.Helper.setUpDriver(Helper.java:40) at stepDefinitions.Hooks.setUp(Hooks.java:15)		
1	Given User Launches Chrome Browser	SKIPPED	0.001 s
2	When User opens DS Algo portal link	SKIPPED	0.001 s
3	Then User clicks Get Started button	SKIPPED	0.000 s
4	And User lands on Home page	SKIPPED	0.000 s
	AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.003 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "Utilities.Helper.getDriver()" is null at stepDefinitions.Hooks.tearDown(Hooks.java:22)		