


## Experiment 1

**AIM: To solve  $x - \cos(x)$  using Bisection Method**

```
#include <iostream>
#include <cmath>
using namespace std;
double function(double x) {
    return (x - cos(x));
}
int main() {
    double midx, function_mid, left, right, previous_function_mid;
    left = 0, right = 1;
    midx = (left + right) / 2;
    previous_function_mid = function(midx);
    while(true) {
        double value_at_left = function(left);
        double value_at_right = function(right);
        double value_at_mid = function(midx);
        if(value_at_mid * value_at_left < 0)
            right = midx;
        else
            left = midx;
        previous_function_mid = value_at_mid;
        midx = (left + right) / 2;
        if(abs(previous_function_mid) <= 0.00001)
            break;
    }
    cout << midx << "\n";
}
```

ANS = 0.739082

 C:\WINDOWS\system32\cmd.exe

```
c:\Users\Arpit\Documents\SC Lab>g++ bisection.cpp -o bisection && bisection  
0.739082
```


```
c:\Users\Arpit\Documents\SC Lab>
```

## Experiment 2

**AIM: To solve  $x - \cos(x)$  using Regula Falsi Method.**

```
#include <iostream>
#include <cmath>
using namespace std;
float f(float x) {
    return (x - cos(x));
}
int main() {
    float a = 0, b = 1;
    float x = 0, y = 0;
    while(true) {
        x = (a * f(b) - b * f(a)) / (f(b) - f(a));
        if(f(a) * f(b) < 0)
            b = x;
        else
            a = x;
        if(y == x)
            break;
        y = x;
    }
}
```

ANSWER = 0.739085

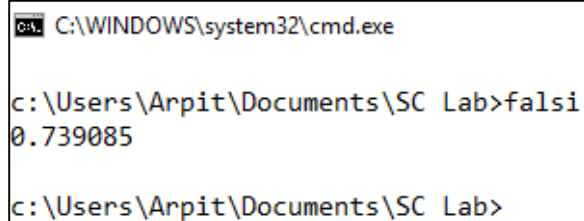

```
C:\WINDOWS\system32\cmd.exe

c:\Users\Arpit\Documents\SC Lab>falsi
0.739085


c:\Users\Arpit\Documents\SC Lab>
```

## Experiment 3

**AIM: To solve  $x^3 - 3x + 1 = 0$  using Newton Raphson Method**

```
#include <iostream>
#include <cmath>
using namespace std;
double function(double x) {
    return (pow(x, 3) - (3) * (x) + 1);
}
double derivative(double x) {
    return (3 * pow(x, 2) - 3);
}
int main() {
    double xn = 0, xn1;
    while(true) {
        xn1 = xn - (function(xn) / derivative(xn));
        if(xn1 == xn)
            break;
        xn = xn1;
    }
    cout << xn1 << "\n";
}
```

ANSWER = 0.347296

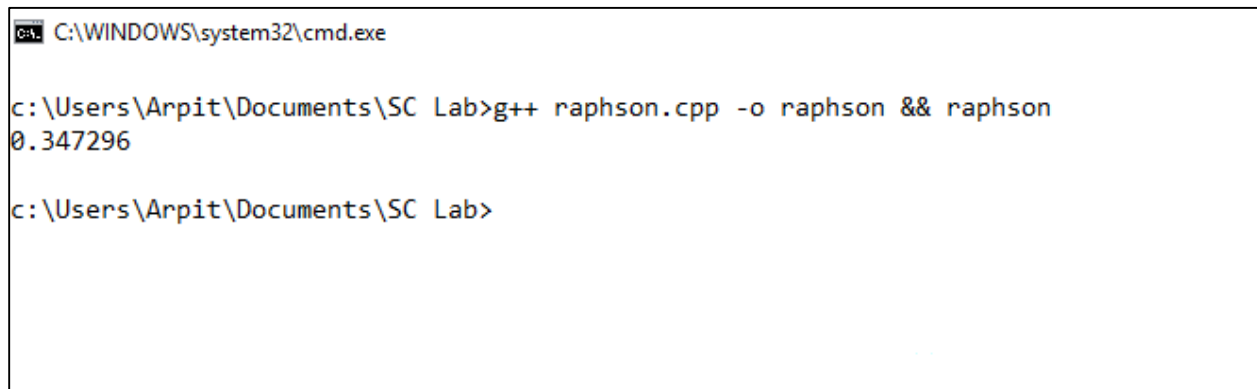

```
C:\WINDOWS\system32\cmd.exe

c:\Users\Arpit\Documents\SC Lab>g++ raphson.cpp -o raphson && raphson
0.347296

c:\Users\Arpit\Documents\SC Lab>
```

## Experiment 4

**AIM: To solve the given system of equations using Gauss Elimination Method**

$$10x - 7y + 3z + 5t = 6$$

$$-6x + 8y - z - 4t = 5$$

$$3x + y + 4z + 11 = 2$$

$$5x - 9y - 2z + 4t = 7$$

```
#include<iostream>
using namespace std;
void transform(float arr[4][5], int src, int dest, float factor){
    for(int i = 0 ; i < 5 ; i++){
        arr[dest][i] = arr[dest][i] + arr[src][i] * factor;
    }
}

int main(){
    float arr[4][5] = {10, -7, 3, 5, 6,
                       -6, 8, -1, -4, 5,
                       3, 1, 4, 11, 2,
                       5, -9, -2, 4, 7};

    transform(arr, 0, 1, -arr[1][0] / arr[0][0]);
    transform(arr, 0, 2, -arr[2][0] / arr[0][0]);
    transform(arr, 0, 3, -arr[3][0] / arr[0][0]);
    transform(arr, 1, 2, -arr[2][1] / arr[1][1]);
    transform(arr, 1, 3, -arr[3][1] / arr[1][1]);
    transform(arr, 2, 3, -arr[3][2] / arr[2][2]);
    for(int i = 0 ; i < 4 ; i++){
        for(int j = 0 ; j < 5 ; j++){
            cout<<arr[i][j]<< " ";
        }
        cout<<endl;
    }

    float fin[4];
    for(int i = 3 ; i >= 0 ; i--) {
```

```

        cout << "x" << (i + 1) << " : ";
        float ans = arr[i][4];
        for(int j = 0 ; j < 4 ; j++) {
            if(j != i)
                ans -= arr[i][j] * fin[j];
        }
        ans /= arr[i][i];
        fin[i] = ans;
        cout << ans << endl;
    }
    return 0;
}

```

ANS = (5, 4, -7, 1)

```

C:\WINDOWS\system32\cmd.exe

c:\Users\Arpit\Documents\SC Lab>g++ gelimination.cpp -o gelimination && gelimination
10 -7 3 5 6
2.38419e-007 3.8 0.8 -1 8.6
-3.13709e-007 -2.88612e-008 2.44737 10.3158 -6.81579
4.48637e-008 -1.31771e-007 -5.0868e-008 9.92473 9.92473
x4 : 1
x3 : -7
x2 : 4
x1 : 5

c:\Users\Arpit\Documents\SC Lab>

```

## Experiment 5

**AIM: To solve the system of equations sing Gauss Seidal Method**


$$5x - y + z = 10$$

$$2x + 8y - z = 11$$

$$-x + y + 4 = 3$$

```
#include <iostream>
#include <vector>
#include <cmath>
using namespace std;
int main() {
    ios_base::sync_with_stdio(0);
    vector<vector<float> > matrix;
    matrix.resize(3, vector<float>(4));
    for(int i = 0 ; i < 3 ; i++)
        for(int j = 0 ; j < 4 ; j++)
            cin >> matrix[i][j];
    vector<float> ans(3, 0);
    bool pass = true;
    while(pass) {
        pass = false;
        for(int i = 0 ; i < 3 ; i++) {
            float val = matrix[i][3];
            for(int j = 0 ; j < 3 ; j++)
                if(i != j)
                    val -= matrix[i][j] * ans[j];
            val /= matrix[i][i];
            if(abs(val - ans[i]) > 0.00001)
                pass = true;
            ans[i] = val;
        }
    }
    cout << "x = " << ans[0] << "\n";
```

```
    cout << "y = " << ans[1] << "\n";  
    cout << "z = " << ans[2] << "\n";  
}  
ANS = (2, 1, 1)
```

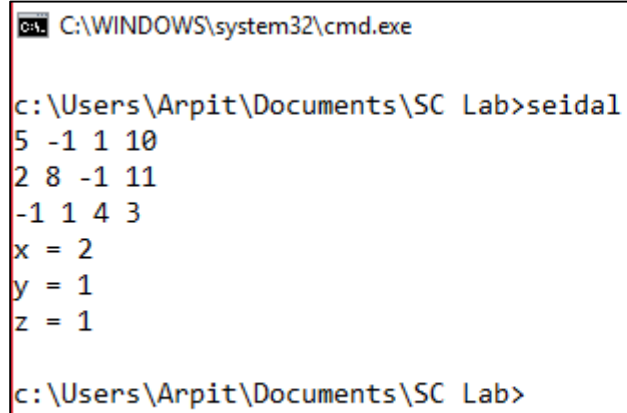

The screenshot shows a Windows command prompt window with the title bar "C:\WINDOWS\system32\cmd.exe". The prompt is "c:\Users\Arpit\Documents\SC Lab>". The user has entered the command "seidal". The output of the program is displayed on the next four lines: "5 -1 1 10", "2 8 -1 11", "-1 1 4 3", and "x = 2", "y = 1", "z = 1". The prompt "c:\Users\Arpit\Documents\SC Lab>" is shown again on the final line.

```
C:\WINDOWS\system32\cmd.exe  
c:\Users\Arpit\Documents\SC Lab>seidal  
5 -1 1 10  
2 8 -1 11  
-1 1 4 3  
x = 2  
y = 1  
z = 1  
c:\Users\Arpit\Documents\SC Lab>
```



## Experiment 6


**AIM: Use Newton Forward Interpolation Formula to get value at  $x = 1895$ .**

<b><math>X</math></b>	1891	1901	1911	1921	1931
<b><math>Y</math></b>	46	66	81	93	101

```
#include <iostream>
#include <vector>
using namespace std;
typedef float f;
vector<f> y;
f p = 0.4, n = 5, ans = 0;
float factorial(float n) {
    if(n <= 1)
        return 1;
    else
        return (n * factorial(n - 1));
}
void solve(float k) {
    if(k == n)
        return;
    float prod = y[0];
    for(int i = 0 ; i < k ; i++)
        prod *= (p - i);
    prod /= factorial(k);
    ans += prod;
    for(int i = 0 ; i < (n - k - 1) ; i++)
        y[i] = y[i + 1] - y[i];
    solve(k + 1);
}
int main() {
    y.resize(5, 0);
```

```
y[0] = 46; y[1] = 66; y[2] = 81; y[3] = 93;  
y[4] = 101;  
solve(0);  
cout << ans << "\n";  
}
```

ANS = 54.8528

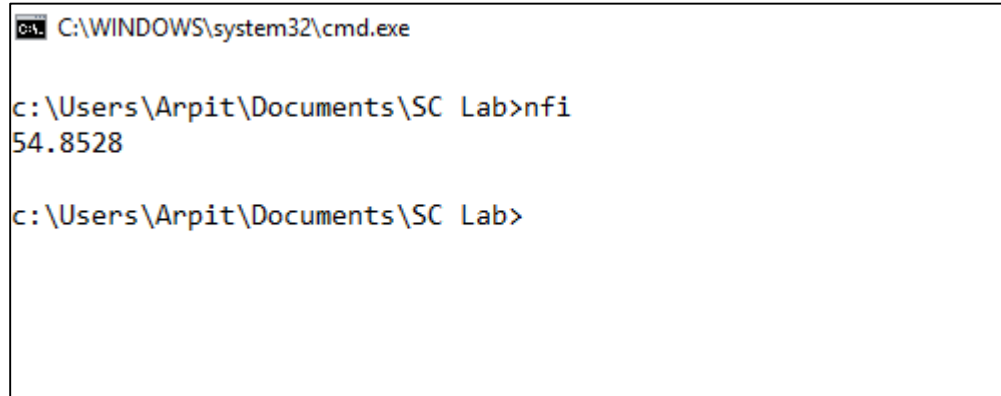

A screenshot of a Windows command prompt window. The title bar at the top reads "C:\WINDOWS\system32\cmd.exe". The command prompt shows the user's current directory as "c:\Users\Arpit\Documents\SC Lab". The user has entered the command "nfi", and the prompt has responded with the output "54.8528". The prompt is now waiting for the next command.

```
C:\WINDOWS\system32\cmd.exe  
c:\Users\Arpit\Documents\SC Lab>nfi  
54.8528  
c:\Users\Arpit\Documents\SC Lab>
```


## Experiment 7

**AIM: Find the value of  $y$  at  $x = 9.5$  using Lagrange's Method**

<b>X</b>	7	8	9	10
<b>Y</b>	3	1	1	9

```
#include <iostream>
using namespace std;
float point = 9.5;
int x[] = {7, 8, 9, 10};
int y[] = {3, 1, 1, 9};
int main() {
    float answer = 0;
    for(int index = 0 ; index < 4 ; index++) {
        float term = y[index];
        for(int i = 0 ; i < 4 ; i++)
            if(index != i)
                term *= (point - x[i]) / (x[index] - x[i]);
        answer += term;
    }
    cout << answer << "\n";
}
```

ANS = 3.625

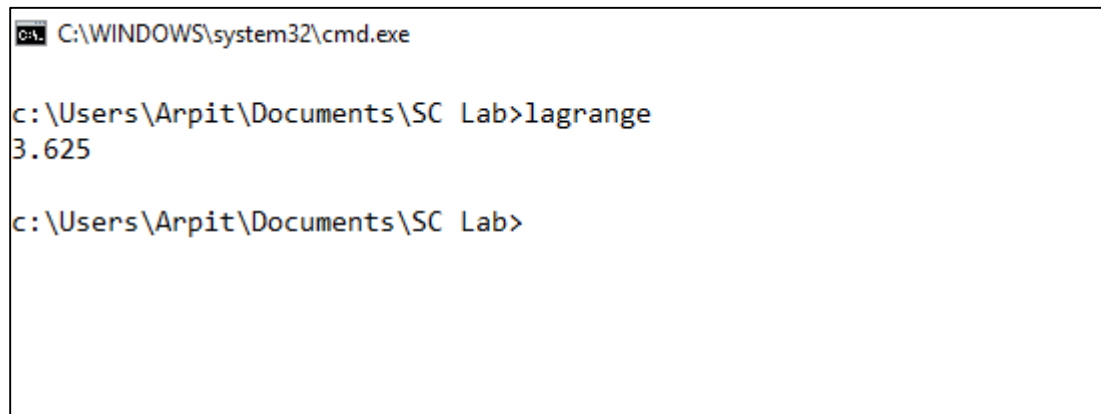

The screenshot shows a Windows command prompt window with the title bar "C:\WINDOWS\system32\cmd.exe". The command prompt is at the directory "c:\Users\Arpit\Documents\SC Lab". The user has entered the command "lagrange", and the output "3.625" is displayed on the next line. The prompt is currently at "c:\Users\Arpit\Documents\SC Lab>".


## Experiment 8

**AIM: Evaluate the integral using Simpson's 1/3rd Formula**

$$\int_4^{5.2} \log(x)$$

```
#include <iostream>
#include <cmath>
using namespace std;
float h = 0.2, lower = 4, upper = 5.2;
double f(double x) {
    return log(x);
}
int main() {
    ios_base::sync_with_stdio(0);
    double x = lower + h, sum = 0;
    while(x < upper) {
        double temp = f(x);
        sum += temp;
        x += h;
        cout << sum << " " << x << "\n";
    }
    sum *= 2;
    sum += (f(lower) + f(upper));
    sum *= (h / 2);
    cout << "Answer : " << sum << "\n";
}
```

ANSWER : 1.82766

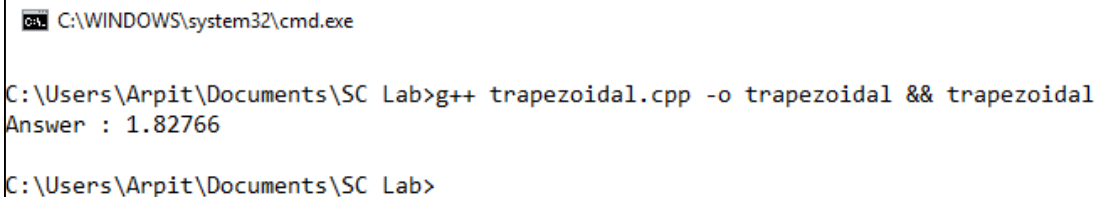

```
C:\WINDOWS\system32\cmd.exe

C:\Users\Arpit\Documents\SC Lab>g++ trapezoidal.cpp -o trapezoidal && trapezoidal
Answer : 1.82766

C:\Users\Arpit\Documents\SC Lab>
```


## Experiment 9

**AIM: Evaluate the integral using Simpson's 1/3<sup>rd</sup> Formula**

$$\int_4^{5.2} \log(x)$$

```
#include <iostream>
#include <cmath>
using namespace std;
double h = 0.2, lower = 4, upper = 5.2;
double f(double x) {
    return log(x);
}
int main() {
    double x = lower + h, sum = 0;
    int counter = 1;
    while(x < upper) {
        if(counter % 2 == 0)
            sum += (2 * f(x));
        else
            sum += (4 * f(x));
        counter++;
        x += h;
    }
    sum += (f(lower) + f(upper));
    sum *= (h / 3);
    cout << sum << "\n";
}
```

ANSWER : 1.82785

 C:\WINDOWS\system32\cmd.exe

```
C:\Users\Arpit\Documents\SC Lab>g++ simpson13.cpp -o simpson13 && simpson13  
1.82785
```

```
C:\Users\Arpit\Documents\SC Lab>
```