

NAME: ANUSHKA NAGTODE

PRN:202501070126

BRANCH : ENTC

DIVISION :ET21

practical 4 :

4.1.1

Write a Python program that takes a list of numbers from the user, creates a Pandas series from it, and then calculates the mean of even and odd numbers separately using the groupby and mean() operations.

Hint: You can group the Series based on whether each number is even or odd.

Input Format:

- The user should enter a list of numbers separated by space when prompted.

Output Format:

- The program should display the mean of even and odd numbers separately.
- Each mean value should be displayed with a label indicating whether it corresponds to even or odd numbers.

Refer to the sample test cases for better understanding regarding input and output format.
code and output :

```
1 import pandas as pd
2
3 # Take inputs from the user to create a list of numbers
4 numbers = list(map(int, input().split()))
5
6 # Create a Pandas series from the list of numbers
7 series = pd.Series(numbers)
8
9 # Grouping by even and odd numbers and calculating the mean
10 grouped = series.groupby(series % 2 == 0).mean()
11
12 # Display the mean of even and odd numbers with labels
13 grouped.index = ['Even' if is_even else 'Odd' for is_even in grouped.index]
14 print("Mean of even and odd numbers:")
15 print(grouped)
```

Average time: 0.010 s (9.67 ms) | Maximum time: 0.025 s (25.00 ms) | 3 out of 3 shown test case(s) passed | 3 out of 3 hidden test case(s) passed

Test case 1 (25 ms) [Debug]

Expected output	Actual output
1 2 3 4 5 6 7 8 9 10	1 2 3 4 5 6 7 8 9 10
Mean of even and odd numbers:	Mean of even and odd numbers:
Odd: 5.0	Odd: 5.0
Even: 6.0	Even: 6.0
dtype: float64	dtype: float64

Terminal | Test cases

4.1.2

A dictionary of lists has been provided to you in the editor. Create a DataFrame from the dictionary of lists and perform the listed operations, then display the DataFrame before and after each manipulation.

Create the DataFrame:

- Convert the dictionary to a Pandas DataFrame.

Add a new row:

- Take inputs from the user for the new row data (name, age).
- Add the new row to the DataFrame.
- Display the DataFrame after adding the new row.

Modify a row:

- Modify a specific row by changing the age. Take the row index and new age value from the user.
- Display the DataFrame after modifying the row.

Delete a row:

- Take the row index to be deleted from the user.
- Remove the specified row.
- Display the DataFrame after deleting the row.

Add a new column:

- Add a column **Gender** with values taken from the user.
- Display the DataFrame after adding the new column.

Modify a column:

- Convert names to uppercase.
- Display the DataFrame after modifying the column.

Delete a column:

- Remove the **Age** column.
- Display the DataFrame after deleting the column.

Sample Test Cases

- dataframeOps.py

V

```
# import pandas as pd
```

```
# df = pd.DataFrame(data)
```

```
## Display the original DataFrame
```

```
# print("Original DataFrame:")
```

```
# print(df)
```

```
# # Adding a new row
```

```
# # Display the DataFrame after adding a new row
```

```
# print("After adding a row:\n",df)
```

```
# # Modifying a row
```

```
# # Display the DataFrame after modifying a row
```

```
# print("After modifying a row:")
```

```
# print(df)
```

```
# # Deleting a row
```

```
# # Display the DataFrame after deleting a row
```

```
# print("After deleting a row:")
```

```
# print(df)
```

```
# # Adding a new column
```

```
# # Display the DataFrame after adding a new column
```

```
# print("After adding a new column:")
```

```
# print(df)
```

```
# # Modifying a column
```

```
# # Display the DataFrame after modifying a column
```

```
# print("After modifying a column:")
```

```
# print(df)
```

```
# # Deleting a column
```

```
# # Display the DataFrame after deleting a column
```

```
# print("After deleting a column:")
```

```
# print(df)
```

```
import pandas as pd
```

```
# Provided dictionary of lists
```

```
data = {
```

```
'Name': ['Alice', 'Bob', 'Charlie'],
```

```
'Age': [25, 30, 35],
```

```
}
```

```
# Convert the dictionary to a DataFrame
```

```
df = pd.DataFrame(data)
```

```
# Display the original DataFrame
```

```
print("Original DataFrame:")
```

```
print(df)
```

```
# Adding a new row
```

```
new_name=input("New name: ")
```

```
new_age=int(input("New age: "))
```

```
new_row={'Name':new_name,'Age':new_age}
df=pd.concat([df,pd.DataFrame([new_row]),ignore_index=True)
# Display the DataFrame after adding a new row
print("After adding a row:\n",df)
```

```
# Modifying a row
modify_index=int (input("Index of row to modify: "))
new_age_mod=int(input ("New age: "))
df.loc[modify_index,"Age"]=new_age_mod
```

```
# Display the DataFrame after modifying a row
print("After modifying a row:")
print(df)
```

```
# Deleting a row
delete_index=int(input("Index of row to delete: "))
```

Translation Failed

Reason for late submission

Please enter at least 15 characters

code :

```
import pandas as pd
```

```
# Provided dictionary of lists
```

```
data = {
    'Name': ['Alice', 'Bob', 'Charlie'],
    'Age': [25, 30, 35],
}
```

```
# Convert the dictionary to a DataFrame
```

```
df = pd.DataFrame(data)
```

```
# Display the original DataFrame
```

```
print("Original DataFrame:")
```

```
print(df)
```

```
# Adding a new row
```

```
new_name=input("New name: ")
```

```
new_age=int(input("New age: "))
```

```
new_row={'Name':new_name,'Age':new_age}
```

```
df=pd.concat([df,pd.DataFrame([new_row])],ignore_index=True)
```

```
# Display the DataFrame after adding a new row
```

```
print("After adding a row:\n",df)
```

```
# Modifying a row
```

```
modify_index=int (input("Index of row to modify: "))
```

```
new_age_mod=int(input ("New age: "))
```

```
df.loc[modify_index,"Age"]=new_age_mod
```

```
# Display the DataFrame after modifying a row
```

```
print("After modifying a row:")
```

```
print(df)
```

```
# Deleting a row
```

```
delete_index=int(input("Index of row to delete: "))
```

```
df=df.drop(delete_index).reset_index(drop=True)
```

```
# Display the DataFrame after deleting a row
```

```
print("After deleting a row:")
```

```
print(df)
```

```
# Adding a new column
```

```
gender_input=input("Enter genders separated by space: ")
```

```
genders=gender_input.split()
```

```
df["Gender"]= genders
```

```
# Display the DataFrame after adding a new column
```

```
print("After adding a new column:")
```

```
print(df)
```

```
# Modifying a column
```

```
df["Name"]=df["Name"].str.upper()
```

```
# Display the DataFrame after modifying a column
```

```
print("After modifying a column:")
```

```
print(df)
```

```
# Deleting a column
```


```
df=df.drop(columns=['Age'])
```

```
# Display the DataFrame after deleting a column
```

```
print("After deleting a column:")
```

```
print(df)
```


output :

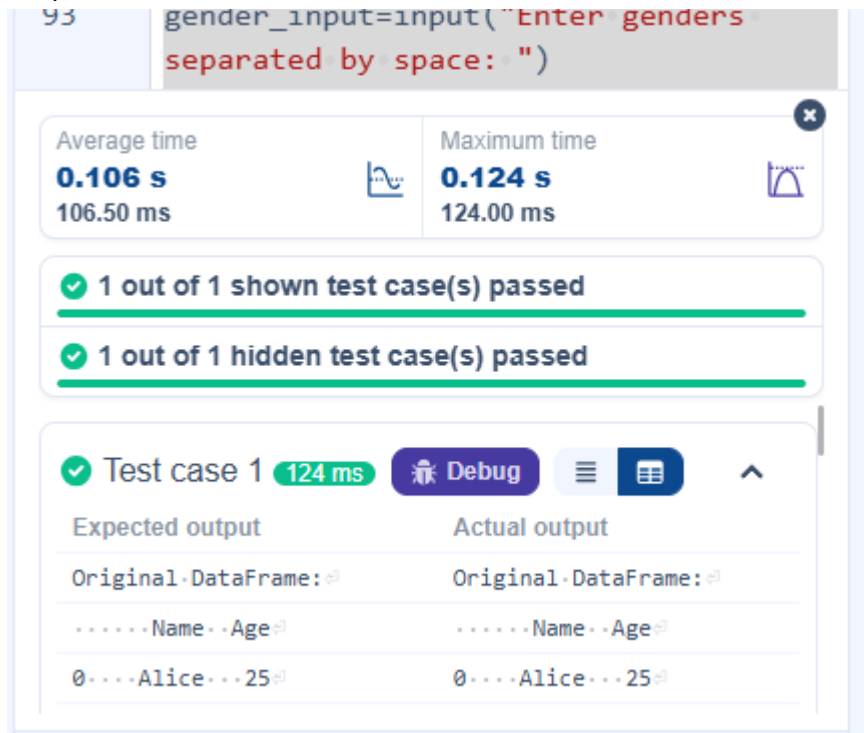

4.1.3

Write a program to read a text file containing student information (name, age, and grade) using Pandas. Perform the following tasks:

- Display the first five rows of the data frame.
- Calculate the average age of the students (limit the average age up to 2 decimal places).
- Filter out the students who have a grade above a certain threshold (consider the threshold grade is 'B').

Note:

Refer to the displayed test cases for better understanding.

Code :

```
import pandas as pd
```

```
# Read the text file into a DataFrame
```

```
file = input()

data = pd.read_csv(file, sep="\s+", header=None, names=["Name", "Age", "Grade"])

# Display the first five rows

print("First five rows:")

print(data.head())

# Calculate the average age (rounded to 2 decimal places)

average_age = round(data['Age'].mean(), 2)

print(f"Average age: {average_age}")

# Filter students with grade up to threshold 'B'

grade_order = {'A': 1, 'B': 2, 'C': 3, 'D': 4, 'F': 5}


threshold = 'B'

filtered_df = data[data['Grade'].map(grade_order) <= grade_order[threshold]]

print(f"Students with a grade up to {threshold}")
```

```
print(filtered_df)
```

output :

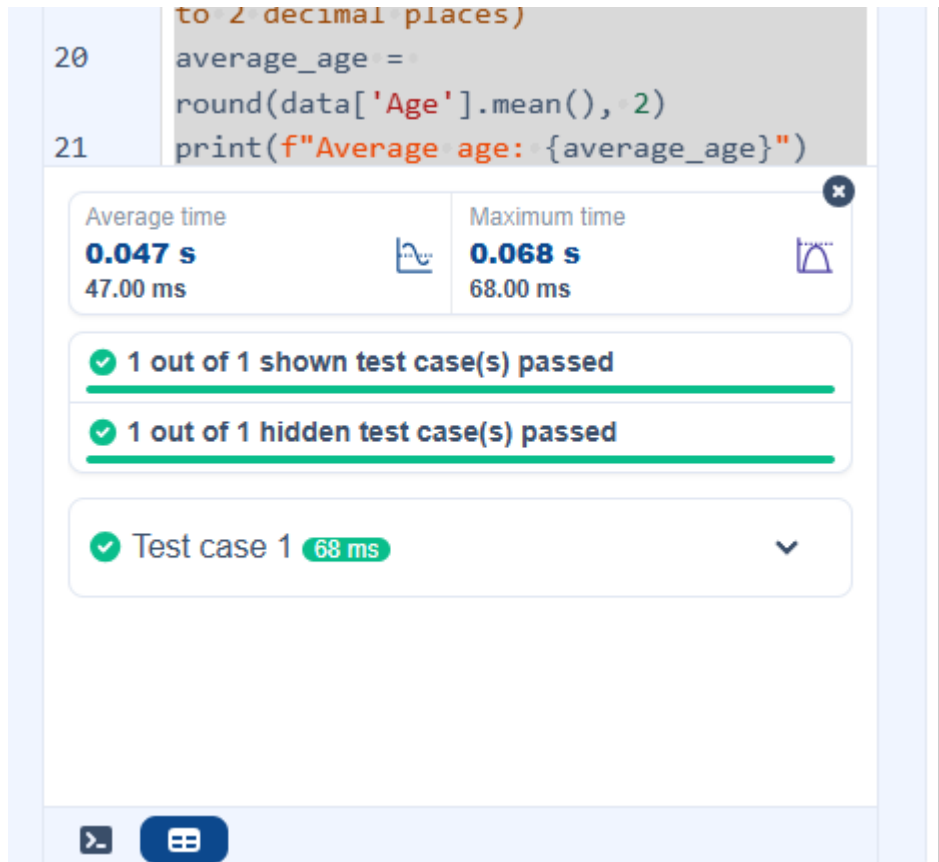

The screenshot shows a Jupyter Notebook interface. The top part displays a code cell with the following Python code:

```
to 2 decimal places)
average_age =
round(data['Age'].mean(), 2)
print(f"Average age: {average_age}")
```

Below the code cell, there is a summary of test results:

Average time	Maximum time
0.047 s 47.00 ms	0.068 s 68.00 ms

Below the table, there are two green bars indicating test results:

- ✓ 1 out of 1 shown test case(s) passed
- ✓ 1 out of 1 hidden test case(s) passed

Below these bars, there is a dropdown menu showing:

- ✓ Test case 1 68 ms

At the bottom of the notebook interface, there are icons for running the cell and viewing the output.

4.2.1

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the columns: Date, Product, Quantity, Price, and City.
- Group the data by Month and calculate the total sales for each month.
- Find the month with the highest total sales and display it.
- Also, display the total sales for the best month.

Sample Data:

Date,Product,Quantity,Price,City

2025-01-01,Product A,5,20,New York

2025-01-01,Product B,3,15,Los Angeles

2025-01-02,Product A,7,20,New York
2025-01-02,Product C,4,30,Chicago
2025-01-03,Product B,2,15,Chicago
2025-01-03,Product A,8,20,Los Angeles
2025-01-04,Product C,6,30,New York
2025-01-04,Product B,5,15,Los Angeles
2025-01-05,Product A,3,20,Chicago
2025-01-05,Product C,10,30,Los Angeles

Note:

The data cannot be displayed in the file. You can refer to the sample data provided for insights.

Code :

```
import pandas as pd
```

```
# Prompt the user for the file name
```

```
file_name = input()
```

```
# Load the data
```

```
df = pd.read_csv(file_name)
```

```
# Convert 'Date' to datetime
```

```
df['Date'] = pd.to_datetime(df['Date'])
```

```
# Calculate total sales for each row
```

```
df['TotalSales'] = df['Quantity'] * df['Price']
```

```
# Extract month in YYYY-MM format
```

```
df['Month'] = df['Date'].dt.to_period('M')
```

```
# Group by month and sum total sales
monthly_sales = df.groupby('Month')['TotalSales'].sum()

# Find the month with highest total sales
best_month = monthly_sales.idxmax()
highest_sales = monthly_sales.max()

print(f"Best month: {best_month}")
print(f"Total sales: ${highest_sales:.2f}")
```

output :

2

Average time

0.030 s

29.67 ms

Maximum time

0.061 s

61.00 ms

✓ 1 out of 1 shown test case(s) passed

✓ 2 out of 2 hidden test case(s) passed

✓ Test case 1

61 ms

Debug

Expected output

Actual output

sales_data.csv

sales_data.csv

Best month: - 2025-01

Best month: - 2025-01

Total sales: - \$1210.00

Total sales: - \$1210.00

>

< Prev

Reset

Submit

Next >

4.2.2

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the columns: Date, Product, Quantity, Price, and City.
- Find the product that sold the most in terms of quantity sold.
- Display the product that sold the most and the total quantity sold for that product.

Sample Data:

Date,Product,Quantity,Price,City

2025-01-01,Product A,5,20,New York

2025-01-01,Product B,3,15,Los Angeles

2025-01-02,Product A,7,20,New York

2025-01-02,Product C,4,30,Chicago

2025-01-03,Product B,2,15,Chicago

2025-01-03,Product A,8,20,Los Angeles

2025-01-04,Product C,6,30,New York

2025-01-04,Product B,5,15,Los Angeles

2025-01-05,Product A,3,20,Chicago

2025-01-05,Product C,10,30,Los Angeles

Note:

The data cannot be displayed in the file. You can refer to the sample data provided for insights.

Code :

```
import pandas as pd
```

```
# Prompt the user for the file name
```

```
file_name = input()
```

```
# Load the CSV data
```

```
df = pd.read_csv(file_name)
```

```
# Group by Product and sum the Quantity
```

```
product_sales = df.groupby('Product')['Quantity'].sum()
```

```
# Find the product with the highest quantity sold
```

```
best_product = product_sales.idxmax()
```

```
highest_quantity = product_sales.max()
```

```
# Display the result
```

```
print(f"Best selling product: {best_product}")
```

```
print(f"Total quantity sold: {highest_quantity}")
```

output :

The screenshot shows a code editor with a Python script and its execution results. The script is as follows:

```
25 # Group by Product and sum the quantity
26 product_sales = df.groupby('Product')
```

The execution results are displayed in a panel below the code. It shows the average and maximum time taken for the execution, along with test case results.

Metric	Value
Average time	0.022 s 22.33 ms
Maximum time	0.047 s 47.00 ms

Test case results:

- 1 out of 1 shown test case(s) passed
- 2 out of 2 hidden test case(s) passed
- Test case 1 47 ms

At the bottom of the panel, there are buttons for navigation: < Prev, Reset, Submit, and Next >. The Submit button is highlighted in green.

4.2.3

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the columns: Date, Product, Quantity, Price, and City.
- Group the data by City and calculate the total quantity of products sold for each city.
- Find the city that sold the most products (based on the total quantity sold).

Sample Data:

Date,Product,Quantity,Price,City

2025-01-01,Product A,5,20,New York

2025-01-01,Product B,3,15,Los Angeles

2025-01-02,Product A,7,20,New York

2025-01-02,Product C,4,30,Chicago

2025-01-03,Product B,2,15,Chicago

2025-01-03,Product A,8,20,Los Angeles

2025-01-04,Product C,6,30,New York

2025-01-04,Product B,5,15,Los Angeles

2025-01-05,Product A,3,20,Chicago

2025-01-05,Product C,10,30,Los Angeles

Note:

The data cannot be displayed in the file. You can refer to the sample data provided for insights.

Code:

```
import pandas as pd
```

```
# Prompt the user for the file name
```

```
file_name = input()
```




```
# Load the CSV data
df = pd.read_csv(file_name)

# Group by City and sum the Quantity
city_sales = df.groupby('City')['Quantity'].sum()

# Find the city with the highest total quantity sold
best_city = city_sales.idxmax()

# Display the result
print(f"City sold the most products: {best_city}")
```

output :

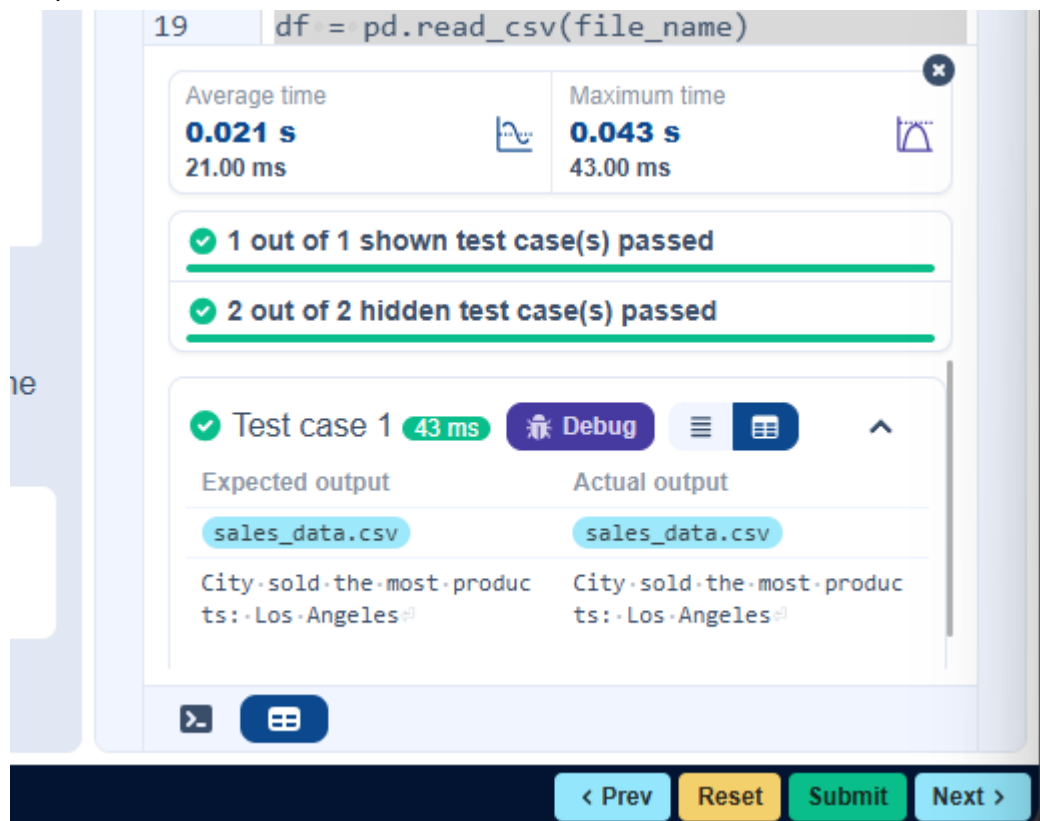

The screenshot shows a code editor with the following code:

```
19 df = pd.read_csv(file_name)
```

Below the code editor, there is a performance summary table:

Average time	Maximum time
0.021 s 21.00 ms	0.043 s 43.00 ms

Below the performance summary, there are two test case status messages:

- 1 out of 1 shown test case(s) passed
- 2 out of 2 hidden test case(s) passed

Below the test case status, there is a detailed view of Test case 1:

Expected output	Actual output
sales_data.csv	sales_data.csv
City sold the most products: Los Angeles	City sold the most products: Los Angeles

At the bottom of the interface, there are navigation buttons: < Prev, Reset, Submit, and Next >.

4.2.4

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the following columns: Date, Product, Quantity, Price, and City.
- For each date, find all pairs of products that were sold together (i.e., two products sold on the same date).
- Output the product pair/s that was sold most frequently.

Sample Data:

Date,Product,Quantity,Price,City

2025-01-01,Product A,5,20,New York

2025-01-01,Product B,3,15,Los Angeles

2025-01-02,Product A,7,20,New York

2025-01-02,Product C,4,30,Chicago

2025-01-03,Product B,2,15,Chicago

2025-01-03,Product A,8,20,Los Angeles

2025-01-04,Product C,6,30,New York

2025-01-04,Product B,5,15,Los Angeles

2025-01-05,Product A,3,20,Chicago

2025-01-05,Product C,10,30,Los Angeles

Explanation:

Transactions:

- **2025-01-01:** Product A, Product B
- **2025-01-02:** Product A, Product C
- **2025-01-03:** Product B, Product A
- **2025-01-04:** Product C, Product B
- **2025-01-05:** Product A, Product C

Now, let's count how often the pairs of products appear together:

- **Product A and Product B:** Appear in transactions on 2025-01-01 and 2025-01-03.
- **Product A and Product C:** Appear in transactions on 2025-01-02 and 2025-01-05.
- **Product B and Product C:** Appears in transactions on 2025-01-04.

Most Frequent Product Combinations:

- **Product A and Product B** (2 times)
- **Product A and Product C** (2 times)

Note:

The data cannot be displayed in the file. You can refer to the sample data provided for insights.

Code:

```
import pandas as pd
```

```
from itertools import combinations
```

```
from collections import Counter
```

```
# Prompt user to input the file name
```

```
file_name = input()
```

```
# Read data from CSV
```

```
df = pd.read_csv(file_name)
```

```
# Initialize a list to store all product pairs
```

```
all_pairs = []
```

```
# Group by each date
```

```
for date, group in df.groupby('Date'):
```

```
    products = group['Product'].tolist()
```

```
    # Generate all unique pairs for this date
```

```
    pairs = combinations(sorted(products), 2)
```

```
    all_pairs.extend(pairs)
```

```
# Count frequency of each product pair
```

```

pair_counts = Counter(all_pairs)

# Find the maximum frequency
max_freq = max(pair_counts.values())

# Get all pairs that have the maximum frequency
most_frequent_pairs = [pair for pair, count in pair_counts.items() if count == max_freq]

# Display the result in the exact expected format
for pair in most_frequent_pairs:
    print(f"{pair[0]} and {pair[1]}: {max_freq} times")

```

output:

The screenshot shows a coding challenge interface. At the top, a code editor displays the line: `max_freq = max(pair_counts.values())`. Below the editor, a performance summary box shows:

- Average time: **0.023 s** (22.67 ms)
- Maximum time: **0.048 s** (48.00 ms)

 Below this, two green checkmarks indicate:

- 1 out of 1 shown test case(s) passed
- 2 out of 2 hidden test case(s) passed

 A third section shows 'Test case 1' with a green checkmark and a green badge indicating '48 ms'. At the bottom of the interface, there are four buttons: '< Prev' (light blue), 'Reset' (yellow), 'Submit' (green), and 'Next >' (light blue).

4.2.5

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the

dataset. For each question, perform necessary data cleaning, transformations, and calculations as required.

1. Display the first 5 rows of the dataset.
2. Display the last 5 rows of the dataset.
3. Get the shape of the dataset (number of rows and columns).
4. Get a summary of the dataset (using `.info()`).
5. Get basic statistics (mean, standard deviation, etc.) of the dataset using `.describe()`.
6. Check for missing values and display the count of missing values for each column.
7. Fill missing values in the 'Age' column with the median age.
8. Fill missing values in the 'Embarked' column with the most frequent value (`mode()`).
9. Drop the 'Cabin' column due to many missing values.
10. Create a new column, 'FamilySize' by adding the 'SibSp' and 'Parch' columns.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

Code :

```
import pandas as pd
```

```
import numpy as np
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
# 1. Display the first 5 rows of the dataset
```

```
print(data.head())
```

```
# 2. Display the last 5 rows of the dataset
```

```
print(data.tail())
```

```
# 3. Get the shape of the dataset
```

```
print(data.shape)
```

```
# 4. Get a summary of the dataset (info)
```

```
print(data.info())
```

```
# 5. Get basic statistics of the dataset
```

```
print(data.describe())
```

```
# 6. Check for missing values
```

```
print(data.isnull().sum())
```

7. Fill missing values in the 'Age' column with the median age

```
data['Age'] = data['Age'].fillna(data['Age'].median())
```

8. Fill missing values in the 'Embarked' column with the mode

```
data['Embarked'] = data['Embarked'].fillna(data['Embarked'].mode()[0])
```

9. Drop the 'Cabin' column due to many missing values

```
data = data.drop(columns=['Cabin'])
```

10. Create a new column 'FamilySize' by adding 'SibSp' and 'Parch'

```
data['FamilySize'] = data['SibSp'] + data['Parch']
```

output :

Average time
0.216 s
216.00 ms

Maximum time
0.216 s
216.00 ms

✓ 1 out of 1 shown test case(s) passed

✓ Test case 1 216 ms Debug

Expected output	Actual output
... PassengerId ... Survived ... Pclass ... Fare ... Cabin ... Embarked ...	... PassengerId ... Survived ... Pclass ... Fare ... C abin ... Embarked ...
0 ... 1 ... 0 3 ... 7.2500 ... NaN	0 ... 1 ... 0 3 ... 7.2500 ...
... S ...	... NaN ... S ...

< Prev Reset Submit Next >

4.2.6

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Create a new column 'IsAlone' which is 1 if the passenger is alone (FamilySize = 0), otherwise 0.
2. Convert the 'Sex' column to numeric values (male: 0, female: 1).
3. One-hot encode the 'Embarked' column, dropping the first category.
4. Get the mean age of passengers.
5. Get the median fare of passengers.
6. Get the number of passengers by class.
7. Get the number of passengers by gender.
8. Get the number of passengers by survival status.
9. Calculate the survival rate of passengers.
10. Calculate the survival rate by gender.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S
8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S
9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S
10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

Code:

```
import pandas as pd
```

```
import numpy as np
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
data['FamilySize'] = data['SibSp'] + data['Parch']
```

```
# 1. Create a new column 'IsAlone' (1 if alone, 0 otherwise)
```

```
data['IsAlone'] = (data['FamilySize'] == 0).astype(int)
```

```
# 2. Convert 'Sex' to numeric (male: 0, female: 1)
```

```
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
```

```
# 3. One-hot encode the 'Embarked' column
```

```
data = pd.get_dummies(data, columns=['Embarked'])
```

```
# 4. Get the mean age of passengers
```

```
print(data['Age'].mean())
```

```
# 5. Get the median fare of passengers
```

```
print(data['Fare'].median())
```

6. Get the number of passengers by class

```
print(data['Pclass'].value_counts())
```

7. Get the number of passengers by gender

```
print(data['Sex'].value_counts())
```

8. Get the number of passengers by survival status

```
print(data['Survived'].value_counts())
```


9. Calculate the survival rate

```
print(data['Survived'].mean())
```

10. Calculate the survival rate by gender

```
print(data.groupby('Sex')['Survived'].mean())
```

output:

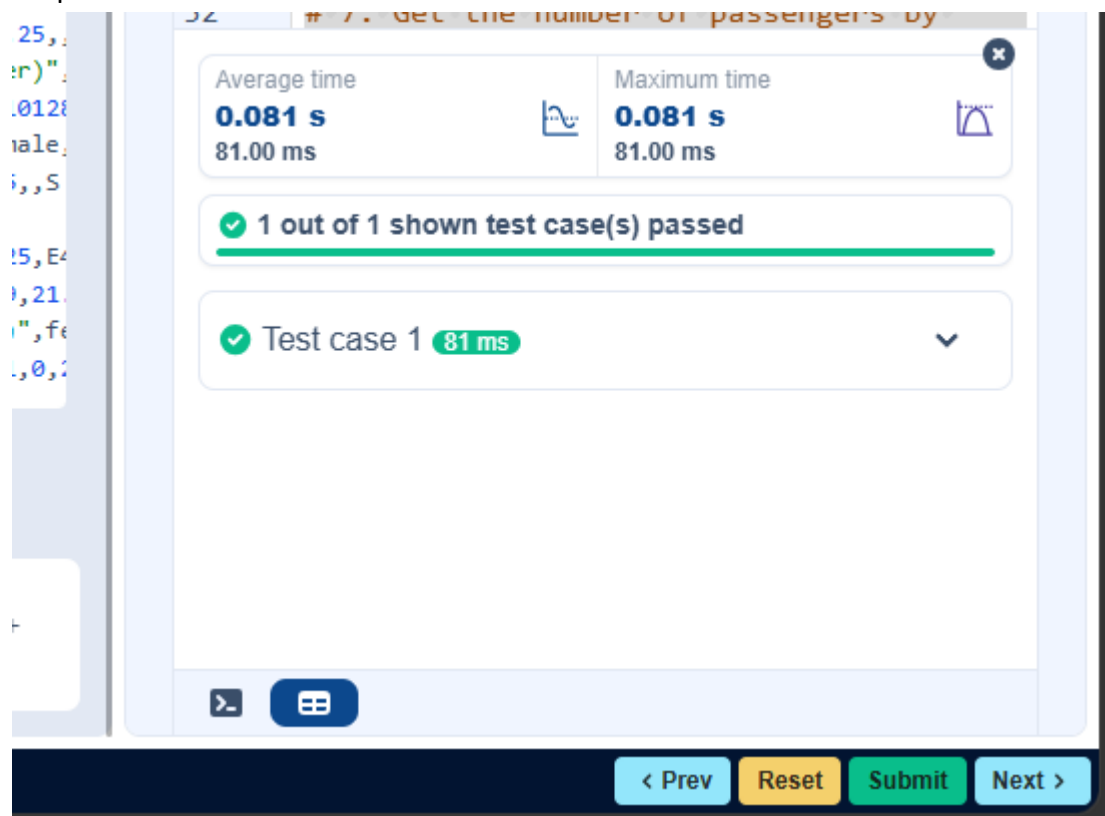

The screenshot shows a coding environment with a terminal window displaying the output of the code. The output is a pandas Series showing the survival rate by gender. The terminal window is titled "# 7. Get the number of passengers by gender" and shows the following output:

```
Sex
male    0.625
female  0.938
dtype: object
```

Below the terminal window, there is a summary of the test results. It shows that the average time for the test case is 0.081 s (81.00 ms) and the maximum time is also 0.081 s (81.00 ms). A green checkmark indicates that 1 out of 1 shown test case(s) passed. Below this, a dropdown menu shows "Test case 1" with a green checkmark and a green pill indicating a time of 81 ms.

At the bottom of the screen, there are navigation buttons: "< Prev", "Reset", "Submit", and "Next >".

4.2.7

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Calculate the survival rate by class.
2. Calculate the survival rate by embarkation location (Embarked_S).
3. Calculate the survival rate by family size (FamilySize).
4. Calculate the survival rate by being alone (IsAlone).
5. Get the average fare by passenger class (Pclass).
6. Get the average age by passenger class (Pclass).
7. Get the average age by survival status (Survived).
8. Get the average fare by survival status (Survived).
9. Get the number of survivors by class (Pclass).
10. Get the number of non-survivors by class (Pclass).

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S
8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S
9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S
10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

Code:

```
import pandas as pd
```

```
import numpy as np
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
data['FamilySize'] = data['SibSp'] + data['Parch']
```

```
data['IsAlone'] = np.where(data['FamilySize'] > 0, 0, 1)
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

```
# 1. Calculate the survival rate by class
```

```
print(data.groupby('Pclass')['Survived'].mean())
```

```
# 2. Calculate the survival rate by embarked location
```

```
print(data.groupby('Embarked_S')['Survived'].mean())
```

```
# 3. Calculate the survival rate by family size
```

```
print(data.groupby('FamilySize')['Survived'].mean())
```

```
# 4. Calculate the survival rate by being alone
```

```
print(data.groupby('IsAlone')['Survived'].mean())
```

5. Get the average fare by class

```
print(data.groupby('Pclass')['Fare'].mean())
```

6. Get the average age by class

```
print(data.groupby('Pclass')['Age'].mean())
```

7. Get the average age by survival status

```
print(data.groupby('Survived')['Age'].mean())
```

8. Get the average fare by survival status

```
print(data.groupby('Survived')['Fare'].mean())
```

9. Get the number of survivors by class

```
print(data[data['Survived'] == 1]['Pclass'].value_counts())
```

10. Get the number of non-survivors by class

```
print(data[data['Survived'] == 0]['Pclass'].value_counts())
```

output :

Average time
0.125 s
125.00 ms

Maximum time
0.125 s
125.00 ms

✓ 1 out of 1 shown test case(s) passed

✓ Test case 1 125 ms Debug

Expected output	Actual output
Pclass	Pclass
1...0.629630	1...0.629630
2...0.472826	2...0.472826
3...0.242363	3...0.242363
Name: Survived dtype: float	Name: Survived dtype: float

< Prev Reset Submit Next >

4.2.8

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Get the number of survivors by gender (Sex).
2. Get the number of non-survivors by gender (Sex).
3. Get the number of survivors by embarkation location (Embarked_S).
4. Get the number of non-survivors by embarkation location (Embarked_S).
5. Calculate the percentage of children (Age < 18) who survived.
6. Calculate the percentage of adults (Age >= 18) who survived.
7. Get the median age of survivors.
8. Get the median age of non-survivors.
9. Get the median fare of survivors.
10. Get the median fare of non-survivors.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Data:

PassengerId,Survived,Pclass,Name,Sex,Age,SibSp,Parch,Ticket,Fare,Cabin,Embarked

1,0,3,"Braund, Mr. Owen Harris",male,22,1,0,A/5 21171,7.25,,S

2,1,1,"Cumings, Mrs. John Bradley (Florence Briggs Thayer)",female,38,1,0,PC
17599,71.2833,C85,C

3,1,3,"Heikkinen, Miss. Laina",female,26,0,0,STON/O2. 3101282,7.925,,S

4,1,1,"Futrelle, Mrs. Jacques Heath (Lily May Peel)",female,35,1,0,113803,53.1,C123,S

5,0,3,"Allen, Mr. William Henry",male,35,0,0,373450,8.05,,S

6,0,3,"Moran, Mr. James",male,,0,0,330877,8.4583,,Q

7,0,1,"McCarthy, Mr. Timothy J",male,54,0,0,17463,51.8625,E46,S

8,0,3,"Palsson, Master. Gosta Leonard",male,2,3,1,349909,21.075,,S

9,1,3,"Johnson, Mrs. Oscar W (Elisabeth Vilhelmina Berg)",female,27,0,2,347742,11.1333,,S

10,1,2,"Nasser, Mrs. Nicholas (Adele Achem)",female,14,1,0,237736,30.0708,,C

Note: Refer to the visible test case for better reference.

Code:

```
import pandas as pd
```

```
import numpy as np
```

```
# Load the Titanic dataset
```

```
data = pd.read_csv('Titanic-Dataset.csv')
```

```
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
```

```
# 1. Get the number of survivors by gender
```

```
print(data[data['Survived'] == 1]['Sex'].value_counts())
```

2. Get the number of non-survivors by gender

```
print(data[data['Survived'] == 0]['Sex'].value_counts())
```

3. Get the number of survivors by embarked location

```
print(data[data['Survived'] == 1]['Embarked_S'].value_counts())
```

4. Get the number of non-survivors by embarked location

```
print(data[data['Survived'] == 0]['Embarked_S'].value_counts())
```

5. Calculate the percentage of children (Age < 18) who survived

```
children = data[data['Age'] < 18]
```

```
print(children['Survived'].mean())
```

6. Calculate the percentage of adults (Age >= 18) who survived

```
adults = data[data['Age'] >= 18]
```

```
print(adults['Survived'].mean())
```

7. Get the median age of survivors

```
print(data[data['Survived'] == 1]['Age'].dropna().median())
```

8. Get the median age of non-survivors

```
print(data[data['Survived'] == 0]['Age'].dropna().median())
```

9. Get the median fare of survivors

```
print(data[data['Survived'] == 1]['Fare'].dropna().median())
```


10. Get the median fare of non-survivors

```
print(data[data['Survived'] == 0]['Fare'].dropna().median())
```

```
ticket...  
7.25,...  
yer)"...  
310128...  
emale,...  
05,,S...  
  
525,E4...  
09,21...  
g)",fe...  
,1,0,2...
```

36

Average time
0.082 s
82.00 ms

Maximum time
0.082 s
82.00 ms

✓ 1 out of 1 shown test case(s) passed

✓ Test case 1 82 ms Debug

Expected output	Actual output
female....233	female....233
male.....109	male.....109
Name:-Sex, dtype:-int64	Name:-Sex, dtype:-int64
male.....468	male.....468
female.....81	female.....81

>

< Prev

Reset

Submit

Next >

