

UML class diagrams



Read more about structuring UML class diagrams here. And for additional help, watch this tutorial about basic UML class diagrams.


Summarize



Customize


Comment

Record video

Click the Quick Action to easily record a video before you share!

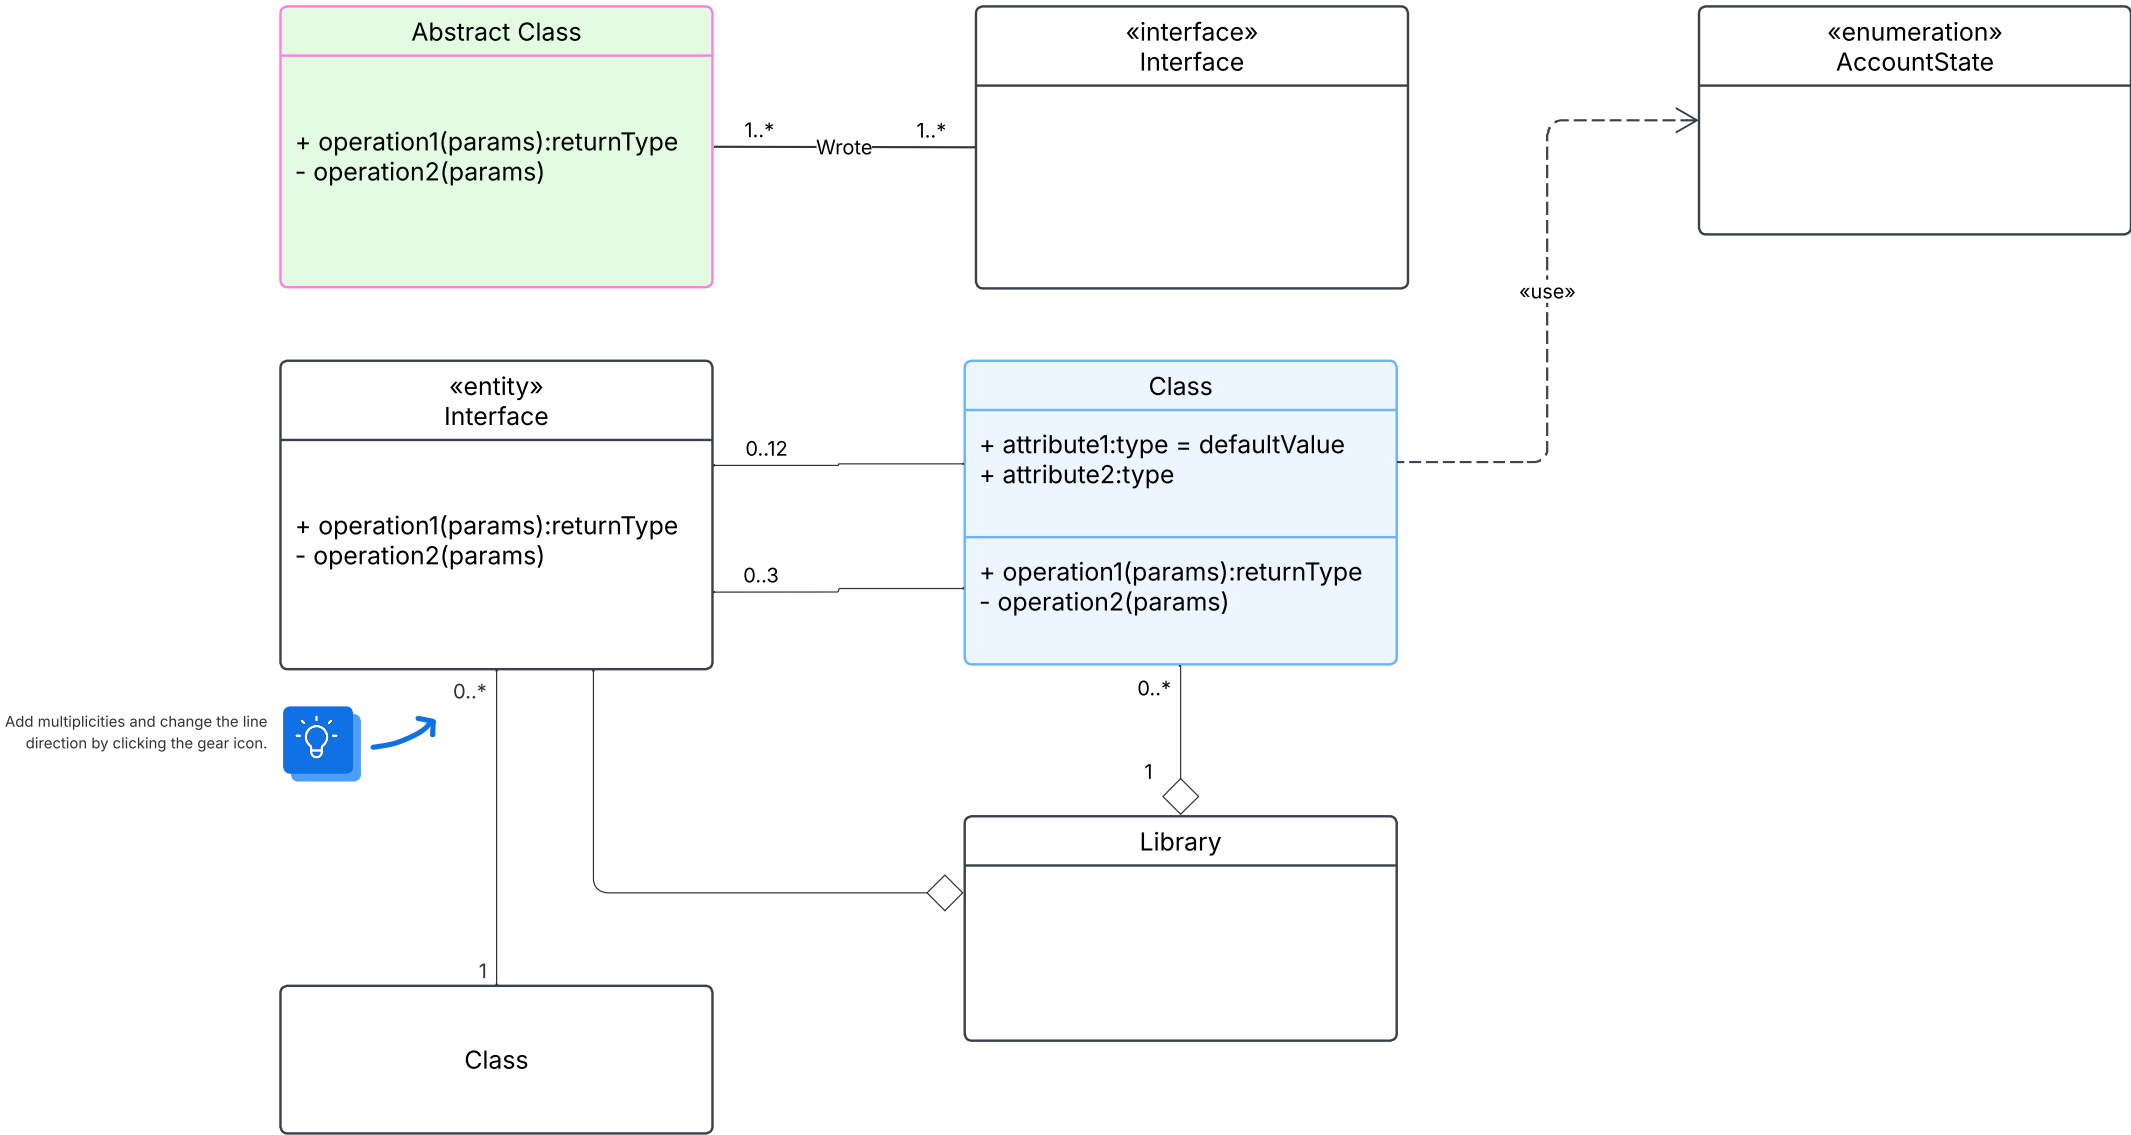

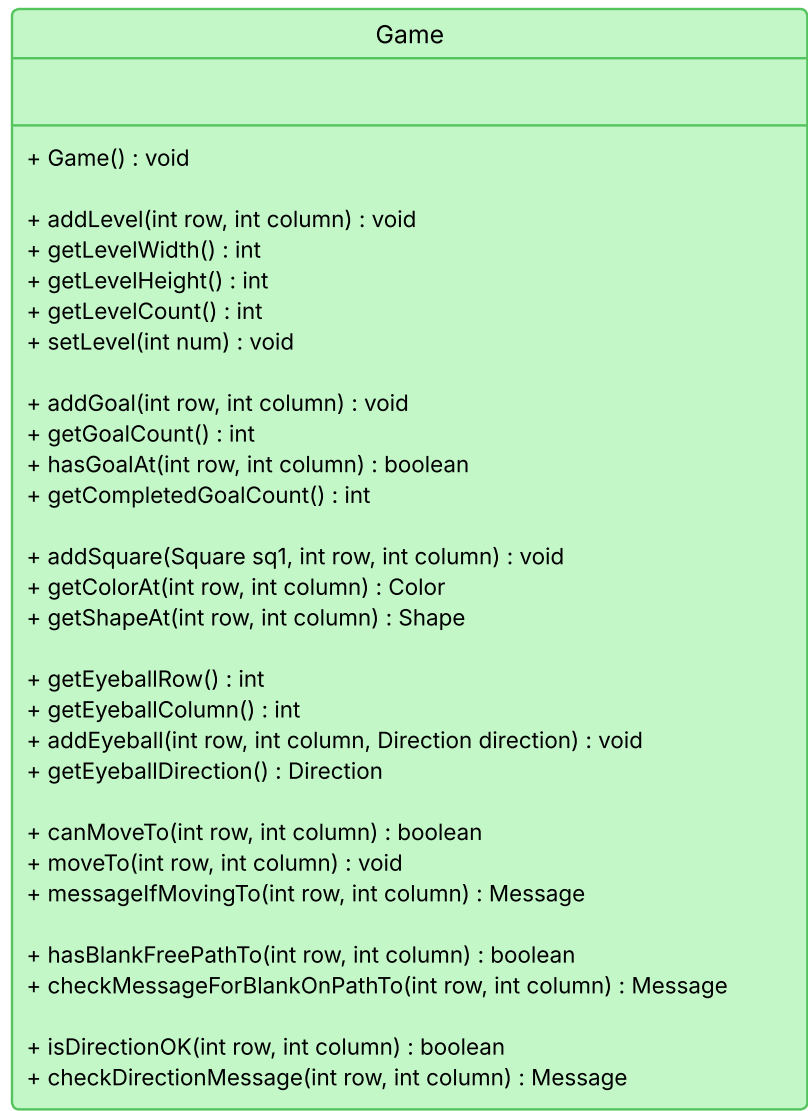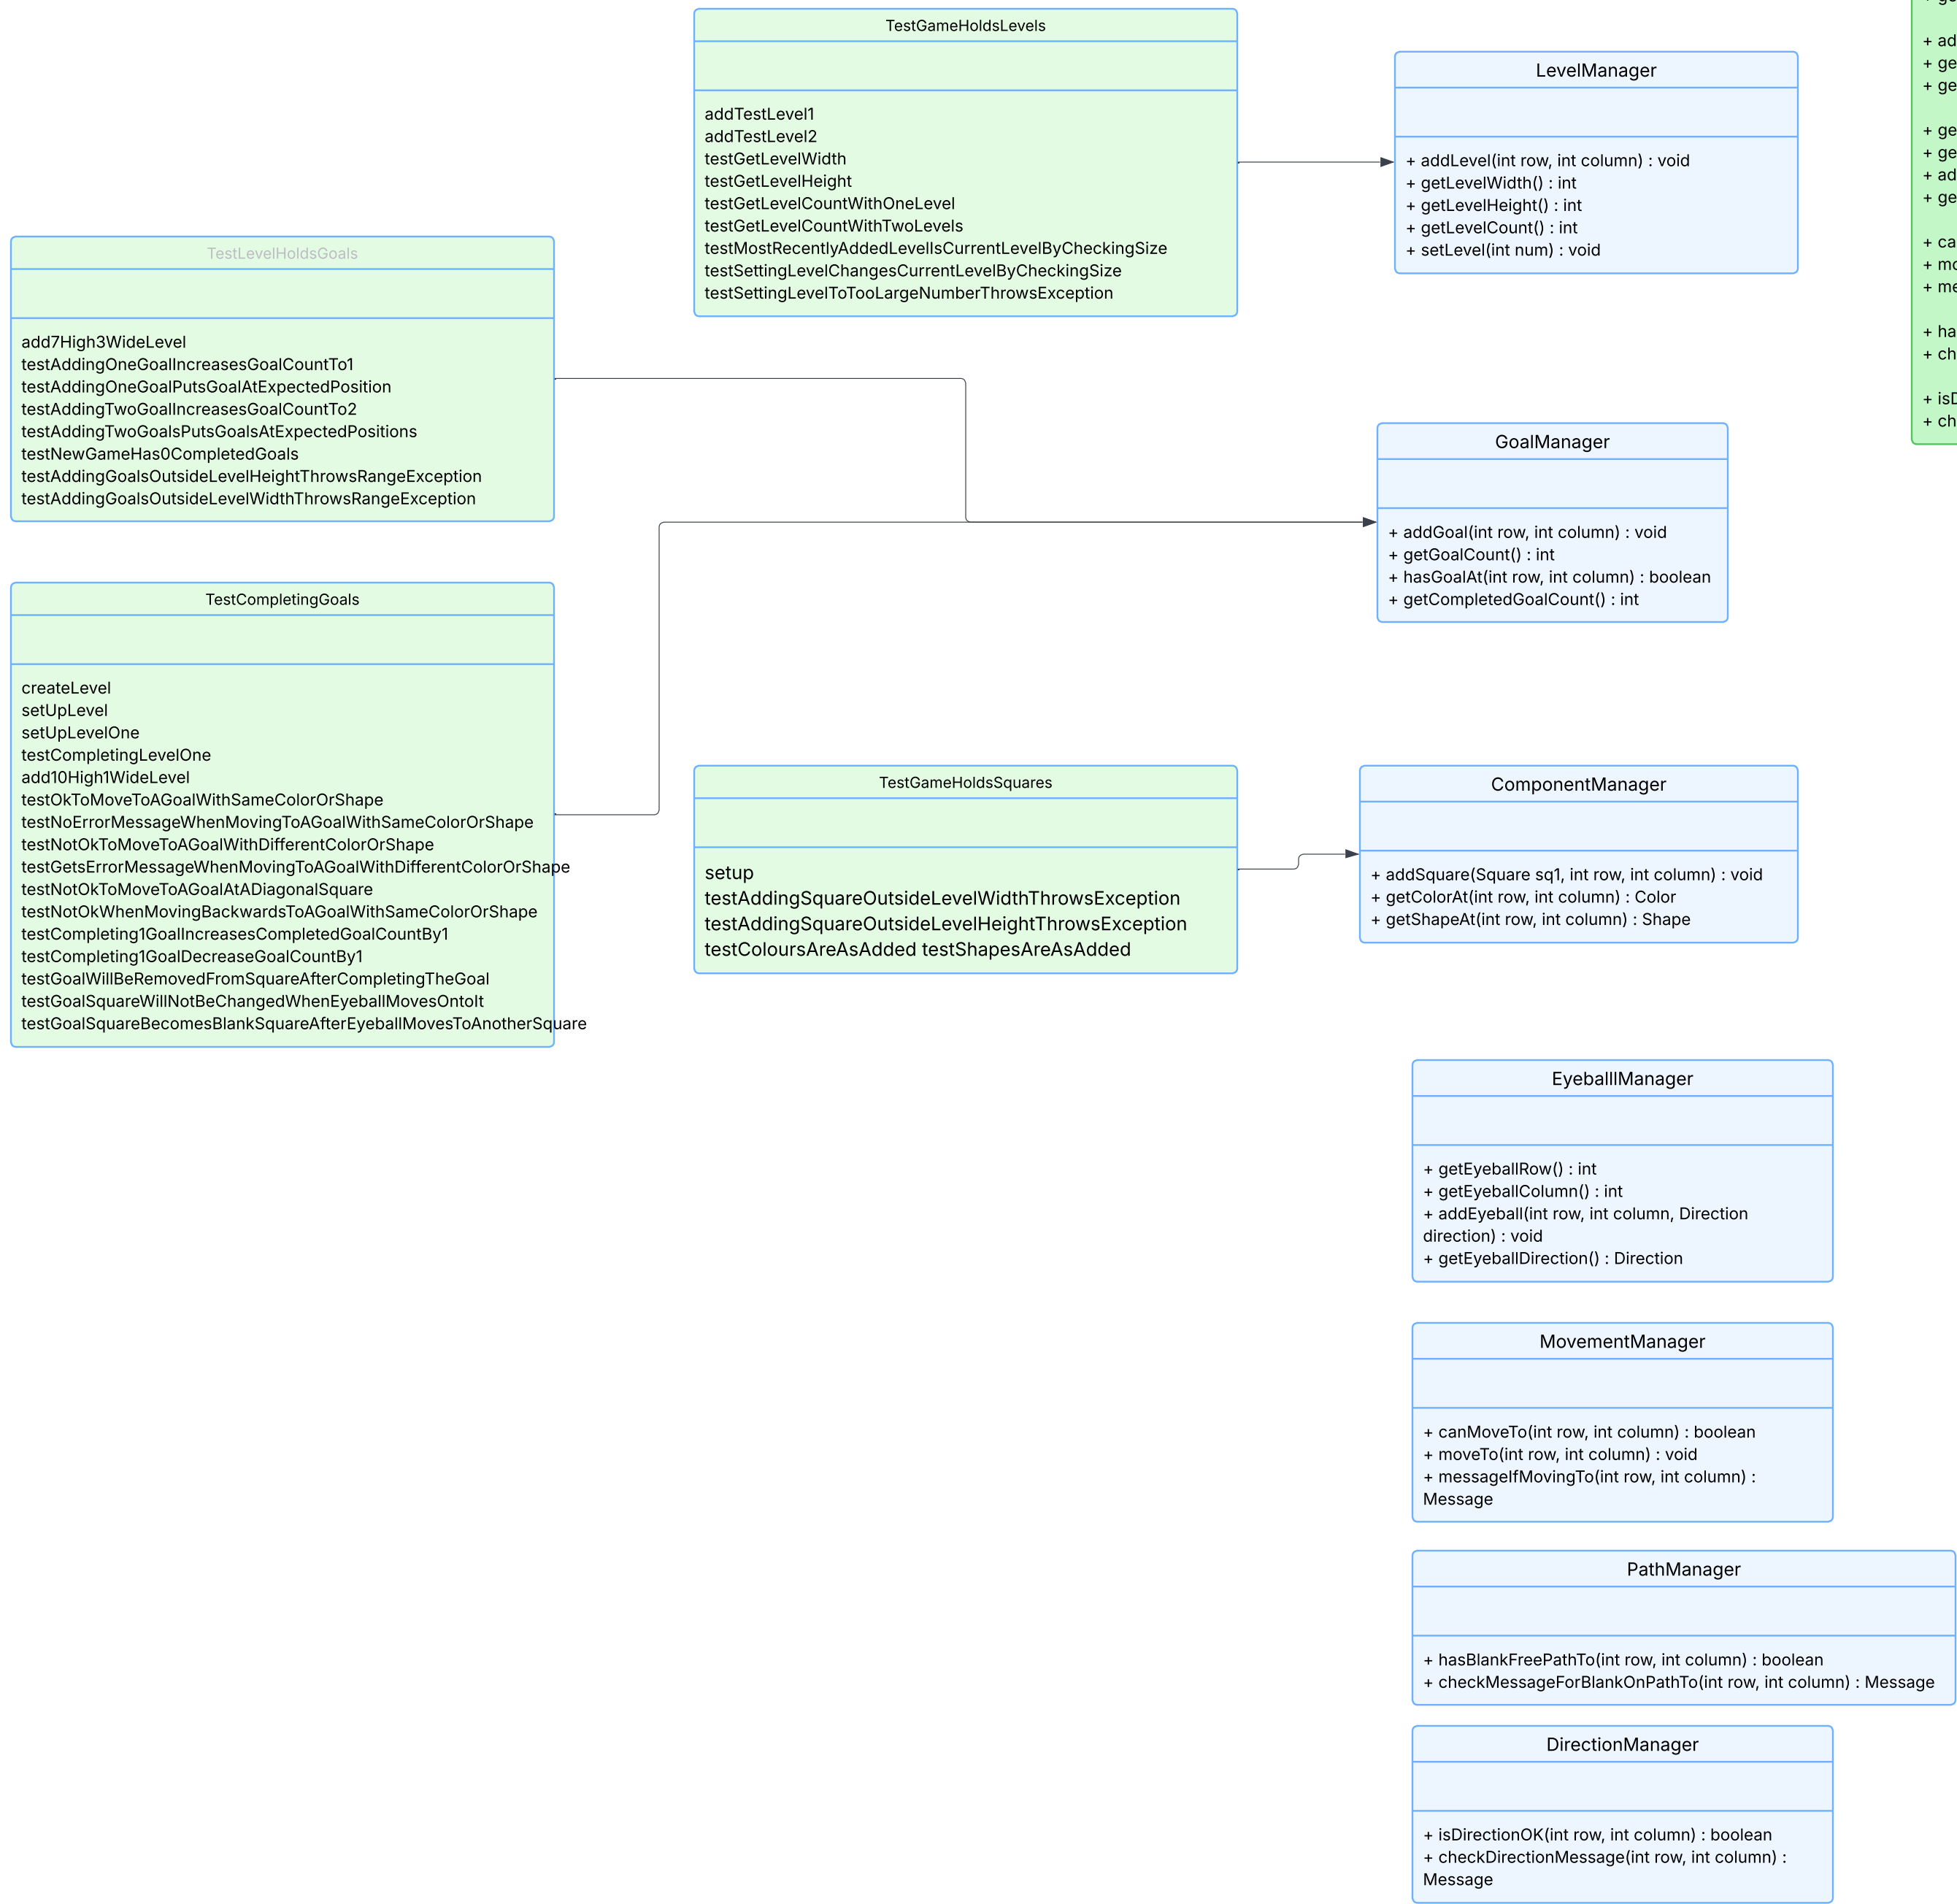

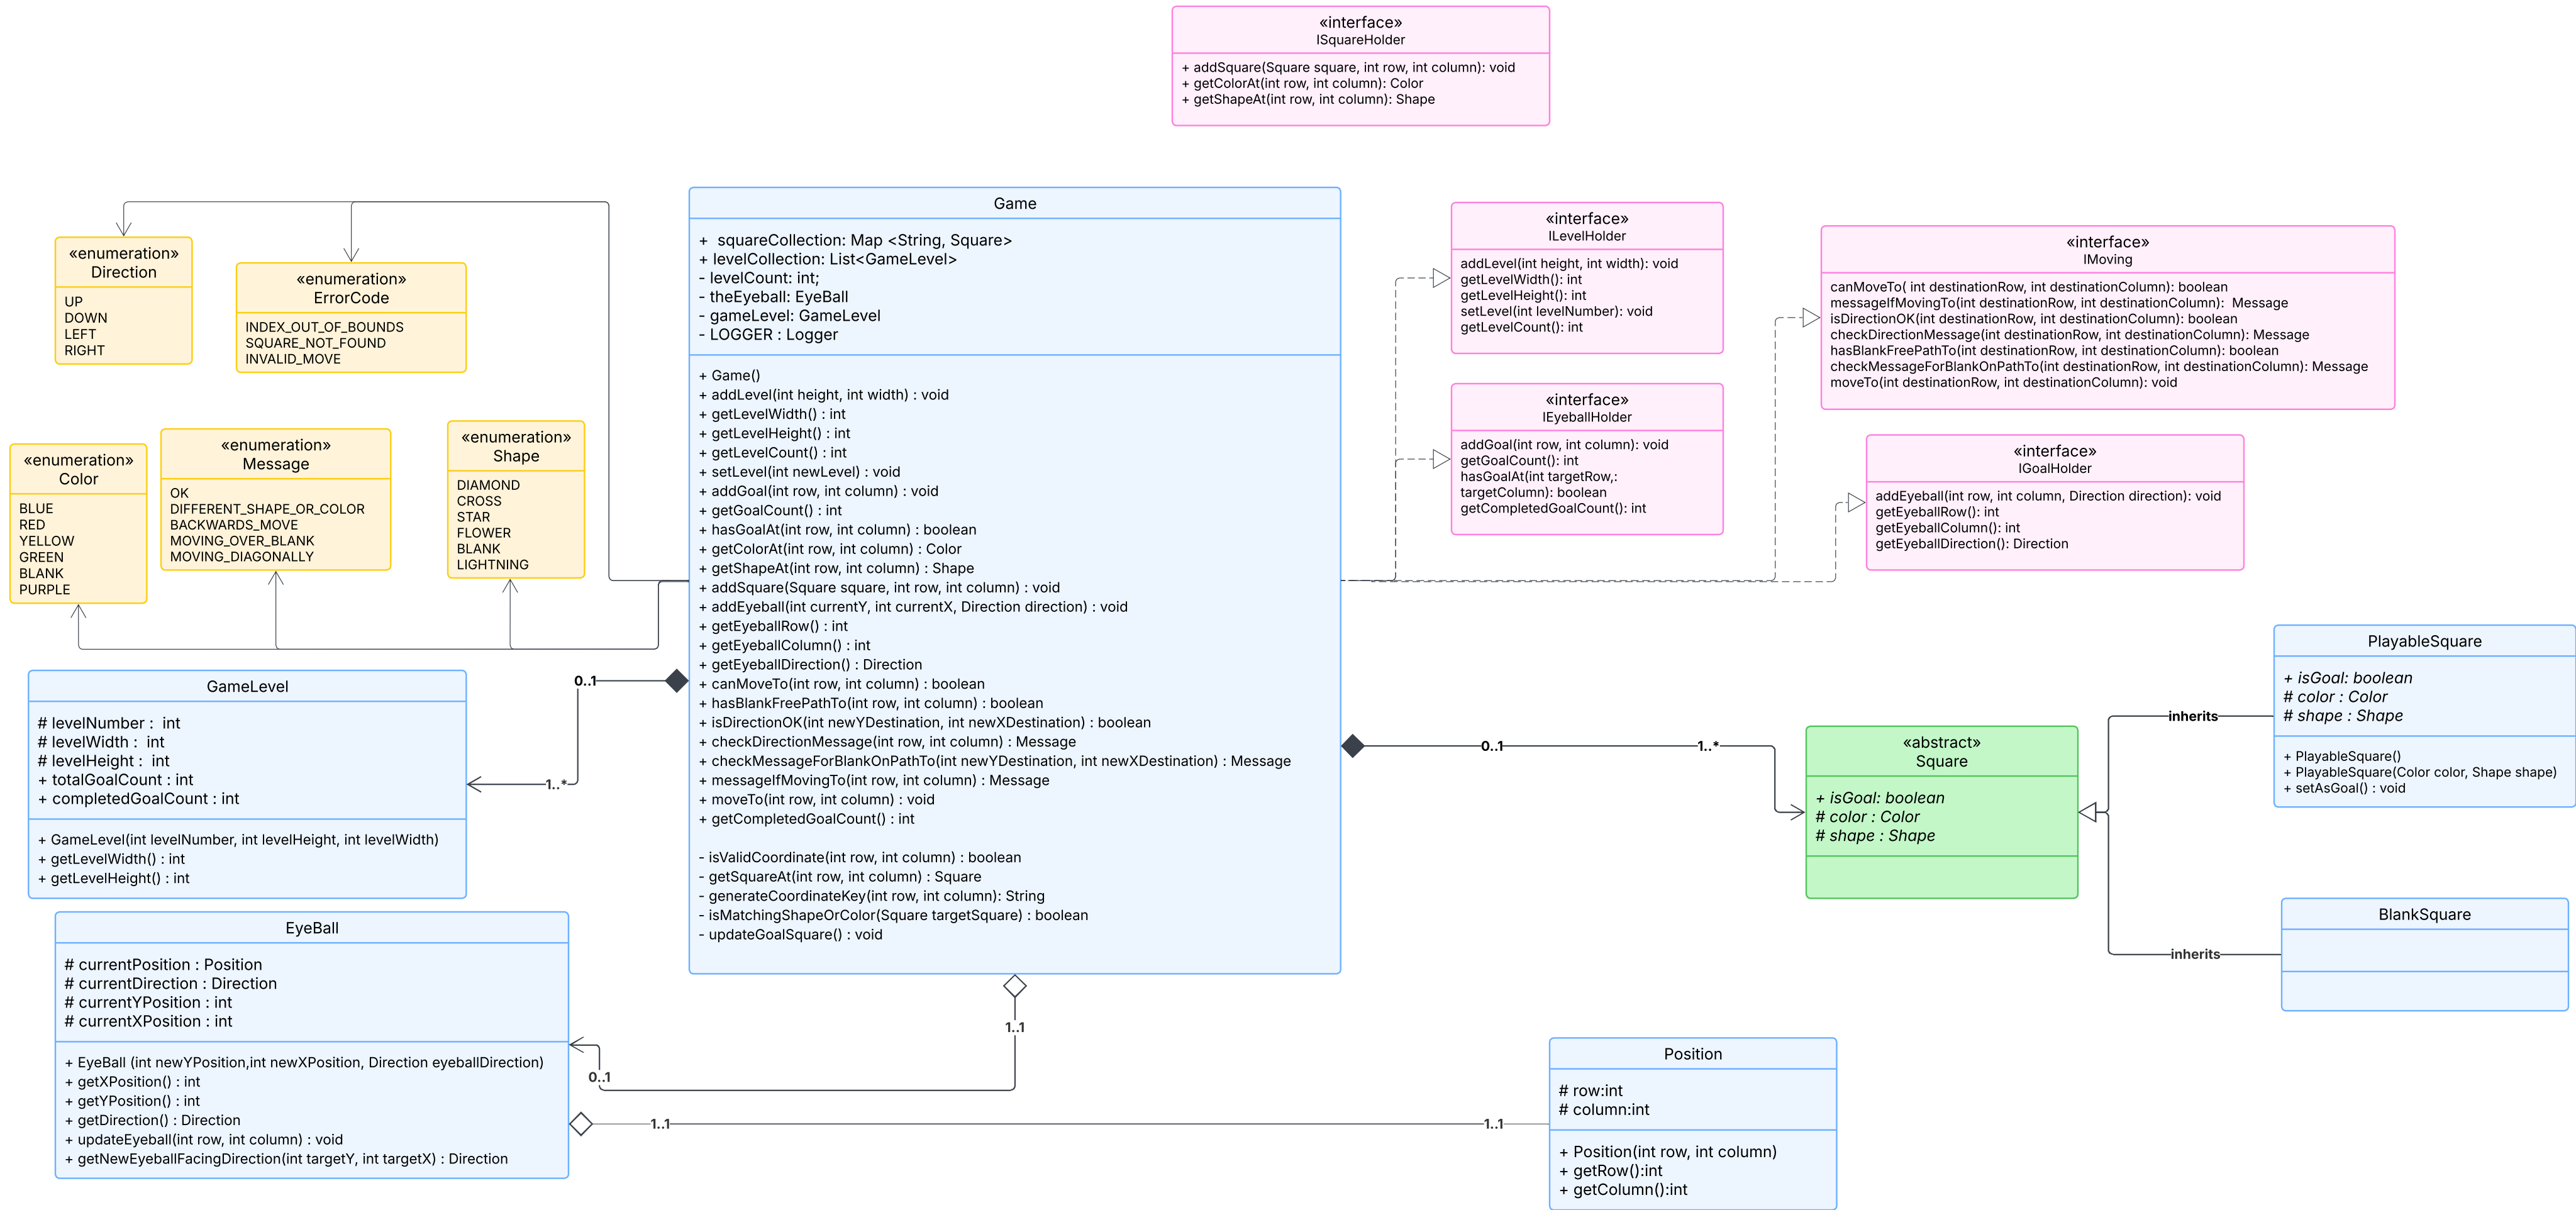

Quick tip

UML activity diagrams

Read more about structuring UML activity diagrams here.

Lucidchart basics

Activity diagram shape key

● Start

□ Action

— Horizontal fork/join

◇ Branch/Merge

★ End

● Team/department name

● Team/department name

Activity diagram shape bank

● — ◇ ● □

■

Summarize

Customize

Use swim lanes to clarify which team or department is responsible for specific activities.

A UML Activity Diagram titled "System name" divided into two swimlanes labeled "Team/department name". The left swimlane contains a start node, an "Action", a thick horizontal fork bar, another "Action", a decision diamond with two outgoing paths labeled "[guard condition]", and two more "Action" nodes. The right swimlane contains an "Action" and an end node. A thick horizontal join bar receives inputs from the two "Action" nodes in the left swimlane and the "Action" in the right swimlane. A final arrow leads from the join bar to the end node.

A UML Sequence Diagram with participants: Actor, Game, Eyeball, and GameLevel. The diagram shows the following interactions:

- Actor to Game: "addEyeBall(y,x, direction)" and "moveTo(y,x)".
- Game to Eyeball: "<<updates (direction, position) >>" and "setNextPosition(y,x)".
- Game to GameLevel: "hasGoal -> completedGoalCount++; totalGoalCount --".
- Game to Game: "get" (returning "Int,Int").

isSameShapeOrColor

isValidCoordinate

A UML Activity Diagram starting with "canMoveTo(y,x)", followed by a thick horizontal fork bar. The flow then goes to "isDirectionOK", a decision diamond with "yes" and "no" paths, each leading to an "Action".

A UML Activity Diagram starting with "addEyeBall(y,x,d)", followed by "isValidCoordinate(y,x)", a decision diamond with "true" (leading to "new EyeBall(position, direction)") and "false" (leading to "INDEX_OUT_OF_BOUNDS"). The flow then goes to a thick horizontal fork bar, which splits into "getLevelWidth" and "getLevelHeight". The flow then goes to "moveTo(y,x)", a thick horizontal fork bar, an "Action", and a decision diamond with two paths labeled "[guard condition]", each leading to an "Action".

A UML Sequence Diagram with participants: addLevel, addSquare, addGoal, and addLevel. The diagram shows a sequence of "Message" interactions: addLevel to addSquare, addSquare to addGoal, and addGoal to addLevel.