


# MISSING DATA : Multiple Imputation

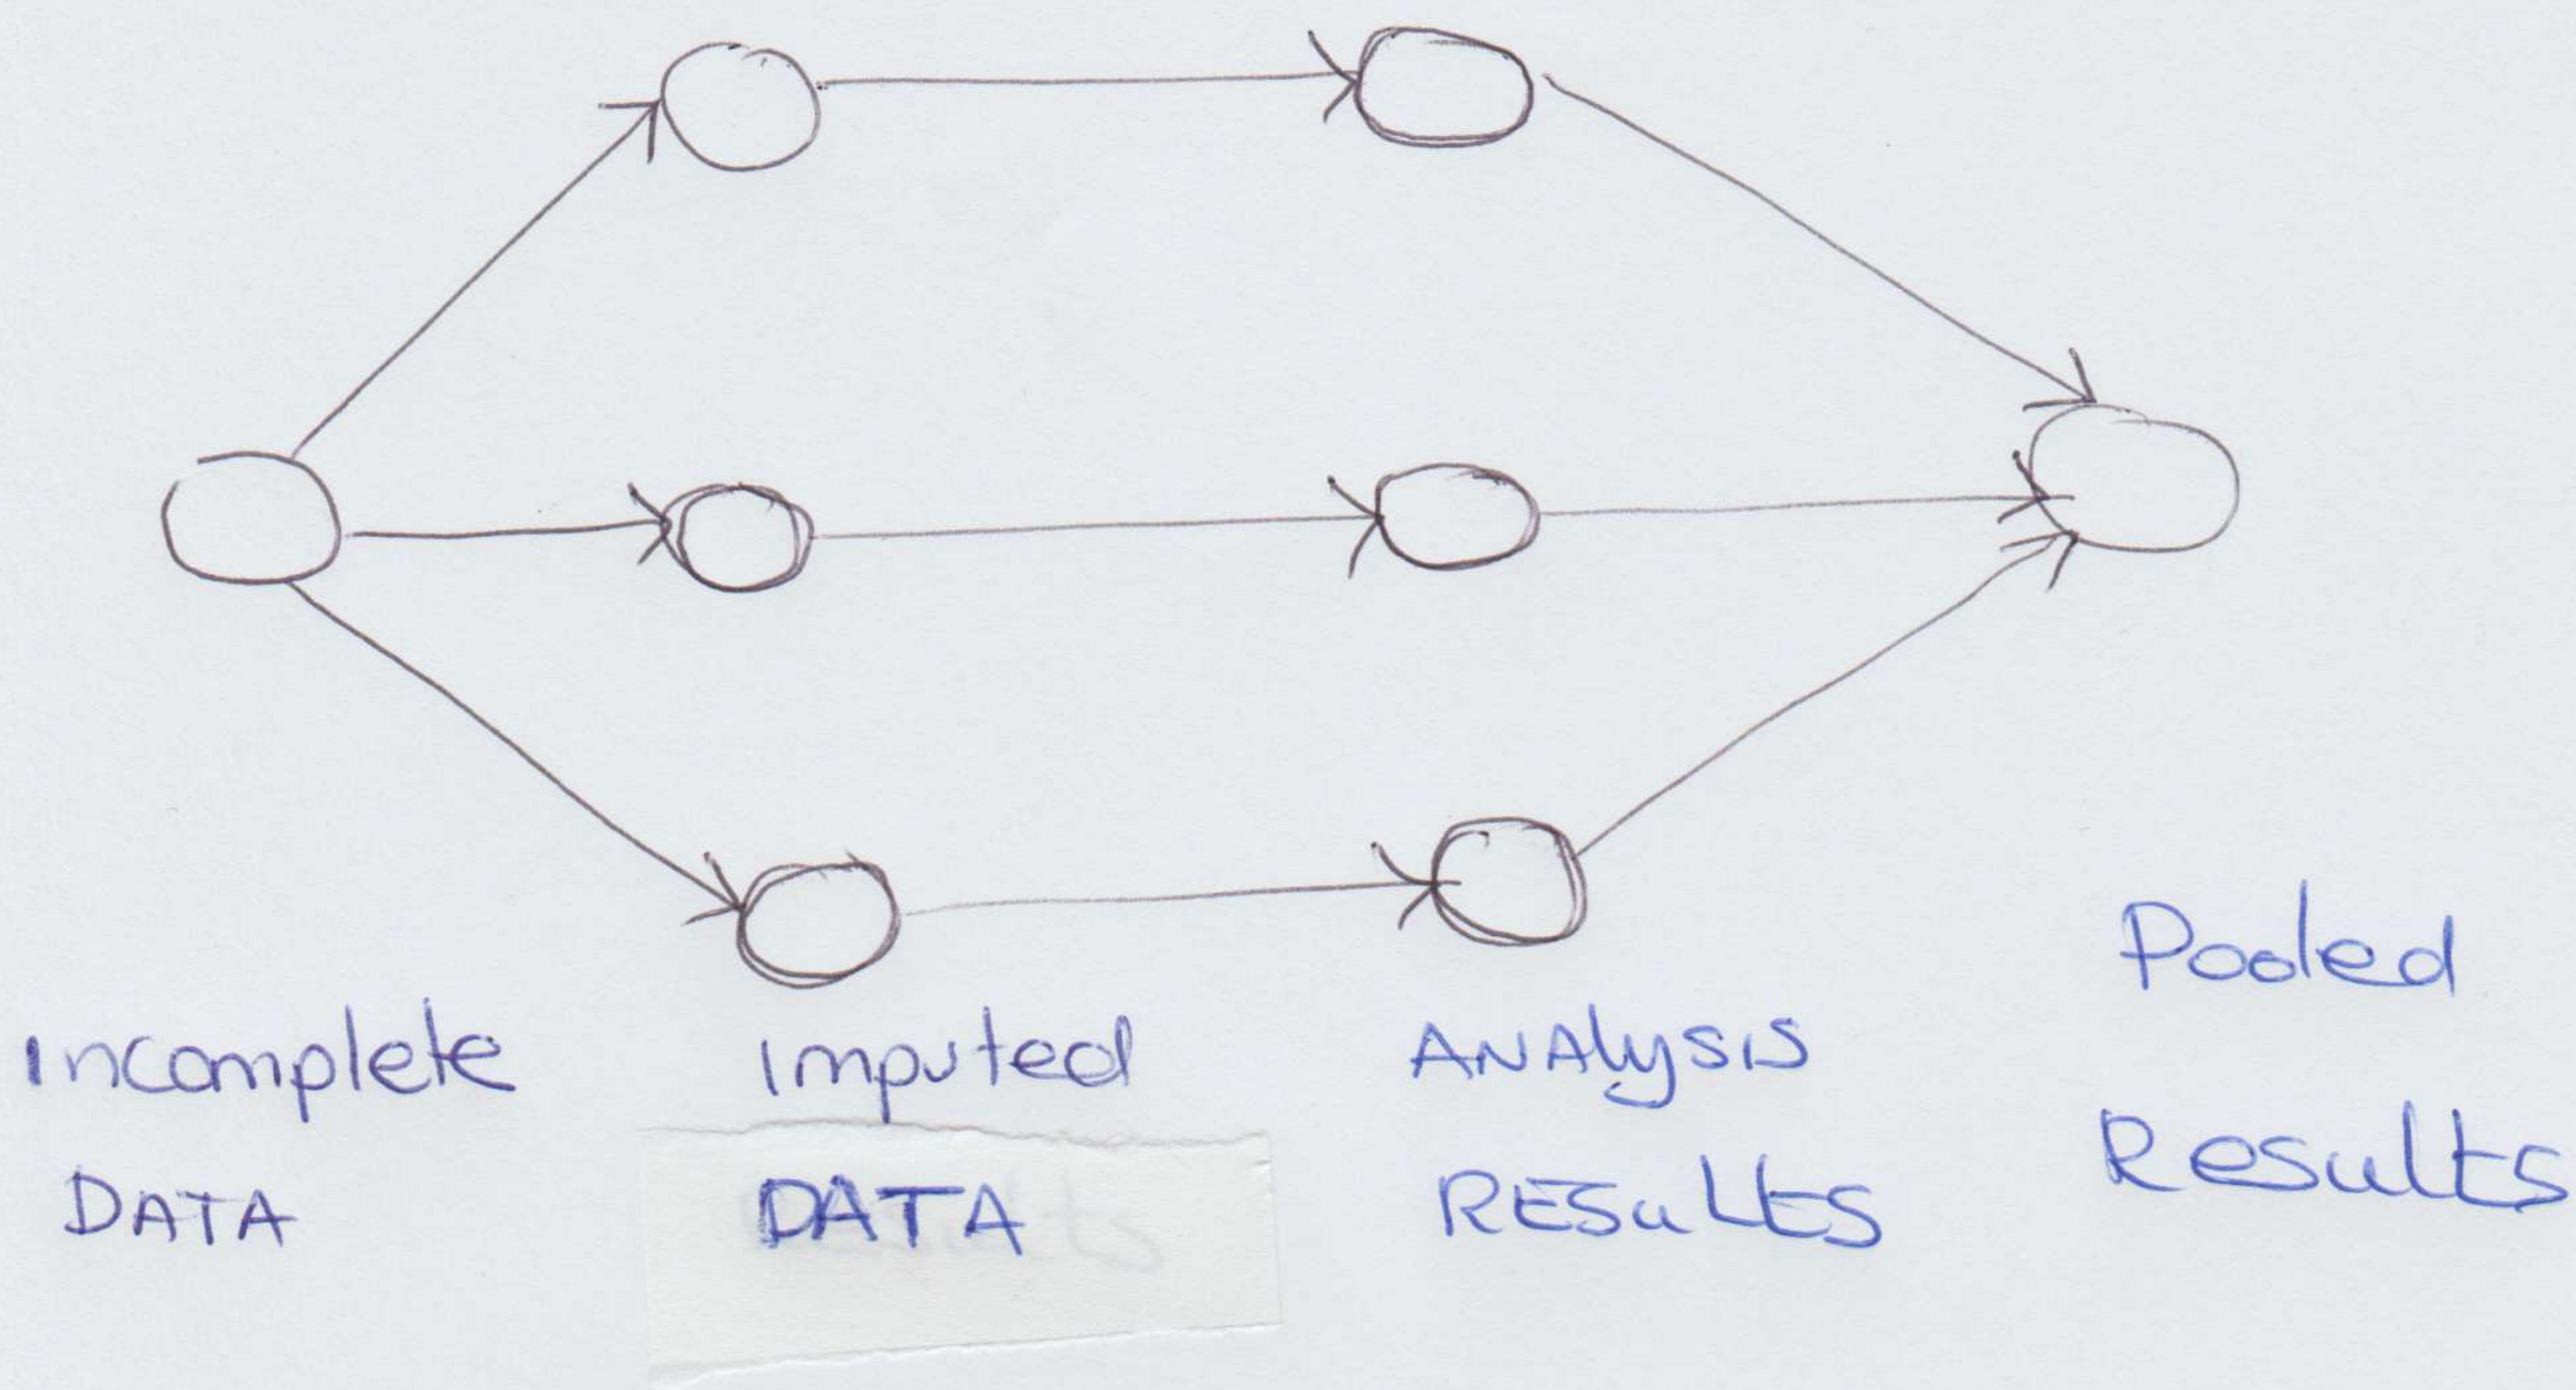

## STEPS

Imputation : impute the missing entries with  $m$  plausible sets of values (supposing more than one missing value per data set).

This creates  $m$  complete data sets.

Analyze : ANALYZE EACH of the  $m$  complete DATA sets.

Pooling : integrate the  $m$  sets of results into a final result, using simple aggregation Rules.