


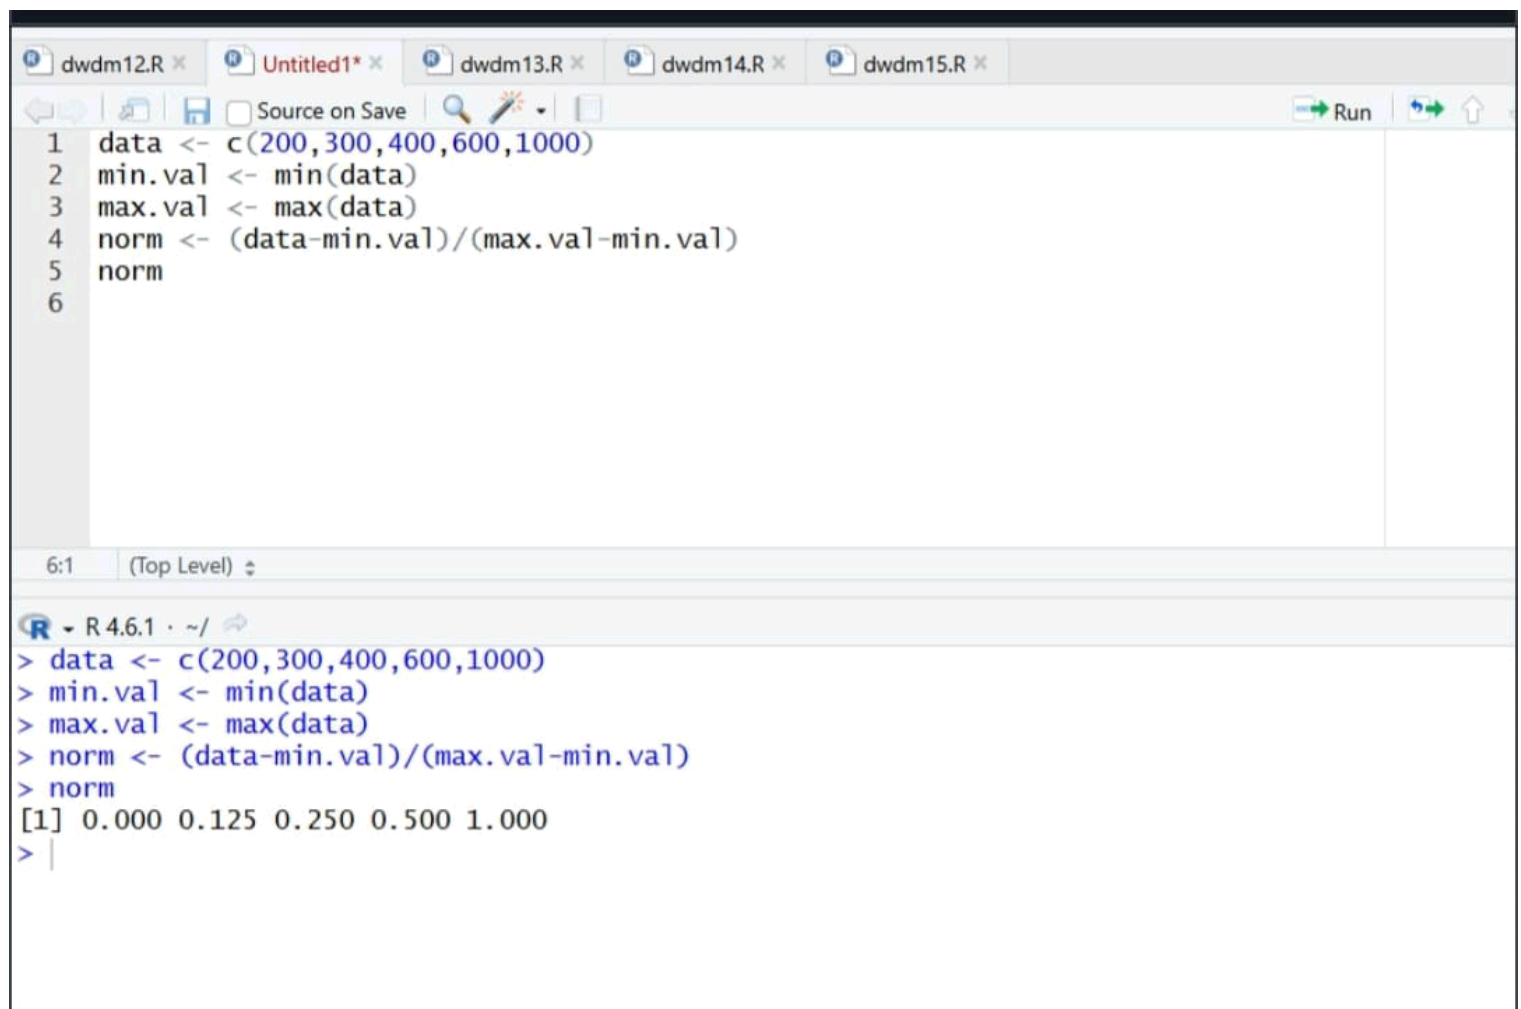

The image shows a screenshot of the RStudio IDE. The top pane displays a script with the following R code:

```
1 data <- c(200,300,400,600,1000)
2 min.val <- min(data)
3 max.val <- max(data)
4 norm <- (data-min.val)/(max.val-min.val)
5 norm
6
```

The bottom pane shows the console output for the executed code:

```
> data <- c(200,300,400,600,1000)
> min.val <- min(data)
> max.val <- max(data)
> norm <- (data-min.val)/(max.val-min.val)
> norm
[1] 0.000 0.125 0.250 0.500 1.000
>
```

The interface includes a tab bar at the top with files named 'dwdm12.R', 'Untitled1*', 'dwdm13.R', 'dwdm14.R', and 'dwdm15.R'. The status bar at the bottom indicates 'R 4.6.1 · ~/ ·'.