


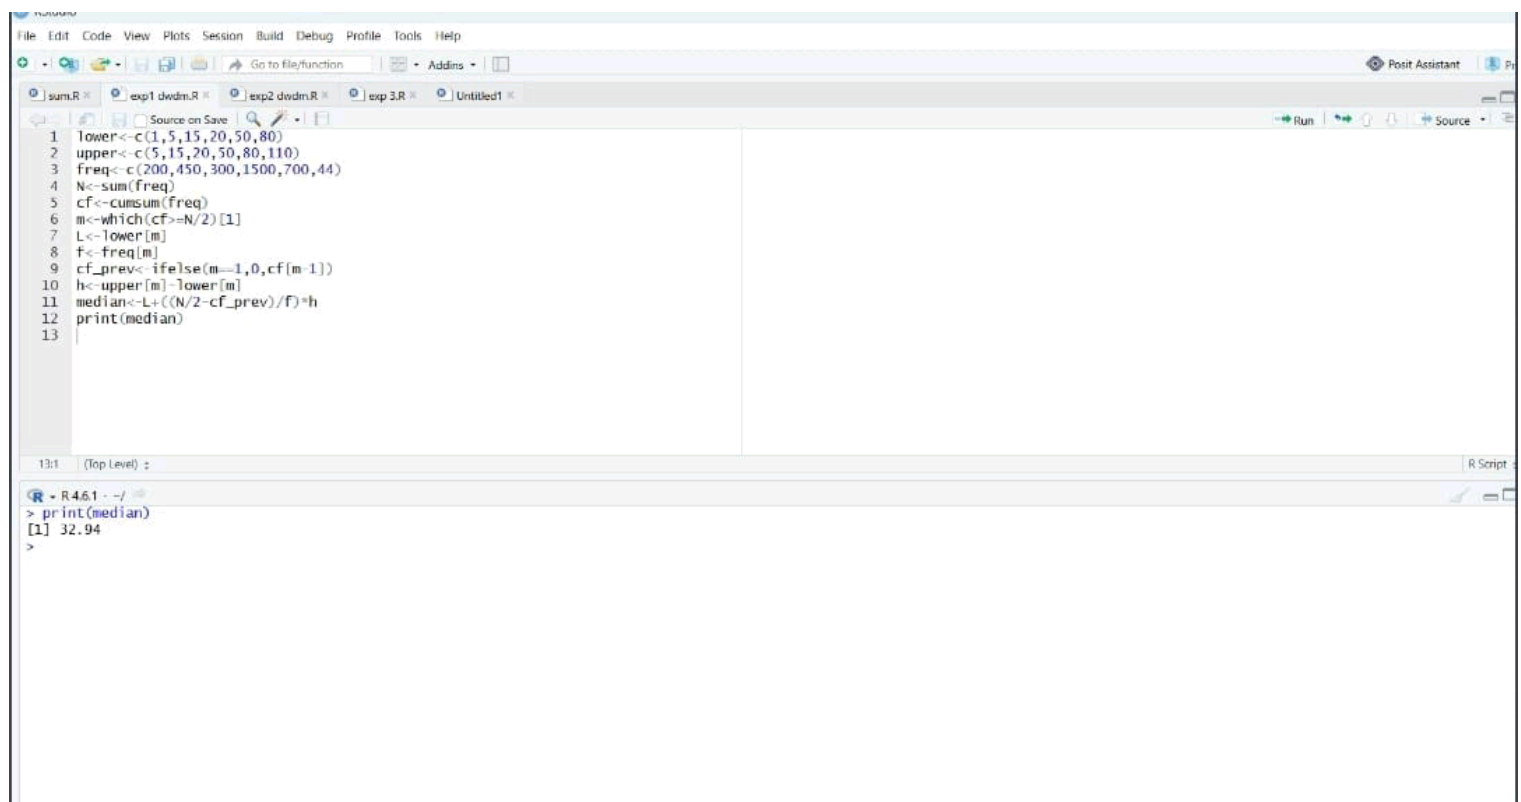

The screenshot shows the RStudio IDE interface. The top menu bar includes File, Edit, Code, View, Plots, Session, Build, Debug, Profile, Tools, and Help. Below the menu is a toolbar with icons for file operations and a search bar. The main editor window displays an R script with the following code:

```
1 lower<-c(1,5,15,20,50,80)
2 upper<-c(5,15,20,50,80,110)
3 freq<-c(200,450,300,1500,700,44)
4 N<-sum(freq)
5 cf<-cumsum(freq)
6 m<-which(cf>=N/2)[1]
7 L<-lower[m]
8 f<-freq[m]
9 cf_prev<-ifelse(m==1,0,cf[m-1])
10 h<-upper[m]-lower[m]
11 median<-L+((N/2-cf_prev)/f)*h
12 print(median)
13
```

The console at the bottom shows the execution of the script, resulting in the output:

```
R > R 4.6.1 ~ -/
> print(median)
[1] 32.94
>
```