
# The model chooses. The application controls.


**01 / SYSTEM BOUNDARIES**

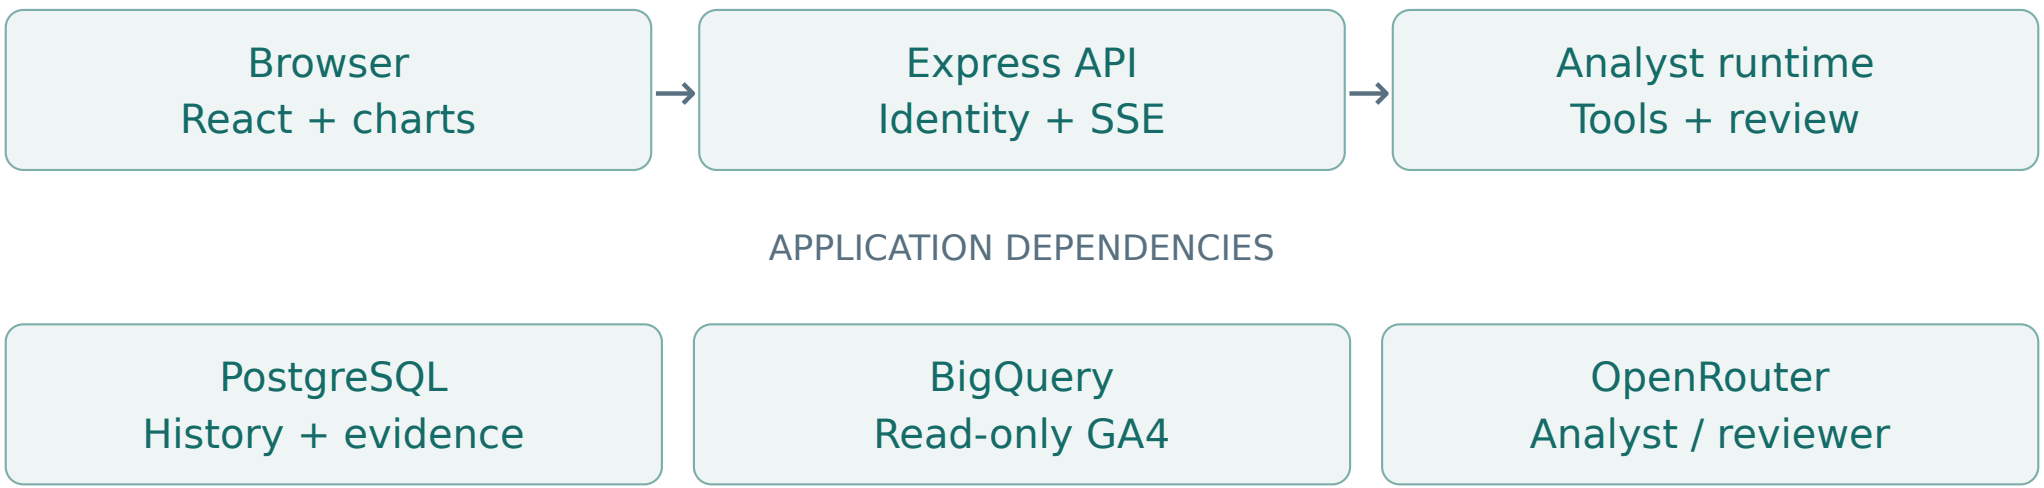


**Application-owned:** access, budgets, persistence, publication.

# Request lifecycle

02 / REQUEST HANDLING

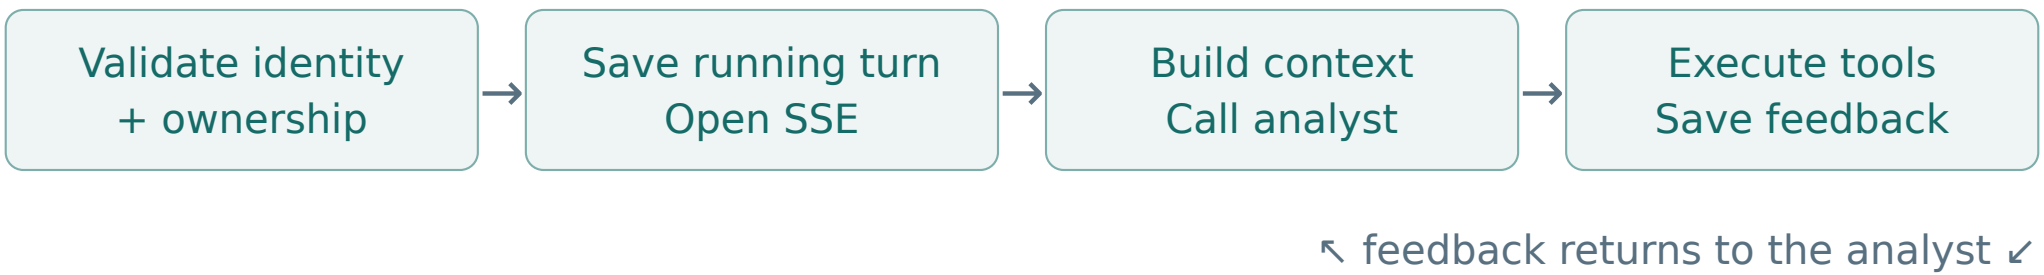



- One active turn per conversation; duplicate IDs are rejected.
- Tools inspect, compute, retrieve evidence, and propose output.
- **Ambiguity → clarification.** The reply begins a new turn.

# Defined metrics, guarded execution

**03 / QUERY EXECUTION**

run_metric: 18 defined metrics | run_sql: purpose + justification

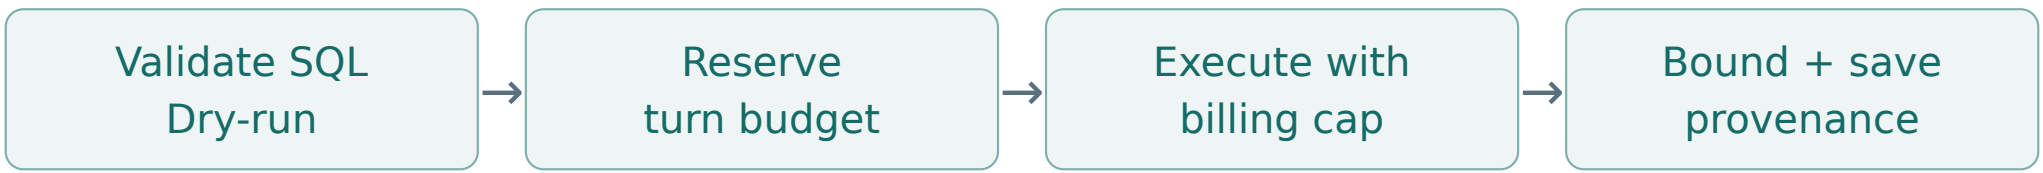



**5 GiB / turn** · 2 GiB / catalog query · 1 GiB / ad-hoc query

LIMIT bounds output, not scan cost. Cancellation is not a cost ceiling.

# Save the evidence. Reuse it.


04 / EVIDENCE AND MEMORY

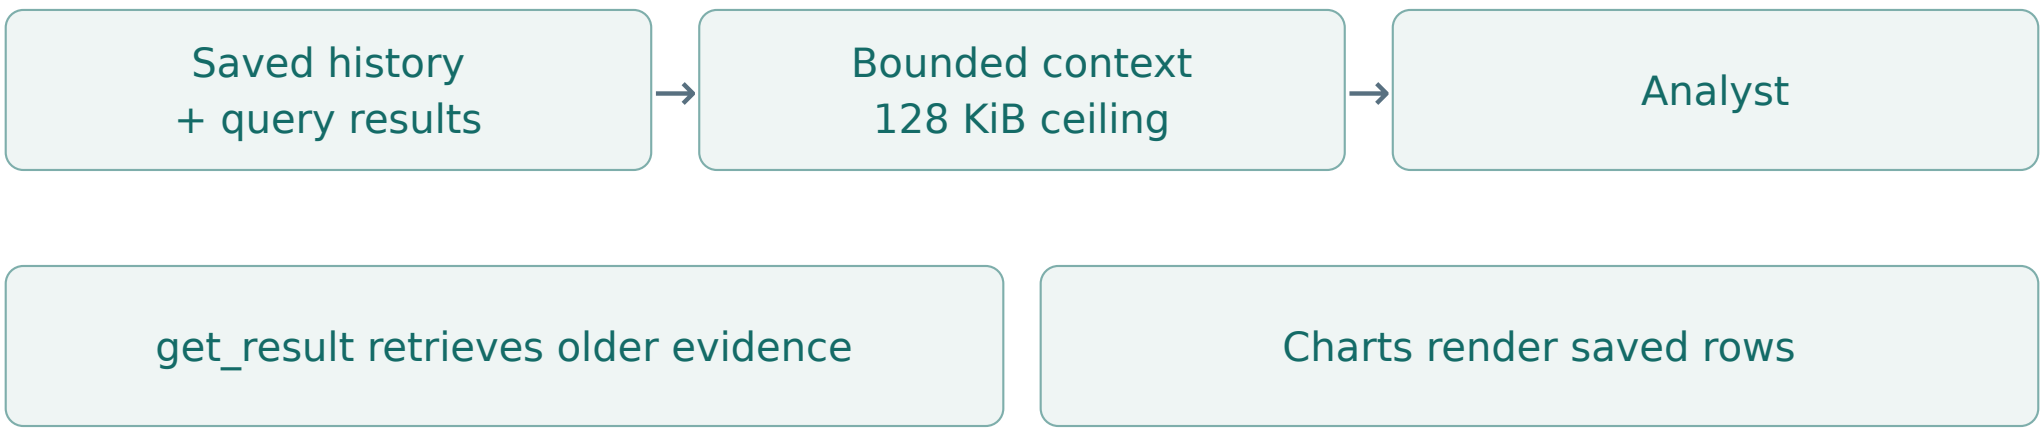


**No paid rerun to draw a chart.** New breakdowns generally need SQL.

# Private candidates cross a publication gate

05 / VERIFICATION

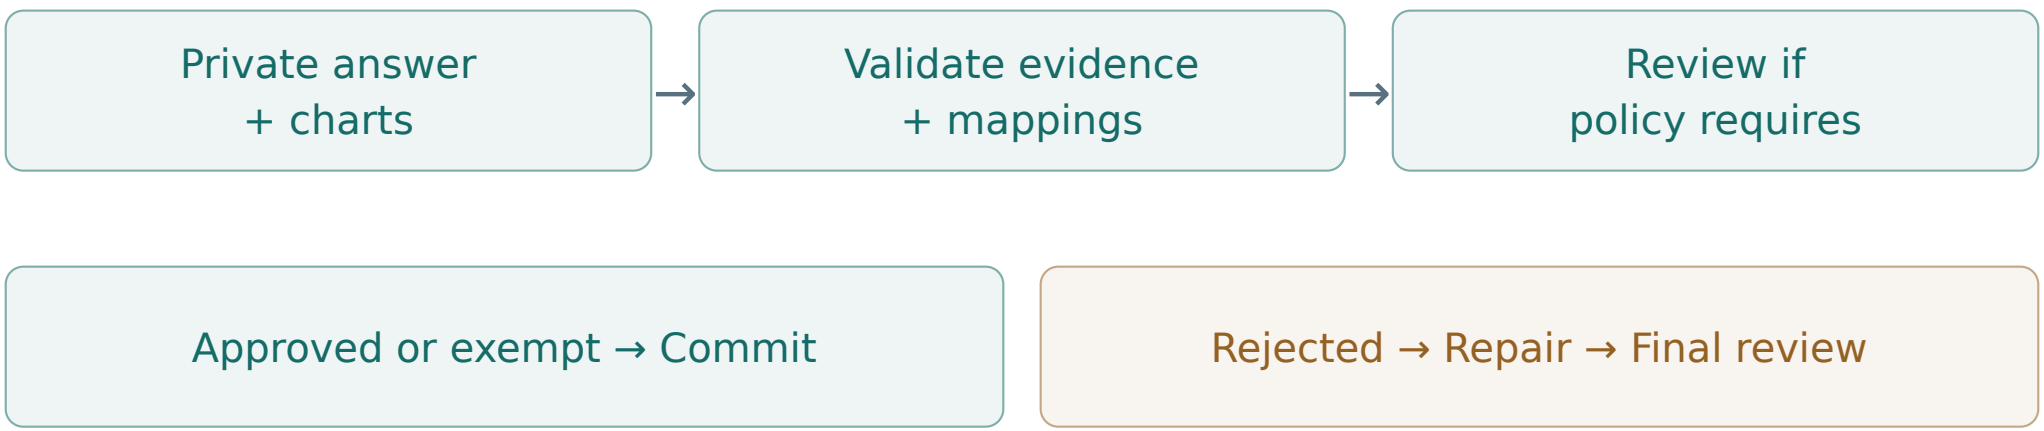


Final rejection or review failure → Withhold the answer.

**Same budget and deadline:** 8 analyst + 2 repair + 2 review calls; 120 seconds.

# Commit first. Stream second.

06 / DELIVERY AND RECOVERY




- Delivery failure after commit leaves a **reloadable answer**.
- Stop, disconnect, or deadline retains saved work.
- Restart interrupts abandoned turns; **no automatic paid replay**.

# Running today. Still measuring accuracy.

07 / CURRENT STATE

## IMPLEMENTED

Deployed
Guest access + Google SSO
Chat persistence + reload
254 API / frontend unit tests

## REMAINING

Broader numerical evaluations
Evidence storage efficiency
Retention policy

**Answers and charts are saved with their supporting query results.**

Reviewer approval is fallible. Independent expected results still matter.