



## REFERENCE MODEL

### The *openEHR* EHR Information Model

Editors: {T Beale, S Heard}<sup>1</sup>, {D Kalra, D Lloyd}<sup>2</sup>

Revision: 5.0rc1

Pages: 77

- 
1. Ocean Informatics Australia
  2. Centre for Health Informatics and Multi-professional Education, University College London

© 2003-2005 The *openEHR* Foundation

### The *openEHR* foundation

is an independent, non-profit community, facilitating the creation and sharing of health records by consumers and clinicians via open-source, standards-based implementations.

#### Founding Chairman

David Ingram, Professor of Health Informatics, CHIME, University College London

#### Founding Members

Dr P Schloeffel, Dr S Heard, Dr D Kalra, D Lloyd, T Beale

**email:** [info@openEHR.org](mailto:info@openEHR.org) **web:** <http://www.openEHR.org>

## Copyright Notice

© Copyright openEHR Foundation 2001 - 2005  
All Rights Reserved

1. This document is protected by copyright and/or database right throughout the world and is owned by the openEHR Foundation.
2. You may read and print the document for private, non-commercial use.
3. You may use this document (in whole or in part) for the purposes of making presentations and education, so long as such purposes are non-commercial and are designed to comment on, further the goals of, or inform third parties about, openEHR.
4. You must not alter, modify, add to or delete anything from the document you use (except as is permitted in paragraphs 2 and 3 above).
5. You shall, in any use of this document, include an acknowledgement in the form: "© Copyright openEHR Foundation 2001-2005. All rights reserved. [www.openEHR.org](http://www.openEHR.org)"
6. This document is being provided as a service to the academic community and on a non-commercial basis. Accordingly, to the fullest extent permitted under applicable law, the openEHR Foundation accepts no liability and offers no warranties in relation to the materials and documentation and their content.
7. If you wish to commercialise, license, sell, distribute, use or otherwise copy the materials and documents on this site other than as provided for in paragraphs 1 to 6 above, you must comply with the terms and conditions of the openEHR Free Commercial Use Licence, or enter into a separate written agreement with openEHR Foundation covering such activities. The terms and conditions of the openEHR Free Commercial Use Licence can be found at [http://www.openehr.org/free\\_commercial\\_use.htm](http://www.openehr.org/free_commercial_use.htm)

## Amendment Record

Issue	Details	Who	Completed
5.0rc1	<b>CR-000014.</b> Adjust History. <b>CR-000140.</b> Redvelop Instruction, based on workflow principles. <b>CR-000164.</b> Improve description of use of times in OBSERVATION.	S Heard S Heard T Beale S Heard H Frankel	30 Oct 2005
RELEASE 0.96			
RELEASE 0.95			
4.5	<b>CR-000108.</b> Minor changes to change_control package. <b>CR-000024.</b> Revert <i>meaning</i> to STRING and rename as <i>archetype_node_id</i> . <b>CR-000098.</b> EVENT_CONTEXT. <i>time</i> should allow optional end time. <b>CR-000109.</b> Add <i>act_status</i> to ENTRY, as in CEN prEN13606. <b>CR-000116.</b> Add PARTICIPATION. <i>function</i> vocabulary and invariant. <b>CR-000118.</b> Make package names lower case. <b>CR-000064.</b> Re-evaluate COMPOSITION. <i>is_persistent</i> attribute. Converted <i>is_persistent</i> to a function; added <i>category</i> attribute. <b>CR-000102.</b> Make DV_TEXT <i>language</i> and <i>charset</i> optional.	T Beale S Heard, T Beale S Heard, DSTC A Goodchild T Beale  T Beale D Kalra  DSTC	10 Dec 2004
RELEASE 0.9			
4.4.1	<b>CR-000096.</b> Allow 0..* SECTIONS as COMPOSITION content.	DSTC	11 Mar 2004
4.4	<b>CR-000019.</b> Add HISTORY & STRUCTURE supertype. <b>CR-000028.</b> Change name of STRUCTURE class to avoid clashes. <b>CR-000087.</b> EVENT_CONTEXT. <i>location</i> should be optional. <b>CR-000088.</b> Move INSTRUCTION. <i>guideline_id</i> to ENTRY.  <b>CR-000092.</b> Improve EVENT_CONTEXT <i>modelling</i> . Rename <i>author</i> to <i>composer</i> . <b>Formally validated using ISE Eiffel 5.4.</b>	T Beale H Frankel  DSTC T Beale, D Kalra S Heard	06 Mar 2004
4.3.10	<b>CR-000044.</b> Add reverse ref from VERSION_REPOSITORY<T> to owner object. Add invariants to DIRECTORY and VERSIONED_COMPOSITION classes. <b>CR-000046.</b> Rename COORDINATED_TERM and DV_CODED_TEXT. <i>definition</i> .	D Lloyd  T Beale	25 Feb 2004
4.3.9	<b>CR-000021.</b> Rename CLINICAL_CONTEXT. <i>practice_setting</i> to <i>setting</i> .	A Goodchild	10 Feb 2004
4.3.8	<b>CR-000057.</b> Environmental information needs to be included in the EHR.	T Beale	02 Nov 2003
4.3.7	<b>CR-000048.</b> Pre-release review of documents. <b>CR-000049.</b> Correct reference types in EHR, DIRECTORY classes. EHR. <i>contributions</i> , <i>all_compositions</i> , FOLDER. <i>compositions</i> attributes and invariants corrected. <b>CR-000050.</b> Update Path syntax reference model to ADL specification.	T Beale, D Lloyd	25 Oct 2003

Issue	Details	Who	Completed
4.3.6	<b>CR-000041.</b> Visually differentiate primitive types in openEHR documents.	D Lloyd	04 Oct 2003
4.3.5	<b>CR-000013.</b> Rename key classes, according to CEN ENV 13606.	S Heard, D Kalra, T Beale	15 Sep 2003
4.3.4	<b>CR-000011.</b> Add author attribute to EVENT_CONTEXT. <b>CR-000027.</b> Move <i>feeder_audit</i> to LOCATABLE to be compatible with CEN 13606 revision.	S Heard, D Kalra	20 Jun 2003
4.3.3	<b>CR-000020.</b> Move VERSION.territory to TRANSACTION. <b>CR-000018.</b> Add DIRECTORY class to RM.EHR Package. <b>CR-000005.</b> Rename CLINICAL_CONTEXT to EVENT_CONTEXT.	A Goodchild	10 Jun 2003
4.3.2	<b>CR-000006.</b> Make ENTRY.provider a PARTICIPATION. <b>CR-000007.</b> Replace ENTRY.subject and subject_relationship with RELATED_PARTY. <b>CR-000008.</b> Remove confidence and is_exceptional attributes from ENTRY. <b>CR-000009.</b> Merge ENTRY protocol and reasoning attributes.	S Heard, T Beale, D Kalra, D Lloyd	11 Apr 2003
4.3.1	DSTC review - typos corrected.	A Goodchild	08 Apr 2003
4.3	<b>CR-000003, CR-000004.</b> Removed ORGANISER_TREE. CLINICAL_CONTEXT and FEEDER_AUDIT inherit from LOCATABLE. Changes to path syntax. Improved definitions of ENTRY subtypes. Improved instance diagrams. DSTC detailed review. (Formally validated).	T Beale, Z Tun, A Goodchild	18 Mar 2003
4.2	<b>Formally validated using ISE Eiffel 5.2.</b> Moved VERSIONED_TRANSACTION class to EHR Package, to correspond better with serialised formalisms like XML.	T Beale, A Goodchild	25 Feb 2003
4.1	<b>Changes post CEN WG meeting Rome Feb 2003.</b> Moved TRANSACTION.version_id postcondition to an invariant. Moved feeder_audit back to TRANSACTION. Added ENTRY.act_id. VERSION_AUDIT.attestations moved to new ATTESTATIONS class attached to VERSIONED<T>.	T Beale, S Heard, D Kalra, D Lloyd	8 Feb 2003
4.0.2	Various corrections and DSTC change requests. Reverted OBSERVATION.items:LIST<HISTORY<T>> to data:HISTORY<T> and EVALUATION.items:LIST<STRUCTURE<T>> to data:STRUCTURE<T>. Changed CLINICAL_CONTEXT.other_context to a STRUCTURE. Added ENTRY.other_participations; Added CLINICAL_CONTEXT.participations; removed hcp_legally_responsible (to be archetyped). Replaced EVENT_TRANSACTION and PERSISTENT_TRANSACTION with TRANSACTION and a boolean attribute is_persistent.	T Beale	3 Feb 2003
4.0.1	Detailed corrections to diagrams and class text from DSTC.	Z Tun	8 Jan 2003
4.0	Moved HISTORY classes to Data Structures RM. No semantic changes.	T Beale	18 Dec 2002
3.8.2	Corrections on 3.8.1. No semantic changes.	D Lloyd	11 Nov 2002

Issue	Details	Who	Completed
3.8.1	Removed SUB_FOLDER class. Now folder structure can be nested separately archetyped folder structures, same as for ORGANISERS. Removed AUTHORED_TA and ACQUISITION_TA classes; simplified versioning.	T Beale, D Kalra, D Lloyd A Goodchild	28 Oct 2002
3.8	Added <i>practice_setting</i> attribute to CLINICAL_CONTEXT, inspired from HL7v3/ANSI CDA standard Release 2.0. Changed DV_PLAIN_TEXT to DV_TEXT. Removed <i>hca_coauthorising</i> ; renamed <i>hca_recording</i> ; adjusted all instances of *_ID; converted CLINICAL_CONTEXT.start_time, end_time to an interval.	T Beale, S Heard, D Kalra, M Darlison	22 Oct 2002
3.7	Removed Spatial package to Common RM document. Renamed ACTION back to ACTION_SPECIFICATION. Removed the class NAVIGABLE_STRUCTURE. Renamed SPATIAL to STRUCTURE. Removed classes STATE_HISTORY, STATE, SINGLE_STATE. Removed Communication (EHR_EXTRACT) section to ow document.	T Beale	22 Sep 2002
3.6	Removed Common and Demographic packages to their own documents.	T Beale	28 Aug 2002
3.5.1	Altered syntax of EXTERNAL_ID identifiers.	T Beale, Z Tun	20 Aug 2002
3.5	Rewrote Demographic and Ehr_extract packages.	T Beale	18 Aug 2002
3.3.1	Simplified EHR_EXTRACT model, numerous small changes from DSTC review.	T Beale, Z Tun	15 Aug 2002
3.3	Rewrite of contributions, version control semantics.	T Beale, D Lloyd, D Kalra, S Heard	1 Aug 2002
3.2	DSTC comments. Various minor errors/omissions. Changed inheritance of SINGLE_EVENT and SINGLE_STATE. Included STRUCTURE subtype methods from GEHR. <i>ehr_id</i> added to VT. Altered EHR/FOLDER attrs. Added EXTERNAL_ID.version.	T Beale, Z Tun	25 Jun 2002
3.1.1	Minor corrections.	T Beale	20 May 2002
3.1	Reworking of Structure section, Action class, Instruction class.	T Beale, S Heard	16 May 2002
3.0	Plans, actions updated.	T Beale, S Heard	10 May 2002
2.9	Additions from HL7v3 coded term model, alterations to quantity model, added explanation sections.	T Beale	5 May 2002
2.8.2a	Interim version with various review modifications	T Beale	28 Apr 2002
2.8.2	Error corrections to EHR_EXTRACT package. P Schloeffel comments on 2.7.	T Beale, P Schloeffel	25 Apr 2002
2.8.1	Further minor changes from UCL on v2.7.	T Beale	24 Apr 2002

Issue	Details	Who	Completed
2.8	Dipak Kalra (UCL) comments on v2.6 incorporated. Added External Package. Minor changes elsewhere.	T Beale, D Kalra	23 Apr 2002
2.7	Final development of initial draft, including EHR_EXTRACT, related models	T Beale	20 Apr 2002
2.6	Further development of path syntax, incorporation of Dipak Kalra's comments	T Beale, D Kalra	15 Apr 2002
2.5	Further development of clinical and record management clusters.	T Beale	10 Apr 2002
2.4	Included David Lloyd's rev 2.3 comments.	T Beale, D Lloyd	4 Apr 2002
2.3	Improved context analysis.	T Beale	4 Mar 2002
2.2	Added path syntax.	T Beale	19 Nov 2001
2.1	Minor organisational changes, some content additions.	T Beale	18 Nov 2001
2.0	Rewrite of large sections post-Eurorec 2001 conference, Aix-en-Provence. Added folder, contribution concepts.	T Beale	15 Nov 2001
1.2	Major additions to introduction, design philosophy	T Beale	1 Nov 2001
1.1	Major changes to diagrams; STILL UNREVIEWED	T Beale	13 Oct 2001
1.0	Based on GEHR Object Model	T Beale	22 Sep 2001

## **Acknowledgements**

Thanks to...

The work reported in this paper has been funded in by a number of organisations, including University College, London; The Cooperative Research Centres Program through the Department of the Prime Minister and Cabinet of the Commonwealth Government of Australia; Ocean Informatics, Australia.

Andrew Goodchild, senior research scientist at the Distributed Systems Technology Centre, Brisbane provided valuable in-depth comments and insights on all aspects of the model during its early development.

<b>1</b>	<b>Introduction.....</b>	<b>11</b>
1.1	Purpose .....	11
1.2	Related Documents.....	11
1.3	Status .....	11
1.4	Peer review .....	11
1.5	Conformance .....	12
<b>2</b>	<b>Background .....</b>	<b>13</b>
2.1	Requirements.....	13
2.1.1	Original GEHR Requirements .....	13
2.1.2	GEHR Australia Requirements .....	13
2.1.3	European Synapses and SynEx Project Requirements.....	13
2.1.4	European EHCR Support Action Requirements .....	14
2.1.5	ISO EHR Requirements .....	14
2.1.6	openEHR Requirements.....	14
2.2	Design Principles.....	14
2.2.1	The System-of-systems EHR Context.....	15
2.3	Relationship to other Health Information Models.....	15
2.3.1	CEN TC/251 prEN13606 .....	15
2.3.2	HL7 Version 3 .....	16
2.3.3	OMG HDTF .....	16
<b>3</b>	<b>The EHR Information Model .....</b>	<b>17</b>
3.1	Overview .....	17
3.2	Archetypes.....	17
3.3	Paths .....	19
3.3.1	Runtime Path Syntax.....	19
3.3.2	Path Values and Language.....	20
3.3.3	Concrete Path Structure.....	20
3.3.4	Archetype Paths.....	21
<b>4</b>	<b>The Record .....</b>	<b>24</b>
4.1	Overview .....	24
4.2	General Organisation of the EHR.....	24
4.2.1	Compositions.....	24
4.2.2	Folders.....	26
4.2.3	Change Control of the EHR .....	28
4.2.4	Versioning of Compositions .....	29
4.2.5	Versioning Scenarios .....	30
<b>5</b>	<b>EHR Package.....</b>	<b>32</b>
5.1	Overview .....	32
5.2	Class Descriptions .....	33
5.2.1	EHR Class .....	33
5.2.2	DIRECTORY Class.....	34
5.2.3	FOLDER Class.....	34
5.2.4	VERSIONED_COMPOSITION Class .....	35
5.3	Historical Views of the Record.....	36
<b>6</b>	<b>Composition Package .....</b>	<b>37</b>
6.1	Overview .....	37



6.1.1	Event Context .....	37
6.1.2	Participations .....	38
6.1.3	Composition Content .....	39
6.2	Class Descriptions.....	39
6.2.1	COMPOSITION Class .....	39
6.2.2	EVENT_CONTEXT Class .....	41
6.2.3	COMPOSITION Instance Structures .....	42
<b>7</b>	<b>Navigation Package.....</b>	<b>43</b>
7.1	Overview .....	43
7.2	Class Descriptions.....	44
7.2.1	SECTION Class.....	44
7.2.2	Section Paths.....	45
7.3	Section Instance Structures .....	45
7.3.1	Problem/SOAP Headings .....	45
7.3.2	Care Plans .....	45
<b>8</b>	<b>Entry Package .....</b>	<b>47</b>
8.1	Overview .....	47
8.2	Entry and its Subtypes .....	48
8.2.1	The Entry class .....	48
8.2.2	Care_entry and Admin_entry .....	48
8.2.3	Observation.....	50
8.2.4	Evaluation .....	53
8.2.5	Instruction .....	54
8.2.6	Action and Instruction_action.....	57
8.3	Class Descriptions.....	58
8.3.1	ENTRY Class.....	58
8.3.2	ADMIN_ENTRY Class .....	60
8.3.3	CARE_ENTRY Class .....	61
8.3.4	OBSERVATION Class.....	61
8.3.5	EVALUATION Class.....	64
8.3.6	INSTRUCTION Class .....	66
8.3.7	WORKFLOW_NODE Class .....	67
8.3.8	CONTROL_NODE Class.....	67
8.3.9	ACTIVITY Class.....	67
8.3.10	TRIGGER Class .....	68
8.3.11	ACTION Class.....	69
8.3.12	INSTRUCTION_ACTION Class .....	70
<b>A</b>	<b>Glossary .....</b>	<b>72</b>
A.1	openEHR Terms.....	72
A.2	Clinical Terms .....	72
A.3	IT Terms.....	72
<b>B</b>	<b>References .....</b>	<b>73</b>
B.1	General.....	73
B.2	European Projects .....	73
B.3	CEN .....	74
B.4	GEHR Australia .....	74

B.5	HL7v3.....	74
B.6	OMG.....	75
B.7	Software Engineering .....	75
B.8	Resources.....	75

# 1 Introduction

---

## 1.1 Purpose

This document describes the *openEHR* EHR Information Model, which is a model of an interoperable EHR in the ISO RM/ODP information viewpoint. This model is somewhat different in scope from models such as the CEN ENV 13606 pre-standard and the HL7v3 Clinical Document Architecture (CDA), in that it describes a logical EHR information architecture rather than just an architecture for communication of EHR extracts or documents between EHR systems. The EHR equivalent of these latter specifications is given in the *openEHR* EHR\_EXTRACT Information Model.

The intended audience includes:

- Standards bodies producing health informatics standards
- Software development groups using *openEHR*
- Academic groups using *openEHR*
- The open source healthcare community

## 1.2 Related Documents

Prerequisite documents for reading this document include:

- The *openEHR* Modelling Guide
- The *openEHR* Support Information Model
- The *openEHR* Data Types Information Model
- The *openEHR* Common Information Model

Other documents describing related models, include:

- The *openEHR* EHR\_EXTRACT Information Model
- The *openEHR* Demographic Information Model

## 1.3 Status

This document is under development, and is published as a proposal for input to standards processes and implementation works.

The latest version of this document can be found in PDF format at [http://svn.openehr.org/specification/BRANCHES/Release-1.0-candidate/publishing/architecture/rm/ehr\\_im.pdf](http://svn.openehr.org/specification/BRANCHES/Release-1.0-candidate/publishing/architecture/rm/ehr_im.pdf). New versions are announced on [openehr-announce@openehr.org](mailto:openehr-announce@openehr.org).

**Blue text** indicates sections under active development.

**NOTE THAT NOT ALL CHANGES MADE TO THIS DOCUMENT HAVE BEEN APPROVED BY THE OPENEHR ARB, AND MAY BE SUBJECT TO FURTHER CHANGE.**

## 1.4 Peer review

Areas where more analysis or explanation is required are indicated with “to be continued” paragraphs like the following:

**To Be Continued:**      more work required

Reviewers are encouraged to comment on and/or advise on these paragraphs as well as the main content. Please send requests for information to [info@openEHR.org](mailto:info@openEHR.org). Feedback should preferably be provided on the mailing list [openehr-technical@openehr.org](mailto:openehr-technical@openehr.org), or by private email.

## 1.5 Conformance

Conformance of a data or software artifact to an *openEHR* Reference Model specification is determined by a formal test of that artifact against the relevant *openEHR* Implementation Technology Specification(s) (ITSs), such as an IDL interface or an XML-schema. Since ITSs are formal, automated derivations from the Reference Model, ITS conformance indicates RM conformance.

## 2 Background

---

This section describes the inputs to the modelling process that created the *openEHR* Information Model.

### 2.1 Requirements

There are broadly three sets of requirements which inform this model, as described in the following subsections.

#### 2.1.1 Original GEHR Requirements

From the European GEHR project (1992-5; [16]), the following broad requirements areas were identified:

- The life-long EHR
- Priority: Clinician / Patient interaction
- Medico-legal faithfulness, traceability, audit-trailing
- Technology & data format independent
- Facilitate sharing of EHRs
- Suitable for both primary & acute care
- Secondary uses: education, research, population medicine
- Open standard & software deliverables

These can be reviewed in detail at the [GEHR page at CHIME, UCL](#).

#### 2.1.2 GEHR Australia Requirements

The GEHR Australia project (1997-2001; [29], [30]) introduced further requirements, including:

- Support for clinical data structures: lists, tables, time-series etc
- Safer model than the original (European) GEHR: context attributes only in valid places (but still similar style)
- Separate compositions groups for “persistent”, “demographic” and “event” information in EHR, which corresponds closely to real clinical querying patterns.
- Interoperability at the knowledge level, i.e. level of domain definitions of information such as “discharge summary” and “biochemistry result”.
- XML-enabled
- Consider compatibility with CEN 13606, Corbamed, HL7v3

These requirements can be found at [30]. GEHR Australia produced a proof of concept implementation in which clinical archetypes were developed and used. See [2] for the technical description of archetypes.

#### 2.1.3 European Synapses and SynEx Project Requirements

Following the original Good European Health Record project the EU-funded Synapses (1996-8; [22]) and SynEx (1998-2000; [11]) projects extended the original requirements basis of GEHR to include further requirements, as follows:

- the requirements of a federation approach to unifying disparate clinical databases and EPR systems: the federated health record (FHR) [23];

- the need to separate a generic and domain independent high-level model for the federated health record from the (closely related) model of the meta-data which defines the domain specific health record characteristics of any given clinical specialty and any given federation of database schemata;
- a formalism to define and communicate (share) knowledge about the semantic hierarchical organisation of an FHR, the permitted data values associated with each leaf node in a record hierarchy and any constraints on values that leaf nodes may take (the Synapses Object Dictionary) [24];
- the core technical requirements of and interfaces for a federation middleware service [22].

### 2.1.4 European EHCR Support Action Requirements

This EU Support Action project (“SupA”; [14], [15], [17]) consolidated the requirements published by a wide range of European projects and national health informatics organisations as a Consolidated List of Requirements [13].

### 2.1.5 ISO EHR Requirements

The above requirements publications and the recent experience of *openEHR* feed into the definition of a set of EHR requirements by ISO Technical Committee 215 (Health Informatics) - ISO TS 18308. The present draft [10] has been reviewed by the authors of this document and *openEHR* will seek to maintain a close mapping between its information models and services and this international requirements work. The *openEHR* mapping to ISO 18308 can be found on the *openEHR* website.

### 2.1.6 *openEHR* Requirements

New requirements for the *openEHR* proposal, based on previous experience in the projects mentioned above include the following:

- Better modelling of time and context (temporal/spatial approach)
- Better understanding of legacy system / federation problem (DSTC, UCL)
- Workflow modelling
- Convergence of EHR standards, leading to a future version of CEN ENV 13606.
- Harmonisation with the emerging HL7v3 standard.

## 2.2 Design Principles

There are numerous considerations outside the requirements which influence the information model, some of which have been described by Beale & Heard, e.g. [3], [4], [5]. These are summarised as follows:

- System-of-systems understanding of information infrastructures (i.e. a set of collaborating middleware components and services), described in more detail below;
- Design paradigm: two level modelling, archetypes;
- Separation of models according to responsibilities;
- Ontological framework within which reference models and archetypes fit;
- A “context model” of information acquisition which describes contexts for each information fragment from the most detailed information structures to the context of the clinical session, and the enterprise;

- The principle of relegating the vagaries of implementation technologies to separate specifications, rather than compromising the central model in any way.

### 2.2.1 The System-of-systems EHR Context

Health care information systems, both at the level of a single enterprise and regional healthcare networks, increasingly comprise a set of software components collaborating through middleware, enabling distributed operations and data exchange. This “system-of-systems” view embraces the distributed object paradigm (exemplified by CORBA and .net), the message-based paradigm (exemplified by HL7), and in a less formal sense, most of today’s organically evolved multi-database hospital IT environments. The distributed systems paradigm is also the generally accepted theoretical and standards view, as exemplified by any modern textbook on information processing, by the ISO RM/ODP standard, by health informatics standards such as the OMG Corbamed [34], [35], [36] specifications and CEN family of health information standards ([25] and many others), and by a wide range of international projects, national health information strategies and demonstrator pilots.

Accordingly, the EHR is understood in *openEHR* as one system (or service) within a distributed health information infrastructure, whose purpose is to manage the longitudinal and comprehensive EHR of individual patients. There is no definitive list of services or systems required within a health care environment. However, it is generally understood that in any deployment scenario an EHR service would be complemented by a range of other services including: terminology, clinical reference data (prescribing, interactions), order management, scheduling, decision support, demographics (both patient and health practitioner), pathology, imaging, and access control. In a distributed system infrastructure, each of these will usually exist as a service within an infrastructure node. Each system has an information model, describing the semantics of the data which can be obtained from it or written to it, as well as its service interface describing the functional interface to the system.

The approach taken in defining the *openEHR* EHR Information Model has been to assume this distributed model, and therefore the existence of several other services, at minimum for demographics, access control, terminology and archetypes. The Information Model therefore contains classes and attributes to facilitate interoperability with such services rather than their duplication inside the EHR service.

## 2.3 Relationship to other Health Information Models

Where relevant, the correspondences to other information models have been documented. Correspondences to the GEHR Australia and EU Synapses/SynEx models are shown, since these are the models on which the *openEHR* EHR information model is primarily based.

### 2.3.1 CEN TC/251 prEN13606

These models have been influenced by and have also influenced the models in CEN prEN13606; accordingly, relationships to 13606 have been documented fairly precisely. There are some parts of this pre-standard which are ambiguous, or confusing, particularly where similar semantics appear in both parts I and IV, in which case the best attempt to understand the standard has been made.

Since January 2002, the prEN13606 prestandard has been the subject of significant revision, as part of its transition to a full European Standard (“EN”). This work has been influenced by the *openEHR* specifications, and has itself been a source of further insights and changes to the *openEHR* specifications. Particular areas of *openEHR* which have been changed due to this process include:

- change of major class names (TRANSACTION -> COMPOSITION etc; see CR-000013);
- improved model of ATTESTATION (see CR-000025);

- improved model of feeder audits (see CR-000027).

### 2.3.2 HL7 Version 3

Correspondences to some parts of HL7 version 3 (ballot 5, July 2003) are also documented where possible, however, it should be understood that there are a number of difficulties with this. Firstly, while the HL7v3 Reference Information Model (RIM) - the closest HL7 artifact to an information model - provides similar data types and some related semantics, it is not intended to be a model of the EHR. In fact, it differs from the information model presented here (and for that matter most published information models) in two basic aspects: a) it is an amalgam of semantics from many systems which would exist in a distributed health information environment, rather than a model of just one (the EHR); b) it is also not a model of data, but an “analysis pattern” in the sense of Fowler [40] from which further specific models - subschemas - are developed by a process of custom restriction, in order to arrive at message definitions. As a consequence, data in messages are not instances of HL7v3 RIM classes, as would be the case in other systems based on information models of the kind presented here.

Despite the differences, there are some areas which could be usefully harmonised, specifically, the data types, terminology use, archetypes and HL7 templates, and the correspondence between *openEHR* compositions and the HL7 Clinical Document Architecture (CDA).

### 2.3.3 OMG HDTF


To Be Continued: relationship to OMG COAS / orders models should be described as well.



## 3 The EHR Information Model

### 3.1 Overview

FIGURE 1 illustrates the package structure of the *openEHR* EHR information model.

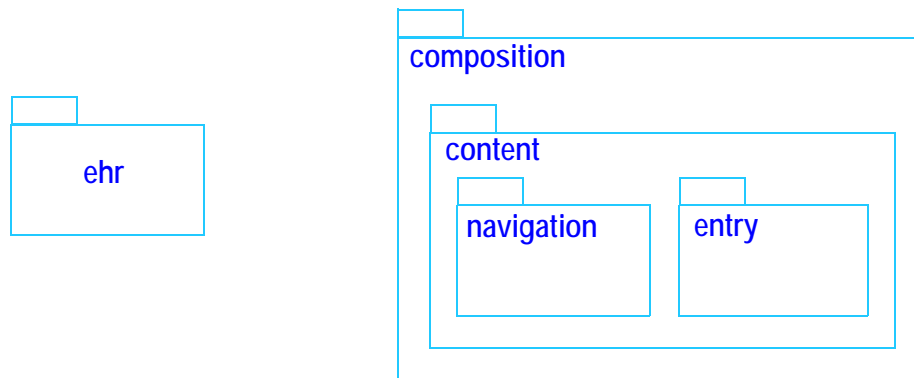

**FIGURE 1** ehr Package Structure

The packages are as follows:

- ehr: This package contains the top level structure, the EHR, which consists of a hierarchical structure of FOLDERS, containing references to VERSIONED\_COMPOSITIONS, and a collection of CONTRIBUTIONS which document the changes to the EHR over time.
- composition: The Composition is the EHR's top level "data container", and is described by the COMPOSITION class.
- content: This package contains the Navigation and Entry packages, whose classes describe the structure and semantics of the contents of Compositions in the health record.
  - navigation: The SECTION class provides a navigational structure to the record, similar to "headings" in the paper record. ENTRYs and other SECTIONs can appear under SECTIONs.
  - entry: This package contains the generic structures for recording clinical statements. Entry types include OBSERVATION (for all observed phenomena, including mechanically or manually measured, and responses in interview), EVALUATION (for assessments, diagnoses, plans), and INSTRUCTION (actionable statements such as medication orders, recalls, monitoring, reviews).

FIGURE 2 illustrates an overview of the class structure of the EHR Information Model, along with the main concepts on which they rely, namely Data Types, Data Structures, Archetyped, and Identification. The EHR Extract core classes are also shown, illustrating the shared content of the EHR and extracts generated from it.

### 3.2 Archetypes

All compositional nodes in an EHR and a COMPOSITION are archetypable, with certain nodes being archetype root points. Instances of the types EHR, COMPOSITION and ENTRY are always guaranteed to be archetype root points; the topmost SECTION and FOLDER instances in any tree are also guaranteed to be archetype root points. Other nodes (e.g. interior SECTIONs, ITEM\_STRUCTURE instances) might also be archetype root points, depending on how archetypes are applied at runtime to data. This

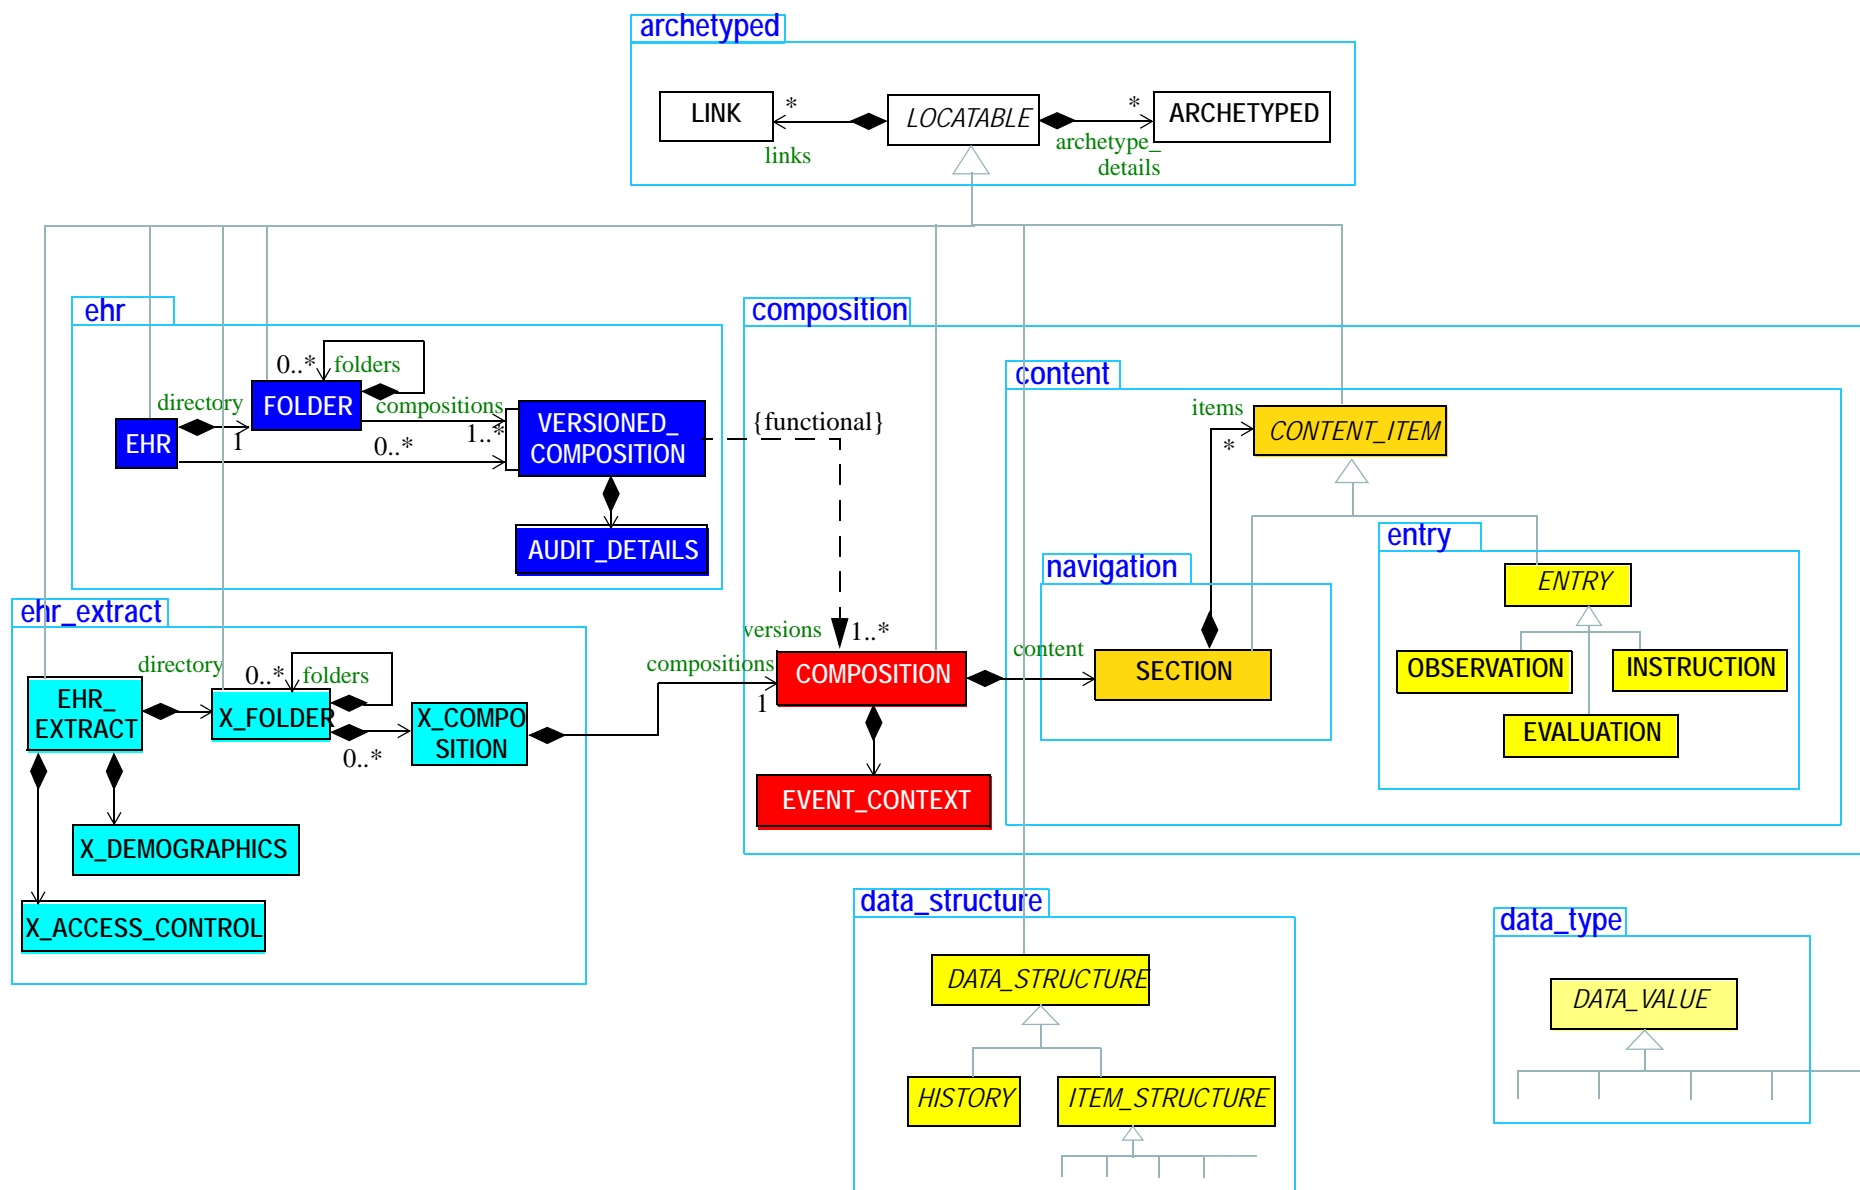


FIGURE 2 openEHR and EHR Extract Information Model Overview

is achieved by every node inheriting from the class `LOCATABLE`. Each archetype root point will have a non-void *archetype\_details*, inherited from `LOCATABLE`; non-root nodes have no *archetype\_details*. FIGURE 3 illustrates the application of archetypes to data. In each block of data controlled by a particular archetype the root node (i.e. the top node of the tree inside the block in question) has a non-void *archetype\_details* attribute value. This figure shows how archetypes may be applied at any level of the data.

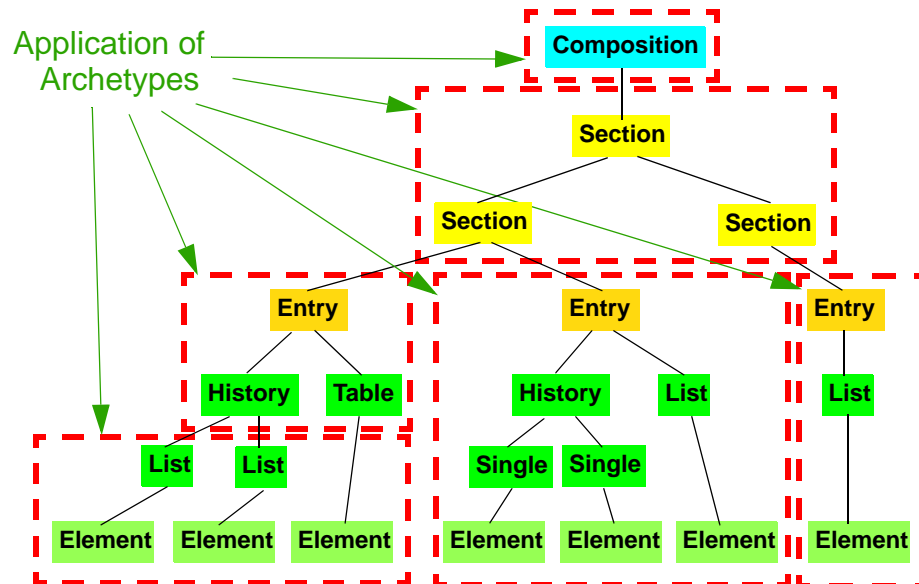


FIGURE 3 How Archetypes apply to Data

In this way, each *archetyped composition* in EHR data has a generating archetype which defines the particular configuration of instances to create the desired composition. An archetype for “biochemistry results” is an `ENTRY` archetype, and constrains the particular arrangement of instances beneath an `ENTRY` object; a “problem/SOAP headings” archetype constrains `SECTION` objects forming a SOAP headings structure. In general, an *archetyped composition* is any composition starting at a root node and continuing to its leaf nodes, at which point lower-level compositions, if they exist begin. Section trees and Entry structures are thus archetype compositions.

The result of the use of archetypes to create data in the EHR is that the structure of data in any particular *openEHR* health record conforms to the constraints defined in a particular composition of archetypes chosen by a user or piece of software during the creation of the data. In particular, it conforms to the path structure of the archetypes, as well as their terminological constraints. Which archetypes were used at data creation time is written into the data, in the form of both archetype identifiers at the relevant root nodes, and values of the *archetype\_node\_id* attribute (inherited from the class `LOCATABLE`), the basis for paths. When it comes time to modify or query data, these archetype data enable applications to retrieve and use the original archetypes, ensuring modifications respect the original constraints, and allowing queries to be intelligently constructed.

## 3.3 Paths

### 3.3.1 Runtime Path Syntax

The *openEHR* record includes a “runtime” path mechanism which enables any node or leaf item of EHR data to be referred to using a string path. The runtime path to an item obeys the Xpath-like path syntax defined in the Archetype Definition Language (ADL) specification, and is made from the con-

catenation of attribute names and object identifiers. Each object in a hierarchy has as its runtime identifier the value of its *name* attribute. All classes in the model whose instances are accessible by paths inherit the *name* attribute from the `LOCATABLE` class.

The value of the *name* attribute is chosen at runtime in various ways: either by the software application responsible for building the record data, by requesting a value from a human user, already fixed by an archetype, or via an algorithm. The general syntax model of path expressions to objects in the EHR is exactly the same as the ADL path syntax, i.e.:

```
[ '/' | root_object_id ] attr_name [ '[' object_id ']' ] { '/' attr_name [ '[' object_id ']' ' /' ] }
```

This gives rise to paths of the form:

```
/attr1[object_id]/attr3/attr2[object_id]
/[root_obj_id]/attr1
```

### 3.3.2 Path Values and Language

In most cases, the *name* value is related to the value of the *archetype\_node\_id* attribute of each item, also inherited from the `LOCATABLE` class. The *archetype\_node\_id* attribute value in EHR data items is predefined by the archetypes from which the data was generated, and defines the “normative” meaning of a data item, regardless of what name is chosen for it at runtime; it is effectively a clinically meaningful node identifier. The clinical meaning is given in the archetype local ontology. However, an important difference is that *names* are text items, expressed in the language of the locale in which the data were created, whereas *archetype\_node\_ids* are language-independent codes. Typical items in the EHR will resemble the objects shown in FIGURE 4.

German language Section object	<table><tr><th>SECTION</th></tr><tr><td>name = “<b>Auswertung</b>”</td></tr><tr><td>archetype_node_id = “at3000”</td></tr></table>	SECTION	name = “ <b>Auswertung</b> ”	archetype_node_id = “at3000”	<table><tr><th>SECTION</th></tr><tr><td>name = “<b>Assessment</b>”</td></tr><tr><td>archetype_node_id = “at3000”</td></tr></table>	SECTION	name = “ <b>Assessment</b> ”	archetype_node_id = “at3000”	English language Section object
SECTION									
name = “ <b>Auswertung</b> ”									
archetype_node_id = “at3000”									
SECTION									
name = “ <b>Assessment</b> ”									
archetype_node_id = “at3000”									

**FIGURE 4** Names and archetype\_node\_ids in EHR Data

To compare a *name* value to a *archetype\_node\_id*, the logical *archetype\_node\_id* value in the relevant language has to be obtained from the archetype.

In contrast, all attribute names are drawn from the information models, and are therefore in English. (Making attribute names multi-lingual is more difficult, since object formalisms do not natively support this, and would seem to be of minimal benefit, especially as most reference model attribute names are quite generic, such as “data”, “items”, “value” and so on). As a consequence, runtime paths for EHR data not created in an English language system will consist of both English words (from the reference model) and clinical words in the language of the locale; this should not cause much of a problem, since all clinical words - the names - will appear within brackets (“[]”).

### 3.3.3 Concrete Path Structure

The syntax applies to the compositional parts of the EHR to create two kinds of paths as follows:

```
ehr_path [ “/all_compositions” composition_path [ section_path [ entry_path ] ] ]
ehr_path [ “/directory” folder_path composition_path [ section_path [ entry_path ] ] ]
```

The first of these enables an EHR node to be referenced bypassing the Folder directory, while the second goes via the Folder directory. The parts are as follows:

**ehr\_path**: identifier of the EHR. See EHR Path on page 34.

**folder\_path**: path to any object in the EHR, via the folder structure. See Folder Paths on page 35.

**composition\_path**: path to a COMPOSITION (a version of a VERSIONED\_COMPOSITION) as defined in Composition Path on page 40.

**section\_path**: path to a particular SECTION, as defined in Section Paths on page 45.

**entry\_path**: path to an item in an ENTRY, as defined in ENTRY Paths on page 59.

This syntax allows paths to be partially specified, from the most minimal, referring to the whole EHR, to a fully specified leaf node. Examples of logical paths are as follows.

- Everything under the “subjective” heading of “diabetes” in a Composition committed by Dr Stephen Smith to patient 39403945’s EHR at the primary EHR system at Nambour Base Hospital:  
/[39403945@ehr.nambour\_bh.health.au]/all\_compositions[patient contact (steven\_smith @ ehr1.nambour\_bh.health.au @ 03-05-1997 23:04:55)] /content[Diabetes] /items[Subjective]
- A complete family history Composition in the summary EHR for patient 959678b09, in the “B” EHR system at Nantes general hospital in France  
/[959678b09]/all\_compositions[family history]
- The 1000Hz threshold value of the 3rd sample of an audiogram test, recorded under the headings “Hearing/test results”, in a Composition committed to patient op01293’s EHR at EHR node ‘A’ at St Bartholomew’s Hospital, London.  
/[op01293@ehr.barts.uk]/all\_compositions[Test Results (peter\_cole@ehr\_a.barts.uk@13-12-1990 09:22:00)] /content[Hearing] /items[test results] /items[audiology] /items[audiology results] /history /events[sample\_3] /data[hearing threshold] /items[left ear] /items[1000Hz threshold]

Paths are used to construct instances of the data value type DV\_EHR\_URI, which are simply paths in the “ehr” scheme-space.

### 3.3.4 Archetype Paths

*Archetype\_node\_id* values are concatenated to form paths in archetypes, known as “archetype” paths using the ADL path syntax. Archetype paths can also be used with runtime data - since each runtime data element contains the relevant *archetype\_node\_id* value - they act as queries, or patterns. Whereas runtime paths are always unique in data, archetype paths are only unique inside archetypes, but may not be in data.

Runtime paths are thus used to locate data items or trees in the EHR, while archetype paths are used to match sub-compositions to their generating archetype structures, to identify matching sub-compositions during archetype-assisted querying, or to aid GUI display. As an illustration, assume that there is a blood pressure archetype shown here in the ADL abstract syntax:

```
ENTRY[at0000] matches {      -- blood pressure measurement
  name matches {...}
  data matches {
    HISTORY[at9001] matches {      -- history
      count matches {1..*}
      events {1..*} matches {
        EVENT[at9002] {0..1} matches {-- baseline
          name matches {...}
          data matches {
            ITEM_LIST[at1000] matches {-- systemic arterial BP
```

```

count matches {2..*}
ordered matches {True}
items matches {
  ELEMENT[at1100] matches {-- systolic BP
    name matches {...}
    value matches {...}
  }
  ELEMENT[at1200] matches {-- diastolic BP
    name matches {...}
    value matches {...}
  }
  ELEMENT[at9000] {0..*} matches {*}
                                -- unknown new item
}
}
}
}
}
EVENT[at9003] {0..1} matches {-- other event
  name matches {...}
  data matches {
    use_node ITEM_LIST [at0000]/.../data[at1000]/
              -- list structure from first sample
  }
}
}
}
}

```

The archetype\_node\_ids are shown as the codes [atnnnn] at each node; the comments at the end of each of these lines is the english text of the meaning (however, any other language could have been used). The following physical archetype path is visible:

```
/[at1000]/data[at9001]/events[at9002]
```

or in logical form (i.e. with the meaning texts substituted for meaning codes):

```
/[BP measurement]/data[history]/events[baseline]
```

Now consider a data composition, in which a history of two blood pressures has been recorded using this archetype.

```

ENTRY[at0000] = <                -- blood pressure measurement
  name = <xxxx>
  data = <
    HISTORY[at9001] = <                -- history
      count = <xx>
      events = <
        EVENT[at9002] = <                -- baseline
          name = <"standing">
          data = <
            ITEM_LIST[at1000] = <-- systemic arterial BP
              ...
            >
          >
        >
      >
    >
  >
  EVENT[at9003] = <                -- other event
    name = <"sitting">
    data = <
      ITEM_LIST[at1000] = <-- systemic arterial BP
    >
  >

```

```

      >
    >
  >
  ...

```

The corresponding runtime paths from this data are as follows:

```

/[BP measurement]/data[history]/events[standing]
/[BP measurement]/data[history]/events[sitting]

```

Thus, where the same archetype path occurs, unique runtime paths are used. The rules governing archetype and runtime paths are as follows:

- The value of the *name* attribute must be unique in runtime data at each node, guaranteeing globally unique paths within the whole structure of data.
- The value of the archetype *archetype\_node\_id* attribute must be unique in archetypes at each node, guaranteeing globally unique paths within the whole structure of an archetype, and providing reliable “path patterns” in runtime data.

The example above illustrates the need to ensure that all instances of a blood pressure entry in the EHR can be related back to a common archetype governing its logical structure, and also ensure that each instance is uniquely and unambiguously identifiable.

## 4 The Record

---

### 4.1 Overview

The general design of the *openEHR* EHR is a combination of concepts from the GeHR Australia project [29], the Synapses project [22], [23], [24], the CEN ENV13606 standard, the HL7v3 Clinical Document Architecture (CDA) and the HL7 Reference Information Model (RIM) [32]. The structure consists of Compositions (equivalent to the CEN 13606 Composition and the HL7 CDA Document), organised by a directory of Folders (a CEN 13606 concept). The *openEHR* EHR is also versioned: every Composition is versioned, and so is the folder structure. This means that every previous state of the EHR - i.e. all states of Compositions and the Folder structure - is available if requested. The versioning facilities are provided by the concepts defined in the `rm.common.change_control` package. All changes to the EHR are created by *contributions*, where a contribution might include any of: creation of Compositions, update or correction of compositions, modification of the Folder structure, move of Compositions in the Folder structure, and deletion of Compositions or part of the Folder structure. This approach guarantees that the EHR progresses from one valid state to another, regardless of what changes occur in any particular contribution.

This approach to informational integrity underpins the clinical view of the health record, wherein events, issues, problems, episodes and other clinical arrangements of information are accommodated.

The discussion below commences by describing the general organisation of the EHR, and then how change control applies to the EHR. It then describes the semantics of Compositions - the containers of data in the EHR, and finally describes the role of the Folder structure.

### 4.2 General Organisation of the EHR

#### 4.2.1 Compositions

The Composition concept in the *openEHR* EHR originated from the Transaction concept of the GEHR project [18], [19], [20], [21], which was based on the concept of a unit of information corresponding to the interaction of a healthcare agent with the EHR. It was originally designed to satisfy the following needs (which include the well-known ACID characterisation of transactions [6]):

- *durability*: the need for a persistent unit of information committal in the record;
- *atomicity*: the need for a minimal unit of integrity for clinical information, corresponding to a minimal unit for committal, transmission and security;
- *consistency*: the need for contributions to the record to leave the record in a consistent state;
- *isolation*: the need for contributions to the record by simultaneous users not to interfere with each other;
- *indelibility*: the requirement that information committed to the record be indelible in order to support later investigations, for both medico-legal and process improvement purposes, and the consequent requirement to be able to access previous states of the record;
- *modification*: the need for users to be able to modify EHR contents, in order to correct errors or update previously recorded information (e.g. current medications, family history); and
- *traceability*: the need to record adequate auditing information at committal, in order to provide clinical and legal traceability.

The Transaction concept has since been renamed to “Composition”, which is the name of the equivalent concept in the current CEN 13606, and it has been expanded and more formally defined in



*openEHR* in two ways. Firstly, the idea of a unit of committal has been formalised by the *openEHR* model of change control (see the *openEHR* Common Information Model); how this applies to the EHR and compositions is described below. Secondly, the informational purpose of a Composition is no longer just to contain data from a passing clinical event such as a patient contact, but also to capture particular categories of clinical data which have long-lived significance, such as problem and medication lists.

Experience with health information systems, including the GEHR (Australia) project, SynEx, Synapses, and inspection of common commercial systems, has shown that there are basically two types of information at the coarse level which exist in the EHR: *event* items, and longitudinal, or *persistent* items, of which there might be various kinds.

Events record what happens during the *clinical session* context [4] which occur due to billable health-care system events with or for the patient, such as patient contacts, but also sessions in which the patient is not a participant (e.g. surgery) or not present (e.g. pathology testing). Persistent items capture information which remains valid in the long term, such as the patient's family history, current medications, care plan and so on. Both types of information are contained within Compositions, the top level information container of the *openEHR* EHR. FIGURE 5 illustrates a simple EHR comprising an accumulation of event compositions.



**FIGURE 5** Basic Event-oriented EHR

An important job of the event Composition is to record not only the data from the session, such as observations on the patient, but also to record the clinical context information, i.e. the who, when, where and why of the session. For this reason, a specific class representing clinical context is associated with event compositions in the formal model.

However, in a more sophisticated EHR, there are also likely to be persistent compositions. Many items of long-term interest in the record are separated by clinicians into well-known categories, such as:

- Family history
- Social history
- Problem list
- Current medications
- Therapeutic precautions
- Vaccination history
- Lifestyle
- Care plan

Note that over time, the number of event Compositions is likely to far outstrip the number of persistent Compositions. FIGURE 6 illustrates an EHR containing persistent information as well as event information.

In any clinical session, an event composition will be created, and in many cases, persistent compositions will be modified. How this works is described below under Change Control of the EHR on page 28.



**FIGURE 6** An EHR containing Event and Persistent Compositions

## 4.2.2 Folders

As Compositions accumulate over time in the EHR, they form a long-term patient history. Previous work in CEN [25] - [28] and SynEx [23] suggests that it is useful to be able to organise Compositions using a hierarchy of folders to classify them, much the same way files in a file system are arranged in the directory structure, as visualised by the Windows Explorer and other similar tools. In the *openEHR* model, folders do not contain Compositions by value but by reference, and are completely optional. More than one Folder can refer to the same Composition. Folders might be used to manage a simple classification of Compositions, e.g into event and persistent, or they might be used to create numerous categories, based on episodes or other groupings of Compositions. Folder structures can be archetyped.

A simple structure showing Folders referencing Compositions is shown in FIGURE 7, in which the following folders are used:

- Subject*: a composition containing clinically relevant demographic data of the patient;
- Persistent*: compositions containing information which is valid in the long term;
- Event*: compositions containing information whose currency is limited to the short term after the time of committal;
- Episode\_xxx*: rather than using a single ‘event’ folder, it may be convenient to group event compositions into episodes (periods of treatment at a health care facility relating to one or more identified problems) and/or other categories such as on the basis of type of healthcare (orthodox, homeopathic, etc).

A justification for these particular categories is based on patterns of access. The persistent category consists of a dozen or so compositions described above, and which are continually required by querying (particularly lifestyle, current problems and medications). The event category consists of clinical data whose relevancy fades fairly quickly, including most measurements made on the patients or in pathology. Compositions in this category are thus potentially very numerous over the patient’s lifetime, but of decreasing relevance to the clinical care of the patient in time; it therefore makes sense to separate them from the persistent compositions.

Regardless of the folder structure used, the folder concept in itself poses no restrictions, nor does it add any clinical meaning to the record - it simply provides a logical navigational structure to the “lumps” of information committed to the record (remembering that inside compositions, there are other means of providing fine-grained structure in entries).

Note that neither the folder names nor the composition names described and illustrated above are part of the *openEHR* EHR architecture: all such details are provided by archetypes; hence, EHR structures based on completely different conceptions of division of information, or even different types of medicine are equally possible.

The folder structure of an EHR constitutes a third category of information which must be controlled over time, in order to allow changes to the folder structure to be remembered along with changes to content. The contents of a typical EHR now resemble FIGURE 8.

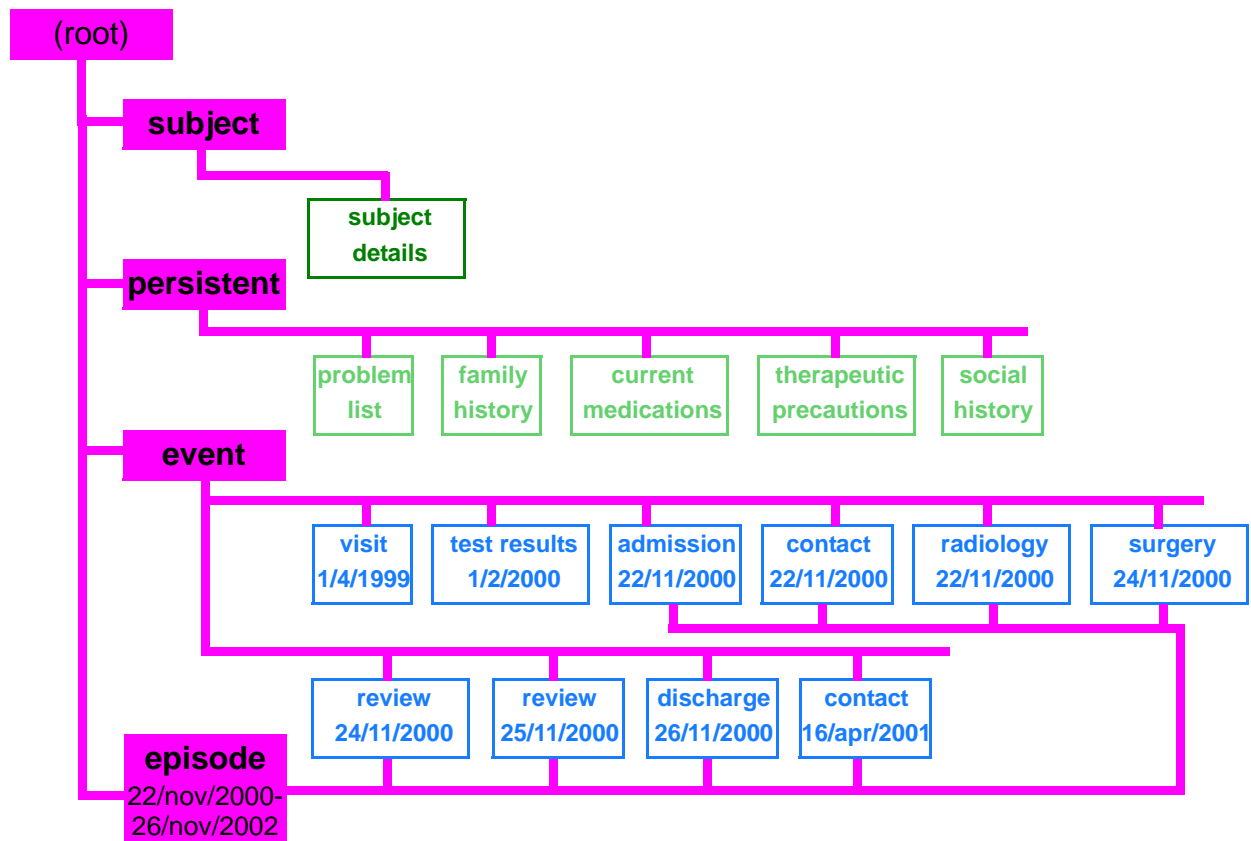


FIGURE 7 Using Folders to Group Compositions



FIGURE 8 An EHR containing Compositions and Folder Structure CIs

A final category of information which may be needed in the change-controlled EHR is that of “technical contextual information”, which includes environment settings, software application names and version ids, identification and versions of data resources such as terminologies and possibly even actual software tools, configuration files, keys and so on. Such information is commonly versioned in software configuration management systems, in order to enable the reconstruction of earlier versions of software with the correct tools. One reason to store such information at all is that it adds to medico-legal support when clinicians have to justify a seemingly bad decision: if it can be shown that the version of software in use at the time was faulty, they are protected, but to do this requires that such information be recorded in the first place. We therefore add a fourth category of content to the notional controlled EHR - that of “environment”, as shown in FIGURE 9.



FIGURE 9 A Comprehensive Medico-legal EHR

### 4.2.3 Change Control of the EHR

The EHR described thus far is essentially a logical arrangement of Compositions within a directory structure of Folders. However we have not described the semantics of update to the record, or audit-trailing of changes.


A number of requirements and design considerations lead to the final design of Compositions in the *openEHR* EHR. The first is the *system interaction context*, in which a healthcare agent (usually a human, but may be a software process) interacts with the EHR system to enter data. This is the context during which Compositions and Folder structures are created or modified on the system, and once again, the contextual details of who, when and where must be recorded. As described in [4], these details might be quite different from the context details of the *clinical session*, as is the case when the EHR is updated some time after a contact, and by other personnel.

Given an EHR in which there is a folder structure, and event and persistent compositions, the general model of update of the EHR is that any of these might be created and/or modified during the update. The simplest, most common case is probably the creation of a single contact Composition, which is placed in an “events” folder. A very common case will be the creation of an event Composition, and modification of one or more persistent Compositions, e.g. due to facts learned in the consultation about family history, or due to prescription of new medications. Other types of updates include corrections to existing compositions, and acquisition of compositions from another site such as a hospital. Any of these updates might also include a change to the folder structure, or the moving of existing Compositions to other Folders. Naturally these scenarios depend on a structure of the record including event and persistent compositions, and a folder structures; in the extreme, an EHR consisting only of event Compositions and no folders, will experience only the creation of a single Composition for most updates, with acquisitions being the exception.

Recording of contextual information is not the only requirement of the EHR. Numerous projects (GEHR/Europe, GEHR/Australia, SynEx, Synapses etc) as well as standards (CEN 13606, the emerging ISO 18308 EHRRA Requirements) and academic work all agree on the need to satisfy a number of medico-legal requirements of the EHR. These are essentially: that all additions and changes to the record be audit-trailed and that all previous states of the record be available for the purposes of medico-legal investigation. The former is satisfied by the recording of context details in the relevant places (including at the Entry level, dealt with later in this specification). The latter requirement leads us to the use of version control of information items, and eventually, to a formal change management approach.

Change management of information is a non-trivial business, and requires a well-defined approach, such as the “configuration management” (CM) paradigm described in the *openEHR* Common Information Model. Under this paradigm we can visualise how changes occur to the EHR. FIGURE 10 shows a number of *contributions* (known as “change sets” in CM) to the EHR as follows:

- The first is due to a patient contact, and causes the creation of a new contact composition; it also causes changes to the problem list, current medications and care plan compositions (once again, in a differently designed record, all this information might have been contained in a single event Composition; likewise, it might be been distributed into even more Compositions).
- The next contribution is the acquisition of test results from a pathology laboratory.
- The third is another contact in which both family history and the folder structure are modified, and the fourth is a correction.
- This fourth is an error correction (e.g. a misspelled name, wrongly entered value), and shows that there can be a contribution even when there is no clinical session.

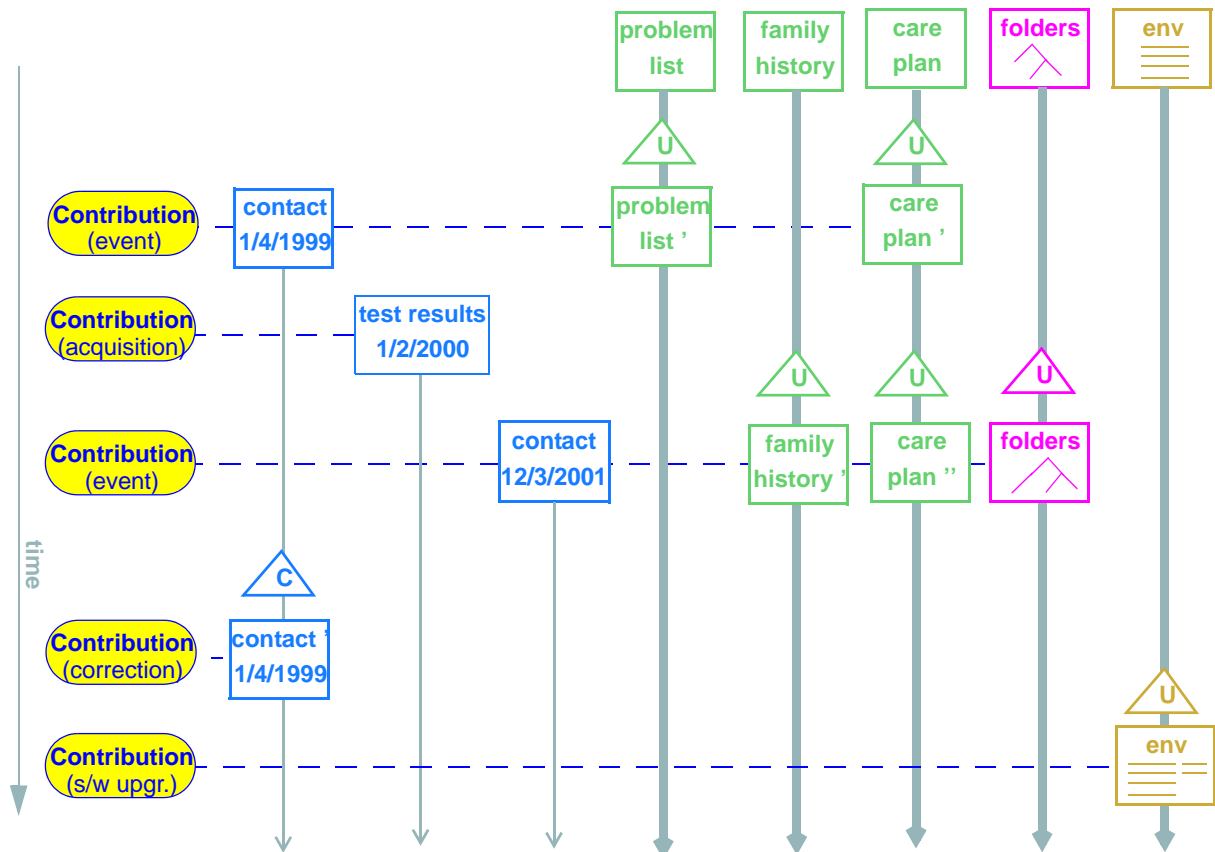**FIGURE 10** Contributions to the EHR

- The last is an update to the environmental information in the EHR, due to a software upgrade.

We can now see that the CM paradigm is a suitable approach. Consider the EHR described thus far:

- it is a repository of information about the patient, which is separated into distinct entities, (Compositions);
- it may have a directory of folders acting as a navigational structure of the compositions;
- there can be multiple, simultaneous users of the repository;
- changes to the information occur due to interactions of users with the repository, and must be attested with revision history information;
- previous states in time of the repository must be available upon request.


Thus, the EHR corresponds very closely to the general model of a change-controlled repository. The implication is that we should consider updates to the EHR to be the “contributions” described in the CM paradigm, where each contribution causes the creation or modification of one or more Compositions (configuration items, or “CIs”) and/or changes to the folder structure (directory structure).

#### 4.2.4 Versioning of Compositions

Versioning of Compositions is achieved with the `VERSIONED<T>` type from the Change Control package, which in the Composition package is explicitly bound to the `COMPOSITION` class, via the class `VERSIONED_COMPOSITION` which inherits from the type `VERSIONED<COMPOSITION>`. This is done because versioned Compositions are self-standing entities - they are not contained by value in

any other class. Consequently, there is no other class where the type binding `VERSIONED<COMPOSITION>` can take place.

The effect of version control on Compositions is visualised in FIGURE 11. The versions (each “version” being a `COMPOSITION`) shown here in a `VERSIONED_COMPOSITION` are the same versions shown along each vertical line in FIGURE 10, this time shown with their associated audit items. The set of versions should be understood as a set of successive modifications of the same data in time.

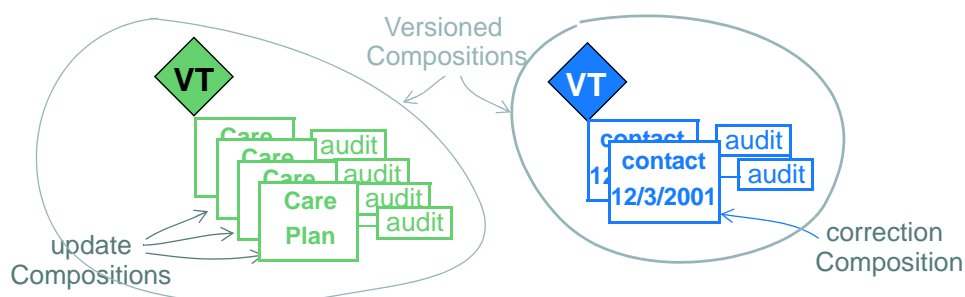

**FIGURE 11** The versioned composition

The `VERSIONED_COMPOSITION` can be thought of as a kind of intelligent repository: how it stores successive versions in time is an implementation concern (there are a number of intelligent algorithms available for this sort of thing), but what is important is that its functional interface enables any version to be retrieved, whether it be the latest, the first, or any in between.

Returning to Compositions, the logical types “event composition” and “persistent composition” are modelled using the class `COMPOSITION`, a coded attribute *category*, and a Boolean-returning function *is\_persistent*. The function returns true for those categories deemed to be persistent categories, and can be implemented as required on each system. For event Compositions this function should return false. There will usually be a *context* attribute, which carries the clinical context information corresponding to the event, although in continuous care situations this might not always be used. Persistent Compositions do not include this, although if it is necessary to determine what clinical session (if any) caused an update to a persistent Composition, the contribution can be found from the audit, and then checked for the presence of an event Composition.

## 4.2.5 Versioning Scenarios

The following scenarios for creating new `COMPOSITION` versions have been identified as follows.

- Case 0:* information is authored locally, causing the creation of a new `VERSION<COMPOSITION>`. If this is the first version, a new `VERSIONED_COMPOSITION` will be created first.
- Case 1:* information is modified locally, such as for the correction of a wrongly entered datum in a composition. This causes the creation of a new `VERSION<COMPOSITION>` in an existing `VERSIONED_COMPOSITION`, in which the `AUDIT_DETAILS.change_type` is set to “correction”.
- Case 2:* information received from a feeder system, e.g. a test result, which will be converted and used to create a new `VERSION<COMPOSITION>`. This kind of acquisition could be done automatically. If the receiver system needs to store a copy of the original feeder system audit details, it writes it into the `COMPOSITION.feeder_audit`.
- Case 3:* a `VERSION<COMPOSITION>` (such as a family history) received as part of an `EHR_EXTRACT` from another *openEHR* system, which will be used by a local author to

create a new COMPOSITION which includes some content chosen from the received VERSION<COMPOSITION>. In this case, the new VERSION<COMPOSITION> is considered as a locally authored one, in which some content has been obtained from elsewhere. If it is the first version, a VERSIONED\_COMPOSITION is first created. The AUDIT\_DETAILS documents the committal of this content, and the clinician may choose to record some details about it in the audit *description*.

In summary, the AUDIT\_DETAILS is always used to document the addition of information locally, regardless of where it has come from. If there is a need to record original audit details, they become part of the content of the versioned object.

## 5 EHR Package

### 5.1 Overview

The `ehr` package is illustrated in FIGURE 12. The `EHR` class is the root of the EHR information structure, and is a change-controlled repository of the kind described in the *openEHR* Common Information Model. Accordingly, it contains a directory, in the form of a versioned Folder structure, logical reference to the `VERSIONED_COMPOSITIONS` which are the versioned data containers of the EHR, and references to the `CONTRIBUTIONS` which document all changes so far to the EHR. The directory structure is optional, and consists of `FOLDERS`, enabling the construction of a hierarchical directory of any complexity. Each folder in the structure can contain any number of references to versioned Compositions. The structure as a whole acts as a directory for organising Compositions in the record.

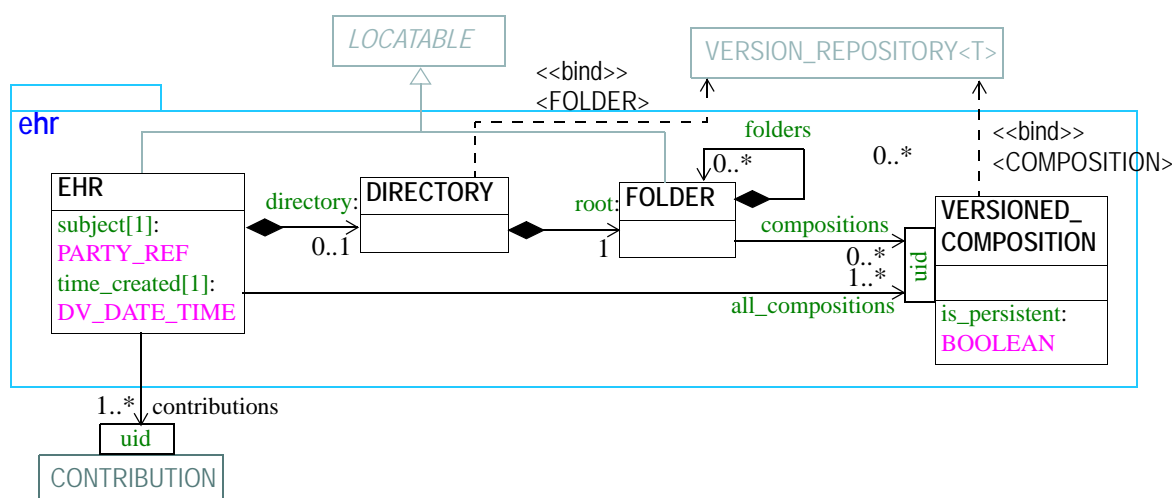


FIGURE 12 rm.ehr Package

The use of references between Folders and Compositions allows more than one folder to refer to the same Composition, in turn allowing multiple ways of finding or classifying Compositions. This arrangement is akin to a computer directory system which also allows links (Unix) or “shortcuts” (Windows); in the EHR it allows for example a contact Composition to be grouped with other Compositions in an episode, and also in a group corresponding to a type of problem. The sophistication of the folder structure is completely under the control of the designers of EHR systems, and can be as simple or complex as required, according to the use of archetypes. The whole folder structure may correspond to one archetype, or there may be multiple archetypes used to create it.

References rather than containment by value are also used for the *all\_compositions* relationship between the `EHR` and `VERSIONED_COMPOSITION` classes, reflecting the vast majority of retrieval scenarios in which only select (usually recent) Compositions are needed. Containment by value would lead to systems which retrieved all `VERSIONED_COMPOSITION` objects every time the `EHR` object was accessed. (However, while undesirable from the resource usage point of view, there is nothing semantically incorrect with containment by value between the `EHR` and its subparts).

Exactly the same logic holds for the relationship between the `EHR` and its `CONTRIBUTIONS`. The role of Contributions, as documented in the Common Information Model, is to record the set of versions added to a repository during a single logical update, along with the audit details of the change. In the context of the EHR as one such repository, each instance of the `CONTRIBUTION` class potentially includes in its list of versions not only compositions, but also the folder structure itself, if this was



changed during the update. Since the *versions* attribute of the CONTRIBUTIONS class is in fact a list of OBJECT\_REFS, the same list can accommodate both types of object.

## 5.2 Class Descriptions

### 5.2.1 EHR Class

CLASS	EHR	
<b>Purpose</b>	The EHR class is the centre node of the EHR “repository” for a subject of care.	
<b>CEN</b>	EHCR class	
<b>Synapses</b>	RecordFolder class	
<b>GEHR</b>	G1_EHR	
<b>Inherit</b>	LOCATABLE	
Attributes	Signature	Meaning
	<b>subject:</b> PARTY_REF	The subject of this EHR.
	<b>time_created:</b> DV_DATE_TIME	Time of creation of the repository
	<b>contributions:</b> List<OBJECT_REF>	List of contributions causing changes to this EHR. Each contribution contains a list of versions, which may include references to any number of VERSION instances, i.e. items of type VERSIONED_COMPOSITION and DIRECTORY.
	<b>directory:</b> DIRECTORY	Optional directory structure for this EHR.
	<b>all_compositions:</b> List <OBJECT_REF>	Master list of all composition references in this EHR
<b>Invariants</b>	<i>Is_archetype_root:</i> is_archetype_root <i>Directory_valid:</i> directory /= Void <b>and then</b> directory.latest_version.data.is_archetype_root <i>Subject_exists:</i> subject /= Void <i>Time_created_exists:</i> time_created /= Void <i>Contributions_valid:</i> contributions /= Void <b>and then not</b> contributions.is_empty <b>and then</b> contributions.for_all(type.is_equal(“CONTRIBUTION”)) <i>All_compositions_valid:</i> all_compositions /= Void <b>and then</b> all_compositions.for_all(type.is_equal(“VERSIONED_COMPOSITION”))	

### 5.2.1.1 EHR Path

The path to the EHR as a whole is formed from the value of the EHR name attribute. The name attribute is usually the patient identifier, i.e. the *subject.id.value* attribute (usually a meaningless identifier), optionally with the EHR node id appended. The syntax is as follows:

```
`[' EHR.name.value ']
```

Possible EHR paths are as follows:

```
[10290494@st_vincent's.health.au]
[04959900021]
```

Paths *from* the EHR must include the appropriate attribute names, as follows:

- path to any folder:  

```
`[' EHR.name.value "]/directory" folder_path
```

 e.g. [04959900021]/directory/root/folders[family history]
- path to any composition (bypassing the folder directory):  

```
`[' EHR.name.value "]/all_compositions" composition_path
```

 e.g. [04959900021]/all\_compositions[family history]
- path to a contribution:  

```
`[' EHR.name.value "]/contributions[" contribution.uid ']'
```

 e.g. [04959900021]/contributions[uid=deepak\_patel@indrisi\_clinic.health.in @2000-10-03 12:34:00]

## 5.2.2 DIRECTORY Class

CLASS	DIRECTORY	
<b>Purpose</b>	A version-controlled hierarchy of FOLDERS.	
<b>Inherit</b>	VERSION_REPOSITORY <FOLDER>	
Attributes	Signature	Meaning
	<b>root:</b> FOLDER	Root FOLDER of the directory.
<b>Invariants</b>	<i>Root_exists:</i> root /= Void <i>Owner_id_valid:</i> owner_id.type.is_equal("EHR")	

## 5.2.3 FOLDER Class

CLASS	FOLDER
<b>Purpose</b>	The concept of a named folder.
<b>CEN</b>	FOLDER class
<b>Synapses</b>	RecordFolder class
<b>Inherit</b>	LOCATABLE

CLASS	FOLDER	
Attributes	Signature	Meaning
	<b>folders:</b> List<FOLDER>	Sub-folders of this FOLDER.
	<b>compositions:</b> List<OBJECT_REF>	The list of references to versioned compositions in this folder. Since more than one folder can include the same composition, this relationship is an association.
<b>Invariants</b>	<b>Folders_valid:</b> folders /= Void <i>implies not</i> folders.empty <b>Compositions_valid:</b> compositions /= Void <i>implies</i> (not compositions.empty <i>and then</i> compositions.for_all(type.is_equal("VERSIONED_COMPOSITION")))	

### 5.2.3.1 Folder Paths

Folder paths are built using Folder *name* attribute values, which will usually be derived from the value of the *archetype\_node\_id* attribute, plus a uniqueness modifier if required. The syntax is as follows:

```
`[' FOLDER.name.value "]/folders[" FOLDER.name.value "]/" ...
`/folders[" FOLDER.name.value "]/" ...
```

Example folder paths:

```
[hospital episodes]
[patient entered data]/folders[diabetes monitoring]
[homeopathy contacts]
```

Uniqueness modifiers are appended in parentheses, and only needed to differentiate folders at the same node that would otherwise have the same names, e.g.

```
[hospital episodes]
[hospital episodes(car accident Aug 1998)]
```

### 5.2.3.2 EHR and FOLDER Instance Structure

To Be Continued:

## 5.2.4 VERSIONED\_COMPOSITION Class

CLASS	VERSIONED_COMPOSITION	
<b>Purpose</b>	Version-controlled composition abstraction, defined by inheriting VERSION_REPOSITORY<COMPOSITION>.	
<b>Use</b>		
<b>GEHR</b>	G1_VERSIONED_COMPOSITION	
<b>Inherit</b>	VERSION_REPOSITORY<COMPOSITION>	
<b>Function</b>	<b>Signature</b>	<b>Meaning</b>

CLASS	VERSIONED_COMPOSITION	
	<b>is_persistent:</b> Boolean	Indicates whether this composition set is persistent; derived from first version.
<b>Invariants</b>	<i>Archetype_node_id_valid:</i> all_versions.for_all (data.archetype_node_id.is_equal(all_versions.first.data.archetype_node_id)) <i>Persistent_valid:</i> all_versions.for_all (data.is_persistent = all_versions.first.data.is_persistent) <i>Owner_id_valid:</i> owner_id.type.is_equal("EHR")	

#### 5.2.4.1 VERSIONED\_COMPOSITION Path

The path of a VERSIONED\_COMPOSITION is taken from the *name* attribute value of the contained compositions. Thus, typical paths to VERSIONED\_compositions include:

```
[family history]
[current medications]
[current medications (chinese)]
[patient contact]
```

The path to any particular version within a VERSIONED\_COMPOSITION is given by adding the value of the version\_id of the version as a uniqueness modifier. This may be a combination like {*committer, ehr\_node, time\_committed*}, taken from the attributes in the AUDIT\_DETAILS object attached to the relevant VERSION object, or it might be the special symbolic version identifiers “first”, “latest”. The patterns for the path to a version are therefore:

```
"[" name "(" committer "@" ehr_node @ time_committed ")" ]"
[" name "(" first ")" ]"
[" name "(" latest ")" ]"
```

Example paths to individual versions include:

- [current medications (latest)]
- [patient contact (sam\_heard@park\_rd\_clinic.health.au@2002-04-26 12:34:00)]
- [test results (p\_athologist@dbh.health.au)]

## 5.3 Historical Views of the Record

It is important to understand that the COMPOSITION versions at a previous point in time represent a previously available *informational state* of the EHR, at a particular EHR node. Such previous states include only those compositions from other sources as have been acquired by that point in time, *regardless of whether the acquired information pertains to clinical information recorded earlier*. A previous historical state of the EHR thus corresponds to what users of a system could see at a particular moment of time. It is important to differentiate this from previous *clinical* states of the patient: previous *informational* states of the EHR might include acquired information which is significantly older than the point in time when merging occurred. A previous clinical state of the patient would be a view of the EHRs in all locations for the patient - what is sometimes called the virtual EHR - at a given point in time, minus acquired Compositions, since these constitute (usually out-of-date) copies of Compositions primarily available elsewhere.

It is previous informational states with which we are concerned for medico-legal purposes, since they represent the information actually available to clinicians at a health-care facility, at a point in time. But previous clinical views may be useful for reconstructing an actual sequence of events as experienced by the patient.

## 6 Composition Package

### 6.1 Overview

FIGURE 13 illustrates the composition package.

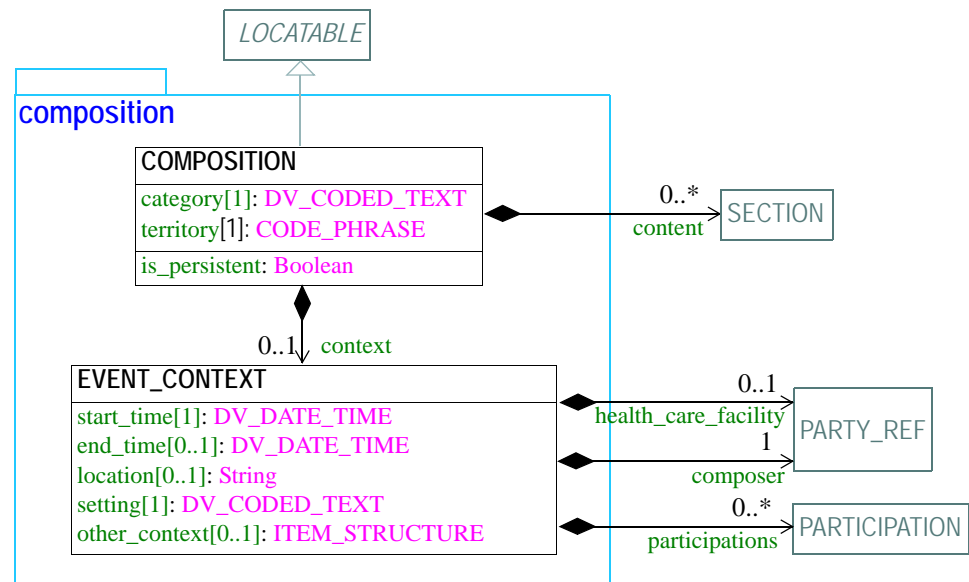


FIGURE 13 rm.composition Package

Instances of the COMPOSITION class can be considered as self-standing data aggregations, or documents in a document-oriented system (similar to HL7v3 CDA “documents”). The majority of the use of paths in *openEHR* is likely to within Compositions.

#### 6.1.1 Event Context

The EVENT\_CONTEXT of a COMPOSITION is used to record information describing the real world (usually clinical) event which gave rise to the creation or changes in Compositions in the record. An Event context is created only for Compositions to which the context information relates. Persistent Compositions do not have an event context. In general, a Contribution to the EHR consists of one or more Compositions, which were created or modified due to some activity. Within such a set, there will usually be one Composition relating directly to the event, such as the patient contact - this is the Composition containing the doctor’s observations, nurses activities etc, during the visit. This Composition will include an EVENT\_CONTEXT object documenting the time, location and participants in the event. Other Compositions changed during the same event (e.g. updates to medication list, family history and so on) do not require an event context, since they are part of the same Contribution, and the event context of the primary Composition can always be retrieved if desired.

The times recorded in the Event context object represent the time of an encounter or other activity undertaken by a health provider to/for/on behalf of the patient. The time is represented as a mandatory start time and optional end time. It is assumed that where there is a clinical session (i.e. an EVENT\_CONTEXT object does exist), e.g. a patient encounter, the start time is known or can be reasonably approximated. It is quite common that the end time of a consultation or encounter is not recorded, but rather inferred from e.g. average consult times, or the start\_time of the next consult for the same physician.

Event context is used even if the additions are made to the EHR long after the event took place, such as happens when a doctor writes his notes into the record system at night, after all patients have been seen. In such cases, the versioned Composition audit trail indicates the context of when the data were entered, as distinct from the context of when the clinical interaction took place.

In some cases, updates are made to the record where no event context is recorded, for example, if a secretary corrects an error in a Composition previously recorded for a patient visit; in such cases, the Event context of any Compositions from the original commit will remain intact and unchanged (unless the correction is to the event context itself of course), and will correctly reflect the fact that no new clinical interaction occurred. Event context will often not be used in hospital situations, since many patient ‘contacts’ are simply nurse’s observations.

### 6.1.2 Participations

As part of the Event context, participations can be recorded to describe who participated, and how. Usually this will be used to record the details of patient and clinician participation. Each participation object describes the “mode” of participation as well, such as direct presence, video-conference and so on. There are no general rules about who participates. For example, while there will be a patient participation during a GP visit, there will be no such participation recorded when the clinical event is a tissue test in a laboratory. Conversely, a patient might record some observations and self drug administration in the record, in which case there will be no clinician participation. Consequently, the use of participations will mostly be archetype-driven.

A few ‘participations’ are predefined: *health\_care\_facility* and *author*. These are formally defined as follows:

*health\_care\_facility* (HCF): the health care facility under whose care the event took place. This is the most specific identifiable (by the health system) workgroup or care delivery unit within a care delivery enterprise which was involved in the care event. The identification of the HCF can be used to ensure medico-legal accountability. Often, the HCF is also where the encounter physically took place, but not in the case of patient home visits, internet contacts or emergency care; the HCF should not be thought of as a physical place, but as a care delivery management unit. The physical place of care can be separately recorded in `EVENT_CONTEXT.location`.

The *health\_care\_facility* attribute is optional to allow for cases where the clinical event did not involve any care delivery enterprise, e.g. self-care at home by the patient, emergency revival by a non-professional (e.g. CPR by lifeguard on a beach), care by a professional acting in an unofficial capacity (doctor on a plane asked to aid a passenger in difficulty). In all other cases, it is mandatory. Archetypes are used to express this.

*composer*: the person who was primarily responsible for the content of the Composition (not necessarily its entry into the EHR system). This is the identifier which should appear on the screen. It could be a junior doctor who did all the work, even if not legally responsible, or it could be a nurse, even if later attested by a more senior clinician; it will be the patient in the case of patient-entered data. It may or may not be the person who entered the data. It may also be a software agent. This attribute is mandatory, since all content must be been created by some person or agent.

*location*: the physical location where the care delivery took place, and should document a reasonably specifically identifiable location possible. Examples include “bed 5, ward E”, “home”. This attribute is optional, since the location is not always known, particularly in legacy data.

*setting*: this attribute documents the “setting” of the care event. In clinical record keeping, this has been found to be a useful coarse-grained classifier of information. The *openEHR* Terminology “setting” group is used to code this attribute. It is mandatory, on the basis that making it optional will reduce its utility for querying and classification.

### 6.1.3 Composition Content

The data in a Composition is stored in the *content* attribute. There are four ways the *content* attribute can be populated:

- it may be empty. Although for most situations, there should be content in a Composition, there are at least two cases where an empty Composition makes sense:
  - the first is a Composition in ‘draft’ editing state (*VERSION.lifecycle\_state* = ‘draft’)
  - the second is for systems that are only interested in the fact of an event having taken place, but want no details, such as so-called clinical ‘event summary’ systems, which might record the fact of visits to the doctor, but contain no further information. This can be achieved using Compositions with event context, and no further content.
- it may contain one or more *SECTIONS* which are defined in the archetype of the Composition;
- it may contain one or more Section trees, each of which is a separately archetyped structure;
- it may be a mixture of the last two possibilities.

## 6.2 Class Descriptions

### 6.2.1 COMPOSITION Class

CLASS	COMPOSITION	
<b>Purpose</b>	One version in a <i>VERSIONED_COMPOSITION</i> . A composition is considered the unit of modification of the record, the unit of transmission in record extracts, and the unit of attestation by authorising clinicians. In this latter sense, it may be considered equivalent to a signed document.	
<b>CEN</b>	Composition	
<b>GEHR</b>	G1_COMPOSITION_VERSION	
<b>Synapses</b>	Composition class	
<b>HL7v3</b>	CDA DOCUMENT	
<b>Inherit</b>	LOCATABLE	
Attributes	Signature	Meaning
	<b>content:</b> <i>List</i> <SECTION>	The clinical session content of this Composition, i.e. the information generated in the clinical session.

CLASS	COMPOSITION	
	<b>context:</b> EVENT_CONTEXT	The clinical session context of this Composition, i.e. the contextual attributes of the clinical session.
	<b>category:</b> DV_CODED_TEXT	Indicates what broad category this Composition is belongs to, e.g. “persistent” - of longitudinal validity, “event”, “process” etc.
	<b>territory:</b> CODE_PHRASE	Name of territory in which this Composition was written. Coded from openEHR “countries” code set, which is an expression of the ISO 3166 standard.
Functions	Signature	Meaning
	<b>is_persistent:</b> Boolean	True if category is a “persistent” type, False otherwise. Useful for finding Compositions in an EHR which are guaranteed to be of interest to most users.
Invariants	<i>is_archetype_root:</i> is_archetype_root <i>content_valid:</i> content != Void <b>implies not</b> content.is_empty <i>Category_validity:</i> category != Void <b>and then</b> terminology(“openehr”).codes_for_group_name(“composition category”, “en”).has(category.defining_code) <i>Is_persistent_validity:</i> is_persistent <b>implies</b> context = Void <i>name_value:</i> not is_persistent <b>implies</b> name.value.is_equal(context.health_care_facility.as_string + context.start_time.as_string) <i>territory_valid:</i> territory != Void <b>and then</b> code_set(“countries”).has(territory)	

### 6.2.1.1 Composition Path

Like all other EHR components, the path of a COMPOSITION is derived from its *name* attribute. Because VERSIONED\_COMPOSITIONS are archetyped, the runtime value of *name* is normally related to, if not the same as the value of the meaning of the *archetype\_node\_id* attribute (i.e. the “text” value for the relevant *archetype\_node\_id* code, in the local archetype ontology). The COMPOSITION runtime *name* value for both persistent and event compositions is based on the *archetype\_node\_id* value, although it can be any other value if required. The general model for the *name* value is:

- meaning “(“ modifier “)”

Here “modifier” is an addition to the *name* attribute to ensure uniqueness. For persistent compositions such as “family history” and “current medications”, there would normally only be one instance, although there is no guarantee of this, for example when different groups of practitioners (e.g. western medicine clinicians and chinese herbalists) maintain separate instances of the major persistent compositions. The modifier will then be the name of the clinician group. There are many other reasons why persistent compositions might be split. Typical name values include:

- “family history”



- “current medications”
- “current medications (chinese)”
- “therapeutic precautions (food and allergy)”
- “therapeutic precautions (drug)”

To Be Continued: to be reviewed: in the following, in fact there is no need for uniqueness on event composition names, since the paths will be made unique at the next level up.

For event Compositions for which there will normally be numerous instances, the name requires a different type of uniqueness modifier. One approach would be to use ordinal numbers, leading to name values of the form:

- “patient contact (1)”
- “patient contact (2)”
- ...
- “patient contact (73)”

This creates problems for merging Compositions from other records for the same patient. since independent changes might be made to more than one copy of a previously-shared Composition held on two or more EHR systems.

A better approach uses a modifier made from attributes from the `EVENT_CONTEXT` object, which all event Compositions must include. Specifically, the attributes *health\_care\_facility*, *time* should guaranteed uniqueness within a given patient record, and constitute an appropriate uniqueness modifier. The name value for an event Composition will thus be of the form:

- meaning “(” health\_care\_facility “@” time “)”

Example Compositions paths are therefore:

```
[patient contact (Park Rd Clinic@1997-09-12 12:24:00)]
[test results (QML Taringa Lab@2001-01-08 15:35:00)]
```

## 6.2.2 EVENT\_CONTEXT Class

CLASS	EVENT_CONTEXT	
<b>Purpose</b>	Documents the clinical context of the clinical session (or encounter). The context information recorded here are independent of the attributes recorded in the version audit, which document the “system interaction” context, i.e. the context of a user interacting with the health record system. Clinical sessions include patient contacts, and any other business activity, such as pathology investigations which take place on behalf of the patient.	
<b>CEN</b>	Composition class	
<b>Synapses</b>	Composition class	
<b>HL7v3</b>	TBD	
<b>Attributes</b>	<b>Signature</b>	<b>Meaning</b>

CLASS	EVENT_CONTEXT	
	<b>health_care_facility:</b> PARTY_REF	The health care facility under whose care the event took place. This is the most specific workgroup or delivery unit within a care delivery enterprise which has an official identifier in the health system, and can be used to ensure medico-legal accountability.
	<b>start_time:</b> DV_DATE_TIME	Start time of the clinical session or other kind of event during which a provider performs a service of any kind for the patient.
	<b>end_time:</b> DV_DATE_TIME	Optional end time of the clinical session.
	<b>composer:</b> PARTY_REF	The person primarily responsible for the content of the Composition (not necessarily its entry into the EHR system). This is the identifier which should appear on the screen. It may or may not be the person who entered the data.
	<b>participations:</b> List <PARTICIPATION>	Parties involved in the <i>clinical</i> session. These would normally include the physician(s) and often the patient (but not the latter if the clinical session is a pathology test for example).
	<b>location:</b> String	The actual location where the session occurred, e.g. “microbiol lab 2”, “home”, “ward A3” and so on.
	<b>setting:</b> DV_CODED_TEXT	The setting in which the clinical session took place. Coded using the <i>openEHR</i> Terminology, “setting” group.
	<b>other_context:</b> ITEM_STRUCTURE	Other optional context which will be archetyped.
<b>Invariants</b>	<b>composer_exists:</b> composer /= Void <b>start_time_exists:</b> start_time /= Void <b>participations_validity:</b> participations /= Void <i>implies not</i> participations.empty <b>location_valid:</b> location /= Void <i>implies not</i> location.is_empty <b>setting_valid:</b> setting /= Void <i>and then</i> Terminology(“openehr”).codes_for_group_name(“setting”, “en”).has(setting.defining_code)	


### 6.2.3 COMPOSITION Instance Structures

To Be Continued:

## 7 Navigation Package

### 7.1 Overview

The navigation Package defines a hierarchical heading structure, in which all individual headings are considered to belong to a “tree of headings”. Each heading is an instance of the class `SECTION`, illustrated in FIGURE 14.

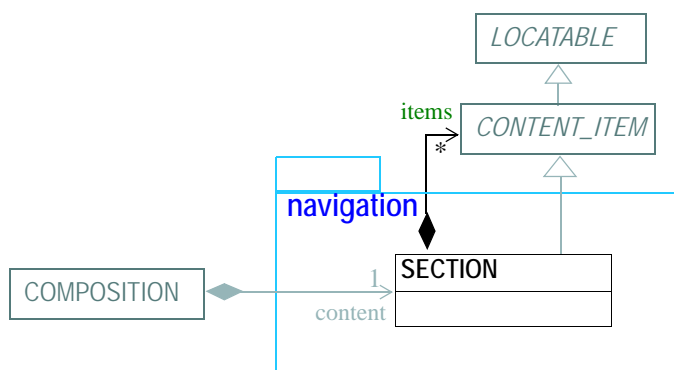


**FIGURE 14** rm.composition.content.navigation Package

Sections provide both a logical structure for the author to arrange `ENTRIES`, and a navigational structure for readers of the record, whether they be human or machine. Sections are archetyped in trees with each tree containing a root Section, one or more sub-sections, and any number of Entries at each node. Section trees which are separately archetyped, such as the SOAP headings, or the heading structure for a physical examination, can be combined at runtime to form one large heading structure.

In terms of understanding of clinical data, section structures are not essential in a Composition - in theory they could be removed. They do not contain *primary instances* of meaning-modifying terms or headings. This means that if there are meaning-modifying terms, such as “history of”, “risk of” etc, such terms are not *primarily* recorded as sections. However, this does not mean that they cannot appear in sections *as well*, as would typically occur with data about family history. Thus, the section “family history” appearing in an section structure is not to be taken as the definitive indicator that any entries are about family history of the subject (rather than directly about the subject); rather, it is a guide to the kind of information to be found under it. If there are indeed entries recording family history information, the fact that the subject of that information is not the patient but a member of his/her family will be formally recorded in the `ENTRIES` themselves.

Despite the above, section structures do not have to be regarded as *ad hoc* or unreliable structures. On the contrary, as they are archetyped, their structures can be relied upon in the same way as any other structure in the record can be relied on to conform to its archetype. Accordingly, solid assumptions can be made about sections, based on their archetypes, for the purposes of querying. In fact, the main benefit of Sections is that they may provide significant performance benefits to querying, whether by interactive application or by automated systems.

One potentially confusing aspect of an section structure is that while the root section is logically a section, it would not appear in a display or printed form as a visible section, due to the fact that humans don’t usually write down top-level headings for anything, since there is always a containing structure acting as a top-level organising context (such as the piece of paper one is writing on). For example, consider the way a clinician writes down the problem/SOAP headings on paper. She writes the name of the first problem, then under that, the S/O/A/P headings, then repeats the process for fur-

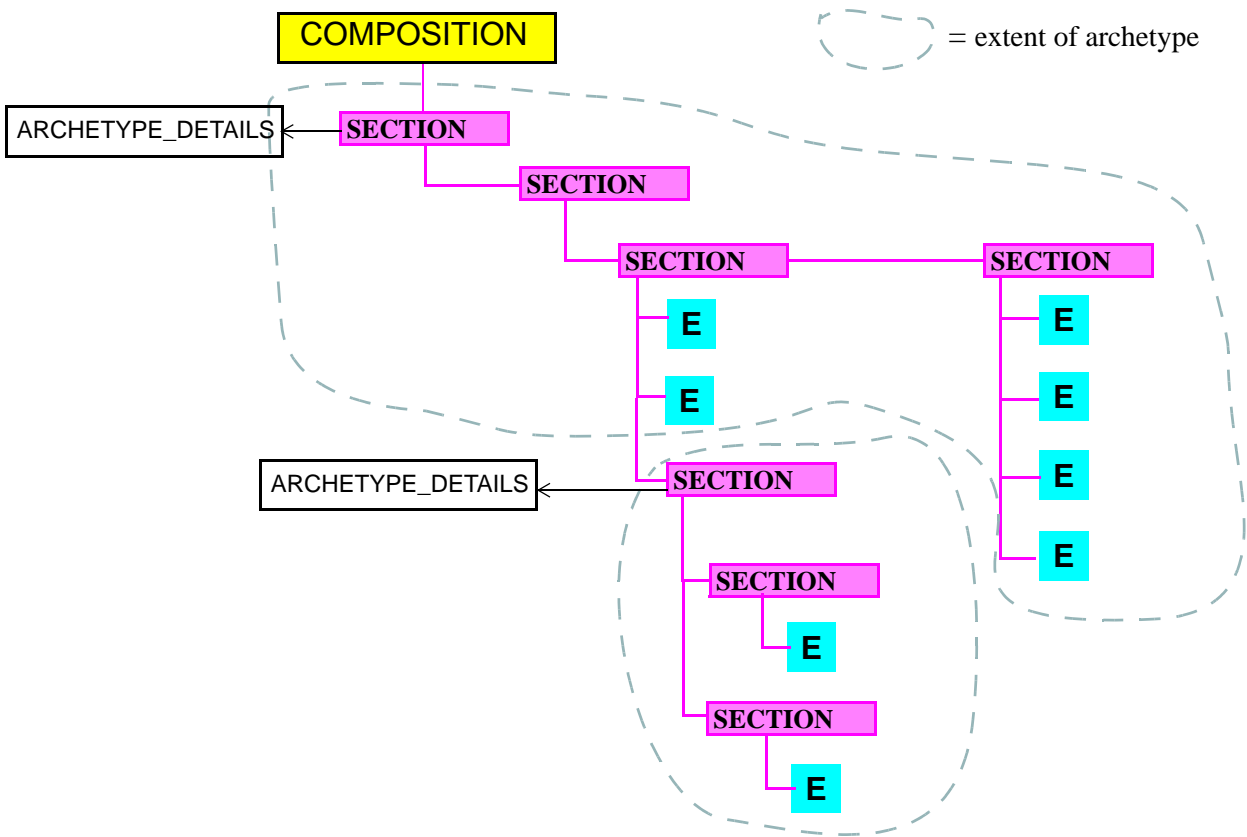

**FIGURE 15** Section View of a General Practice Contact Composition

ther problems. But she doesn’t write down a heading above the level of the problems, even though there must be one from a data structure point of view.

## 7.2 Class Descriptions

### 7.2.1 SECTION Class

CLASS	SECTION
Purpose	Represents a heading in a heading structure, or “section tree”.
Use	Created according to archetyped structures for typical headings such as SOAP, physical examination, but also pathology result heading structures.
MisUse	Should not be used instead of ENTRY hierarchical structures.
CEN	Headed_section
OMG HDTF	COAS::CompositeObservation (COAS does not distinguish between the semantics of Sections and hierarchical structure inside Entries, modelled in openEHR by Cluster).
GEHR	G1_ORGANISER

CLASS	SECTION	
HL7v3	CDA Heading.	
Inherit	CONTENT_ITEM	
Attributes	Signature	Meaning
	<b>items:</b> List<CONTENT_ITEM>	Ordered list of content items under this section, which may include: <ul style="list-style-type: none"> <li>• more SECTIONS</li> <li>• ENTRYs</li> </ul>
Invariants	<i>Items_exists</i> : items /= Void <i>implies not</i> items.is_empty	

## 7.2.2 Section Paths

Section paths are built using the values of the *name* attribute of each SECTION in an section structure, as follows:

```
`[' SECTION.name.value "]/items[" SECTION.name.value "]/" ...
`/items[" SECTION.name.value "]/" ...
```

Examples include:

```
[SOAP headings]/items[diabetes mellitus]/items[Plan]
/items[diabetes mellitus]/items[Plan]
```

## 7.3 Section Instance Structures

### 7.3.1 Problem/SOAP Headings

An example of an section tree representing the problem/SOAP heading structure is shown in FIGURE 16.

### 7.3.2 Care Plans

To Be Continued: this section to be developed

General form:

- therapies & indications
- review
- monitoring
- managers (who) - participants, roles
- goals
- preventative health care (screening, education)
- triggers

To Be Continued:


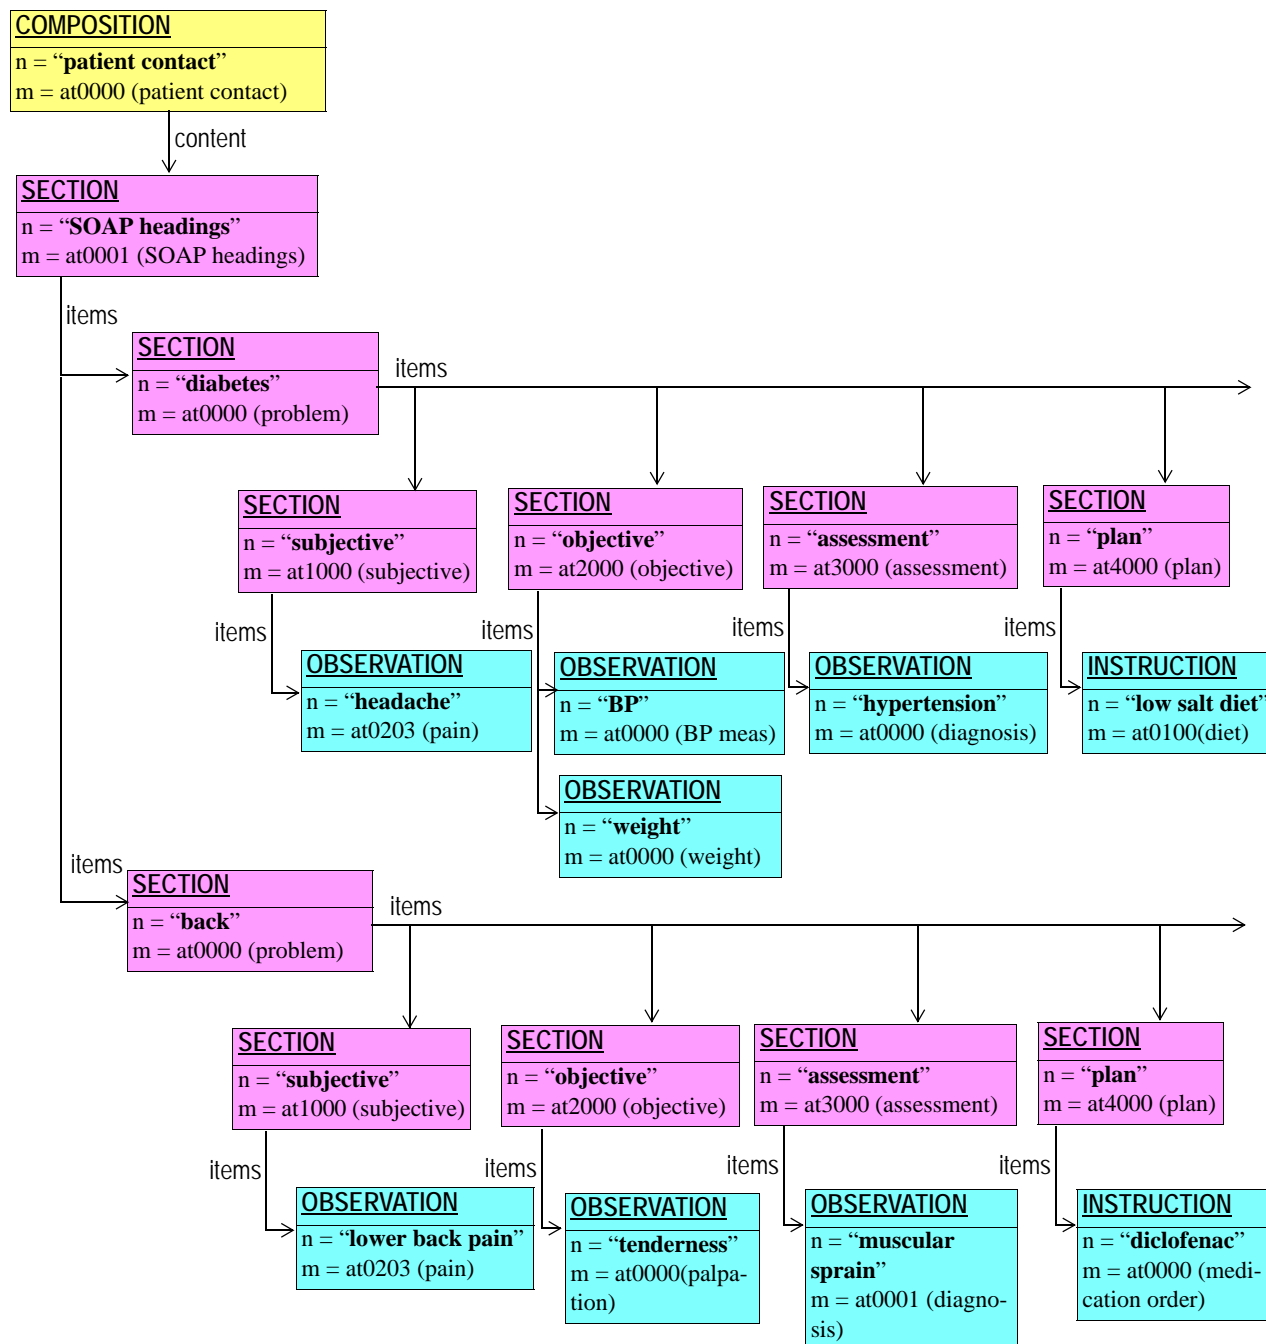


FIGURE 16 "problem/SOAP" Section Structure

## 8 Entry Package

### 8.1 Overview

All information which is created in the *openEHR* health record is expressed as an instance of a class in the Entry package, containing the `ENTRY` class and a number of descendants. An Entry instance is logically a single ‘clinical statement’, but may contain a significant amount of data, e.g. an entire microbiology result, a psychiatric examination, a complex prescription. The Entry classes are the most important in the *openEHR* EHR Information Model, since they define the semantics of all the ‘hard’ information in the record. They are intended to be achetyped, and in fact, archetypes for Entries make up the vast majority of important clinical archetypes defined. The design of Entry package is based both on past experience, and upon a solid theoretical model of clinical recording, described in Beale & Heard [3], which includes a typology of information categories shown in the following figure (the *openEHR* Entry class names are annotated next to categories which are directly modelled).

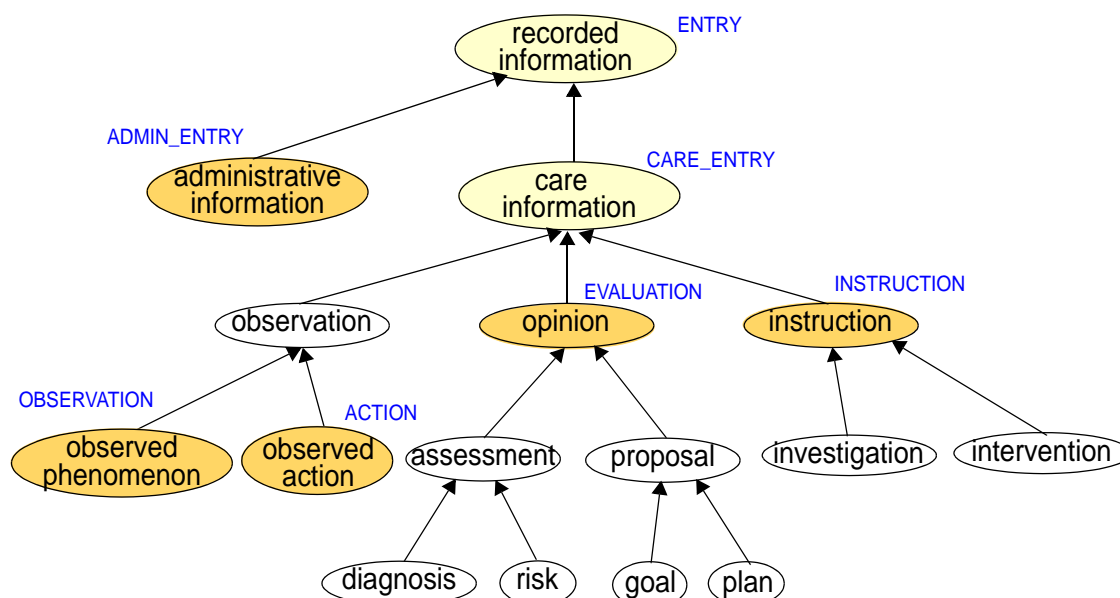

**FIGURE 17** Typology of Recorded Information (adapted from Beale & Heard, 2006)

The key top-level categories in the typology are ‘care information’ and ‘administrative information’. The former encompasses all statements which might be recorded at any point in the clinical care process, and consists of the major subcategories ‘observation’, ‘opinion’ and ‘instruction’, which themselves correspond to the past, present and future in time (ISO TC215 uses the terms ‘retrospective’, ‘current’ and ‘prospective’). The administrative information category covers information which is not generated by the care process, but relates to organising it, such as appointments and admissions.

There are two key justifications for using such a typology as a basis for class design. Firstly, although for all categories in the typology there is a meaning for ‘contextual’ attributes of time, place, identity, reason and so on, each category has a different structure for these attributes. For example time in the Observation category has a linear historical structure, whereas in Instructions it has a branching, potentially cyclic structure. The separation of types allows these contextual attributes to be modelled according to the type. Secondly, the separation of types helps to ensure safe querying of information instances, preventing confusion between the same base concept at different times, such as a hip

replacement that has occurred (an Action), a proposed hip replacement (a Plan) and an order for a hip replacement to occur in 2 months' time (an Instruction).

The Entry model is defined by the `composition.content.entry` package, shown in FIGURE 18.

## 8.2 Entry and its Subtypes

The choice of subtypes of ENTRY is based on the typology shown in FIGURE 17 and its associated model. The names do not coincide exactly however, for a number of reasons. Firstly, the category names in the hierarchy were chosen on a rigorous scientific basis, whereas the class names used here reflect common health computing and clinical usage of these terms (i.e. names which will make sense to software developers in the health arena). Additionally, for categories such as Opinion and Instruction, the subcategories shown in the typology (e.g. Assessment, Goal and Plan) are too variable to safely be concretised in software, and are distinguished at the archetype level; only a single class is used in the formal model. The use of different names and a slightly simplified mapping has not however prevented the faithful implementation of the semantics of the model. The model classes are described in the following subsections.

### 8.2.1 The Entry class

All Entries have a number of attributes in common. Language and encoding attributes indicate how all text data within the Entry are to be interpreted linguistically and at the character set level. Normally, the language will be the same throughout the entire Entry, but in cases where it is not, the optional language attribute of DV\_TEXT can be used to override the value in the enclosing ENTRY (or other enclosing structure, if a DV\_TEXT is being used in some other context). Similarly character encoding can be overridden by the *encoding* attribute within DV\_TEXT.

The other common Entry attributes are as follows:

*subject*: person or other subject of the information contained in the Entry. This is expressed in the form of a RELATED\_PARTY, which describes the kind of relationship, and optionally, identifies the demographic entity when the relationship is not "self".

*provider*: the agent who provided the information. This is usually the patient or the clinician, but may be someone else, or a piece of software or device.

*other\_participations*: other participations which existed for this Entry, e.g. a nurse who administered a drug in an INSTRUCTION; only required in cases where participants other than the subject of the information and the provider of the information need to be recorded.

Note that the term 'provider' as used here should not be confused with the more specific healthcare term used in many english-speaking countries meaning 'health care provider', which is usually understood to be a physician or health care delivery enterprise such as a hospital. In the model here, it simply means 'provider of information' in the context of an Entry.

### 8.2.2 Care\_entry and Admin\_entry

A basic division occurs between clinical and non-clinical information. The CARE\_ENTRY class is an abstract precursor of classes which express information of any clinical activity in the care process around the patient, while ADMIN\_ENTRY is used to capture administrative information. The division may seem ambiguous at a theoretical level, but at a practical level, it is almost always clear. Administrative information has the following characteristics:

- it is created by non-clinical staff, or clinical staff acting in an administrative capacity (e.g. a nurse or doctor who has to fill out an admission form in A&E);



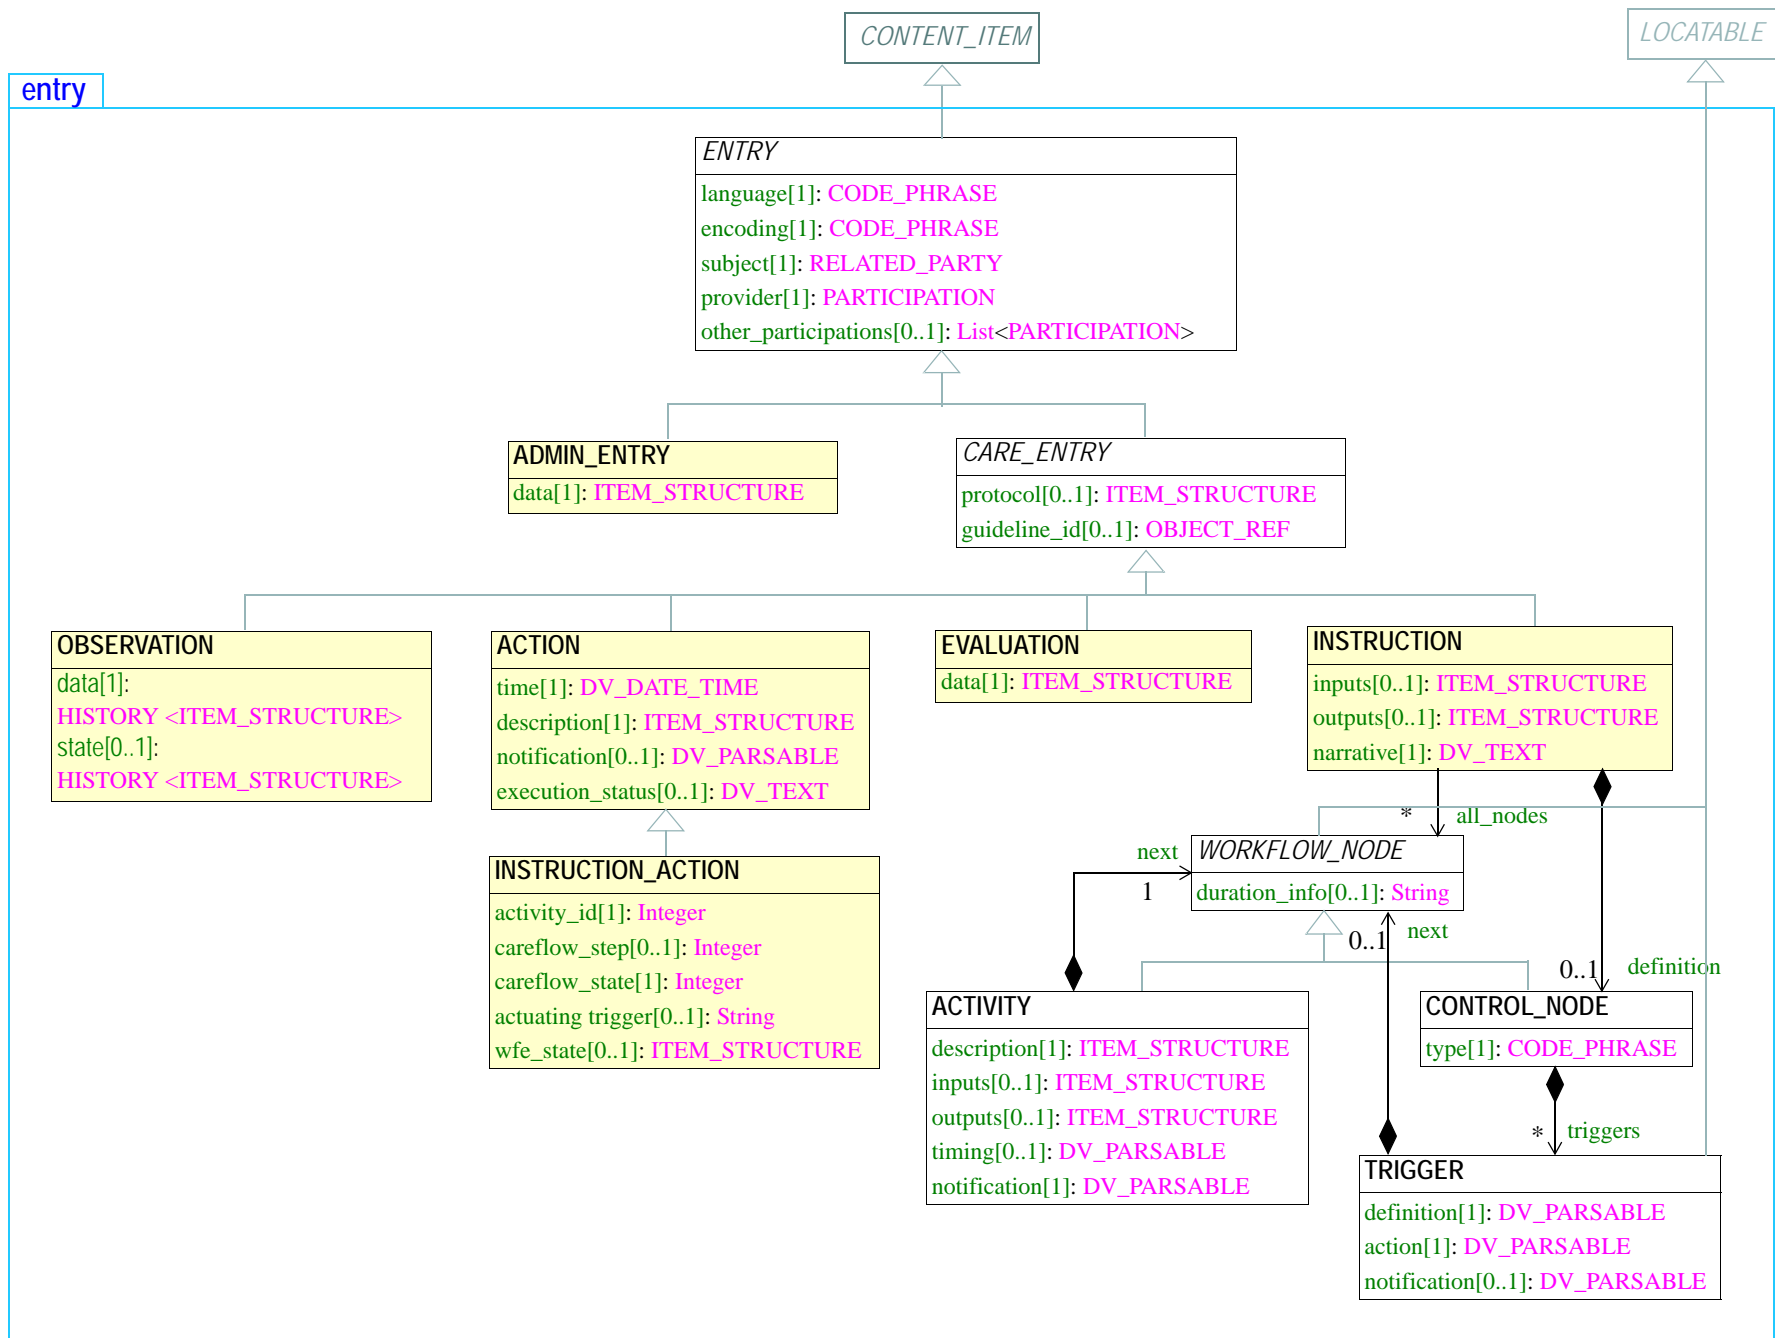


FIGURE 18 rm.composition.content.entry Package

- it expresses details to do with *coordinating* the clinical process, by recording e.g. admission information (enables clinical staff to know who is in the hospital and where they can be found), appointments (ensuring patient and physician get together at an agreed time and place), discharge/dismissal (allowing clinical staff to know that a patient has been sent home healthy, or transferred to another institution), billing and insurance information (where such information is required in the EHR; it may well be in its own system);
- removing administrative information from the EHR would not compromise its clinical integrity, it would simply mean that carers and patients would no longer know when and where they were supposed to meet.

Conversely, every instance of a `CARE_ENTRY` subtype is clinically significant, even if it also carries information which might be of interest to other health management functions billing (e.g. ICD10 coded diagnoses), practice management (e.g. date, time and place in an order for day surgery). The `CARE_ENTRY` type includes two attributes particular to all clinical entries, namely *protocol* and *guideline\_id*.

*TBD\_1: guideline\_id is too specific and should probably be replaced by reasoning: ITEM\_STRUCTURE*

These attributes allow the “how” and “why” aspects of any clinical recording to be expressed. Protocol is often recorded for Observations (e.g. staining method in microscopy) and Instructions (e.g.

It is worth noting that another high-level division exists, namely between EHR and demographic information. The general approach of *openEHR* is to enable the complete separation of demographic (particularly patient-identification information) from health records, both in the interests of privacy (in some cases required by national legislation) and separated data management. The Demographic IM therefore defines demographic information. However, there is nothing to prevent certain demographic information occurring in the EHR, and in some cases this is desirable. The two main cases for this are:

- clinically-relevant patient information, such as age, sex, height, weight, eye-colour, ethnicity or ‘race’, occupation;
- identifiers and/or names of health care provider individuals and organisations may be stored directly in the EHR, regardless of whether there is also more detailed information about such entities in the demographic system.

The model of all information intended for a separate *openEHR* demographic service (itself usually a front-end to an existing hospital master patient index or similar) is defined in the *openEHR* Demographic Information Model.

### 8.2.3 Observation

Instances of the `OBSERVATION` class record the observation of any phenomenon or state of interest to do with the patient, including pathology results, blood pressure readings, the family history and social circumstances as told by the patient to the doctor, and self-entered answers to a psychological assessment questionnaire. Observations are distinguished from Actions by excluding interventions; they record only information relating to the situation of the patient, not what is done to her.

The main data of Observation is expressed in the *data* and *state* attributes, and the inherited *protocol* attribute. This trio of attributes is of key importance in recording observations, and may be understood as follows.

*data*: the actual datum being recorded; expressed in the form of a History of Events, each of which can be a complex data structure such as a List, Table, Single (value), or Tree, in its own right. Examples include blood pressure, heartrate, ECG traces.

*state*: any particular information about the state of entity (usually the patient) necessary to correctly interpret the data, which is not already known in the health record (i.e. facts such as the patient being female, pregnant, or currently undergoing chemotherapy). For example, exertion level (resting, post-marathon...), position (lying, standing), post- glucose challenge, and so on. The form of the *state* attribute is the same as that of the *data* attribute: a History of Events of Item\_structures.

*protocol*: details of how the observation was carried out, which might include a particular clinical protocol (e.g. Bruce protocol for treadmill exercise ECG) and/or information about instruments other observational methods.

The semantics of Observation data are described in the following subsections.

### 8.2.3.1 Timing in Observations

Many health information models express observation time as one or more attributes with names like ‘observation\_time’, ‘activity\_time’ and so on. The *openEHR* model departs from this by modelling historical time inside a History/Event structure defined in the `data_structures.history` package<sup>1</sup>. In short, this package defines the `HISTORY` class with an *origin* attribute, and a series of `EVENT` instances each containing a *time* attribute. Instantaneous and interval events are distinguished using the `EVENT` attribute *is\_instantaneous*; interval events have the *width* attribute is set to the duration of the interval.

### 8.2.3.2 Valid Contents of a History

The intention of this model is to represent single sample and time-based data for which *measurement protocol is invariant*. It is not intended for measurements in “coarse” time taken by different people, different instruments, or with any other difference in data-gathering technique. In these cases, separate, usually single-sample histories are used, usually occurring in distinct container objects (e.g. Compositions, in the EHR). Accordingly, in the general practice setting, the use of `HISTORY` will correspond to measurement series which occur *during* the clinical session (i.e. during a patient contact). In a hospital setting, nurses’ observations might occur in 4-hourly intervals, and there is no well-defined clinical session - simply a series of `ENTRIES` during the time of the episode. Two approaches are possible here.

- If each observation is to be committed to the EHR as soon as it is made, the result should be distinct `COMPOSITIONS` in time, each with its *event\_context* corresponding to the period of the nurse’s presence. Each Composition will contain one or more Observations, each containing in their data a History of one sample of the measured vital sign.
- If observations are not committed to the EHR immediately, but are stored elsewhere and only committed (say) at the end of each day, then the result will be a single Composition whose *event\_context* corresponds to the data gathering period, and which contains Observations whose data are multi-event Histories representing the multiple measurements made over the day.

Whether time-based data remain outside the record until a series of desired length is gathered, or entered as it occurs is up to the design of applications and systems; the approach taken should be based on the desired availability of the data in the system in question. If for example, it must be visi-

1. Defined in the Data Structures IM; see [http://svn.openehr.org/specification/TRUNK/publishing/architecture/rm/data\\_structures\\_im.pdf](http://svn.openehr.org/specification/TRUNK/publishing/architecture/rm/data_structures_im.pdf).

ble in the EHR as soon as the appropriate Compositions are written, then it should be represented as Histories in each relevant Composition; if it need only be available at some much later point in time (e.g. because it is known that no-one but the treating clinician is interested in it), then it can be stored in another system until sufficient items have been gathered for entry into the EHR.

### 8.2.3.3 Clinical Semantics of Event Time

In most cases, the times recorded in a History (*HISTORY.origin* and *EVENT.time, width*) can be thought of as “the times when the observed phenomena were true”. For example, if a pulse of 88bpm is recorded for 12/feb/2005 12:44:00, this is the time at which the heartrate (for which pulse is a surrogate) existed. In such cases, the *sample* time, and the *measuring* time are one and the same.

However in cases where the time of sampling is different from that of measurement, the semantics are more subtle. There are two cases. The first is where a sample is taken (e.g. a tissue sample in a needle biopsy), and is tested later on, but from the point of view of the test, the time delay makes no difference. This might be because the sample was immediately preserved (e.g. freezing, placed in a sterile anaerobic transport container), or because even if it decays in some way, it makes no difference to the test (e.g. bacteria may die, but this makes no difference to a PCT analysis, as long as the biological matter is not physically destroyed).

The second situation is when the sample does decay in some way, and the delay is relevant. Most such cases are in pathology, where presence of live biological organisms (e.g. anaerobic bacteria) is being measured. The sample time (or ‘collection’ time) must be recorded. Depending on when the test is done, the results may be interpreted differently.

The key question is: what is the meaning of the *HISTORY.origin* and *EVENT.time* attributes in these situations? It is tempting to say that their values are (as in other cases) just the times of the actual act of observation, e.g. microscopy, chromatography etc. However, there are two problems with this. Firstly, and most importantly, all physical samples must be understood as being *indirect surrogates for some aspect of the patient state at the time of sampling*, which cannot be observed by direct, instantaneous means in the way a pulse can be taken. This means that no matter when the laboratory work is done, the time to which the result applies is the sample time. It is up to the laboratory to take into account time delays and effects of decay of samples in order to provide a test result which correctly indicates the state of the patient at the time of sampling. The common sense of this is clear when one considers the extreme case where the patient is in a coma or dead (possibly for reasons completely unrelated to the problem being tested for) by the time laboratory testing actually occurs; however, the test result indicates the situation at the point in time when the sample was taken, i.e. when the patient was alive. The second reason is that some kinds of testing are themselves lengthy. For example fungal specimens require 4-6 weeks to confirm a negative result; checks will be made on a daily or weekly basis to find positive growth. However, the result data reported by the laboratory (and therefore the structure of the Observation) is not related to the timing of the laboratory testing; it is reported as being the result for the time of collection of the specimen from the patient.

The meaning therefore of the *HISTORY.origin* and *EVENT.time* attributes in *openEHR* is always the time of sampling. Where delays between sample and measurement times exist and are significant, they are noted in the protocol section of the Observation; such times are modelled in the appropriate archetypes, and taken into account in results.

(It should be noted that if *openEHR* were deployed in the pathology laboratory itself, it would be quite reasonable to use Observation structures to directly record lengthy testing processes and intermediate result states. In this case, the subject of the Observation would be the sample, not the patient. Such data would however have to be processed into a clinical Observation result as described here to be compatible with the target EHR).

### 8.2.3.4 Two ways of Recording State

State information is optional, and is not needed if the data are meaningful on their own. If it is recorded, it can either be as a History of its own (i.e. using the `OBSERVATION.state` attribute described above), or else as *state* values within the `EVENT` instances in the `OBSERVATION.data` History. Both methods are useful in different circumstances. A separate state history is more likely to be used in a correlation study such as a sports medicine study on heartrate with respect to specific types of exercise. In this method, the state information is a History of Events whose times and widths need not match those of the History in the *data* attribute. The state data under this approach generally express the condition of the subject in *absolute* terms, i.e. they are standalone statements about the subject's state at certain points in time, such as "walking on treadmill 10km/h, 10° incline".

The other method will be used in most general medicine, e.g. for recording fasting and post glucose challenge states of a patient undergoing a glucose tolerance test. (See the Data Structures Information Model for more details). State values stored within the *data* History represent the situation in the subject at the time of the Event within the History and usually in relation to it, for example "post 8 hour fast". Recording the latter example in an independent state History would require an Event of 8 hours' duration called 'fast'. The latter would be technically still correct, but would be very unnatural to most clinicians. FIGURE 19 illustrates the two methods of recording state.

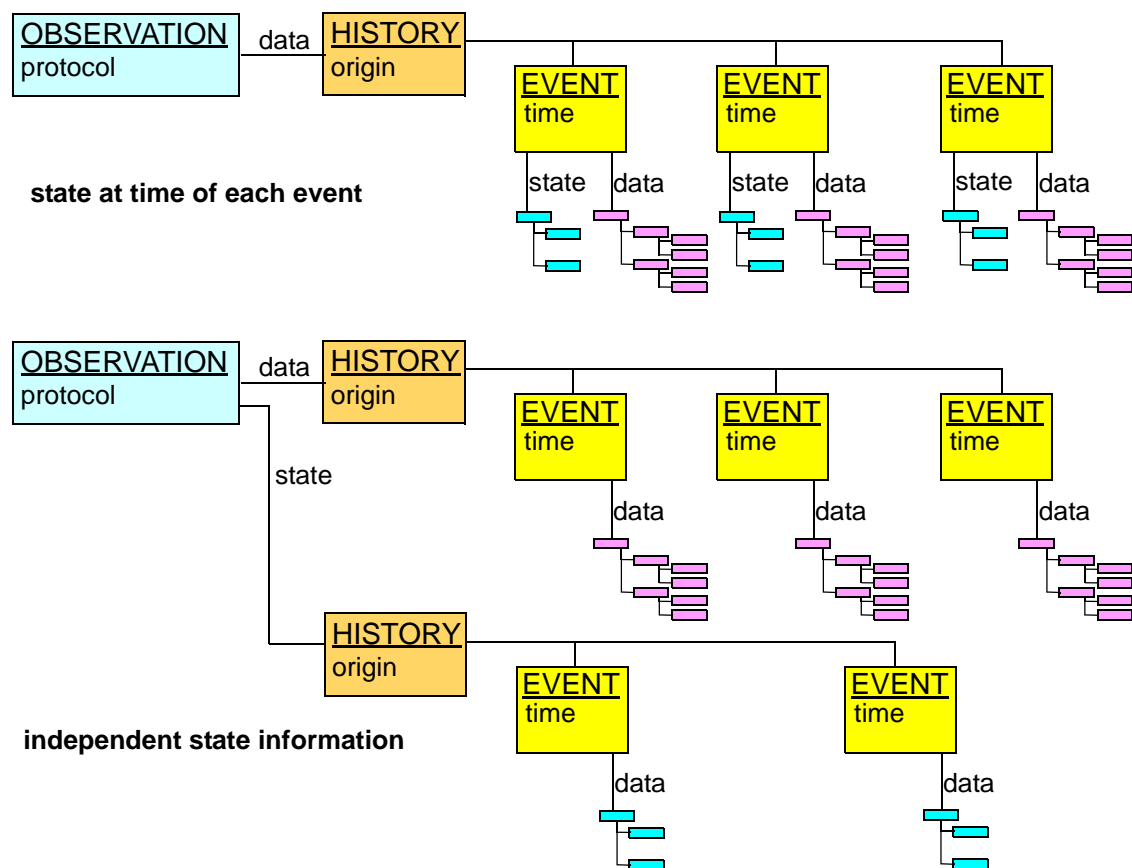


FIGURE 19 Alternative ways of recording state

## 8.2.4 Evaluation

According to the typology described in [3], the Opinion category covers a number of concrete concepts, as follows.

*problem/diagnosis*: the assignment of a known diagnosis or problem label to a set of observed signs and symptoms in the patient, for the purpose of determining and managing treatment. The physician will usually include a date of initial onset, date clinically recognised, date of last occurrence, date of resolution of last occurrence and possibly other timing information.

*risk assessment*: an evaluation of the likelihood and timing of a certain event occurring or condition appearing.

*goal*: statement of a target, and a time at which it should be reached.

*plan*: a description in general terms of a care plan for the patient, based on diagnosis; includes various times or time-periods for activities, such as monitoring, taking of medications, and review.

The approach taken to modelling these concepts in *openEHR* is heavily based upon the development of archetypes for assessments such as “diagnosis” (various kinds), “goal”, “adverse reactions”, “alert”, “exclusion”, “clinical synopsis”, “risk based on family history” and so on. Experience has shown that the Opinion category is too variable for safely modelling its sub-categories directly in the reference model. Instead, a single class `EVALUATION` is used for all instances of the Opinion category. (The name Evaluation has been present in *openEHR* for some years, and is retained for reasons of continuity).

The design of the `EVALUATION` class is very simple. In addition to the attributes inherited from `ENTRY` and `CARE_ENTRY`, it has only one attribute, *data*: `ITEM_STRUCTURE`. This structure is intended to be archetyped so as to model all the details of any particular clinical information in the Opinion category. No timing attributes are included, since there is no time associated with creation or capturing of Evaluation information as such, only times included in the information. The only times of generic significance are (potentially) the time of a patient consultation during which the Evaluation was created (recorded in `COMPOSITION.event_context.start_time` and `end_time`) and the time of commitment to the EHR system (recorded in `VERSION.audit` attribute).

The general meaning of the inherited attributes is as for all Entries. In Evaluations, the *provider* is almost always the physician, while the *protocol* may be used to indicate how a particular assessment was made. The *other\_participations* attribute is not as likely to be used for Evaluations representing diagnoses as in Observation, since a diagnosis is usually the result of thinking on the part of the physician; an exception to this would be if an expert system were used. However, Plans for complex patients may well be constructed by multiple physicians.

## 8.2.5 Instruction

Instructions in *openEHR* specify actions to be performed in the future. They differ from information in the Proposal sub-category of Opinion in the typology (i.e. instances of Evaluation in the class model) in that they are specified in complete detail, and can be enacted without further clinical decision-making, e.g by the patient or a nurse. For example, an Evaluation may say that “oral cortico-steroids are indicated at a peak flow of 200 l/m”. A corresponding Instruction would indicate the actual drug, route, dose, frequency, and so on.

*TBD\_2:* Instructions may also describe non-clinical intentions such as consent???

In the typology, Instructions are further categorised as Investigation and Intervention. However, as for Evaluation, only a single key class, `INSTRUCTION`, is used to model all types of the Instruction category, with archetypes defining the details of the Instruction.

Instruction is the most complex of the Entry subtypes, mainly due to the complexities of expressing actions in future time, and as a consequence is modelled using a number of classes.

### 8.2.5.1 Requirements

The Instruction package is designed to satisfy the following requirements:

- All kinds of interventions should be representable using the same model;
- Instructions should always have a narrative expression, with an optional machine-processible expression in cases where automation will be used;
- The freedom must exist to model any particular intervention in as much or little detail as required by local circumstances;
- Clinicians must be able to specify workflows in their own terms, i.e. using terms like “prescribe”, “dispense”, “start administering”, etc;
- Instructions representing diverse clinical workflows must be queryable in a standard way, so that it can be ascertained what Instructions are ‘active’, ‘completed’ and so on for a patient;
- It should be possible to provide a coherent view of phases of an Instruction which have been executed in different healthcare provider environments;
- It must be possible to record *ad hoc* actions in the record, i.e. acts for which no Instruction was defined (at least in the EHR in question);
- Instructions must be archetypable in terms comprehensible to clinicians;
- Instructions must integrate with notification / alert services;
- Instruction information must be processible by workflow engines.

### 8.2.5.2 Design Basis

The design approach is based on three principles. The first is that the specification of an Instruction is distinguished from the information representing actions performed as a result. This makes the model and resulting information instances clear to software designers and data users. It also enables workflow engines to determine which parts of the specification have been executed, and allows for Actions actually performed to differ from those specified.

The second principle is the use of a ‘standard state machine’ defining possible states and transitions for any Instruction, no matter whether it be a simple self-administered prescription or a complex chemotherapy course. The use of standardised states means that the execution state of any given Instruction can be characterised in exactly the same way (e.g. ‘planned’, ‘active’, etc), and that it is therefore possible to query the EHR and find out all interventions of any kind in a particular state, e.g. ‘expired’ or ‘suspended’.

The third principle is to enable the model to be mapped to particular clinical two kinds of workflows, or ‘careflows’. Clinical careflows can be modelled as workflows, using steps which have names sensible to healthcare professionals, such as “prescribe”, “dispense” and “administer”.

The result is a model whose semantics are that of a workflow specification, with additional features to capture the execution state, current careflow step and other details.

The following sections describe the model in further detail.

### 8.2.5.3 The Standard State Machine


When a careflow process is unfolding in a clinical context, EHR users want to know things such as the following:

- what is the current step in the process for the patient?



- for a given patient, what processes are planned, active, suspended, finished and so on.
- for the populations of patients, what is the state of a particular workflow, such as a recall?

The approach chosen here to support such functionality is to define a ‘standard state machine’ whose state transitions can be mapped to the steps of a specific care process, [such as the one shown in FIGURE 2](#), enabling it to be used as a descriptive device for recording the state of any business process. The state machine developed for use with EHR Instructions is illustrated in FIGURE 20. This state machine has been arrived at by long term experience<sup>1</sup> with clinical workflows and act management systems.

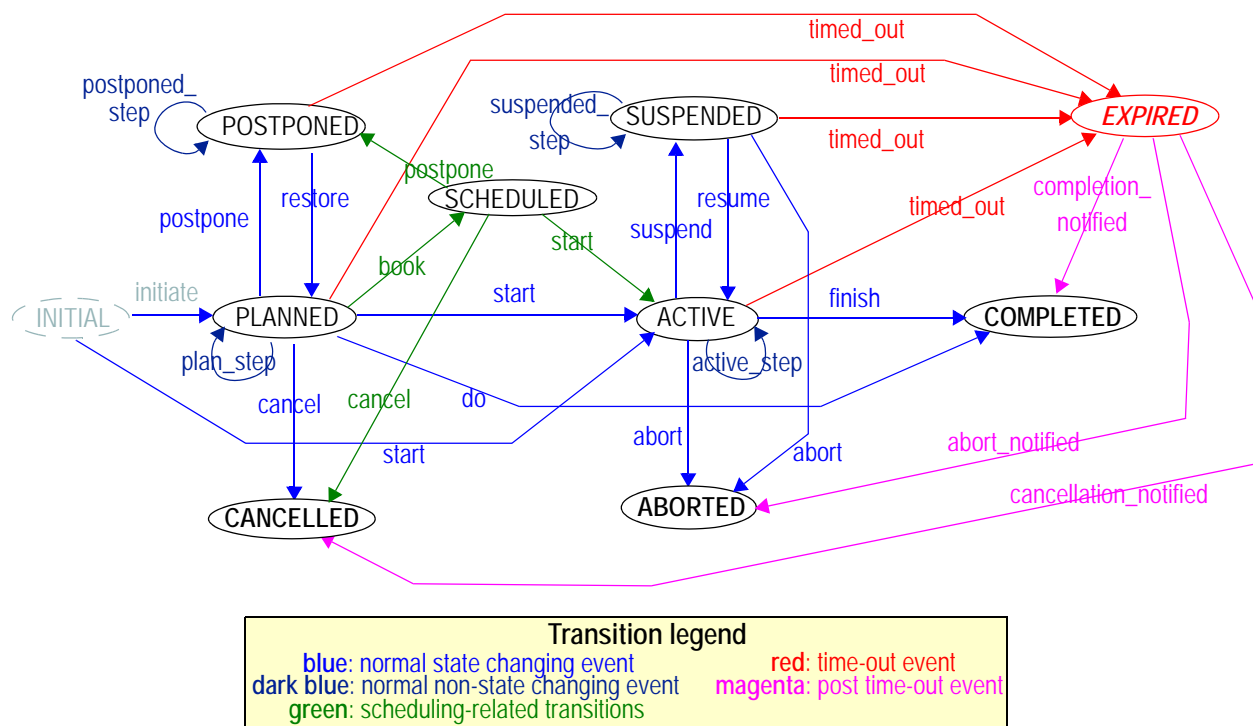

**FIGURE 20** openEHR Standard State Machine for Instructions

The states are as follows:

**INITIAL:** initial state, prior to planning activity (default starting state for computable representation of state machine)

**PLANNED:** the action has been described, but not as yet taken place

**POSTPONED:** the action has not taken place and will not without specific conditions being met. Specifically, events and conditions which would normally ‘activate’ the instruction will be ignored, until it a restore event occurs.

**SCHEDULED:** the action will take place, and has been booked in a scheduling system.

**CANCELLED:** the action was defined, but was cancelled before anything happened; it has not and will not take place.

**ACTIVE:** the action is taking place according to its definition. The entire course of medication or therapy corresponds to this state.

**SUSPENDED:** the action has begun, but will not occur again until specific conditions are met which allow it to resume.

1. The SCHEDULED state was taken from Van de Velde & Degoulet , Fig 5.5 [12]



**ABORTED:** the action began but was terminated before normal completion and will not occur again.

**COMPLETED:** the action began and was completed normally.

**EXPIRED:** the time during which the action could have been relevant has expired; the action may have completed, been cancelled, or never occurred.

States **CANCELLED**, **ABORTED** and **COMPLETED** are all terminal states. The **EXPIRED** state is a pseudo-terminal state, from which transitions are allowed to any of the true terminal states, due to information being received after the fact (such as a patient reporting that they did indeed finish a course of antibiotics). However it is likely in the EHR that Instructions for many simple medications will finish in the **EXPIRED** state and remain there.

The transitions are self-explanatory for the most part, however a few deserve comment. The *start* and *finish* events correspond to situations when the administration is not instantaneous, as is the situation with most medications. The *do* event is equivalent to the *finish* event occurring immediately after the *start* event, corresponding to an instantaneous administration, completion of which puts the whole Instruction in the completed state. A single shot vaccination or patient taking a single tablet are typical examples. The states **PLANNED**, **POSTPONED**, **ACTIVE**, **SUSPENDED**, each have a `xxx_step` transition which return the state machine to the same state. Workflow steps which cause no transition are mapped to these events and thus leave the Instruction in the same state. An example is a medication review, which will leave the medication in the **ACTIVE** state.

#### 8.2.5.4 Clinical Careflow Definition and Mapping

To Be Continued:

#### 8.2.5.5 Clinical Workflow Definition

To Be Continued:

### 8.2.6 Action and Instruction\_action

The second subcategory of Observation in the typology is Observed Action, here modelled by the **ACTION** class. Instances of **ACTION** are used to record interventions performed to or for the patient, and may be as fine-grained as required by the users of the EHR.

To Be Continued:

If a recorded action is the result of a care plan (an Evaluation) and subsequent Instruction, it will be instantiated as an **INSTRUCTION\_ACTION**. The further attributes added by this class connect the instance to the relevant part of its causing **INSTRUCTION**, and allow automated workflow processing to take place.

To Be Continued:      example: injecting morphine as part of intervention is an Action; injection of Heroin as act of patient is recorded in terms of observed signs and symptoms due to injection.

## 8.3 Class Descriptions

### 8.3.1 ENTRY Class

CLASS	<i>ENTRY (abstract)</i>	
<b>Purpose</b>	<p>The abstract parent of all ENTRY subtypes. An ENTRY is the root of a logical item of “hard” clinical information created in the “clinical statement” context, within a clinical session. There can be numerous such contexts in a clinical session. Observations and other Entry types only ever document information captured/created in the clinical session documented by the enclosing Composition. (The effect of this is that pathology results etc, if represented in the EHR, must be expressed as Entries inside Compositions representing the session in the pathology lab, not within Compositions created during a consultation during which a clinician might read the pathology result and make some decision based on it.)</p> <p>An ENTRY is also the minimal unit of information any query should return, since a whole ENTRY (including subparts) records spatial structure, timing information, and contextual information, including meaning-changing modifiers as well as the subject and generator of the information.</p>	
<b>CEN</b>	Cluster OCC	
<b>OMG HDTF</b>	COAS::HealthRecordEntry and COAS::ObservationQualifier, a generic class which is used to represent context attributes which are concretely modelled here.	
<b>Synapses</b>	The Item class is the closest match for Entry as described here.	
<b>GEHR</b>	*_CONTENT	
<b>HL7v3</b>	Act	
<b>Inherit</b>	CONTENT_ITEM	
Attributes	Signature	Meaning
	<b>language:</b> CODE_PHRASE	Mandatory indicator of the localised language in which this Entry is written. Coded from <i>openEHR</i> Code Set “languages”.
	<b>encoding:</b> CODE_PHRASE	Name of character set in which text values in this Entry are encoded. Coded from <i>openEHR</i> Code Set “character sets”.

CLASS	ENTRY ( <i>abstract</i> )	
	<b>subject:</b> RELATED_PARTY	Id of human subject of this ENTRY; usually the patient, but may be: <ul style="list-style-type: none"> <li>• organ donor</li> <li>• foetus</li> <li>• a family member</li> <li>• another clinically relevant person</li> </ul> Relationship of subject of this ENTRY to the subject of the record. May be coded. If it is the patient, coded as “self”.
	<b>provider:</b> PARTICIPATION	Id of provider of statement in this ENTRY, which might be: <ul style="list-style-type: none"> <li>• the patient</li> <li>• a patient agent, e.g. parent, guardian</li> <li>• the clinician</li> <li>• a device or software</li> </ul>
	<b>other_participations:</b> List <PARTICIPATION>	Other participations at ENTRY level - archetypable.
<b>Invariants</b>	<i>Language_valid:</i> language /= Void <i>and then</i> code_set(“languages”).has(language) <i>Encoding_valid:</i> encoding /= Void <i>and then</i> code_set(“character sets”).has(encoding) <i>Subject_exists:</i> subject /= Void <i>Provider_valid:</i> provider /= Void <i>Other_participations_valid:</i> other_participations /= Void <i>implies not</i> other_participations.is_empty <i>Archetype_root_point:</i> is_archetype_root	

### 8.3.1.1 ENTRY Paths

Entry paths are based on the value of *name*, which will usually be the *archetype\_node\_id* attribute, and may have a uniqueness modifier, if there is more than one entry based on the same archetype, under the same SECTION, thus:

```
[' meaning '(' uniqueness_modifier ')' ' ']
```

Where “meaning” stands for (*ENTRY.archetype\_node\_id*). Examples include:

```
[ECG results]
[blood pressure (before exercise)]
[blood pressure (after exercise)]
```

The paths to access the structures connected by the *data*, *state* and *protocol* attributes are built in the usual way, using the names of these attributes followed by the relative paths to the node of interest, i.e.:

```
[' meaning '(' uniqueness_modifier ')' ' ' '/' attribute_name '/'
subpart_path
```

Examples include:

```
[ECG results]/data[history]/items[event_16]/item[ECG
result]/items[lead 3]
[blood pressure measurement (after exercise)]/data[history]/items[1
min]/item[blood pressure]/items[systolic pressure]
[blood pressure measurement (after exercise)]/protocol[BP
protocol]/items[position]
```

## Semantics of Paths

One of the concerns of EHR data is the role and handling of ‘meaning-modifying’ terms, e.g. “risk of”, “family history of” and so on. Previous efforts in this area have concentrated on finding a special place or kind of marker in the information model to indicate the presence of a modifier, mainly to guarantee that query engines do not falsely match things like “family history of coronary disease” when searching for “coronary disease” as a current problem of the subject of the record.

However it can easily be shown that the problem of meaning modification is far larger than just the prepending of one term to another. Consider the following examples:

- a blood sugar level after a 75gm oral loading vs a fasting blood sugar
- the phrase “fear of” associated with the phrase “lung cancer” vs the phrase “cause of death” associated with the same phrase.
- “total hip replacement” in the context of a “planned procedure”
- “meningitis” in the context of a “differential diagnosis”

Clearly the modification of the meaning cannot be modelled in a hard way in the information model, since meaning-modifying terms might appear anywhere in a semantic structure. Consequently, there is no special attribute or place for modifying terms in the spatial classes or elsewhere in the information model. The question remains of how querying will function properly: how will false positive matches for terms with meaning modifiers be avoided? The key to ensuring safe querying is to always use *whole paths*, not partial ones, i.e. complete paths always starting from the root of a spatial structure. It is apparent that if full paths e.g. [differential diagnosis]/items[meningitis] is used compared to [current problems]/items[meningitis] there will be no ambiguity in querying. Conversely, errors will occur if paths not commencing at the root are used. Paths in spatial and temporal structures used inside Entries are described in the Data Structures Information Model.

### 8.3.2 ADMIN\_ENTRY Class

CLASS	ADMIN_ENTRY	
Purpose	Entry subtype for administrative information, i.e. information about setting up the clinical process, but not itself clinically relevant.	
Use	Typically for administrative details of admission, episode, ward location, discharge, appointment (if not stored in a practice management or appointments system).	
Misuse	Not for any clinically significant information.	
Inherit	ENTRY	
Attributes	Signature	Meaning
	<b>data:</b> ITEM_STRUCTURE	The data of the Entry; modelled in archetypes.

CLASS	ADMIN_ENTRY
Invariants	<i>Data_valid</i> : data /= Void

### 8.3.3 CARE\_ENTRY Class

CLASS	CARE_ENTRY ( <i>abstract</i> )	
Purpose	The abstract parent of all clinical ENTRY subtypes. A CARE_ENTRY defines protocol and guideline attributes for all clinical Entry subtypes.	
Inherit	ENTRY	
Attributes	Signature	Meaning
	<b>protocol</b> : ITEM_STRUCTURE	Description of <i>how</i> and/or <i>why</i> the information in this entry was arrived at. For OBSERVATIONS, this is a description of the method or instrument used. For EVALUATIONS, how the evaluation was arrived at. For INSTRUCTIONS, how to execute the instruction. This may take the form of references to guidelines, including manually followed and executable; knowledge references such as a paper in Medline; clinical reasons within a largercare process.
	<b>guideline_id</b> : OBJECT_REF	Optional external identifier of guideline creating this action if relevant
Invariants		

### 8.3.4 OBSERVATION Class

CLASS	OBSERVATION
Purpose	Entry subtype for all clinical data in the past or present, i.e. which (by the time it is recorded) has already occurred. OBSERVATION data is expressed using the class HISTORY<T>, which guarantees that it is situated in time.
Use	OBSERVATION is used for all notionally objective (i.e. measured in some way) observations of phenomena as well as all statements or opinions (i.e. subjective data) about things in the past.
MisUse	Not used for future statements of any kind, including instructions, intentions, plans etc.
CEN	Cluster
GEHR	G1_OBSERVATION_CONTENT, G1_SUBJECTIVE_CONTENT

CLASS	OBSERVATION	
HL7v3	Observation	
Inherit	CARE_ENTRY	
Attributes	Signature	Meaning
	<b>data:</b> HISTORY <ITEM_STRUCTURE>	The data of this observation, in the form of a history of values which may be of any complexity.
	<b>state:</b> HISTORY <ITEM_STRUCTURE>	The state of subject of this observation during the observation process, in the form of a history of values which may be of any complexity. Optional.
Invariants	<i>Data_exists</i> : data /= Void	

### 8.3.4.1 OBSERVATION Instance Structures

#### Periodic Series

FIGURE 21 illustrates three events over 35 seconds, with the first event 15 seconds after the origin.


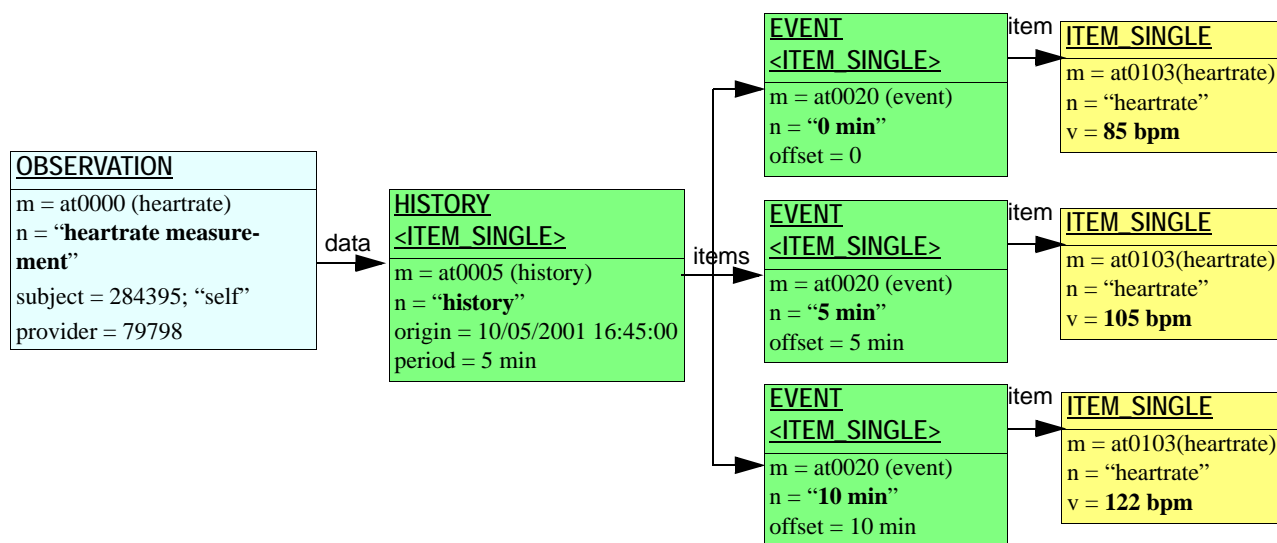


FIGURE 21 Periodic series Instance Structure

**Blood Pressure with Protocol**

FIGURE 22 illustrates a blood pressure observation with protocol.

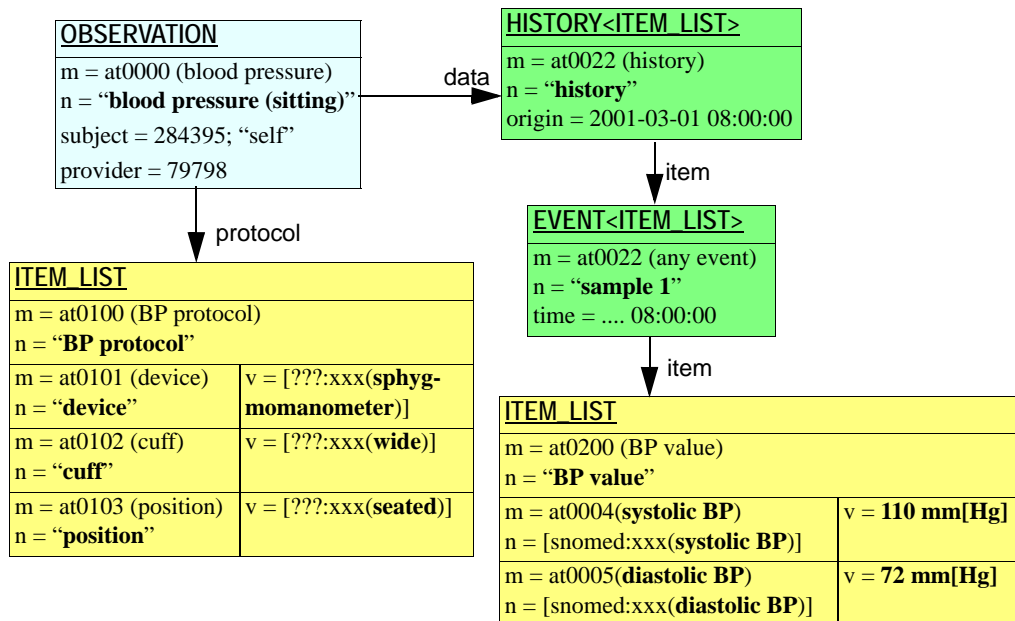

**FIGURE 22** Blood Pressure Measurement Observation

**Glucose Tolerance Test**

An oral glucose tolerance test takes the following form, although the number and timing of the blood sugar levels may be slightly different in practice:

- challenge: no calories fasting from 12pm to 8am
- datum: BSL - 8am
- challenge: 75 g glucose orally - 8:01 am
- datum: BSL - 9 am
- datum: BSL - 10 am

The OGTT is treated as a single clinical concept, and thus requires only one archetype. As with any other clinical concept, there is undoubtedly more than one way to represent an OGTT. The model provides one very obvious one however, in which the two challenges, and the set of three blood sugar levels are each represented by a **HISTORY** under an **ENTRY**, as illustrated in FIGURE 23.

**Clinical Observation Set**

The observation periodically made by a nurse may occur every 15 mins up to once/twice day in hospital, and might be weekly in a nursing home. The following four data items are recorded:

- pulse
- BP
- temperature
- respiratory rate

**To Be Continued:** is this an event history? depends when it is entered into the record (might be recorded in some other system, and summarised into the EHR.

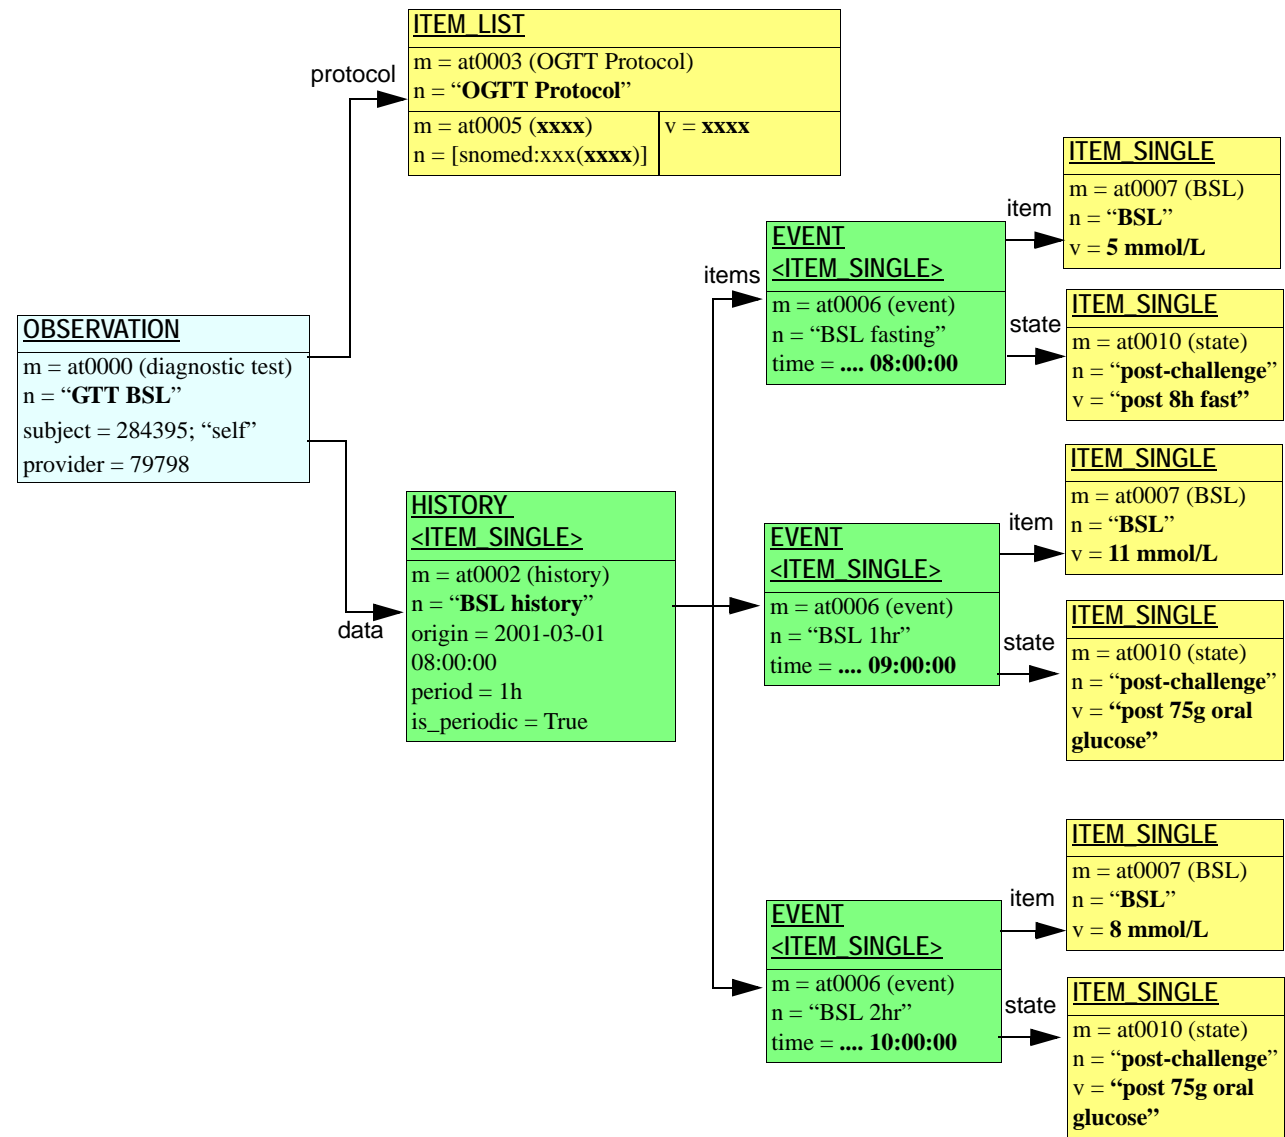


FIGURE 23 OGTT Instance Structure

8.3.4.2 Apgar

To Be Continued:

8.3.5 EVALUATION Class

CLASS	EVALUATION
Purpose	Entry type for evaluation statements.
Use	Used for all kinds of statements which evaluate other information, such as interpretations of observations, diagnoses, differential diagnoses, hypotheses, risk assessments, goals and plans.
MisUse	Should not be used for actionable statements such as medication orders - these are represented with the INSTRUCTION type.



CLASS	EVALUATION	
CEN	Cluster	
GEHR	G1_SUBJECTIVE_CONTENT	
HL7v3	????	
Inherit	CARE_ENTRY	
Attributes	Signature	Meaning
	<b>data:</b> ITEM_STRUCTURE	The data of this evaluation, in the form of a spatial data structure.
Invariants	<i>Data_valid</i> : data /= Void	

### 8.3.5.1 EVALUATION Instance Structures

#### Differential Diagnosis

To Be Continued:

#### Plan

Plans are typically created for a patient based on published plans, and have a structure which usually includes the elements:

- therapies
- monitoring
- review
- prevention
- education

Each of these might be represented as EVALUATION and/or INSTRUCTION instances, depending on whether they are intended to be general statements of intention to be interpreted at a later time by a clinician, or actual executable statements, such as medication orders.

FIGURE 24 illustrates a partial asthma management plan in which monitoring (peak flow) with dependent actions (review and admission to ER) and therapy (bronchodilator) are shown. In a complete plan, symptom monitoring and other medications might be shown. The parts of the plan are

linked to the root EVALUATION node via the *links*: Set<LINK> attribute inherited from the LOCATABLE class.

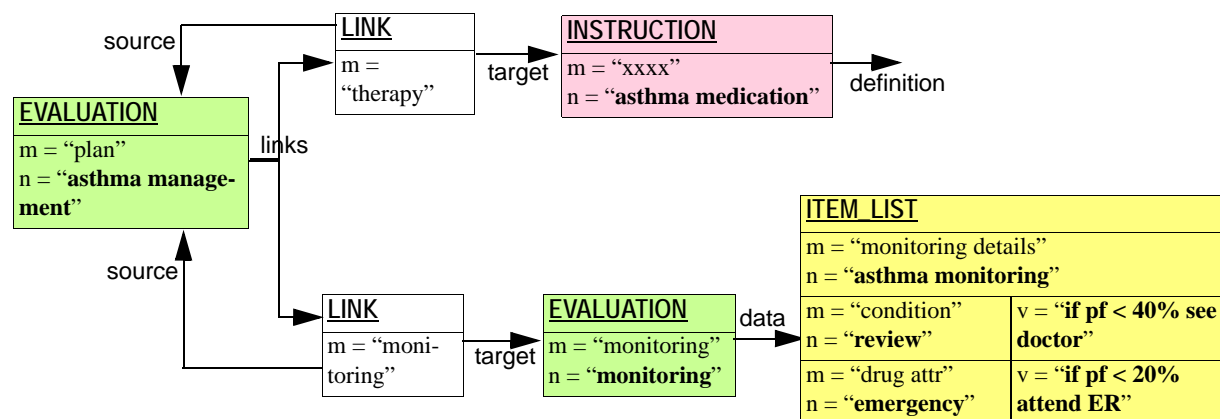


FIGURE 24 Partial Asthma Management Plan

### 8.3.6 INSTRUCTION Class

CLASS	INSTRUCTION	
<b>Purpose</b>	Used to specify actions in the future. Enables simple and complex specifications to be expressed in a workflow form.	
<b>Use</b>	Used for any actionable statement such as medication and therapeutic orders, monitoring, recall and review. Enough details must be provided for the specification to be directly executed by an actor, either human or machine.	
<b>Misuse</b>	Not to be used for plan items which are only specified in general terms.	
<b>GEHR</b>	G1_INSTRUCTION	
<b>HL7v3</b>	Act subtype Substance_administration, any Act type which is really an action specification (cf an Act in the past)	
<b>Inherit</b>	CARE_ENTRY	
Attributes	Signature	Meaning
	<b>inputs:</b> ITEM_STRUCTURE	Data inputs to the Instruction, including EHR variable references.
	<b>outputs:</b> ITEM_STRUCTURE	Data outputs of the Instruction, e.g. reporting information.
	<b>narrative:</b> DV_TEXT	Mandatory human-readable version of what the Instruction is about.
	<b>definition:</b> CONTROL_NODE	Optional computable expression of the Instruction.

CLASS	INSTRUCTION	
	<b>all_nodes:</b> List<CONTROL_NODE>	Reference list of all nodes in definition.
<b>Invariants</b>	<i>Narrative_exists</i> : narrative /= Void	

### 8.3.7 WORKFLOW\_NODE Class

CLASS	WORKFLOW_NODE	
<b>Purpose</b>	Abstract parent of node types.	
<b>Inherit</b>	LOCATABLE	
Attributes	Signature	Meaning
	<b>duration_info:</b> String	Information to do with intended duration of this node.
<b>Invariants</b>		

### 8.3.8 CONTROL\_NODE Class

CLASS	CONTROL_NODE	
<b>Purpose</b>	Used to specify control nodes in an Instruction, include START, AND-SPLIT, OR-SPLIT, LOOP and so on.	
<b>Inherit</b>	WORKFLOW_NODE	
Attributes	Signature	Meaning
	<b>type:</b> CODE_PHRASE	
	<b>triggers:</b> List<TRIGGER>	
<b>Invariants</b>	<i>Type_exists</i> : type /= Void	

### 8.3.9 ACTIVITY Class

CLASS	ACTIVITY	
<b>Purpose</b>	Used to specify activity nodes in an Instruction, i.e. nodes which actually perform an activity. During execution of an Instruction, one or more INSTRUCTION_ACTION instances will be generated for each ACTIVITY.	
<b>Inherit</b>	WORKFLOW_NODE	

CLASS	ACTIVITY	
Attributes	Signature	Meaning
	<b>description :</b> ITEM_STRUCTURE	Description of the activity to be performed, in the form of an archetyped structure.
	<b>inputs :</b> ITEM_STRUCTURE	Data inputs to the Activity, including EHR variable references.
	<b>outputs :</b> ITEM_STRUCTURE	Data outputs of the Activity, e.g. reporting information.
	<b>timing :</b> DV_PARSABLE? or DV_TIMING_SPECIFICATION?	Timing information for the activity, in a parsable form such as HL7 GTS.
	<b>notification :</b> DV_PARSABLE	Notification in a parsable form suitable for consumption by a notification service.
	<b>next :</b> CONTROL_NODE	
<b>Invariants</b>	<i>Description_exists</i> : description /= Void <i>Notification_exists</i> : notification /= Void <i>Next_exists</i> : next /= Void	

### 8.3.10 TRIGGER Class

CLASS	TRIGGER	
<b>Purpose</b>	Used to specify triggers, i.e. condition/action pairs at a cont.	
Attributes	Signature	Meaning
	<b>definition :</b> DV_PARSABLE	Definition of the trigger in a parsable format. Standard syntax does not yet exist, but an example might be something like: \$ehr.fetch("[haematological_finding]/...[leukocyte_count] < 1000")
	<b>action :</b> DV_PARSABLE	Definition of workflow action to be performed, e.g. "abort(W,P)", meaning: do state transition "abort".
	<b>notification :</b> DV_PARSABLE	Definition of any notification to issue if the trigger is fired during execution, e.g. a message to someone that the workflow has been suspended or terminated.

CLASS	TRIGGER	
	<b>next:</b> CONTROL_NODE	The node in the workflow to execute if this trigger is fired.
<b>Invariants</b>	<i>Definition_exists</i> : definition /= Void <i>Next_exists</i> : next /= Void	

### 8.3.10.1 INSTRUCTION Instance Structures

#### Simple Medication Order

To Be Continued:

#### Chained Medication Order

Often, a medication order for one drug consists of segments in which one or more of the administration details of route, form, frequency, dose etc is changed. In hospitals, intravenous antibiotics and pain relief drugs may be followed by a tablet form of the same drug to be taken orally. Other examples are common in general practice, such as the following order:

- trade name = Panafcortelone; generic name = Prednisolone; form = tablets; dose = 25mg; route = oral; freq = bd x 3 days; od x 2 days.

To Be Continued:

#### Recall

The general form of a recall is a communication action or appointment which needs to occur at a certain point in time. Recalls can be generated by management plans, particularly for chronic patients, e.g. ophthalmology and podiatry checkups for diabetics, or by legislated or otherwise standardised public health procedures, such as Pap smear checkups, vaccination programs and so on. The main differences between recalls and other plans are that the time periods involved tend to be long.

To Be Continued:

#### Encapsulated Guideline

To Be Continued:

### 8.3.10.2 INSTRUCTION Paths

Paths for plans follow the same form as for other structures, i.e. via the concatenation of relevant *name* values and attribute names. The form of the path is as follows:

To Be Continued:

For example:

To Be Continued:

### 8.3.11 ACTION Class

CLASS	ACTION
<b>Purpose</b>	Entry type for recording intervention actions.
<b>Use</b>	Used for all actions for which there is no Instruction in this EHR, e.g. patient self-care actions, actions whose prescription exists in another system.

CLASS	ACTION	
HL7v3	Act and various subclasses.	
Inherit	CARE_ENTRY	
Attributes	Signature	Meaning
	<b>time:</b> <a href="#">DV_DATE_TIME</a> or use an <a href="#">Interval</a> , or add a <a href="#">Duration</a> ?	The time at which this Action was completed.
	<b>description:</b> ITEM_STRUCTURE	The description of the Action, described in archetype. E.g. administration of drug described in terms of drug name, type, dose, route, form, etc.
	<b>notification:</b> DV_PARSABLE	Any notification that was actually issued at completion of this Action, expressed in formal language consumable by notification management system. (Enables tracking of notifications from Instruction executions).
	<b>execution_state:</b> DV_TEXT	Text or coded term indicating the status of the Action, e.g. suspended, completed etc.
Invariants	<i>Time_valid:</i> time /= Void <i>Description_valid:</i> description /= Void	

### 8.3.12 INSTRUCTION\_ACTION Class

CLASS	INSTRUCTION_ACTION	
Purpose	Entry type for recording intervention actions carried out as the result of a previously defined Instruction. The inherited <i>execution_state</i> attribute is used in this class to contain a coded term from the vocabulary of Instruction standard state machine states.	
Inherit	ACTION	
Attributes	Signature	Meaning
	<b>execution_state:</b> DV_CODED_TEXT	State in standard state machine reached due to the execution of this action. <a href="#">Add openEHR vocabulary</a> .
	<b>activity_id:</b> <a href="#">Integer?</a>	Identification of the Instruction and Activity within the Instruction which gave rise to this Action.
	<b>careflow_step:</b> <a href="#">Integer?</a>	The step in the careflow process which occurred as part of generating this action, e.g. “dispense”, “start_administration”. Defined in archetype.

CLASS	INSTRUCTION_ACTION	
	<b>actuating_trigger:</b> <i>String?</i>	Identifier of trigger in Instruction Activity node which caused this action to be undertaken (e.g. patient peak flow fell below 300 l/min).
	<b>wfe_state:</b> ITEM_STRUCTURE	State information about the execution of this Instruction recorded by a workflow engine; typically in some opaque workflow-engine specific format.
<b>Invariants</b>	<i>Execution_state_valid:</i> execution_state /= Void <i>Description_valid:</i> description /= Void	

## A Glossary

---

### A.1 *openEHR* Terms

HCA	Health care agent - any doctor, nurse or other recognised staff member, or software or device
HCF	Health care facility - any place where EHRs are kept
HCP	Health care professional - any doctor, nurse or other recognised staff member of an HCF

### A.2 Clinical Terms

Care Pathway	A global care management strategy for a patient, showing management of health problems or issues in a time-based framework, similar to a project management view of an engineering work.
Contribution	
Episode	A series of clinical events linked in time, such as a hospital admission or a surgical episode.
Event	
Extract	
Issue	A problem as identified by the patient, e.g. "inability to do exercise due to breathing difficulty"; may be the object of wider health care, e.g. social workers, physiotherapists etc.
Section	
Problem	A health problem of the patient, as identified by its underlying medical cause, e.g. asthma; the object of medical care.
Composition	

### A.3 IT Terms

.NET	
API	Application programmer's interface - the software interface to a library or module.
COM	Microsoft's Component Object Model; designed to enable integration of binary components obeying stated exported interfaces.
CORBA	Common Object Request Broker Architecture - an object-oriented middleware architecture enabling the construction of 3-tier systems, in which backend data providers (DBMSs etc) are known only by the services they export to the network. CORBA is an open standard managed by the Object Management Group (OMG).
DCOM	Distributed version of Microsoft COM. Similar in its aim to CORBA.
J2EE	
ODMG-93	A standard for object databases, which includes an object definition language (ODL) for writing schemas, an object query language (OQL) for querying, and several language bindings



## B References

### B.1 General

- 1     Berners-Lee T. "Universal Resource Identifiers in WWW". Available at <http://www.ietf.org/rfc/rfc2396.txt>. This is a World-Wide Web RFC for global identification of resources. In current use on the web, e.g. by Mosaic, Netscape and similar tools. See <http://www.w3.org/Addressing> for a starting point on URIs.
- 2     Beale T. *Archetypes: Constraint-based Domain Models for Future-proof Information Systems*. See <http://www.deepthought.com.au/it/archetypes.html>.
- 3     Beale T, Heard S. *A Systematic Theory of Clinical Recording*. 2006. Publication to be announced.
- 4     Beale T, Heard S. *A Model of Clinical Context for EHR Recording*. 2006. Publishing to be announced.
- 5     Beale T. *An Ontological Framework for Understanding Clinical Information*. 2006. Publishing to be announced.
- 6     Gray J, Reuter A. *Transaction Processing Concepts and Techniques*. Morgan Kaufmann 1993.
- 7     Rector A L, Nowlan W A, Kay S. *Foundations for an Electronic Medical Record*. The IMIA Yearbook of Medical Informatics 1992 (Eds. van Bommel J, McRay A). Stuttgart Schattauer 1994.
- 8     Rossi-Mori A, Consorti F. *Assembling clinical information*. Note sent to HL7v3 discussion list, 2001-04-19.
- 9     Sowa J F. *Knowledge Representation: Logical, philosophical and Computational Foundations*. 2000, Brooks/Cole, California.
- 10    Schloeffel P. (Editor). *Requirements for an Electronic Health Record Reference Architecture*. International Standards Organisation, Australia; Feb 2002; ISO TC 215/SC N; ISO/WD 18308.
- 11    Sottile P.A., Ferrara F.M., Grimson W., Kalra D., and Scherrer J.R. *The holistic healthcare information system*. Toward an Electronic Health Record Europe 1999. Nov 1999; 259-266.
- 12    Van de Velde R, Degoulet P. *Clinical Information Systems: A Component-Based Approach*. 2003. Springer-Verlag New York.

### B.2 European Projects

- 13    Dixon R., Grubb P.A., Lloyd D., and Kalra D. *Consolidated List of Requirements. EHCR Support Action Deliverable 1.4*. European Commission DGXIII, Brussels; May 2001 59pp Available from [http://www.chime.ucl.ac.uk/HealthI/EHCR-SupA/del1-4v1\\_3.PDF](http://www.chime.ucl.ac.uk/HealthI/EHCR-SupA/del1-4v1_3.PDF).
- 14    Dixon R, Grubb P, Lloyd D. *EHCR Support Action Deliverable 3.5: "Final Recommendations to CEN for future work"*. Oct 2000. Available at <http://www.chime.ucl.ac.uk/HealthI/EHCR-SupA/documents.htm>.
- 15    Dixon R, Grubb P, Lloyd D. *EHCR Support Action Deliverable 2.4 "Guidelines on Interpretation"*.

- tion and implementation of CEN EHCRA". Oct 2000. Available at <http://www.chime.ucl.ac.uk/HealthI/EHCR-SupA/documents.htm>.
- 16 Ingram D. *The Good European Health Record Project*. Laires, Laderia Christensen, Eds. health in the New Communications Age. Amsterdam: IOS Press; 1995; pp. 66-74.
- 17 Lloyd D, et al. *EHCR Support Action Deliverable 3.1&3.2 "Interim Report to CEN"*. July 1998. Available at <http://www.chime.ucl.ac.uk/HealthI/EHCR-SupA/documents.htm>.
- 18 *Deliverable 4: GEHR Requirements for Clinical Comprehensiveness*. GEHR Project 1992
- 19 *Deliverable 7: Clinical Functional Specifications*. GEHR Project 1993
- 20 *Deliverable 8: Ethical and legal Requirements of GEHR Architecture and Systems*. GEHR Project 1994
- 21 *Deliverable 19,20,24: GEHR Architecture*. GEHR Project 30/6/1995
- 22 Grimson W. and Groth T. (Editors). *The Synapses User Requirements and Functional Specification (Part B)*. EU Telematics Application Programme, Brussels; 1996; The Synapses Project: Deliverable USER 1.1.1b.
- 23 Kalra D. (Editor). *The Synapses User Requirements and Functional Specification (Part A)*. EU Telematics Application Programme, Brussels; 1996; The Synapses Project: Deliverable USER 1.1.1a. 6 chapters, 176 pages.
- 24 Kalra D. (Editor). *Synapses ODP Information Viewpoint*. EU Telematics Application Programme, Brussels; 1998; The Synapses Project: Final Deliverable. 10 chapters, 64 pages.

## B.3 CEN

- 25 ENV 13606-1 - *Electronic healthcare record communication - Part 1: Extended architecture*. CEN/ TC 251 Health Informatics Technical Committee.
- 26 ENV 13606-2 - *Electronic healthcare record communication - Part 2: Domain term list*. CEN/ TC 251 Health Informatics Technical Committee.
- 27 ENV 13606-3 - *Electronic healthcare record communication - Part 3: Distribution rules*. CEN/ TC 251 Health Informatics Technical Committee.
- 28 ENV 13606-4 - *Electronic Healthcare Record Communication standard Part 4: Messages for the exchange of information*. CEN/ TC 251 Health Informatics Technical Committee.

## B.4 GEHR Australia

- 29 Heard S. *GEHR Project Australia, GPCG Trial*. Available at <http://www.gehr.org/gpcg/ehra.htm>.
- 30 Beale T, Heard S. *GEHR Technical Requirements*. See [http://www.gehr.org/technical/requirements/gehr\\_requirements.html](http://www.gehr.org/technical/requirements/gehr_requirements.html).

## B.5 HL7v3

- 31 Schadow G, McDonald C J. *The Unified Code for Units of Measure*, Version 1.4, April 27,

2000. Regenstrief Institute for Health Care, Indianapolis. See <http://aurora.rg.iu-pui.edu/UCUM>
- 32 Schadow G, Russler D, Mead C, Case J, McDonald C. HL7 version 3 deliverable: *The Unified Service Action Model : Documentation for the clinical area of the HL7 Reference Information Model*. (Revision 2.4+).
- 33 Schadow G, Biron P. HL7 version 3 deliverable: *Version 3 Data Types*. (DRAFT Revision 1.0).

## B.6 OMG

- 34 CORBAMED document: *Person Identification Service*. (March 1999).  
(Authors?)
- 35 CORBAMED document: *Clinical Observations Access Service*. (Jan 2000)  
3M, Care Data Systems, CareFlow/Net, HBO & C, LANL, and others.
- 36 CORBAMED document: *Lexicon Query Service*. (March 1999)  
(Authors?)

## B.7 Software Engineering

- 37 Meyer B. *Object-oriented Software Construction*, 2nd Ed.  
Prentice Hall 1997
- 38 Walden K, Nerson J. *Seamless Object-oriented Software Architecture*.  
Prentice Hall 1994
- 39 Gamma E, Helm R, Johnson R, Vlissides J. *Design patterns of Reusable Object-oriented Software*  
Addison-Wesley 1995
- 40 Fowler M. *Analysis Patterns: Reusable Object Models*  
Addison Wesley 1997
- 41 Fowler M, Scott K. *UML Distilled (2nd Ed.)*  
Addison Wesley Longman 2000
- 42 Booch G, Rumbaugh J, Jacobsen I. *The Unified Modelling Language User Guide*. Addison es-  
ley 1999.

## B.8 Resources

- 43 Arden Syntax. <http://www.cpmc.columbia.edu/arden/>
- 44 Asbru / The Asgaard Project. <http://smi-web.stanford.edu/projects/asgaard/>
- 45 Digital Imaging and Communications in Medicine (DICOM). <http://medical.nema.org/dicom.html>.
- 46 EON ref required

- 47 GLIF (Guideline Interchange Format). <http://www.glif.org/>.
- 48 IANA - <http://www.iana.org/>.
- 49 ProForma language for decision support. <http://www.acl.icnet.uk/lab/proforma.html>.
- 50 SynEx project, UCL. <http://www.chime.ucl.ac.uk/HealthI/SynEx/>.

**END OF DOCUMENT**