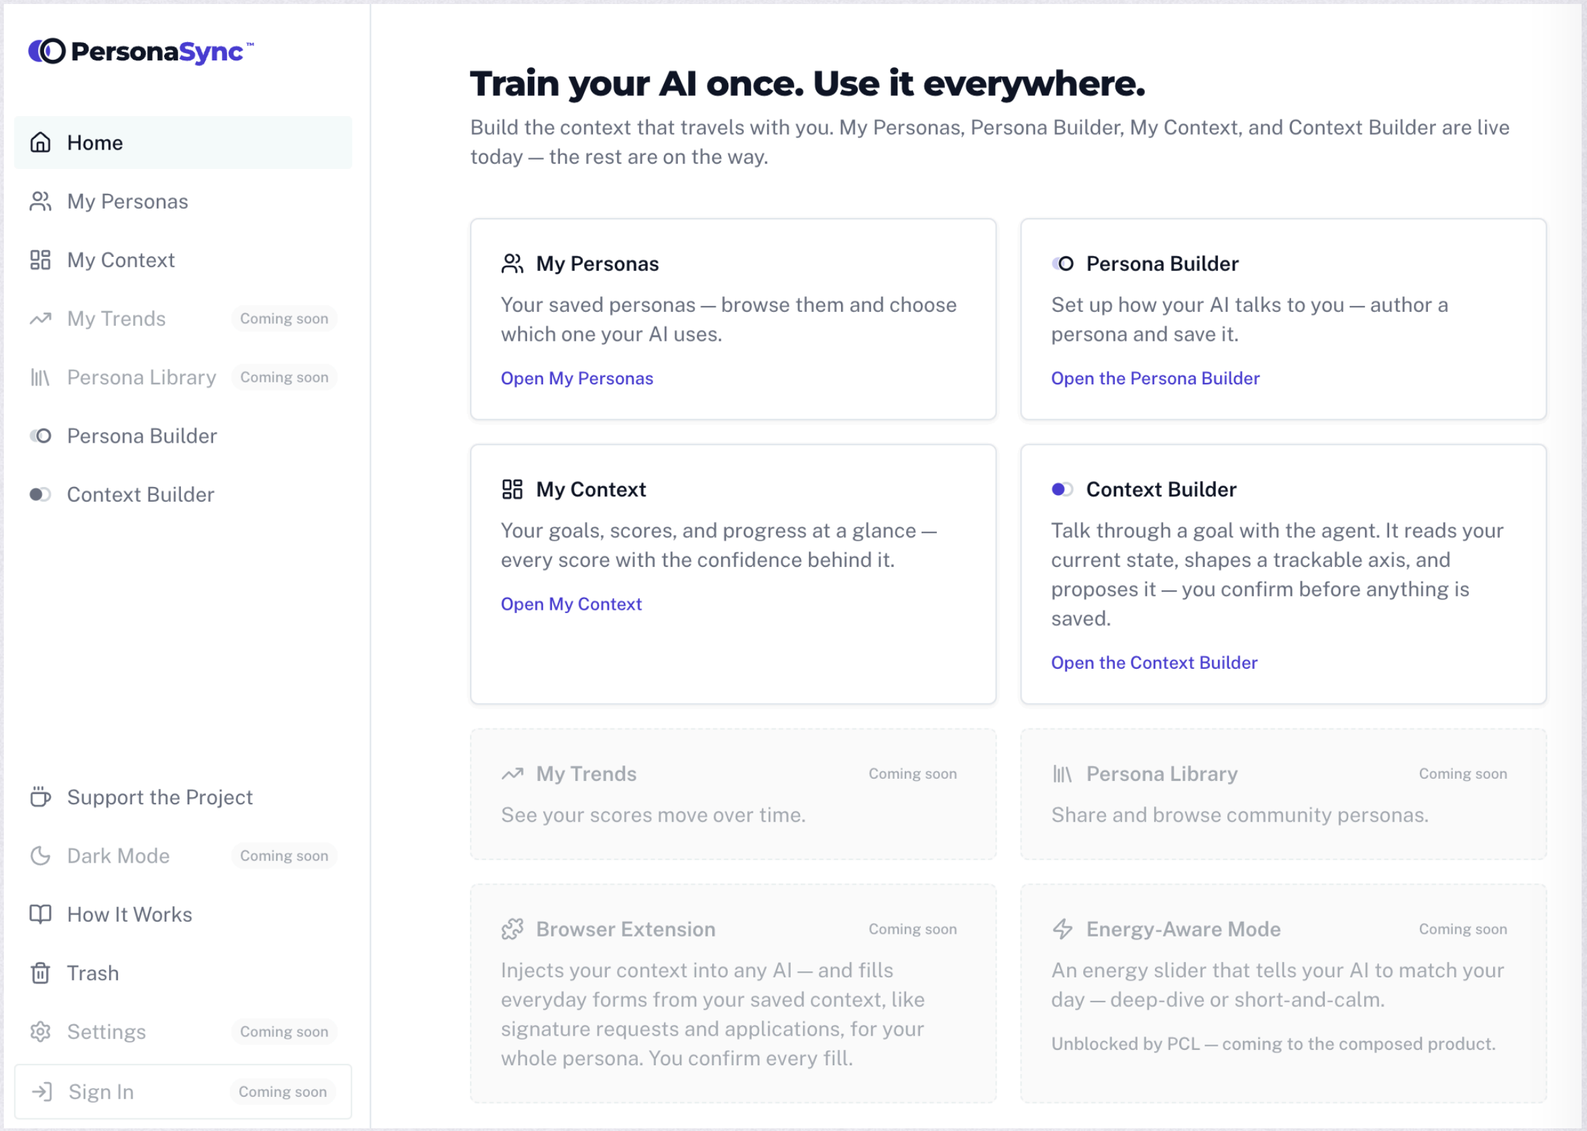


PersonaSync™

CIS 641 · Midterm status update

Arthur Bowman • solo team

Grand Valley State University · October 2026

The idea

What PersonaSync is



Persona

How you want AI to talk to you.

+



Context

Who you are. Your background, goals and notes.

=



PersonaSync

Both together, set up once, carried into any AI tool.

The ring is the persona. The dot is the context. Together they sync to make the mark.

Origin story

The idea came before the degree

November 2025

The idea

Brainstorming projects while applying. Talking to AI was frustrating, and it should know who it is talking to.

Winter 2026

Parked

Started the degree.
The idea waited.

Summer 2026

Built fast

First version in the first half of summer: web app and a local MCP server.

Fall 2026

Building it thoroughly

This class. Scope, packages and names before new code.

Status

Three screens you can use today


PersonaSync™

Home

app.personasync.dev

Train your AI once. Use it everywhere.


> *Plus a local MCP server with seven read tools, so an AI tool can read your context back.*

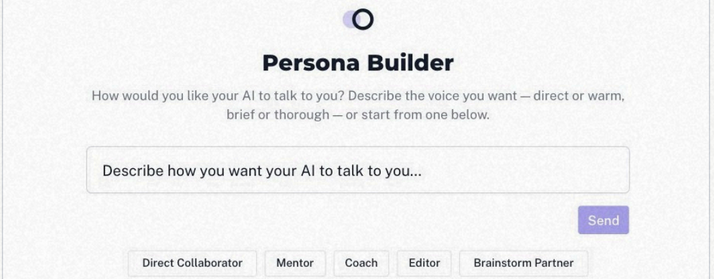

Persona Builder

How your AI talks to you

Talk it through, confirm, saved on your device.

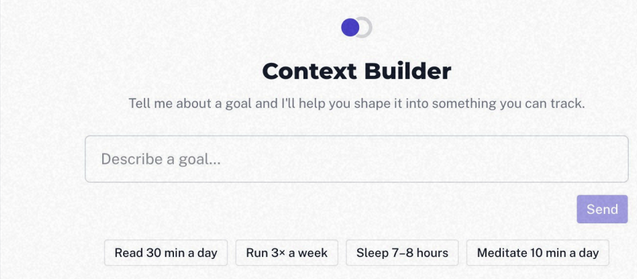

Context Builder


Who you are

Your background, goals, milestones and notes. You confirm before anything is saved.


The reset

Built fast last summer. Designed properly this fall, with systems.

- Diagrams before code.
- Names I chose, written down.
- Own the code, own the project.

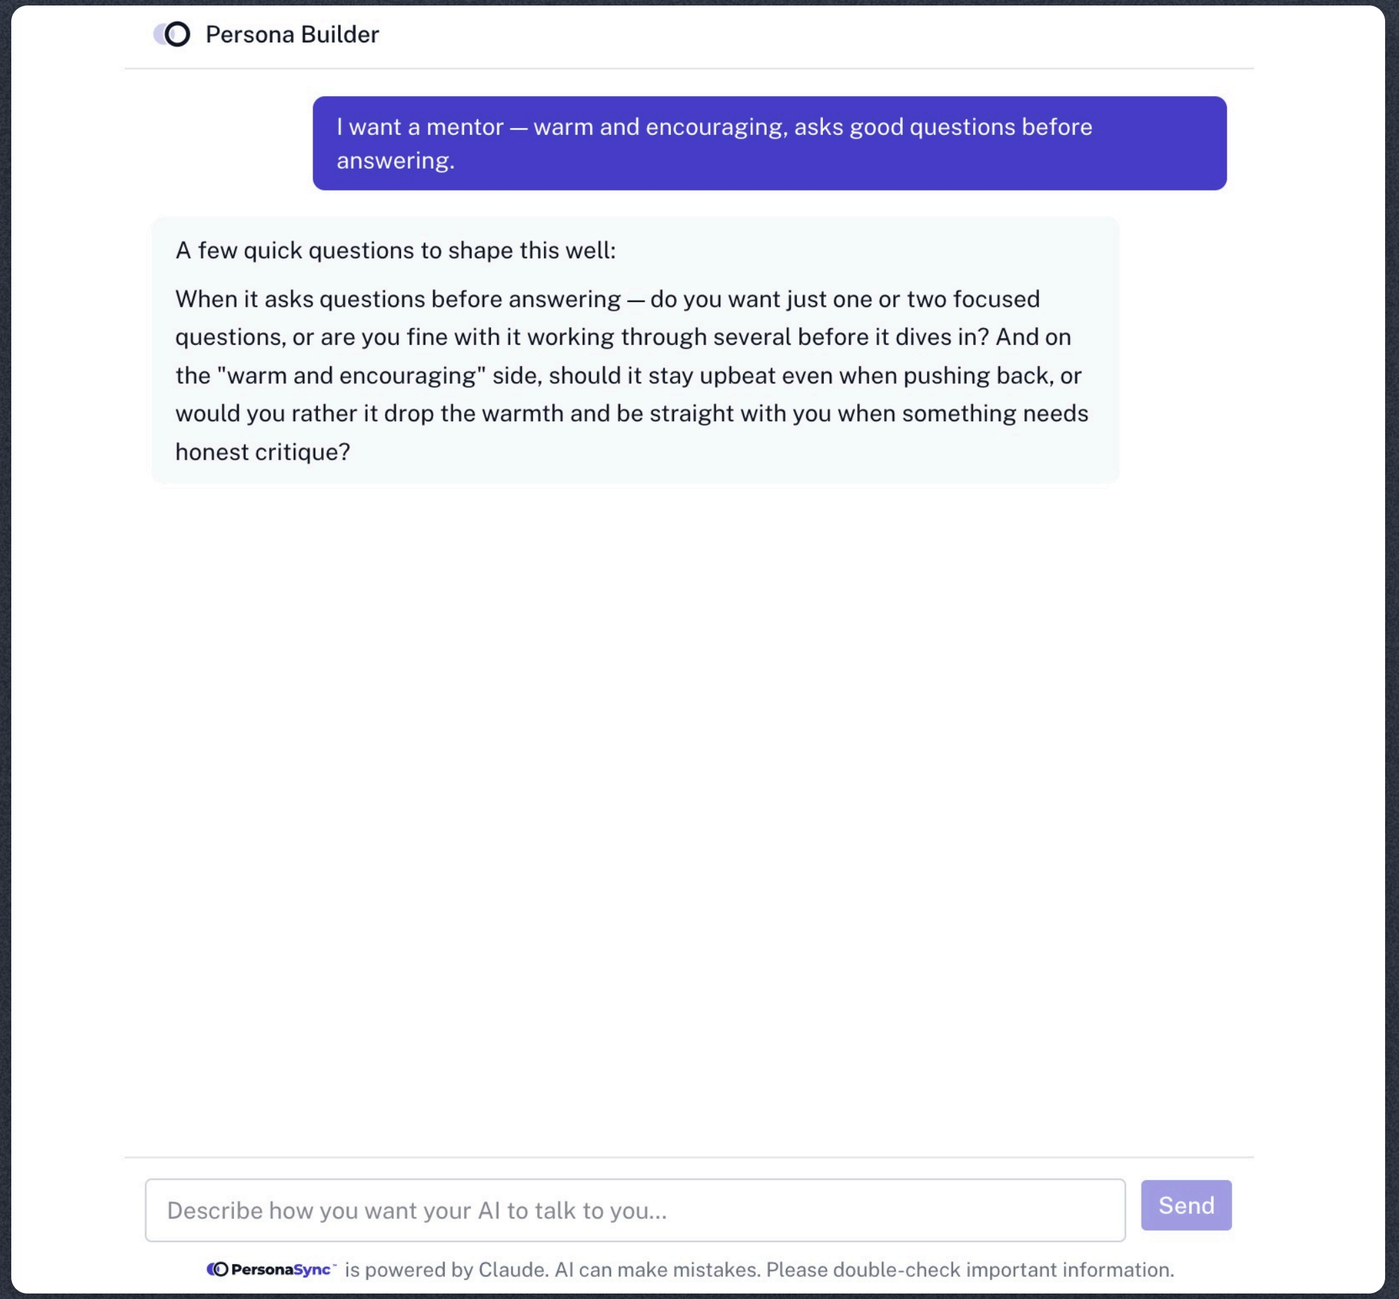

PersonaSync™ Package diagram draft

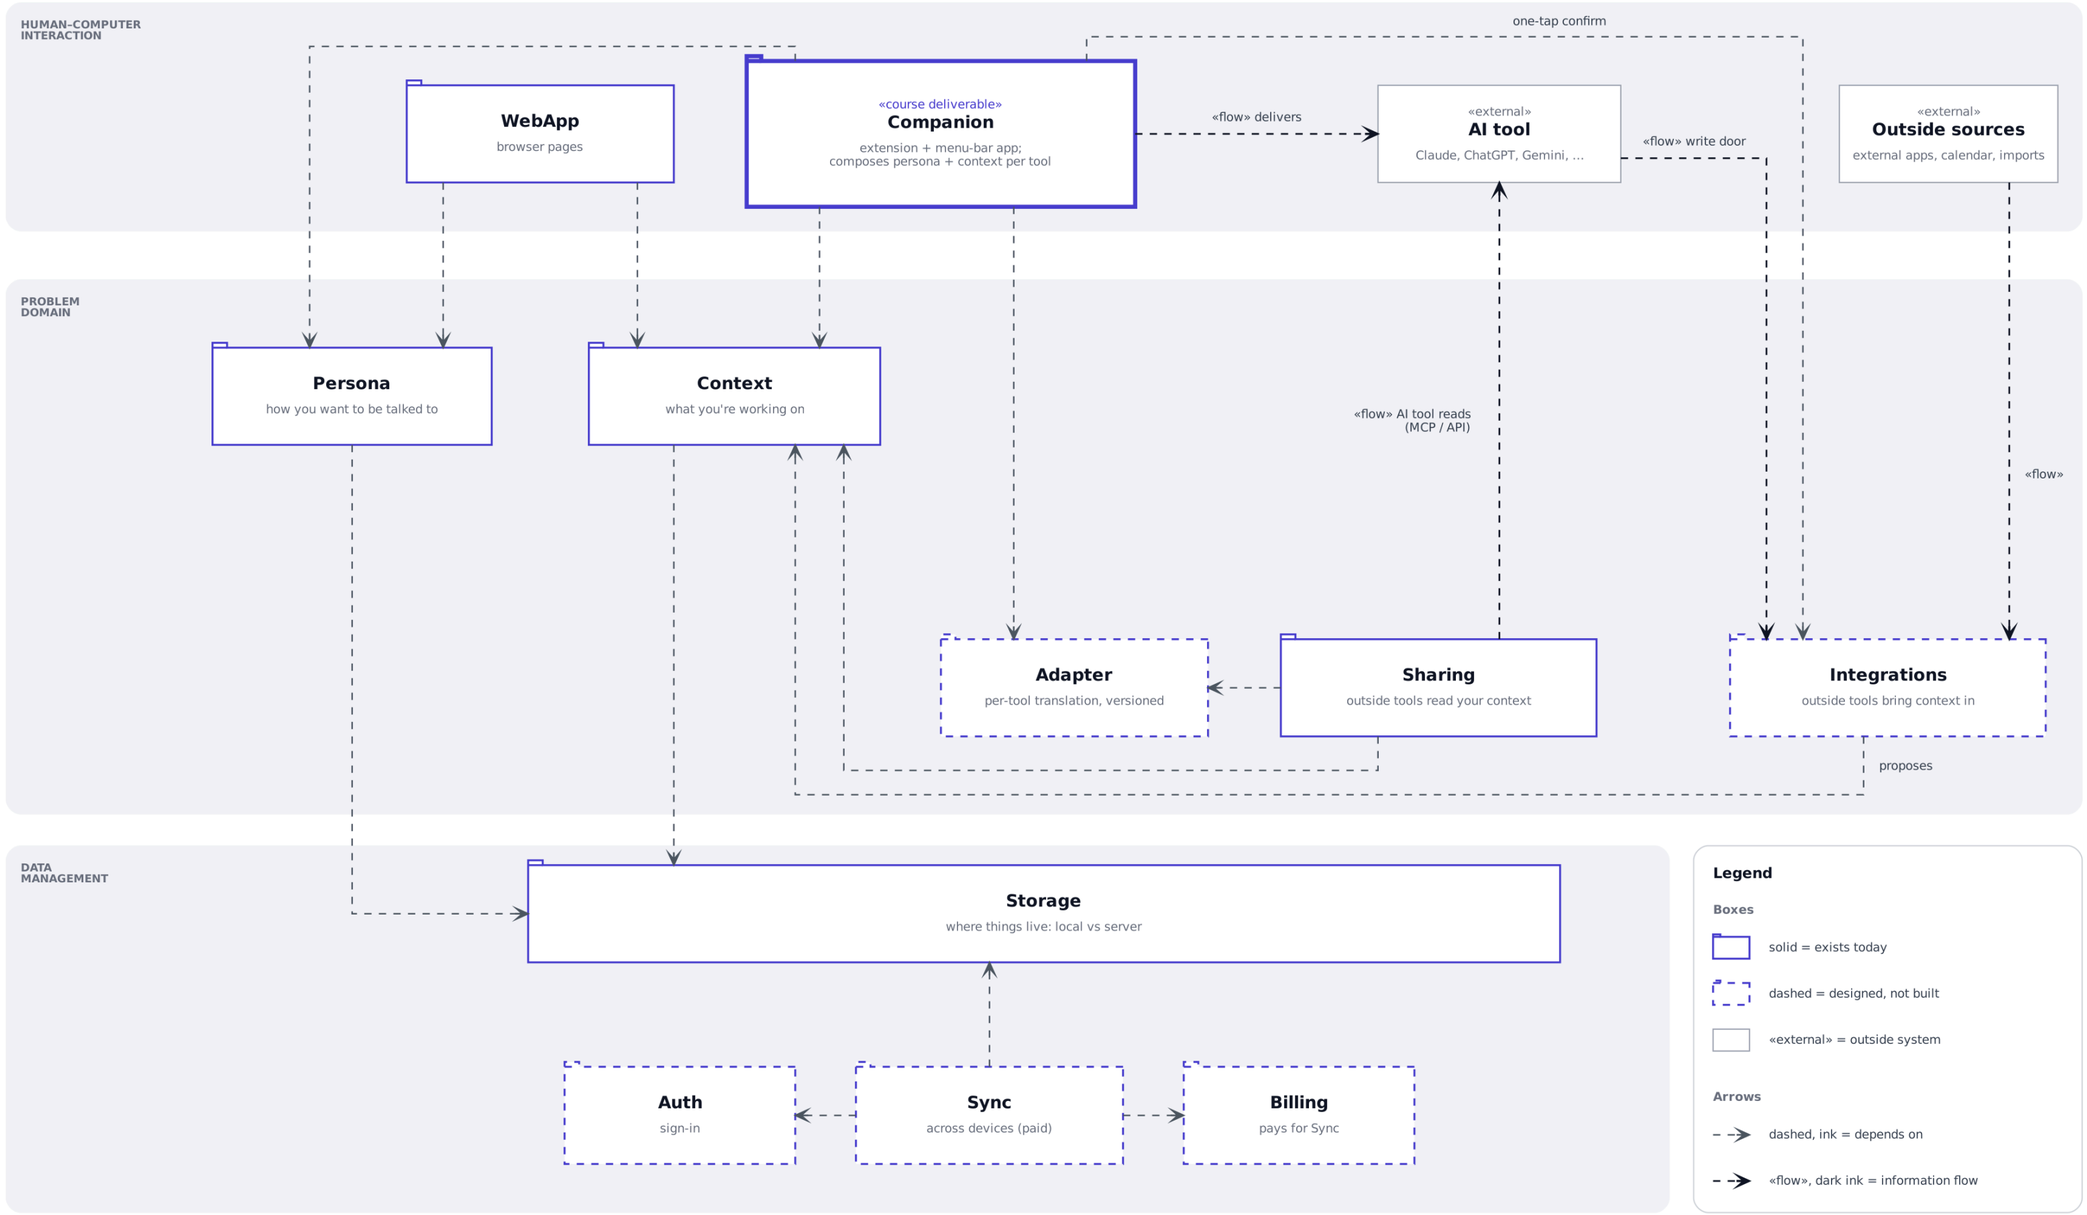

2026-10-25

Names · nouns for packages, verbs for actions

I own the language the system speaks

Persona

How you want to be talked to. Like an agent voice.

A blunt Russian bodybuilder coach.

Context

Who you are.

Grad student, veteran, ENFJ, building a house in Grand Rapids.

Companion

Installed beside your AI tool.

Sits alongside while you work, so your persona and context are one click away.

Adapter

Translates PersonaSync into each AI's way of talking.

Live between the app and the model, so the persona lands the way that LLM expects.

Sharing

Outside tools read your context.

The local MCP server and its seven read tools, so Claude or Gemini can pull your context.

Integrations

Outside tools bring context in.

Calendar, imports, external apps. Designed, not built yet.

WebApp

Where you build and manage everything.

app.personasync.dev, the three screens from earlier.

Storage

Where your personas and context live.

Saved locally, synced later.

Auth · Sync · Billing Sign-in, copying between devices, and paying for it. Later, and only if you want it on your phone.

Roadmap

One deliverable this term

This term: the Companion

Browser extension
built first

Menu-bar app
designed

> *How far it gets depends on how the systems line up once the diagrams are done. There will be a deliverable either way.*

Future work

- Hosting the MCP server
- Bringing context local
- Sync between devices


Reserve

Appendix

Early diagrams from this term, being redrawn against the package diagram.


Use Case Diagram 1 — Persona and context management

How a user builds and maintains their declared context in the PersonaSync web app

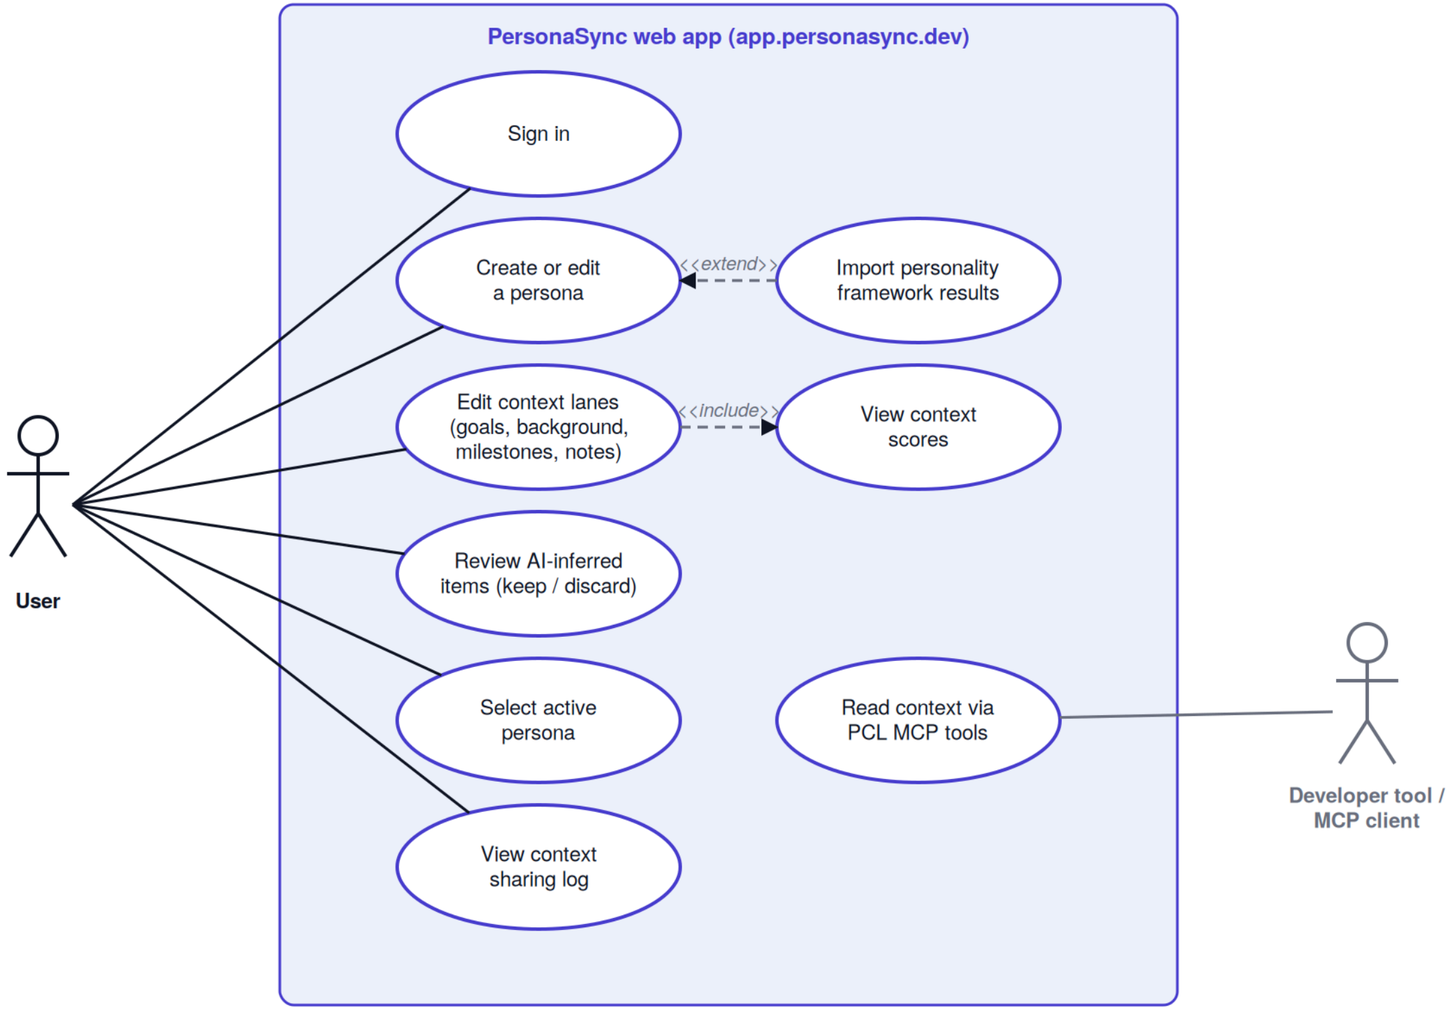


Use Case Diagram 2 — Context delivery at the point of use

Phase 3: carrying stored context into the AI tools where the user actually works

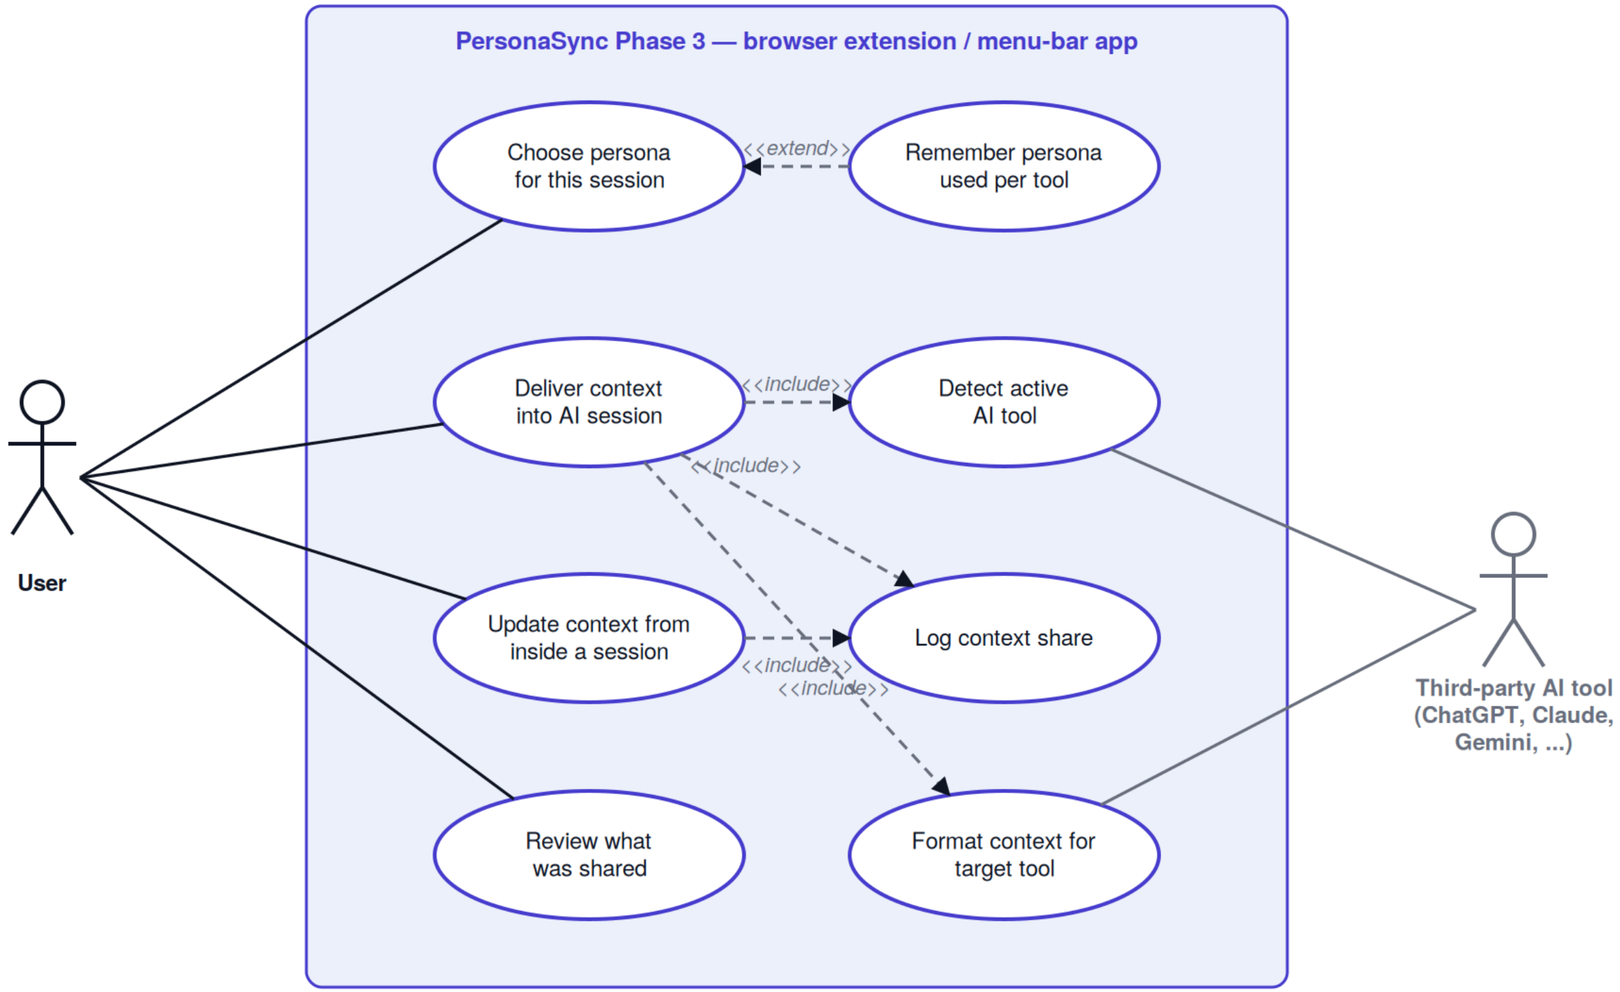

Activity Diagram 1 — Deliver context into an AI session


Main flow for the Phase 3 extension: from opening a tool to a logged, context-loaded session

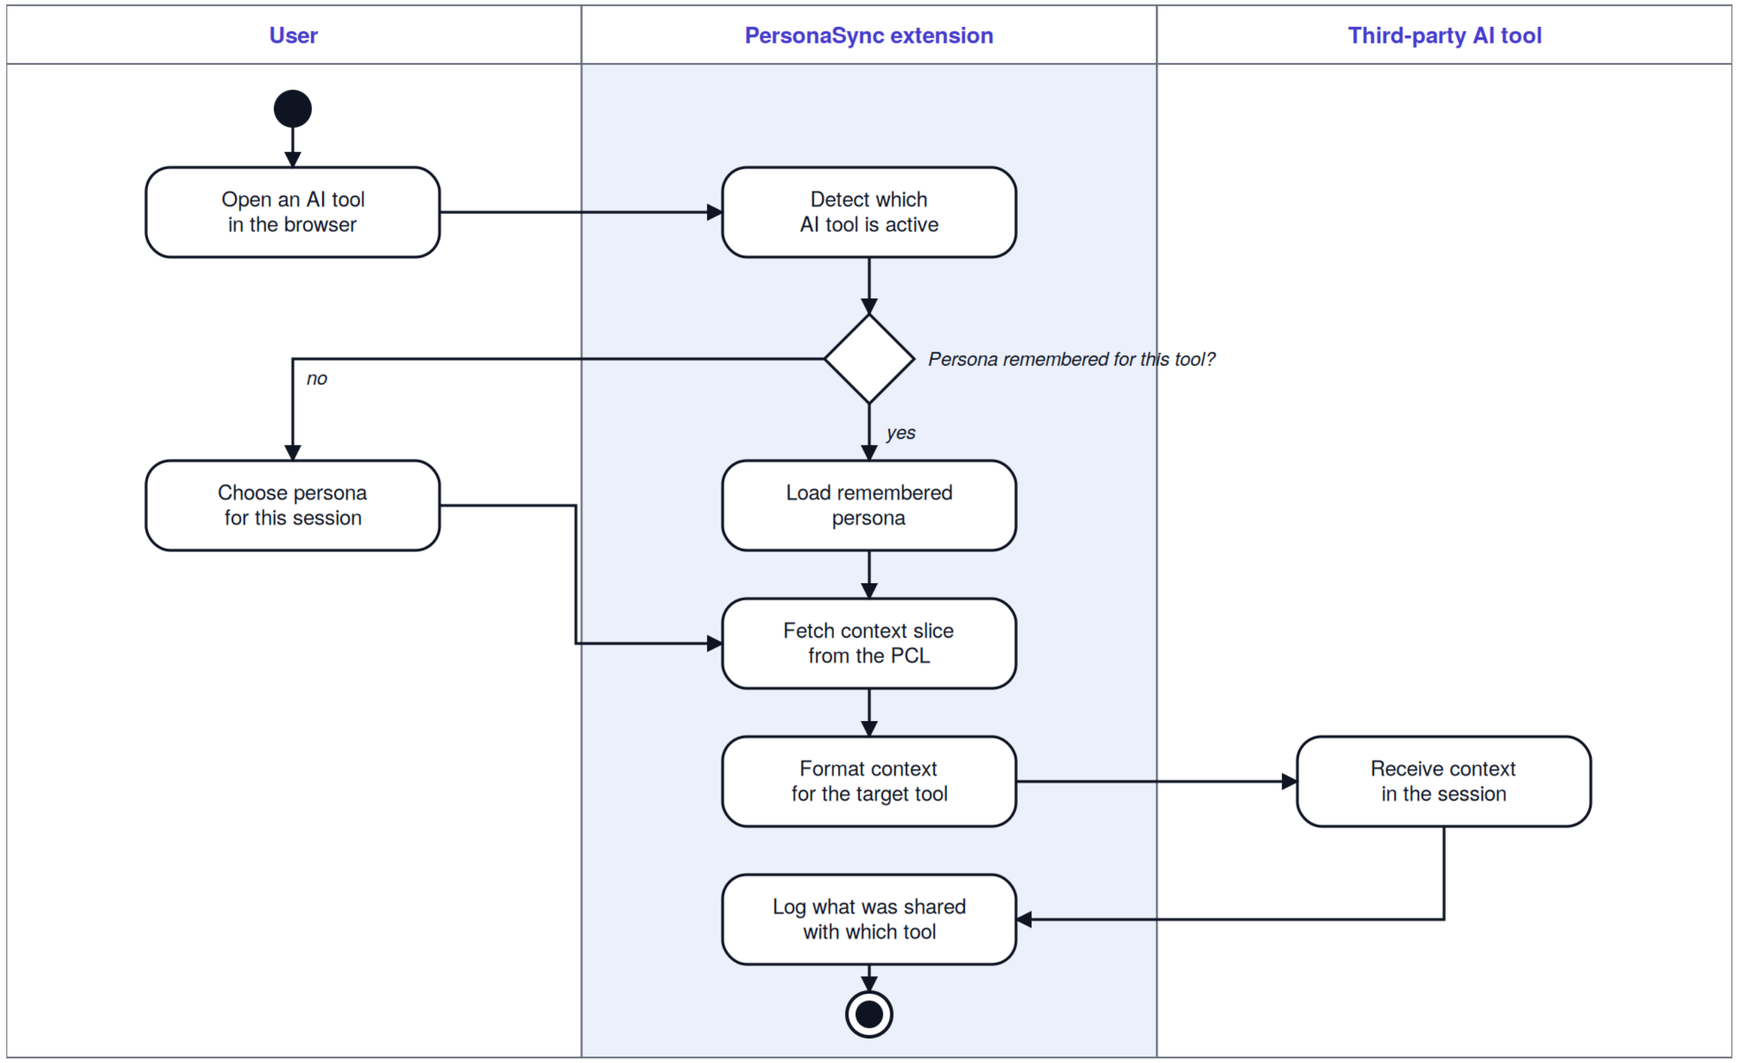



Activity Diagram 2 — Update context from inside a session

How an AI-inferred item is captured, reviewed, and either kept as declared context or discarded

PersonaSync™ · CIS 641 · Artie Bowman

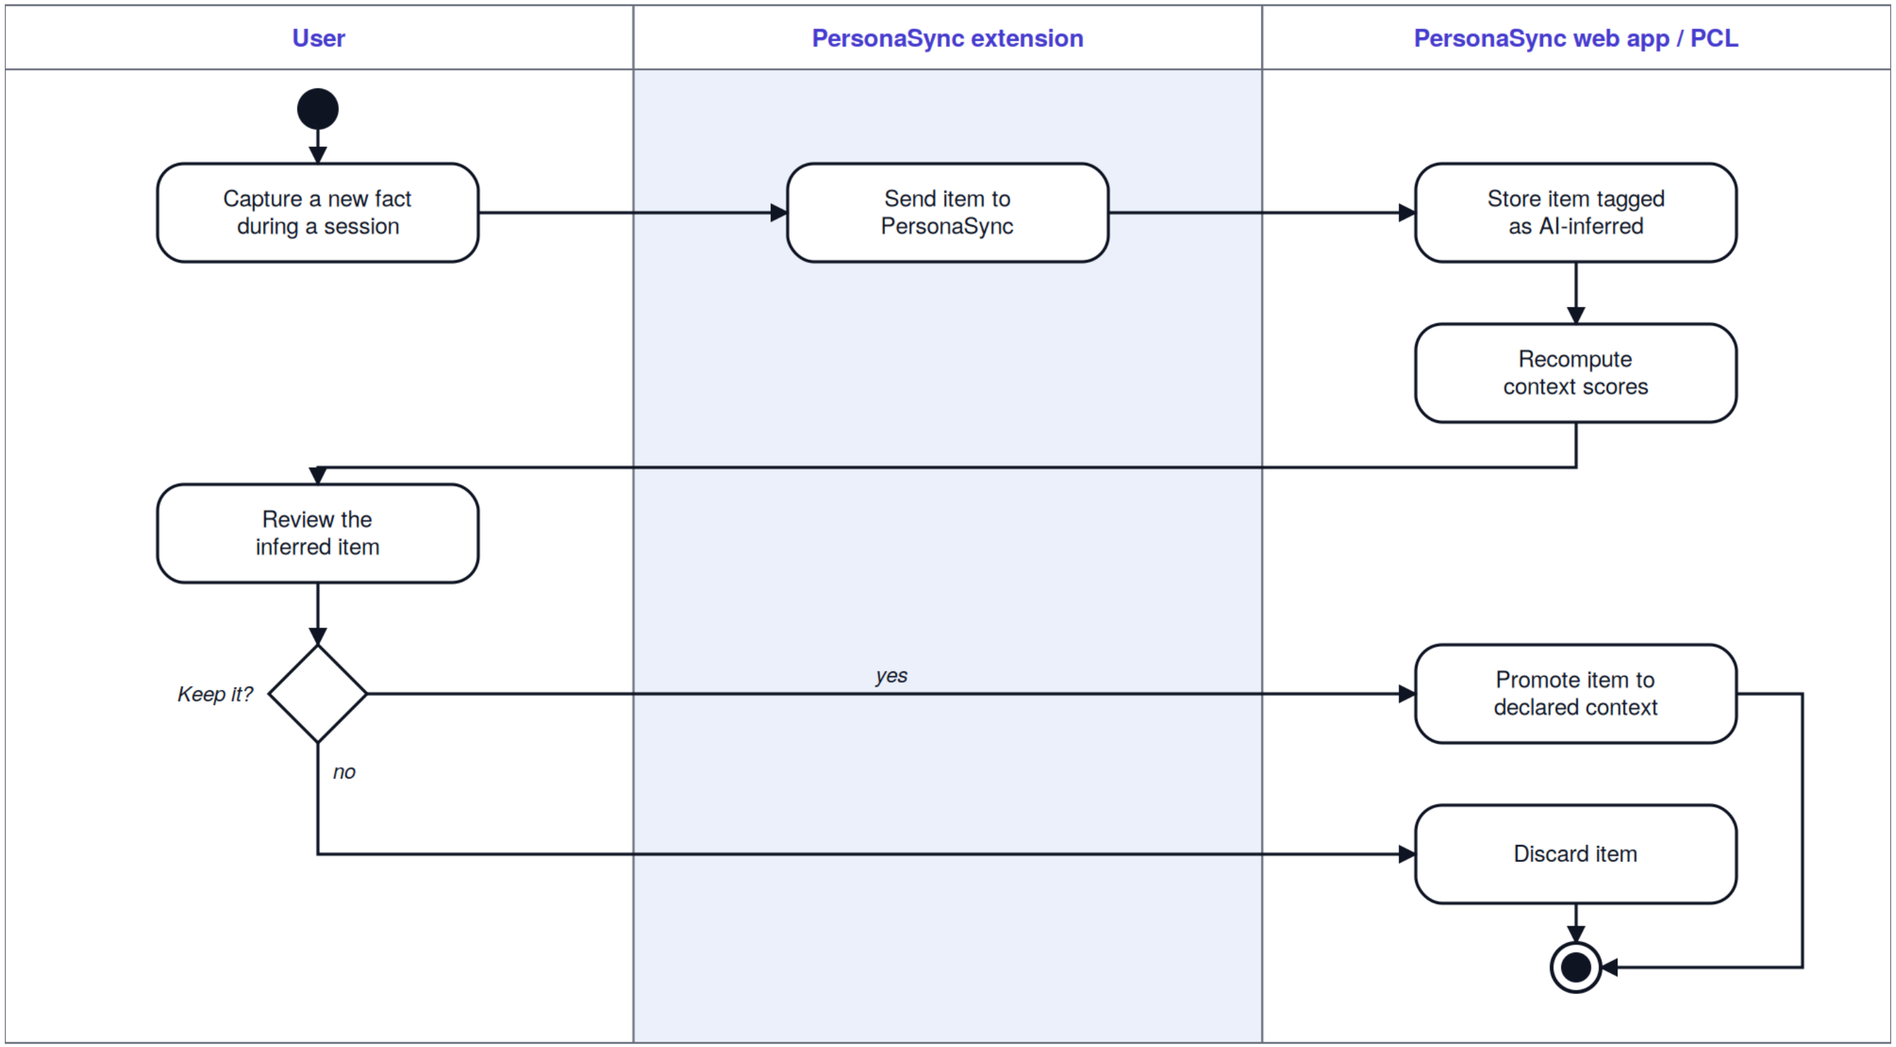

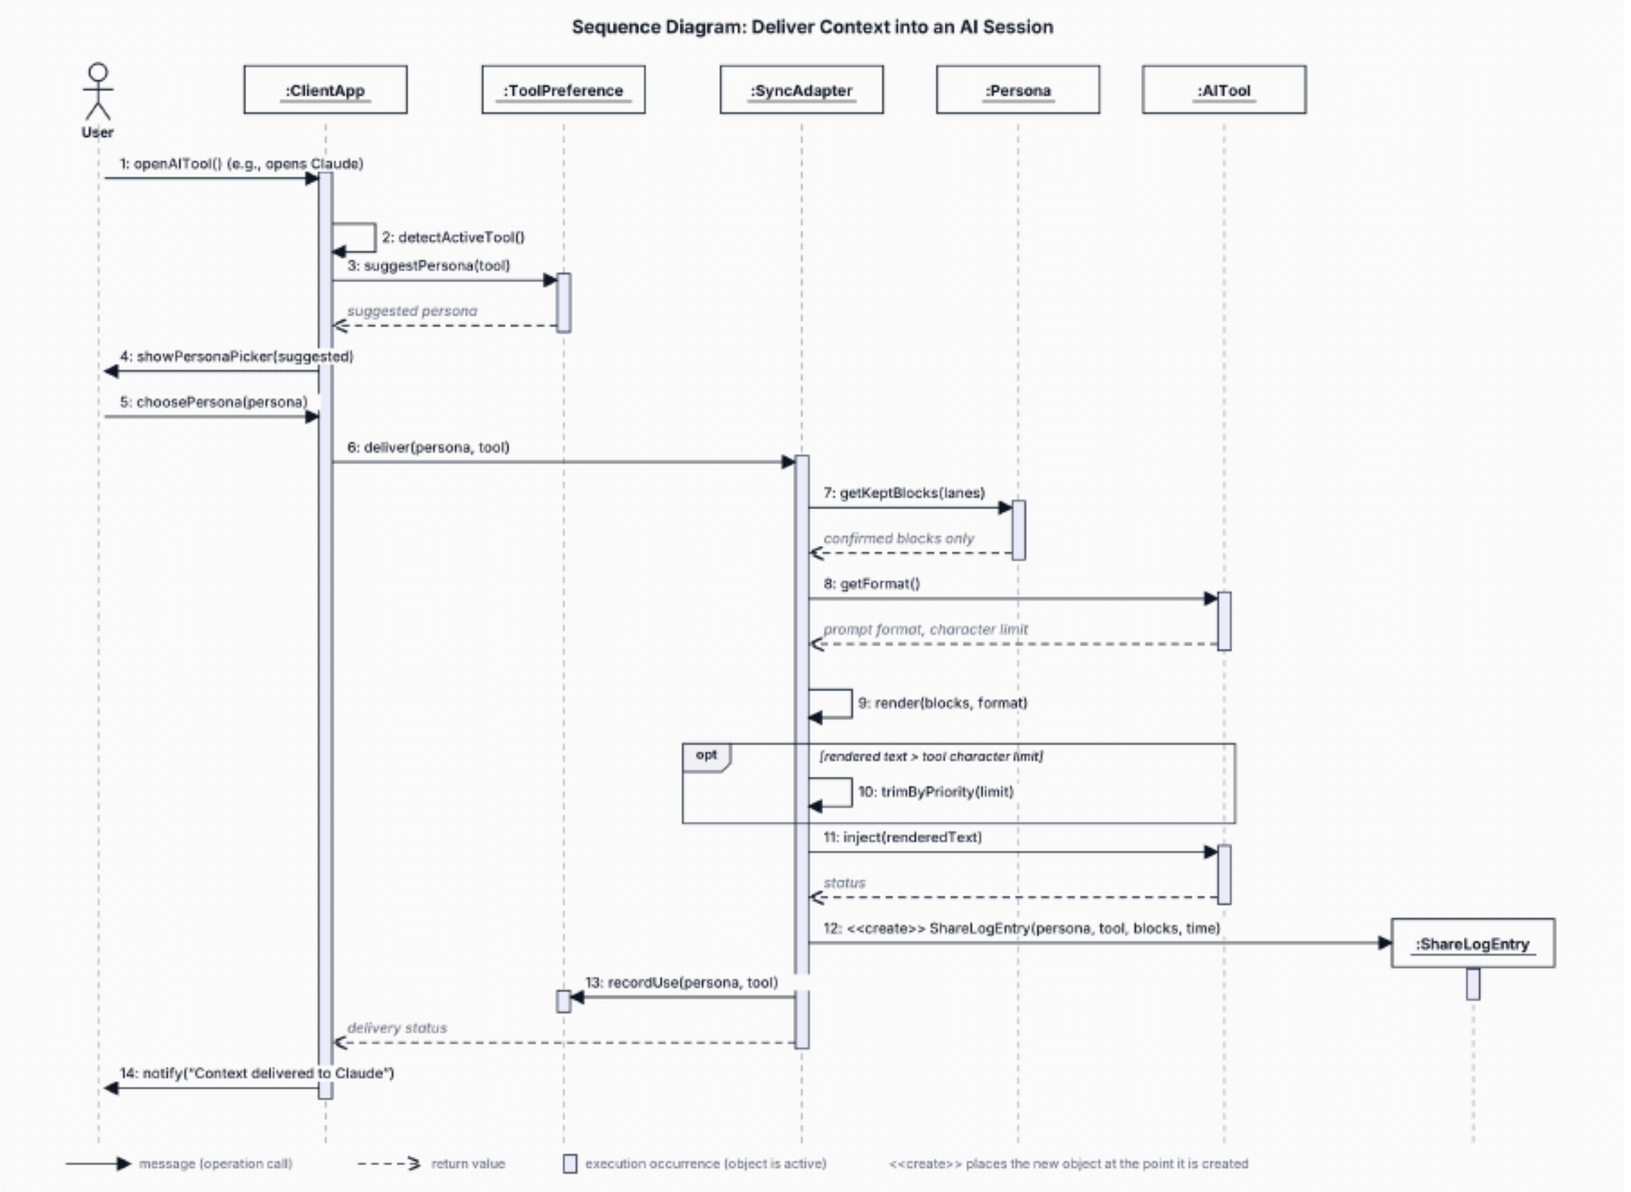
Sequence Diagram: Deliver Context into an AI Session
User
:ClientApp
:ToolPreference
:SyncAdapter
:Persona
:AITool
1: openAITool() (e.g., opens Claude)
2: detectActiveTool()
3: suggestPersona(tool)
suggested persona
4: showPersonaPicker(suggested)
5: choosePersona(persona)
6: deliver(persona, tool)
7: getKeptBlocks(lanes)
confirmed blocks only
8: getFormat()
prompt format, character limit
9: render(blocks, format)
opt
[rendered text > tool character limit]
10: trimByPriority(limit)
11: inject(renderedText)
status
12: <<create>> ShareLogEntry(persona, tool, blocks, time)
:ShareLogEntry
13: recordUse(persona, tool)
delivery status
14: notify("Context delivered to Claude")
message (operation call)
return value
execution occurrence (object is active)
<<create>> places the new object at the point it is created

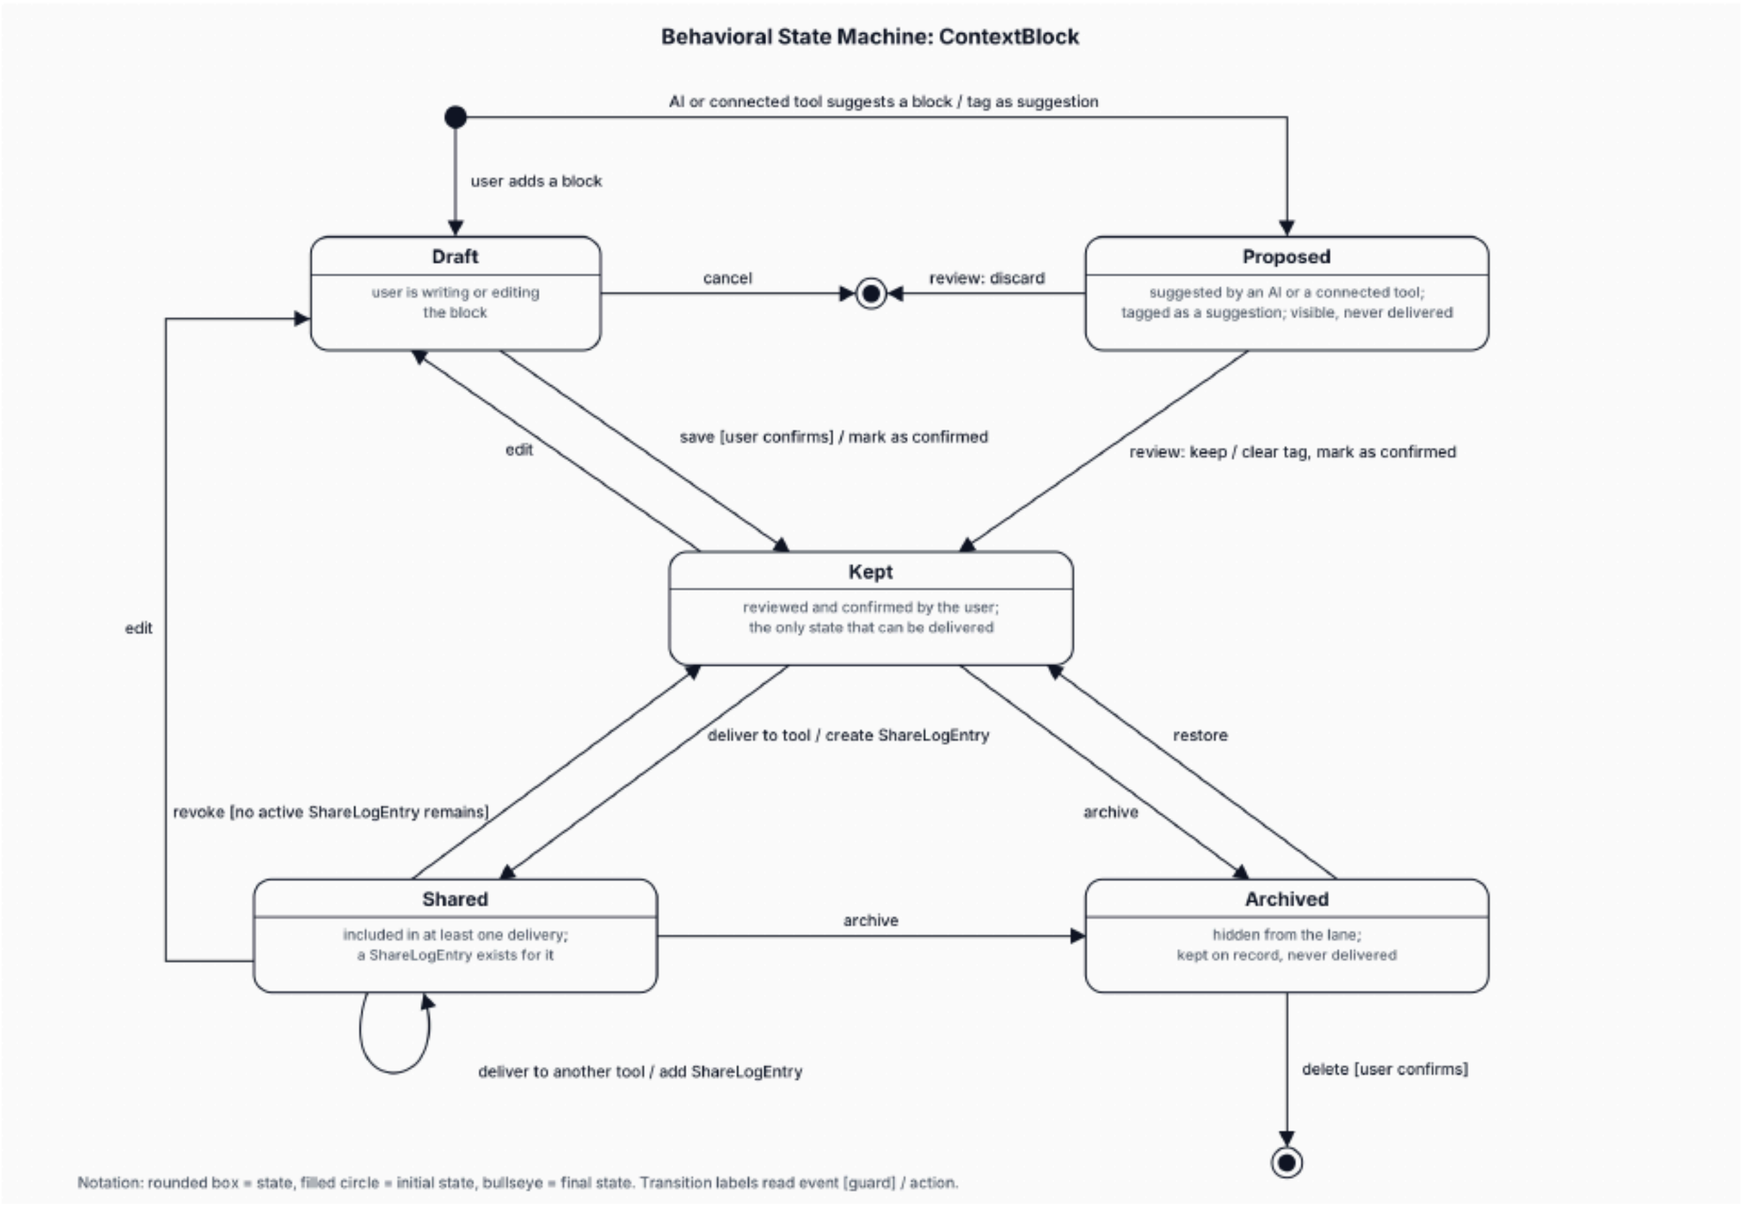
Behavioral State Machine: ContextBlock
AI or connected tool suggests a block / tag as suggestion
user adds a block
Draft
user is writing or editing the block
cancel
review: discard
Proposed
suggested by an AI or a connected tool; tagged as a suggestion; visible, never delivered
edit
save [user confirms] / mark as confirmed
review: keep / clear tag, mark as confirmed
Kept
reviewed and confirmed by the user; the only state that can be delivered
edit
deliver to tool / create ShareLogEntry
restore
revoke [no active ShareLogEntry remains]
archive
Shared
included in at least one delivery; a ShareLogEntry exists for it
archive
Archived
hidden from the lane; kept on record, never delivered
deliver to another tool / add ShareLogEntry
delete [user confirms]
Notation: rounded box = state, filled circle = initial state, bullseye = final state. Transition labels read event [guard] / action.