



Fortify Security Report

Jul 19, 2016

MHussaini

Executive Summary

Issues Overview

On Jul 19, 2016, a source code review was performed over the SpringSecurityEPDS code base. 223 files, 18,202 LOC (Executable) were scanned and reviewed for defects that could lead to potential security vulnerabilities. A total of 82 reviewed findings were uncovered during the analysis.

Issues by Fortify Priority Order

High	61
Critical	21

Recommendations and Conclusions

The Issues Category section provides Fortify recommendations for addressing issues at a generic level. The recommendations for specific fixes can be extrapolated from those generic recommendations by the development group.

Project Summary

Code Base Summary

Code location: C:/AmersFiles/Gitworkspace/SpringSecurityEPDS

Number of Files: 223

Lines of Code: 18202

Build Label: SpringSecurityEPDS

Scan Information

Scan time: 06:41

SCA Engine version: 6.30.0086

Machine Name: AIOCOFT55000042

Username running scan: MHussaini

Results Certification

Results Certification Valid

Details:

Results Signature:

SCA Analysis Results has Valid signature

Rules Signature:

There were no custom rules used in this scan

Attack Surface

Attack Surface:

Command Line Arguments:

com.EPDS.US.Test.main

gov.gao.edps.webservice.Test.main

gov.gao.epds.test.ServiceTest.main

gov.gao.epds.test.ValidationTesting.main

gov.gao.epds.testutils.EmailValidatorTest.main

gov.gao.epds.utils.ExportToExcel.main

gov.gao.epds.utils.PropertyFileEncrypter.main

gov.gao.epds.utils.Util_Test.main

gov.gao.epds.utils.templates.HtmlToPDF.main

gov.usda.epds.test.Sha512Test.main

gov.usda.epds.test.Test.main

File System:

java.io.FileInputStream.FileInputStream

Private Information:

null.null.null

java.security.Provider.getProperty

java.util.Properties.getProperty

Java Properties:

java.lang.System.getProperty
java.util.Properties.load

Stream:

gov.gao.epds.clam.test.ArbitraryInputStream.read
java.io.FileInputStream.read
java.io.InputStream.read

System Information:

null.null.null
com.fasterxml.jackson.core.JsonProcessingException.getMessage
java.lang.Throwable.getMessage
java.net.InetAddress.getLocalHost
java.net.URISyntaxException.getMessage
javax.servlet.ServletContext.getRealPath
org.codehaus.jackson.JsonProcessingException.getMessage
org.codehaus.jackson.map.JsonMappingException.getMessage
org.springframework.core.NestedRuntimeException.getMessage

Web:

javax.servlet.ServletRequest.getRemoteAddr

Filter Set Summary

Current Enabled Filter Set:

Quick View

Filter Set Details:

Folder Filters:

If [fortify priority order] contains critical Then set folder to Critical
If [fortify priority order] contains high Then set folder to High
If [fortify priority order] contains medium Then set folder to Medium
If [fortify priority order] contains low Then set folder to Low

Visibility Filters:

If impact is not in range [2.5, 5.0] Then hide issue
If likelihood is not in range (1.0, 5.0] Then hide issue

Audit Guide Summary

Audit guide not enabled

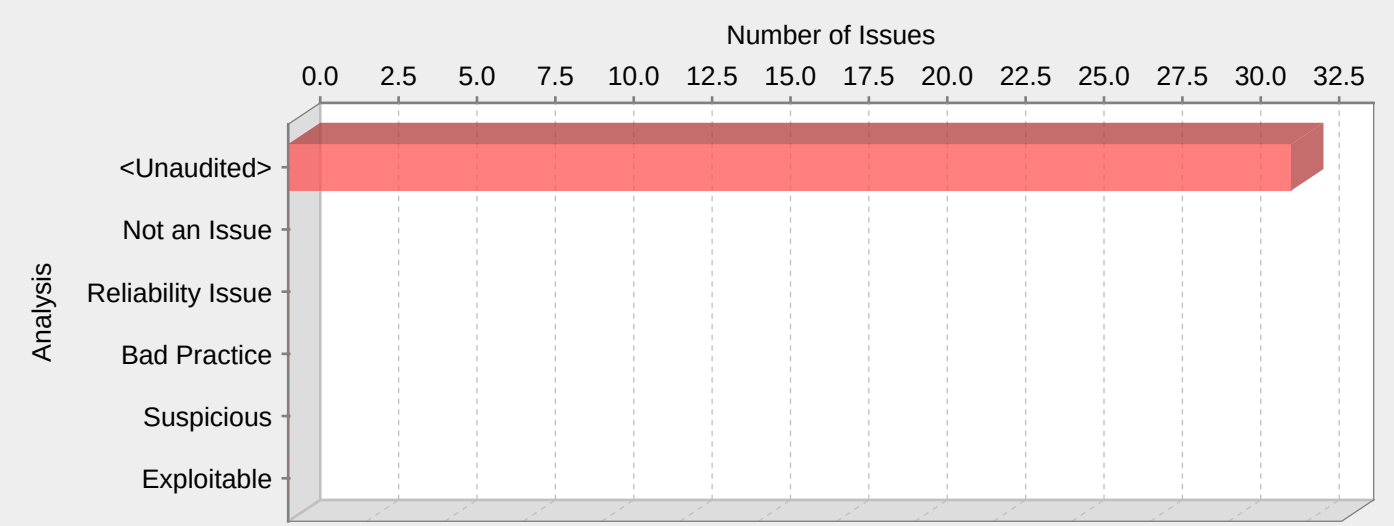
Results Outline

Overall number of results

The scan found 82 issues.

Vulnerability Examples by Category

Category: Password Management: Password in Configuration File (32 Issues)



Explanation:

Storing a plaintext password in a configuration file allows anyone who can read the file access to the password-protected resource. Developers sometimes believe that they cannot defend the application from someone who has access to the configuration, but this attitude makes an attacker's job easier. Good password management guidelines require that a password never be stored in plaintext.

Recommendations:

A password should never be stored in plaintext. Instead, the password should be entered by an administrator when the system starts. If that approach is impractical, a less secure but often adequate solution is to obfuscate the password and scatter the de-obfuscation material around the system so that an attacker has to obtain and correctly combine multiple system resources to decipher the password.

Some third-party products claim the ability to manage passwords in a more secure way. For example, WebSphere Application Server 4.x uses a simple XOR encryption algorithm for obfuscating values, but be skeptical about such facilities. WebSphere and other application servers offer outdated and relatively weak encryption mechanisms that are insufficient for security-sensitive environments. For a secure solution the only viable option is a proprietary one.

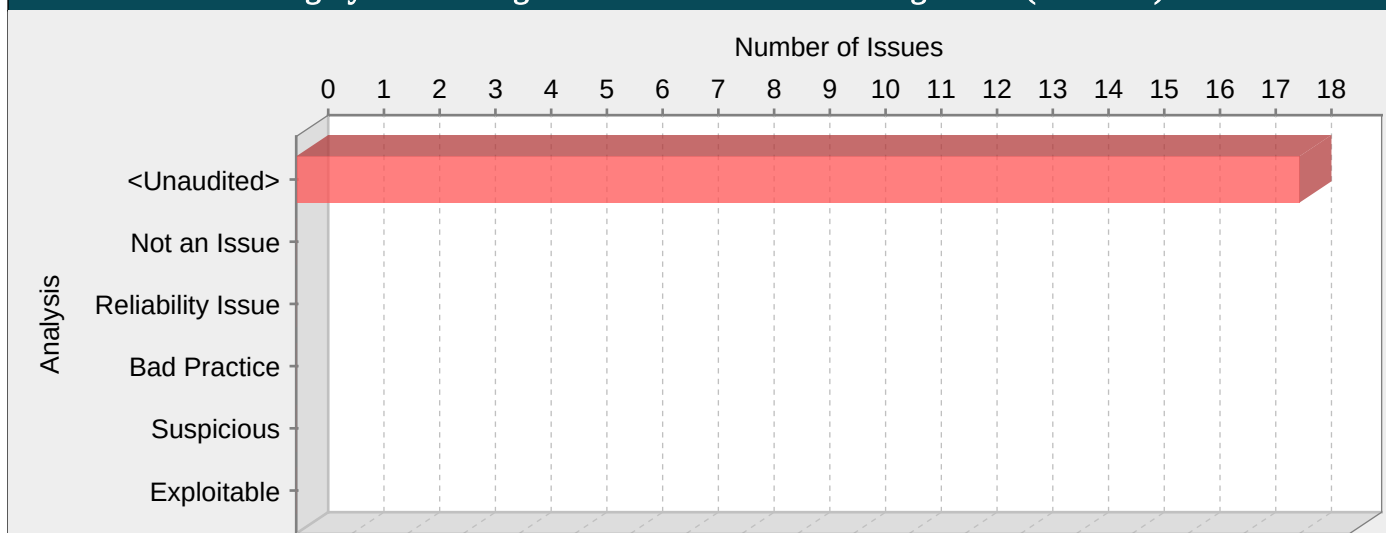
Tips:

- 1. HPE Security Fortify Static Code Analyzer searches configuration files for common names used for password properties. Audit these issues by verifying that the flagged entry is used as a password and that the password entry contains plaintext.
- 2. If the entry in the configuration file is a default password, require that it be changed in addition to requiring that it be obfuscated in the configuration file.

epds.local.properties, line 4 (Password Management: Password in Configuration File)

Fortify Priority:	High	Folder	High
Kingdom:	Environment		
Abstract:	Storing a plaintext password in a configuration file may result in a system compromise.		
Sink:	epds.local.properties:4 forgotPasswordSubmitEmailURI()		
2	#Tue Jun 14 03:43:22 MDT 2016		
3	validateTokenURI=ENC(MKbd7T8BHIhjpezBHPwdX/nVTSuqBwydLxIz6TY1ntZRjLqAgNtjAvaKZaMY0j41WgSzfwJulhHLvHe+ghUXxt9awmcaicxmLe1bBLnUKHE\=)		
4	forgotPasswordSubmitEmailURI=ENC(Bu4YvzJyLL0ceN3YhwhZq043pvtUZg3qsaJYL4jjvvSgzian7QvDS5zZj/xFHU+iQeXYoDfdNfab9o2eD8BA09LassyHE0Wzvm2IBaZLC8yCBi0cMZe2pQ\=\\=)		
5	checkSecurityAnswer=ENC(8R5QAICKrDbJKuiJ508pYkudBwzvSeNldJIzQV0pb1KvrQEgVdufhKWFzFfx+wniZ2DVau7DSZjGW5nlnCi4NYxd76FXDdYOAcZLY4iVoLx10FdII0dAjob08saqBSKICs46bcKKSfK\=)		
6	validatePasswordURI=ENC(fGXmtNPDsigGzXZDBipobNc/c9Pj0WAawUeCoBX4aAbtnZN9HUJGy1UBa0qD06nbXcIrD10ndkgoAVD/7iL+N63uWInFqPfcwMoxY0chiLu/5J5v24fq1Q\=\\=)		

Category: Mass Assignment: Insecure Binder Configuration (18 Issues)

**Explanation:**

To ease development and increase productivity, most modern frameworks allow an object to be automatically instantiated and populated with the HTTP request parameters whose names match an attribute of the class to be bound. Automatic instantiation and population of objects speeds up development, but can lead to serious problems if implemented without caution. Any attribute in the bound classes, or nested classes, will be automatically bound to the HTTP request parameters. Therefore, malicious users will be able to assign a value to any attribute in bound or nested classes, even if they are not exposed to the client through web forms or API contracts.

Example 1: Using Spring MVC with no additional configuration, the following controller method will bind the HTTP request parameters to any attribute in the User or Details classes:

```
@RequestMapping(method = RequestMethod.POST)
public String registerUser(@ModelAttribute("user") User user, BindingResult result, SessionStatus status) {
    if (db.save(user).hasErrors()) {
        return "CustomerForm";
    } else {
        status.setComplete();
        return "CustomerSuccess";
    }
}
```

Where User class is defined as:

```
public class User {
    private String name;
    private String lastname;
    private int age;
    private Details details;

    // Public Getters and Setters
    ...
}
```

and Details class is defined as:

```
public class Details {
    private boolean is_admin;
    private int id;
    private Date login_date;

    // Public Getters and Setters
    ...
}
```

Recommendations:

When using frameworks that provide automatic model binding capabilities, it is a best practice to control which attributes will be bound to the model object so that even if attackers figure out other non-exposed attributes of the model or nested classes, they will not be able to bind arbitrary values from HTTP request parameters.

Depending on the framework used there will be different ways to control the model binding process:

Spring MVC: It is possible to control which HTTP request parameters will be used in the binding process and which ones will be ignored.

Example 2: On Spring applications using annotations, a method can be annotated with `@InitBinder` so that the framework will inject a reference to the Spring Model Binder. The Spring Model Binder can be configured with `setAllowedFields` and `setDisallowedFields` to control which attributes will be bound:

```
final String[] DISALLOWED_FIELDS = new String[]{"details.role", "details.age", "is_admin"};
```

```
@InitBinder
```

```
public void initBinder(WebDataBinder binder) {  
    binder.setDisallowedFields(DISALLOWED_FIELDS);  
}
```

Example 3: Spring applications extending `BaseCommandController` can override the `initBinder(HttpServletRequest request, ServletRequestDataBinder binder)` method in order to get a reference to the Spring model binder:

```
@Override
```

```
protected void initBinder(HttpServletRequest request, ServletRequestDataBinder binder) throws Exception {  
    binder.setDisallowedFields(new String[]{"details.role", "details.age", "is_admin"});  
}
```

Apache Struts: Struts 1 and 2 will only bind HTTP request parameters to those Actions or ActionForms attributes which have an associated public setter accessor. If an attribute should not be bound to the request, its setter should be made private.

Example 4: Configure a private setter so that Struts framework will not automatically bind any HTTP request parameter:

```
private String role;  
private void setRole(String role) {  
    this.role = role;  
}
```

REST frameworks: Most REST frameworks will automatically bind any HTTP request bodies with content type JSON or XML to a model object. Depending on the libraries used for JSON and XML processing, there will be different ways of controlling the binding process. The following are some examples for JAXB (XML) and Jackson (JSON):

Example 5: Models bound from XML documents using Oracle's JAXB library can control the binding process using different annotations such as `@XmlAccessorType`, `@XmlAttribute`, `@XmlElement` and `@XmlTransient`. The binder can be told not to bind any attributes by default, by annotating the models using the `@XmlAccessorType` annotation with the value `XmlAccessType.NONE` and then selecting which fields should be bound using `@XmlAttribute` and `@XmlElement` annotations:

```
@XmlRootElement
```

```
@XmlAccessorType(XmlAccessType.NONE)
```

```
public class User {  
    private String role;  
    private String name;  
    @XmlAttribute  
    public String getName() {  
        return name;  
    }  
    public void setName(String name) {  
        this.name = name;  
    }  
    public String getRole() {  
        return role;  
    }  
    public void setRole(String role) {  
        this.role = role;  
    }  
}
```

Example 6: Models bound from JSON documents using FastXML's Jackson library can control the binding process using different annotations such as `@JsonIgnore`, `@JsonIgnoreProperties`, `@JsonIgnoreType` and `@JsonInclude`. The binder can be told to ignore certain attributes by annotating them with `@JsonIgnore` annotation:

```
public class User {  
    @JsonIgnore  
    private String role;  
    private String name;  
    public String getName() {  
        return name;  
    }  
    public void setName(String name) {  
        this.name = name;  
    }  
    public String getRole() {  
        return role;  
    }  
    public void setRole(String role) {  
        this.role = role;  
    }  
}
```

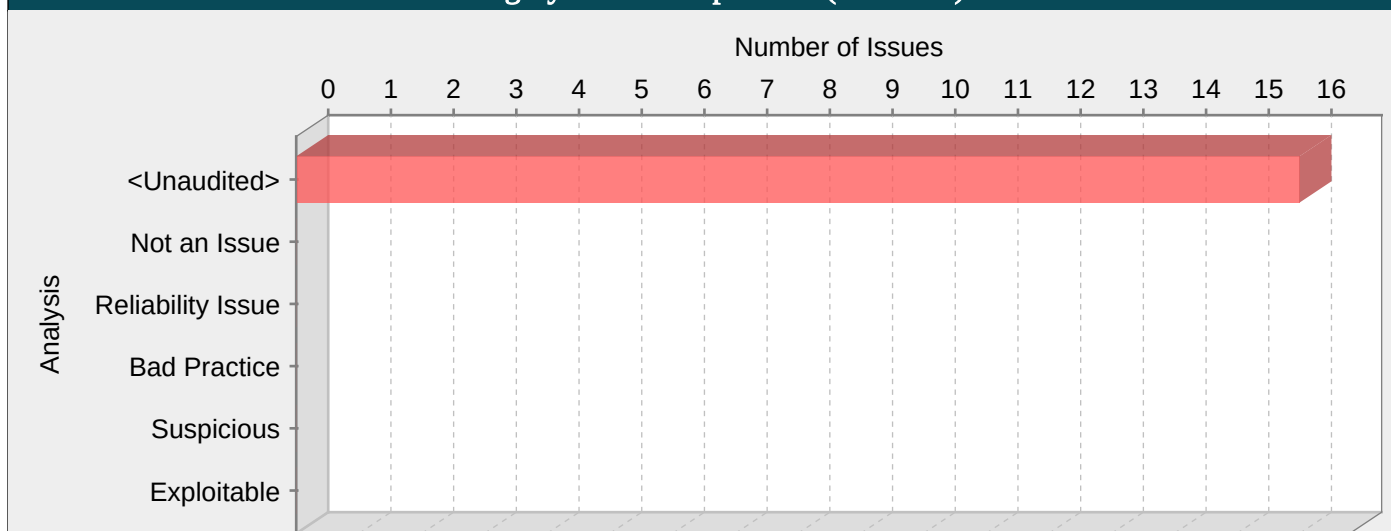
A different approach to protecting against mass assignment vulnerabilities is using a layered architecture where the HTTP request parameters are bound to DTO objects. The DTO objects are only used for that purpose, exposing only those attributes defined in the web forms or API contracts, and then mapping these DTO objects to Domain Objects where the rest of the private attributes can be defined.

Tips:

- 1. This vulnerability category can be classified as a design flaw since accurately finding these issues requires understanding of the application architecture which is beyond the capabilities of static analysis. Therefore, it is possible that if the application is designed to use specific DTO objects for HTTP request binding, there will not be any need to configure the binder to exclude any attributes.

CaseDocketSheetController.java, line 570 (Mass Assignment: Insecure Binder Configuration)			
Fortify Priority:	High	Folder	High
Kingdom:	API Abuse		
Abstract:	The framework binder used for binding the HTTP request parameters to the model class has not been explicitly configured to allow, or disallow certain attributes.		
Sink:	CaseDocketSheetController.java:570 Function: changeProtest_Info_Attribute()		
568			
569	@RequestMapping(value = "/change-protest_Info-attribute/{typeOfchange}", method = RequestMethod.POST, produces = MediaType.APPLICATION_JSON)		
570	public @ResponseBody ModelMap changeProtest_Info_Attribute(		
571	HttpServletRequest request,		
572	@PathVariable("typeOfchange") String typeOfchange,		

Category: Path Manipulation (16 Issues)

**Explanation:**

Path manipulation errors occur when the following two conditions are met:

1. An attacker can specify a path used in an operation on the filesystem.
2. By specifying the resource, the attacker gains a capability that would not otherwise be permitted.

For example, the program may give the attacker the ability to overwrite the specified file or run with a configuration controlled by the attacker.

Example 1: The following code uses input from an HTTP request to create a file name. The programmer has not considered the possibility that an attacker could provide a file name such as "../../../tomcat/conf/server.xml", which causes the application to delete one of its own configuration files.

```
String rName = request.getParameter("reportName");
File rFile = new File("/usr/local/apfr/reports/" + rName);
...
rFile.delete();
```

Example 2: The following code uses input from a configuration file to determine which file to open and echo back to the user. If the program runs with privileges and malicious users can change the configuration file, they can use the program to read any file on the system that ends with the extension .txt.

```
fis = new FileInputStream(cfg.getProperty("sub")+".txt");
amt = fis.read(arr);
out.println(arr);
```

Some think that in the mobile world, classic vulnerabilities, such as path manipulation, do not make sense -- why would the user attack themselves? However, keep in mind that the essence of mobile platforms is applications that are downloaded from various sources and run alongside each other on the same device. The likelihood of running a piece of malware next to a banking application is high, which necessitates expanding the attack surface of mobile applications to include inter-process communication.

Example 3: The following code adapts Example 1 to the Android platform.

```
...
String rName = this.getIntent().getExtras().getString("reportName");
File rFile = getBaseContext().getFileStreamPath(rName);
...
rFile.delete();
...
```

Recommendations:

The best way to prevent path manipulation is with a level of indirection: create a list of legitimate resource names that a user is allowed to specify, and only allow the user to select from the list. With this approach the input provided by the user is never used directly to specify the resource name.

In some situations this approach is impractical because the set of legitimate resource names is too large or too hard to keep track of. Programmers often resort to blacklisting in these situations. Blacklisting selectively rejects or escapes potentially dangerous characters before using the input. However, any such list of unsafe characters is likely to be incomplete and will almost certainly become out of date. A better approach is to create a whitelist of characters that are allowed to appear in the resource name and accept input composed exclusively of characters in the approved set.

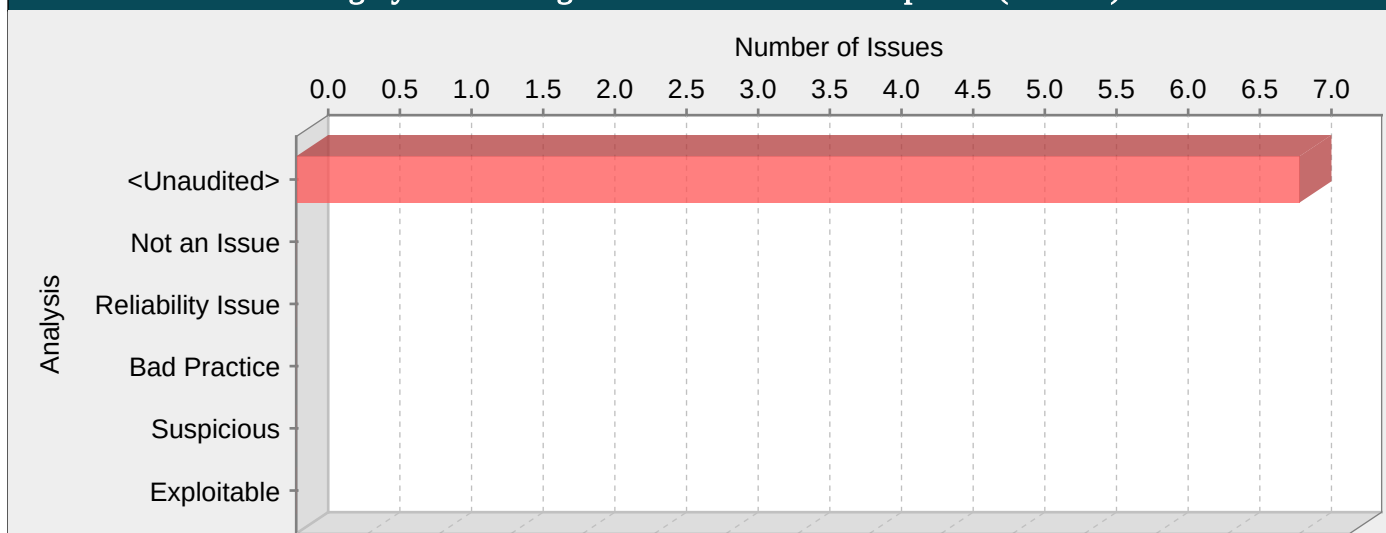
Tips:

1. If the program is performing input validation, satisfy yourself that the validation is correct, and use the HPE Security Fortify Custom Rules Editor to create a cleanse rule for the validation routine.
2. Since implementing a blacklist that is effective on its own is notoriously difficult, if validation logic relies on blacklisting, one should be skeptical. Consider different types of input encoding and different sets of meta-characters that might have special meaning when interpreted by different operating systems, databases, or other resources. Determine whether or not the blacklist can be updated easily, correctly, and completely if these requirements ever change.
3. A number of modern web frameworks provide mechanisms for performing validation of user input. Struts and Spring MVC are among them. To highlight the unvalidated sources of input, the HPE Security Fortify Secure Coding Rulepacks dynamically re-prioritize the issues reported by HPE Security Fortify Static Code Analyzer by lowering their probability of exploit and providing pointers to the supporting evidence whenever the framework validation mechanism is in use. We refer to this feature as Context-Sensitive Ranking. To further assist the HPE Security Fortify user with the auditing process, the HPE Security Fortify Software Security Research group makes available the Data Validation project template that groups the issues into folders based on the validation mechanism applied to their source of input.

EPDSFileUploadController.java, line 209 (Path Manipulation)

Fortify Priority:	Critical	Folder	Critical
Kingdom:	Input Validation and Representation		
Abstract:	Attackers can control the filesystem path argument to File() at EPDSFileUploadController.java line 209, which allows them to access or modify otherwise protected files.		
Source:	EPDS_FileUtils.java:355 javax.servlet.ServletRequest.getParameter()		
353			
354	if (request.getParameter("a_No") != null && a_No == null) {		
355	a_No = request.getParameter("a_No");		
356	}		
Sink:	EPDSFileUploadController.java:209 java.io.File.File()		
207	String storage_Path = EPDS_FileUtils.getStoragePath(request, null);		
208			
209	new File(storage_Path).mkdirs();		
210	String fileStoragePath = new File(storage_Path, fileName)		
211	.getAbsolutePath() + ".temp";		

Category: Mass Assignment: Sensitive Field Exposure (7 Issues)

**Explanation:**

Modern frameworks allow developers to automatically bind HTTP request parameters from both request query and body into model objects for ease of development and increased productivity. If the binder is not correctly configured to control which HTTP request parameters are bound to which model attributes, an attacker may be able to abuse the model binding process and set any other attributes that should not be exposed to user control. This binding is possible even if the model attributes do not appear in the web forms or API contracts.

Example 1: The following Spring controller method (registerUser) is accessed from a web form that asks a user to register an account by providing their first name, last name, and age:

```
@RequestMapping(method = RequestMethod.POST)
public String registerUser(@ModelAttribute("user") User user, BindingResult result, SessionStatus status) {
    if (db.save(user).hasErrors()) {
        return "CustomerForm";
    } else {
        status.setComplete();
        return "CustomerSuccess";
    }
}
```

If registration is successful, the user data will be persisted in the database. The User class is defined as:

```
public class User {
    private String name;
    private String lastname;
    private int age;
    private Details details;
    // Public Getters and Setters
    ...
}
```

And the Details class is defined as:

```
public class Details {
    private boolean is_admin;
    private int id;
    private Date login_date;
    // Public Getters and Setters
    ...
}
```

Given the above scenario, an attacker may be able to explore the application and discover that there is a details attribute in the User model. If this is the case, the attacker may then attempt to overwrite the current values assigned to their attributes.

If an attacker can find out these internal attributes, and the framework binder is not correctly configured in order to disallow binding of these attributes, then the attacker would be able to register an administrator account by sending the following request:

```
name=John&lastname=Smith&age=22&details.is_admin=true
```

Recommendations:

In order to avoid mass assignment vulnerabilities it is important to control the HTTP request to model class binding process. There are different alternatives depending on the framework used:

Architectural: Define dedicated DTO classes to be bound to user data and containing only those attributes that should be exposed to end users. Map their attributes with the Domain Objects used along the application. These Domain Objects will contain attributes to receive the validated user data and extra attributes that should never be exposed to user control.

Binder configuration: Certain frameworks such as Spring, allow the developers to configure the model binder to accept or reject HTTP request parameters based on their names. Eg:

Example 2:

```
@Override
```

```
protected void initBinder(HttpServletRequest request, ServletRequestDataBinder binder) throws Exception {
    binder.setDisallowedFields(new String[]{"details.role", "details.age", "is_admin"});
}
```

Model class configuration: Depending on the frameworks used and the serialization/deserialization libraries in use, the model classes to be bound to the HTTP request parameters can be annotated to allow, or disallow, certain attribute bindings. For example, if user data is sent in JSON format and Jackson library is used to deserialize this data, the `@JsonIgnore` annotation can be used to tell Jackson to ignore a given attribute for serialization and deserialization purposes.

Example 3:

```
public class User {
    @JsonIgnore
    private String role;
    private String name;
    public String getName() {
        return name;
    }
    public void setName(String name) {
        this.name = name;
    }
    public String getRole() {
        return role;
    }
    public void setRole(String role) {
        this.role = role;
    }
}
```

In other frameworks such as Apache Struts 1 and 2, the framework will only allow binding HTTP request parameters to class members with public setters. In case a given attribute should not be exposed, the setter should be declared private.

Example 4:

```
private String role;
private void setRole(String role) {
    this.role = role;
}
```

Tips:

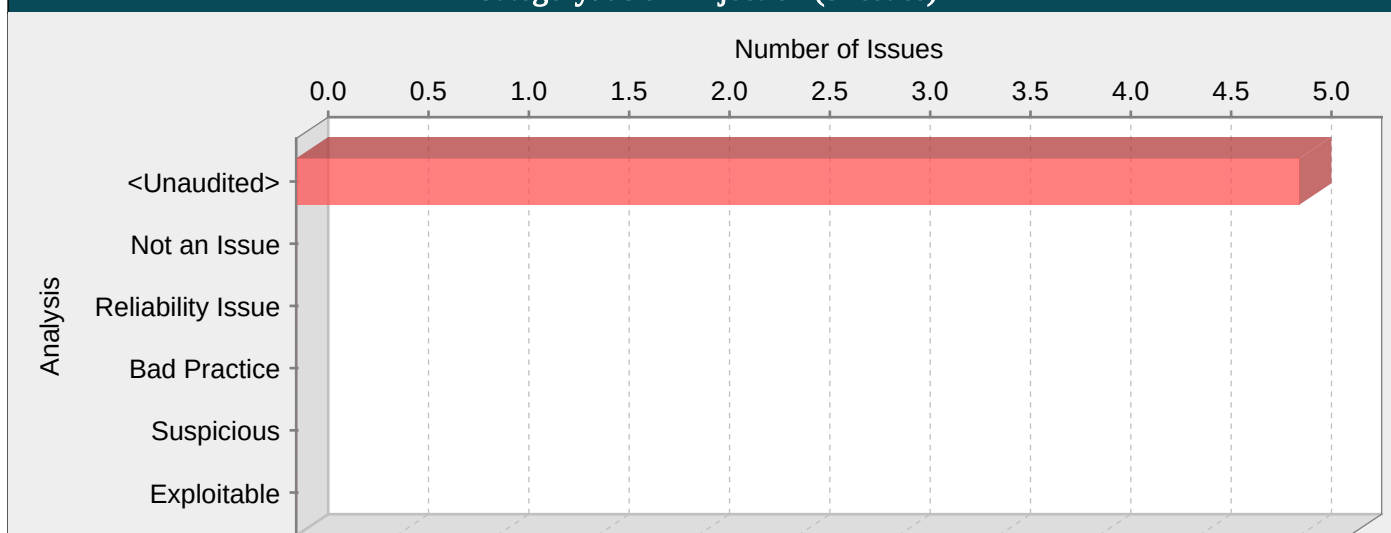
1. This vulnerability category can be classified as a design flaw since accurately finding these issues requires understanding of the application architecture which is beyond the capabilities of static analysis. Therefore, it is possible that if the application is designed to use specific DTO objects for HTTP request binding, there will not be any need to configure the binder to exclude any attributes.

User_info_dto.java, line 411 (Mass Assignment: Sensitive Field Exposure)

Fortify Priority:	High	Folder	High
Kingdom:	Encapsulation		

Abstract:	A sensitive field defined in User_info_dto.java on line 411 is exposed to the model binder.
Source:	UserInfoController.java:372 registerAgencyInfo(3)
370	@RequestMapping(value = "/register-agency-info", method = RequestMethod.POST, produces = MediaType.APPLICATION_JSON)
371	public void registerAgencyInfo(HttpServletRequest request,
372	ModelMap map, RedirectAttributes redirectmap, User_info_dto user_info_dto) throws Exception {
373	
374	if (logger.isDebugEnabled()){
Sink:	User_info_dto.java:411 Assignment to this.role()
409	
410	public void setRole(String role) {
411	this.role = role;
412	}

Category: JSON Injection (5 Issues)

**Explanation:**

JSON injection occurs when:

1. Data enters a program from an untrusted source.
2. The data is written to a JSON stream.

Applications typically use JSON to store data or send messages. When used to store data, JSON is often treated like cached data and may potentially contain sensitive information. When used to send messages, JSON is often used in conjunction with a RESTful service and can be used to transmit sensitive information such as authentication credentials.

The semantics of JSON documents and messages can be altered if an application constructs JSON from unvalidated input. In a relatively benign case, an attacker may be able to insert extraneous elements that cause an application to throw an exception while parsing a JSON document or request. In a more serious case, such as that involving JSON injection, an attacker may be able to insert extraneous elements that allow for the predictable manipulation of business critical values within a JSON document or request. In some cases, JSON injection can lead to cross-site scripting or dynamic code evaluation.

Example 1: The following Java code uses Jackson to serialize user account authentication information for non-privileged users (those with a role of "default" as opposed to privileged users with a role of "admin") from user-controlled input variables username and password to the JSON file located at ~/user_info.json:

```
...
JsonFactory jfactory = new JsonFactory();
JsonGenerator jGenerator = jfactory.createJsonGenerator(new File("~/user_info.json"), JsonEncoding.UTF8);
jGenerator.writeStartObject();
jGenerator.writeFieldName("username");
jGenerator.writeRawValue "\"" + username + "\"");
jGenerator.writeFieldName("password");
jGenerator.writeRawValue "\"" + password + "\"");
jGenerator.writeFieldName("role");
jGenerator.writeRawValue "\"default\"");
jGenerator.writeEndObject();
jGenerator.close();
```

Yet, because the JSON serialization is performed using `JsonGenerator.writeRawValue()`, the untrusted data in username and password will not be validated to escape JSON-related special characters. This allows a user to arbitrarily insert JSON keys, possibly changing the structure of the serialized JSON. In this example, if the non-privileged user mallory with password Evil123! were to append `,"role":"admin"` to her username when entering it at the prompt that sets the value of the username variable, the resulting JSON saved to ~/user_info.json would be:

```
{
"username":"mallory",
"role":"admin",
"password":"Evil123!",
```

```
"role":"default"
}
```

If this serialized JSON file were then deserialized to an HashMap object with Jackson's JsonParser as so:

```
JsonParser jParser = jfactory.createJsonParser(new File("~/user_info.json"));
while (jParser.nextToken() != JsonToken.END_OBJECT) {
String fieldname = jParser.getCurrentName();
if ("username".equals(fieldname)) {
jParser.nextToken();
userInfo.put(fieldname, jParser.getText());
}
if ("password".equals(fieldname)) {
jParser.nextToken();
userInfo.put(fieldname, jParser.getText());
}
if ("role".equals(fieldname)) {
jParser.nextToken();
userInfo.put(fieldname, jParser.getText());
}
if (userInfo.size() == 3)
break;
}
jParser.close();
```

The resulting values for the username, password, and role keys in the HashMap object would be mallory, Evil123!, and admin respectively. Without further verification that the deserialized JSON values are valid, the application will incorrectly assign user mallory "admin" privileges.

Recommendations:

When writing user supplied data to JSON some guidelines should be followed:

1. Don't create JSON attributes whose names are derived from user input.
2. Ensure that all serialization to JSON is performed using a safe serialization function that delimits untrusted data within single or double quotes and escapes any special characters.

Example 2: The following Java code implements the same functionality as that in Example 1, but instead uses JsonGenerator.writeString() rather than JsonGenerator.writeRawValue() to serialize the data, therefore ensuring that any untrusted data is properly delimited and escaped:

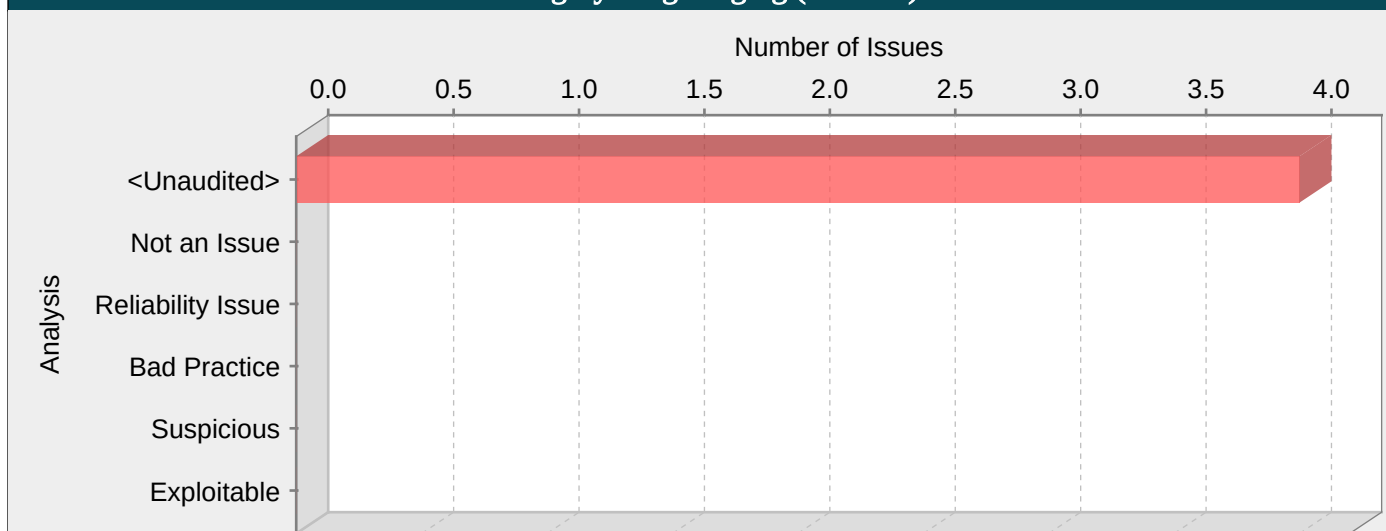
```
...
JsonFactory jfactory = new JsonFactory();
JsonGenerator jGenerator = jfactory.createJsonGenerator(new File("~/user_info.json"), JsonEncoding.UTF8);
jGenerator.writeStartObject();
jGenerator.writeFieldName("username");
jGenerator.writeString(username);
jGenerator.writeFieldName("password");
jGenerator.writeString(password);
jGenerator.writeFieldName("role");
jGenerator.writeString("default");
jGenerator.writeEndObject();
jGenerator.close();
```

AuthUtil.java, line 108 (JSON Injection)

Fortify Priority:	Critical	Folder	Critical
-------------------	----------	--------	----------

Kingdom:	Input Validation and Representation
Abstract:	On line 108 of AuthUtil.java, the method getJsonNode() writes unvalidated input into JSON. This call could allow an attacker to inject arbitrary elements or attributes into the JSON entity.
Source:	AuthUtil.java:147 org.springframework.web.client.RestTemplate.getForObject() 145 RestTemplate restTemplate = new RestTemplate(requestFactory); 146 String targetURI = PropertyFileEncrypter.decrypt(prop.getProperty(uri)) + pathVariable; 147 return restTemplate.getForObject(targetURI, responseClass); 148 }
Sink:	AuthUtil.java:108 com.fasterxml.jackson.databind.ObjectMapper.readTree() 106 } 107 108 JsonNode jsonNode = new ObjectMapper().readTree(validResponse); 109 JsonNode message = jsonNode.path(nodePath); 110 return message;

Category: Log Forging (4 Issues)

**Explanation:**

Log forging vulnerabilities occur when:

1. Data enters an application from an untrusted source.
2. The data is written to an application or system log file.

Applications typically use log files to store a history of events or transactions for later review, statistics gathering, or debugging. Depending on the nature of the application, the task of reviewing log files may be performed manually on an as-needed basis or automated with a tool that automatically culls logs for important events or trending information.

Interpretation of the log files may be hindered or misdirected if an attacker can supply data to the application that is subsequently logged verbatim. In the most benign case, an attacker may be able to insert false entries into the log file by providing the application with input that includes appropriate characters. If the log file is processed automatically, the attacker can render the file unusable by corrupting the format of the file or injecting unexpected characters. A more subtle attack might involve skewing the log file statistics. Forged or otherwise, corrupted log files can be used to cover an attacker's tracks or even to implicate another party in the commission of a malicious act [1]. In the worst case, an attacker may inject code or other commands into the log file and take advantage of a vulnerability in the log processing utility [2].

Example 1: The following web application code attempts to read an integer value from a request object. If the value fails to parse as an integer, then the input is logged with an error message indicating what happened.

```
...
String val = request.getParameter("val");
try {
    int value = Integer.parseInt(val);
}
catch (NumberFormatException nfe) {
    log.info("Failed to parse val = " + val);
}
...
```

If a user submits the string "twenty-one" for val, the following entry is logged:

INFO: Failed to parse val=twenty-one

However, if an attacker submits the string "twenty-one%0a%0aINFO:+User+logged+out%3dbadguy", the following entry is logged:

INFO: Failed to parse val=twenty-one

INFO: User logged out=badguy

Clearly, attackers can use this same mechanism to insert arbitrary log entries.

Some think that in the mobile world, classic web application vulnerabilities, such as log forging, do not make sense -- why would the user attack themselves? However, keep in mind that the essence of mobile platforms is applications that are downloaded from various sources and run alongside each other on the same device. The likelihood of running a piece of malware next to a banking application is high, which necessitates expanding the attack surface of mobile applications to include inter-process communication.

Example 2: The following code adapts Example 1 to the Android platform.

```
...
String val = this.getIntent().getExtras().getString("val");
try {
    int value = Integer.parseInt();
}
catch (NumberFormatException nfe) {
    Log.e(TAG, "Failed to parse val = " + val);
}
...
```

Recommendations:

Prevent log forging attacks with indirection: create a set of legitimate log entries that correspond to different events that must be logged and only log entries from this set. To capture dynamic content, such as users logging out of the system, always use server-controlled values rather than user-supplied data. This ensures that the input provided by the user is never used directly in a log entry.

Example 1 can be rewritten to use a pre-defined log entry that corresponds to a `NumberFormatException` as follows:

```
...
public static final String NFE = "Failed to parse val. The input is required to be an integer value."
...
String val = request.getParameter("val");
try {
    int value = Integer.parseInt(val);
}
catch (NumberFormatException nfe) {
    log.info(NFE);
}
..
```

And here is an Android equivalent:

```
...
public static final String NFE = "Failed to parse val. The input is required to be an integer value."
...
String val = this.getIntent().getExtras().getString("val");
try {
    int value = Integer.parseInt();
}
catch (NumberFormatException nfe) {
    Log.e(TAG, NFE);
}
...
```

In some situations this approach is impractical because the set of legitimate log entries is too large or complicated. In these situations, developers often fall back on blacklisting. Blacklisting selectively rejects or escapes potentially dangerous characters before using the input. However, a list of unsafe characters can quickly become incomplete or outdated. A better approach is to create a whitelist of characters that are allowed to appear in log entries and accept input composed exclusively of characters in the approved set. The most critical character in most log forging attacks is the '\n' (newline) character, which should never appear on a log entry whitelist.

Tips:

1. Many logging operations are created only for the purpose of debugging a program during development and testing. In our experience, debugging will be enabled, either accidentally or purposefully, in production at some point. Do not excuse log forging vulnerabilities simply because a programmer says "I don't have any plans to turn that on in production".

2. A number of modern web frameworks provide mechanisms for performing validation of user input. Struts and Spring MVC are among them. To highlight the unvalidated sources of input, the HPE Security Fortify Secure Coding Rulepacks dynamically re-prioritize the issues reported by HPE Security Fortify Static Code Analyzer by lowering their probability of exploit and providing pointers to the supporting evidence whenever the framework validation mechanism is in use. We refer to this feature as Context-Sensitive Ranking. To further assist the HPE Security Fortify user with the auditing process, the HPE Security Fortify Software Security Research group makes available the Data Validation project template that groups the issues into folders based on the validation mechanism applied to their source of input.

PreAuthUtil.java, line 39 (Log Forging)

Fortify Priority:	High	Folder	High
Kingdom:	Input Validation and Representation		
Abstract:	The method checIfTokenIsValid() in PreAuthUtil.java writes unvalidated user input to the log on line 39. An attacker could take advantage of this behavior to forge log entries or inject malicious content into the log.		
Source:	Util.java:235 javax.servlet.http.HttpServletRequest.getHeader() 233 234 if (ip == null ip.length() == 0 "unknown".equalsIgnoreCase(ip)) { 235 ip = request.getHeader("Proxy-Client-IP"); 236 } 237 if (ip == null ip.length() == 0 "unknown".equalsIgnoreCase(ip)) {		
Sink:	PreAuthUtil.java:39 org.slf4j.Logger.info() 37 boolean isValid = false; 38 String response = ""; 39 logger.info("Validate Token response clientIp ={}",remoteIp); 40 41 try {		

Detailed Project Summary

Files Scanned

Code base location: C:/AmersFiles/Gitworkspace/SpringSecurityEPDS

Files Scanned:

.settings/org.eclipse.wst.common.project.facet.core.prefs.xml xml 321 bytes May 13, 2016 8:44:52 AM
.settings/org.eclipse.wst.common.project.facet.core.xml xml 390 bytes May 13, 2016 8:44:51 AM
functional-tests/pom.xml xml 5.4 KB Feb 10, 2016 3:37:54 PM
functional-tests/src/test/resources/arquillian.xml xml 2.1 KB Feb 10, 2016 3:37:54 PM
pom.xml xml 13 KB Jul 7, 2016 3:21:06 PM
src/main/java/gov/gao/epds/clamscan/ClamScan.java java 127 Lines 8.9 KB Jun 13, 2016 8:39:51 AM
src/main/java/gov/gao/epds/clamscan/ScanResult.java java 27 Lines 2 KB Apr 1, 2016 11:33:43 AM
src/main/java/gov/gao/epds/config/HibernateConfiguration.java java 2.6 KB May 19, 2016 9:17:55 AM
src/main/java/gov/gao/epds/config/JaversSpringJpaApplicationConfig.java java 5.2 KB May 20, 2016 10:08:01 AM
src/main/java/gov/gao/epds/config/PropertyFileConfig.java java 4 Lines 773 bytes Apr 15, 2016 11:53:01 AM
src/main/java/gov/gao/epds/controller/CaseDocketSheetController.java java 216 Lines 27.6 KB Jul 18, 2016 5:07:00 PM
src/main/java/gov/gao/epds/controller/DashboardController.java java 170 Lines 24.5 KB Jul 18, 2016 5:07:37 PM
src/main/java/gov/gao/epds/controller/EPDSFileUploadController.java java 75 Lines 8.8 KB Jul 13, 2016 1:24:15 PM
src/main/java/gov/gao/epds/controller/HomeController.java java 54 Lines 7.4 KB Jul 19, 2016 12:54:12 PM
src/main/java/gov/gao/epds/controller/ProtestInfoController.java java 320 Lines 34.5 KB Jul 18, 2016 5:09:49 PM
src/main/java/gov/gao/epds/controller/UserInfoController.java java 160 Lines 25.1 KB Jun 20, 2016 9:37:59 AM
src/main/java/gov/gao/epds/dao/Agency_Info_DAO.java java 58 Lines 4.9 KB Jun 15, 2016 5:07:01 PM
src/main/java/gov/gao/epds/dao/File_Info_DAO.java java 229 Lines 17.3 KB Jul 5, 2016 11:21:59 AM
src/main/java/gov/gao/epds/dao/GC_Track_Service_DAO.java java 59 Lines 4.8 KB Jul 15, 2016 9:15:23 AM
src/main/java/gov/gao/epds/dao/Protest_Info_DAO.java java 514 Lines 48.3 KB Jul 8, 2016 8:56:57 AM
src/main/java/gov/gao/epds/dao/User_Info_DAO.java java 512 Lines 38.8 KB Jun 15, 2016 4:22:10 PM
src/main/java/gov/gao/epds/dto/AdvancedSearchDTO.java java 105 Lines 9.6 KB Jul 15, 2016 5:14:28 PM
src/main/java/gov/gao/epds/dto/BrowserLogs.java java 11 Lines 1.2 KB Mar 16, 2016 5:57:46 PM
src/main/java/gov/gao/epds/dto/CaseCompletionStatus.java java 12 Lines 1.6 KB Jul 15, 2016 5:07:14 PM
src/main/java/gov/gao/epds/dto/CompanyInfo.java java 10 Lines 1.1 KB Jul 15, 2016 5:00:08 PM
src/main/java/gov/gao/epds/dto/DTOValidator.java java 6 Lines 2.5 KB Jul 19, 2016 9:32:03 AM
src/main/java/gov/gao/epds/dto/DashboardPreferences.java java 5 Lines 414 bytes May 4, 2016 9:56:08 AM
src/main/java/gov/gao/epds/dto/EditFileInfo.java java 6 Lines 779 bytes Jul 18, 2016 9:08:13 AM
src/main/java/gov/gao/epds/dto/EditProtestInfo.java java 14 Lines 2 KB Jul 18, 2016 9:18:38 AM
src/main/java/gov/gao/epds/dto/InputValidationError.java java 8 Lines 728 bytes Jul 18, 2016 2:01:10 PM
src/main/java/gov/gao/epds/dto/LoginDTO.java java 7 Lines 865 bytes Jun 28, 2016 3:53:13 PM
src/main/java/gov/gao/epds/dto/ProtestInfoFormDTO.java java 79 Lines 8.3 KB Jul 15, 2016 5:06:53 PM
src/main/java/gov/gao/epds/dto/Recaptcha.java java 3 Lines 585 bytes Jun 8, 2016 3:08:44 PM
src/main/java/gov/gao/epds/dto/RemoveIntervenor.java java 6 Lines 793 bytes Jul 15, 2016 5:12:20 PM
src/main/java/gov/gao/epds/dto/SubmitNewDocDTO.java java 58 Lines 7.3 KB Jul 15, 2016 4:05:25 PM
src/main/java/gov/gao/epds/dto/TemplateDataDTO.java java 13 Lines 1.4 KB Feb 10, 2016 3:37:57 PM
src/main/java/gov/gao/epds/dto/UploadedFileIdentifier.java java 5 Lines 697 bytes Mar 7, 2016 1:26:57 PM
src/main/java/gov/gao/epds/dto/User_info_auth.java java 43 Lines 3.5 KB Feb 10, 2016 3:37:57 PM
src/main/java/gov/gao/epds/dto/User_info_dto.java java 92 Lines 10.3 KB Jul 19, 2016 9:28:51 AM
src/main/java/gov/gao/epds/dto/ValidateToken.java java 6 Lines 818 bytes Jul 15, 2016 5:09:52 PM
src/main/java/gov/gao/epds/fileupload/utils/ChunkFileInfo.java java 61 Lines 3.7 KB Feb 10, 2016 3:37:57 PM
src/main/java/gov/gao/epds/fileupload/utils/ChunkFileInfoStorage.java java 29 Lines 2.3 KB Jul 15, 2016 5:13:43 PM
src/main/java/gov/gao/epds/fileupload/utils/HttpUtils.java java 14 Lines 774 bytes Feb 10, 2016 3:37:56 PM
src/main/java/gov/gao/epds/filters/Cors.java java 16 Lines 2.8 KB Apr 25, 2016 8:40:54 AM
src/main/java/gov/gao/epds/filters/CorsFilter.java java 2.2 KB Apr 25, 2016 1:14:14 PM
src/main/java/gov/gao/epds/filters/CsrfHeaderFilter.java java 17 Lines 4.5 KB Jun 16, 2016 12:58:22 AM

src/main/java/gov/gao/epds/filters/CustomPreAuthenticationFilter.java java 33 Lines 3.7 KB Jun 22, 2016 7:36:08 AM

src/main/java/gov/gao/epds/gctrack/Attorney.java java 7 Lines 526 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/AuthenticationFilter.java java 16 Lines 1.6 KB Jun 15, 2016 5:36:59 PM

src/main/java/gov/gao/epds/gctrack/AuthenticationService.java java 21 Lines 1.6 KB Jun 14, 2016 9:16:45 AM

src/main/java/gov/gao/epds/gctrack/BatchUpdateLogInfo.java java 13 Lines 1.6 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/EPDS_Update.java java 17 Lines 1.7 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/EPDS_event.java java 13 Lines 1.1 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/EpdsUpdate.java java 5 Lines 717 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/Event_Notification_Response.java java 5 Lines 425 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/GCTrackService.java java 154 Lines 13.3 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/GC_Track_Service_Call_Response.java java 9 Lines 727 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/GC_Track_WebService_Event_Test.java java 8 Lines 928 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/GC_test_dataHandler.java java 209 Lines 15.5 KB Jun 8, 2016 12:14:10 PM

src/main/java/gov/gao/epds/gctrack/GC_track_case.java java 21 Lines 1.8 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/Gc_Track_Update2.java java 7 Lines 558 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/Gc_protest_info.java java 59 Lines 6.2 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/NewEpdsEventsPerCase.java java 17 Lines 1.5 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/NewProtest.java java 11 Lines 939 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/OrgUnit.java java 5 Lines 316 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/gctrack/Party.java java 5 Lines 338 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/logging/ui/LoggingUtil.java java 2 Lines 679 bytes Jun 13, 2016 8:42:06 AM

src/main/java/gov/gao/epds/persistence/DataAccess.java java 177 Lines 12.1 KB Jul 7, 2016 2:55:12 PM

src/main/java/gov/gao/epds/persistence/entity/Agency_Info.java java 9 Lines 1 KB Jun 16, 2016 8:55:45 AM

src/main/java/gov/gao/epds/persistence/entity/Attorney_Info.java java 5 Lines 560 bytes Feb 10, 2016 3:37:56 PM

src/main/java/gov/gao/epds/persistence/entity/CustomTrackingRevisionEntity.java java 10 Lines 2 KB Jun 7, 2016 9:06:31 AM

src/main/java/gov/gao/epds/persistence/entity/Doc_Info.java java 9 Lines 959 bytes Feb 10, 2016 3:37:56 PM

src/main/java/gov/gao/epds/persistence/entity/File_Alert.java java 9 Lines 1 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/persistence/entity/File_Info.java java 74 Lines 7.6 KB Jun 16, 2016 8:57:22 AM

src/main/java/gov/gao/epds/persistence/entity/GAO_User.java java 12 Lines 1 KB Jun 1, 2016 11:50:09 AM

src/main/java/gov/gao/epds/persistence/entity/GC_Track_Service_Event.java java 33 Lines 3.6 KB Jun 1, 2016 11:50:03 AM

src/main/java/gov/gao/epds/persistence/entity/Gc_Track_Data.java java 15 Lines 1.7 KB Jun 1, 2016 11:50:15 AM

src/main/java/gov/gao/epds/persistence/entity/Group_Info.java java 5 Lines 557 bytes Feb 10, 2016 3:37:56 PM

src/main/java/gov/gao/epds/persistence/entity/Invited_User.java java 29 Lines 3.4 KB Jun 1, 2016 11:51:25 AM

src/main/java/gov/gao/epds/persistence/entity/Notification.java java 9 Lines 873 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/persistence/entity/Protest_Dm_Info.java java 15 Lines 2.4 KB Jun 6, 2016 2:05:19 PM

src/main/java/gov/gao/epds/persistence/entity/Protest_File_Bridge.java java 7 Lines 883 bytes Jun 6, 2016 2:06:30 PM

src/main/java/gov/gao/epds/persistence/entity/Protest_Info.java java 184 Lines 21 KB Jun 16, 2016 9:17:30 AM

src/main/java/gov/gao/epds/persistence/entity/Request_To_Intervene.java java 7 Lines 766 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/persistence/entity/Tier_1_Agency.java java 7 Lines 1.1 KB Jun 16, 2016 9:02:31 AM

src/main/java/gov/gao/epds/persistence/entity/Tier_2_Agency.java java 9 Lines 1.3 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/persistence/entity/Tier_3_Agency.java java 9 Lines 1.1 KB Jun 16, 2016 9:03:24 AM

src/main/java/gov/gao/epds/persistence/entity/User_Info.java java 57 Lines 5.7 KB Jun 14, 2016 1:15:48 PM

src/main/java/gov/gao/epds/persistence/entity/User_Protest_Role_Bridge.java java 33 Lines 3.9 KB Jun 8, 2016 12:59:43 PM

src/main/java/gov/gao/epds/persistence/entity/User_Role.java java 5 Lines 576 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/persistence/entity/User_Role_Bridge.java java 7 Lines 686 bytes Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/persistence/interceptors/AuditLogInterceptor.java java 18 Lines 1.8 KB Jun 6, 2016 11:46:54 AM

src/main/java/gov/gao/epds/persistence/listener/CustomEntityTrackingRevisionListener.java java 17 Lines 2 KB Jun 14, 2016 2:55:28 PM

src/main/java/gov/gao/epds/rest/auth/services/AuthResourceProvider.java java 20 Lines 1.4 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/gao/epds/rest/auth/services/AuthUtil.java java 84 Lines 7.5 KB Jul 18, 2016 2:09:49 PM

src/main/java/gov/gao/epds/rest/auth/services/AuthenticationController.java java 190 Lines 18.9 KB Jul 19, 2016 12:24:25 PM

src/main/java/gov/gao/epds/rest/auth/services/ServiceResponse.java java 14 Lines 1.1 KB Feb 10, 2016 3:37:57 PM
src/main/java/gov/gao/epds/security/CustomAccessDeniedHandler.java java 9 Lines 1.3 KB Feb 10, 2016 3:37:57 PM
src/main/java/gov/gao/epds/security/PreAuthenticationException.java java 2 Lines 288 bytes Apr 14, 2016 2:31:43 PM
src/main/java/gov/gao/epds/security/RestAuthenticationEntryPoint.java java 12 Lines 1.4 KB Jun 15, 2016 5:43:29 PM
src/main/java/gov/gao/epds/service/CaseDocketSheetService.java java 459 Lines 37.3 KB Jul 18, 2016 9:27:38 AM
src/main/java/gov/gao/epds/service/CustomUserDetailsService.java java 5 Lines 1.3 KB Feb 10, 2016 3:37:55 PM
src/main/java/gov/gao/epds/service/DashboardService.java java 395 Lines 25.8 KB Jun 20, 2016 12:17:31 AM
src/main/java/gov/gao/epds/service/EmailService.java java 173 Lines 16.1 KB Jun 29, 2016 9:29:34 AM
src/main/java/gov/gao/epds/service/GC_Service.java java 351 Lines 33.7 KB Feb 16, 2016 6:47:35 PM
src/main/java/gov/gao/epds/service/HomeService.java java 237 Lines 25.3 KB May 17, 2016 5:14:11 PM
src/main/java/gov/gao/epds/service/ProtestInfoService.java java 434 Lines 44.7 KB Jun 28, 2016 4:53:06 PM
src/main/java/gov/gao/epds/service/UserInfoService.java java 293 Lines 31 KB Jul 13, 2016 3:03:37 PM
src/main/java/gov/gao/epds/service/recaptcha/RecaptchaController.java java 11 Lines 2 KB Jul 18, 2016 5:26:25 PM
src/main/java/gov/gao/epds/service/recaptcha/RecaptchaService.java java 176 bytes Jun 8, 2016 3:08:52 PM
src/main/java/gov/gao/epds/service/recaptcha/RecaptchaServiceException.java java 2 Lines 318 bytes Jun 8, 2016 3:08:58 PM
src/main/java/gov/gao/epds/service/recaptcha/RecaptchaServiceImpl.java java 20 Lines 2.7 KB Jun 14, 2016 3:54:38 AM
src/main/java/gov/gao/epds/service/recaptcha/RestTemplateConfig.java java 6 Lines 1.2 KB Jun 8, 2016 3:09:09 PM
src/main/java/gov/gao/epds/session/EpdsSession.java java 23 Lines 2.3 KB Jun 22, 2016 2:25:01 PM
src/main/java/gov/gao/epds/session/GlobalAttribute.java java 1 Lines 156 bytes Feb 10, 2016 3:37:57 PM
src/main/java/gov/gao/epds/test/ServiceTest.java java 98 Lines 6.7 KB Jun 15, 2016 5:47:22 PM
src/main/java/gov/gao/epds/test/TestDataHandler.java java 20 Lines 2.4 KB Feb 10, 2016 3:37:54 PM
src/main/java/gov/gao/epds/test/ValidationTesting.java java 25 Lines 1.3 KB Jul 18, 2016 2:48:37 PM
src/main/java/gov/gao/epds/testutils/EmailValidatorTest.java java 7 Lines 606 bytes Jul 7, 2016 4:12:33 PM
src/main/java/gov/gao/epds/testutils/Util.java java 35 Lines 3.3 KB Jun 15, 2016 5:49:06 PM
src/main/java/gov/gao/epds/utils/Date_Util.java java 166 Lines 11 KB Feb 16, 2016 1:05:53 PM
src/main/java/gov/gao/epds/utils/EPDS_FileUtils.java java 135 Lines 13.7 KB Jul 8, 2016 6:59:12 AM
src/main/java/gov/gao/epds/utils/ExportToExcel.java java 135 Lines 10.8 KB Jun 15, 2016 5:50:32 PM
src/main/java/gov/gao/epds/utils/GC_track_util.java java 124 Lines 11.1 KB Jul 15, 2016 9:06:22 AM
src/main/java/gov/gao/epds/utils/GlobalFields.java java 7 Lines 882 bytes Mar 7, 2016 1:21:51 PM
src/main/java/gov/gao/epds/utils/GlobalParams.java java 22 Lines 2 KB Jul 13, 2016 1:30:05 PM
src/main/java/gov/gao/epds/utils/HibernateUtil.java java 11 Lines 1000 bytes Feb 10, 2016 3:37:55 PM
src/main/java/gov/gao/epds/utils/Params.java java 17 Lines 1.2 KB Jun 14, 2016 3:55:35 AM
src/main/java/gov/gao/epds/utils/PreAuthUtil.java java 48 Lines 6.8 KB Jul 15, 2016 10:46:28 AM
src/main/java/gov/gao/epds/utils/PropertyFileEncrypter.java java 17 Lines 1.5 KB Jun 22, 2016 10:24:34 AM
src/main/java/gov/gao/epds/utils/Protest_info_util.java java 158 Lines 15.2 KB Jun 15, 2016 5:55:14 PM
src/main/java/gov/gao/epds/utils/PublicHoliday.java java 211 Lines 11.2 KB Feb 10, 2016 3:37:55 PM
src/main/java/gov/gao/epds/utils/PublicHoliday_Util.java java 1 Lines 73 bytes Feb 10, 2016 3:37:57 PM
src/main/java/gov/gao/epds/utils/RegistrationUtil.java java 213 Lines 10.8 KB Jul 19, 2016 9:48:05 AM
src/main/java/gov/gao/epds/utils/RegularExpressions.java java 3 Lines 204 bytes Jul 5, 2016 1:36:26 PM
src/main/java/gov/gao/epds/utils/RemoveUnlimitedJCERestriction.java java 25 Lines 3.4 KB Jun 16, 2016 8:40:53 AM
src/main/java/gov/gao/epds/utils/SpringApplicationContext.java java 4 Lines 727 bytes Feb 10, 2016 3:37:57 PM
src/main/java/gov/gao/epds/utils/Util.java java 170 Lines 11.4 KB Jun 9, 2016 3:27:58 PM
src/main/java/gov/gao/epds/utils/Util_Test.java java 28 Lines 2.9 KB Feb 10, 2016 3:37:55 PM
src/main/java/gov/gao/epds/utils/ZipFile_Util.java java 94 Lines 9.1 KB Jun 15, 2016 6:06:12 PM
src/main/java/gov/gao/epds/utils/templates/HtmlToPDF.java java 152 Lines 11.6 KB Jun 15, 2016 6:10:00 PM
src/main/java/gov/gao/epds/utils/templates/TemplateUtils.java java 146 Lines 9.3 KB Mar 24, 2016 3:53:20 PM
src/main/java/gov/treas/fms/services/tcsonline/Classification.java java 4 Lines 2.1 KB Feb 10, 2016 3:37:58 PM
src/main/java/gov/treas/fms/services/tcsonline/ClassificationData.java java 5 Lines 2.3 KB Feb 10, 2016 3:37:58 PM
src/main/java/gov/treas/fms/services/tcsonline/CompleteOnlineCollection.java java 4 Lines 1.9 KB Feb 10, 2016 3:37:58 PM
src/main/java/gov/treas/fms/services/tcsonline/CompleteOnlineCollectionRequest.java java 6 Lines 2.2 KB Feb 10, 2016 3:37:57 PM

PM

src/main/java/gov/treas/fms/services/tconline/CompleteOnlineCollectionResponse.java java 4 Lines 1.6 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/CompleteOnlineCollectionResponseType.java java 4 Lines 1.9 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/CreateForce.java java 4 Lines 1.6 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/CreateForceRequest.java java 12 Lines 4.6 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/CreateForceResponse.java java 4 Lines 1.6 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/treas/fms/services/tconline/CreateForceResponseType.java java 4 Lines 1.6 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/treas/fms/services/tconline/CustomCollectionFields.java java 26 Lines 9.5 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/GetDetails.java java 4 Lines 1.6 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/GetDetailsRequest.java java 8 Lines 2.9 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/GetDetailsResponse.java java 4 Lines 1.6 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/treas/fms/services/tconline/GetDetailsResponseType.java java 4 Lines 1.6 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/treas/fms/services/tconline/ObjectFactory.java java 41 Lines 11 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/StartOnlineCollection.java java 4 Lines 1.8 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/StartOnlineCollectionRequest.java java 36 Lines 13.3 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/StartOnlineCollectionResponse.java java 4 Lines 1.4 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/StartOnlineCollectionResponseType.java java 4 Lines 1.8 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/treas/fms/services/tconline/TCSOnlineService.java java 2 Lines 4.2 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/TCSOnlineService_Service.java java 21 Lines 3.1 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/treas/fms/services/tconline/TCSServiceFault.java java 6 Lines 2.2 KB Feb 10, 2016 3:37:57 PM

src/main/java/gov/treas/fms/services/tconline/TCSServiceFault_Exception.java java 5 Lines 1.2 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/TransactionData.java java 16 Lines 6.4 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/TransactionType.java java 9 Lines 1.2 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/Transactions.java java 4 Lines 1.9 KB Feb 10, 2016 3:37:58 PM

src/main/java/gov/treas/fms/services/tconline/package-info.java java 136 bytes Feb 10, 2016 3:37:58 PM

src/main/resources/epds.local.properties java_properties 3.3 KB Jun 14, 2016 9:15:16 AM

src/main/resources/epds.oireasd0108.properties java_properties 3.4 KB Jun 14, 2016 9:15:20 AM

src/main/resources/epds.oireasd0110.properties java_properties 3.6 KB Jun 14, 2016 9:15:24 AM

src/main/resources/log4j.properties java_properties 877 bytes Jun 15, 2016 11:28:00 AM

src/main/webapp/WEB-INF/spring/dispatcher-servlet.xml xml 7.1 KB Jul 14, 2016 8:50:59 AM

src/main/webapp/WEB-INF/spring/spring-security.xml xml 2.9 KB Jun 14, 2016 8:54:43 AM

src/main/webapp/WEB-INF/web.xml xml 2.8 KB Feb 10, 2016 3:37:58 PM

src/main/webapp/resources/GAO_Templates/html/ACKNOWLEDGMENTLETTERSWITHOUTPROTECTIVEORDER.htm html 19.6 KB Mar 24, 2016 3:53:23 PM

src/main/webapp/resources/GAO_Templates/html/ACKNOWLEDGMENTLETTERSWITHPROTECTIVEORDER.htm html 50.6 KB Mar 24, 2016 3:53:20 PM

src/main/webapp/resources/GAO_Templates/html/ACKNOWLEDGMENTOFCLAIMFORCOSTS.htm html 11.8 KB Mar 24, 2016 3:53:20 PM

src/main/webapp/resources/GAO_Templates/html/ADMISSIONTOPROTECTIVEORDER.htm html 9.5 KB Mar 24, 2016 3:53:20 PM

src/main/webapp/resources/GAO_Templates/html/AMENDEDADMISSIONTOPROTECTIVEORDER.htm html 9.9 KB Mar 24, 2016 3:53:20 PM

src/main/webapp/resources/GAO_Templates/html/ENTITLEMENTACKNOWLEDGMENTOFFREQUEST.htm html 12.2 KB Mar 24, 2016 3:53:20 PM

src/main/webapp/resources/GAO_Templates/html/NOTICE.htm html 4.8 KB Mar 24, 2016 3:53:20 PM

src/main/webapp/resources/GAO_Templates/html/PROTECTIVEORDERNOTICEAPPLICATION.htm html 34.4 KB Mar 24, 2016 3:53:20 PM

src/main/webapp/resources/GAO_Templates/html/WITHDRAWALCONFIRMATION.htm html 5.1 KB Mar 24, 2016 3:53:20 PM

src/main/webapp/resources/Zip_File_Contents/data/filters/angular-filter.min.js javascript 1 Lines 19.6 KB Feb 10, 2016 3:37:59 PM

src/main/webapp/resources/Zip_File_Contents/data/script.js javascript 61 Lines 4.7 KB Apr 25, 2016 1:02:05 PM

src/main/webapp/resources/Zip_File_Contents/data/scripts/angular-cookies.js javascript 40 Lines 5.7 KB Feb 10, 2016 3:37:59 PM

src/main/webapp/resources/Zip_File_Contents/data/scripts/angular-local-storage.js javascript 206 Lines 14.9 KB Feb 10, 2016 3:37:59 PM

src/main/webapp/resources/Zip_File_Contents/data/vendor/angular/angular-route.js javascript 205 Lines 34.9 KB Feb 10, 2016 3:37:59 PM

src/main/webapp/resources/Zip_File_Contents/data/vendor/angular/angular.js javascript 6,198 Lines 938.1 KB Feb 10, 2016 3:37:59 PM

src/main/webapp/resources/Zip_File_Contents/data/vendor/bootstrap/js/bootstrap.js javascript 1,292 Lines 67.3 KB Feb 10, 2016 3:37:59 PM

src/main/webapp/resources/Zip_File_Contents/data/vendor/bootstrap/js/bootstrap.min.js javascript 2 Lines 36 KB Feb 10, 2016 3:38:01 PM

src/main/webapp/resources/Zip_File_Contents/data/vendor/bootstrap/js/npm.js javascript 12 Lines 484 bytes Feb 10, 2016 3:37:59 PM

src/main/webapp/resources/Zip_File_Contents/data/views/case-docket-file-info-view.html html 1 Lines 4.5 KB May 18, 2016 1:12:22 AM

src/main/webapp/resources/Zip_File_Contents/index.html html 1 Lines 6.9 KB Jun 10, 2016 12:07:41 PM

src/main/webapp/resources/emailTemplates/add-edit-notes.tpl.htm html 1.1 KB May 15, 2016 5:29:09 PM

src/main/webapp/resources/emailTemplates/caseDocketFilings.tpl.html html 1 KB May 18, 2016 10:10:53 AM

src/main/webapp/resources/emailTemplates/invitation.tpl.htm html 1.2 KB May 15, 2016 5:28:24 PM

src/main/webapp/resources/emailTemplates/newProtest.tpl.html html 1.4 KB May 15, 2016 5:26:41 PM

src/main/webapp/resources/emailTemplates/otherProtest.tpl.html html 1.3 KB May 15, 2016 5:27:14 PM

src/main/webapp/resources/emailTemplates/paymentConfirmation.tpl.html html 1.2 KB May 15, 2016 5:27:33 PM

src/main/webapp/resources/template-edit/filename.htm html 8.2 KB Mar 24, 2016 3:53:20 PM

src/test/java/com/EPDS/US/Dog.java java 19 Lines 1.3 KB Feb 10, 2016 3:37:54 PM

src/test/java/com/EPDS/US/Student.java java 22 Lines 1.9 KB Feb 10, 2016 3:37:54 PM

src/test/java/com/EPDS/US/Test.java java 73 Lines 4.5 KB Feb 10, 2016 3:37:54 PM

src/test/java/com/EPDS/US/TestSendMail.java java 3 Lines 503 bytes Apr 7, 2016 2:08:51 PM

src/test/java/gov/gao/edps/webservice/GcTrackCase2.java java 15 Lines 1.3 KB Feb 10, 2016 3:37:54 PM

src/test/java/gov/gao/edps/webservice/RestClientConfig.java java 17 Lines 2.5 KB Feb 10, 2016 3:37:54 PM

src/test/java/gov/gao/edps/webservice/SimpleClient.java java 810 bytes Feb 10, 2016 3:37:54 PM

src/test/java/gov/gao/edps/webservice/Test.java java 174 Lines 14.4 KB Feb 10, 2016 3:37:54 PM

src/test/java/gov/gao/epds/clam/test/ArbitraryInputStream.java java 17 Lines 1.2 KB Apr 1, 2016 4:34:11 PM

src/test/java/gov/gao/epds/clam/test/ArbitraryInputStreamTestCase.java java 26 Lines 2 KB Apr 1, 2016 4:34:11 PM

src/test/java/gov/gao/epds/clam/test/ClamScanTestCase.java java 37 Lines 4.2 KB Apr 1, 2016 4:38:48 PM

src/test/java/gov/usda/epds/test/Sha512Test.java java 16 Lines 1.1 KB May 13, 2016 4:34:52 PM

src/test/java/gov/usda/epds/test/Test.java java 143 Lines 11.8 KB Feb 10, 2016 3:37:54 PM

target/classes/epds.local.properties java_properties 3.3 KB Jul 18, 2016 5:05:28 PM

target/classes/epds.oireasd0108.properties java_properties 3.4 KB Jul 18, 2016 5:05:28 PM

target/classes/epds.oireasd0110.properties java_properties 3.6 KB Jul 18, 2016 5:05:28 PM

target/classes/log4j.properties java_properties 877 bytes Jul 18, 2016 5:05:28 PM

target/m2e-wtp/web-resources/META-INF/maven/goa.gao.epds/SpringSecurityEPDS/pom.properties java_properties 260 bytes Jul 19, 2016 8:38:27 AM

target/m2e-wtp/web-resources/META-INF/maven/goa.gao.epds/SpringSecurityEPDS/pom.xml xml 13 KB Jul 19, 2016 8:38:27 AM

Reference Elements

Classpath:

C:\Users\mhussaini\.m2\repository\antlr\antlr\2.7.7\antlr-2.7.7.jar

C:\Users\mhussaini\.m2\repository\com\fastxml\jackson\core\jackson-annotations\2.5.0\jackson-annotations-2.5.0.jar
C:\Users\mhussaini\.m2\repository\ch\qos\logback\logback-classic\1.1.3\logback-classic-1.1.3.jar
C:\Users\mhussaini\.m2\repository\ch\qos\logback\logback-core\1.1.3\logback-core-1.1.3.jar
C:\Users\mhussaini\.m2\repository\com\fastxml\jackson\core\jackson-core\2.5.3\jackson-core-2.5.3.jar
C:\Users\mhussaini\.m2\repository\com\fastxml\jackson\core\jackson-databind\2.5.3\jackson-databind-2.5.3.jar
C:\Users\mhussaini\.m2\repository\com\google\code\gson\gson\2.5\gson-2.5.jar
C:\Users\mhussaini\.m2\repository\com\google\guava\guava\18.0\guava-18.0.jar
C:\Users\mhussaini\.m2\repository\com\googlecode\json-simple\json-simple\1.1\json-simple-1.1.jar
C:\Users\mhussaini\.m2\repository\com\itextpdf\itextpdf\5.5.8\itextpdf-5.5.8.jar
C:\Users\mhussaini\.m2\repository\com\itextpdf\tool\xmlworker\5.5.8\xmlworker-5.5.8.jar
C:\Users\mhussaini\.m2\repository\com\jcraft\jsch\0.1.52\jsch-0.1.52.jar
C:\Users\mhussaini\.m2\repository\com\nimbusds\nimbus-jose-jwt\4.7\nimbus-jose-jwt-4.7.jar
C:\Users\mhussaini\.m2\repository\com\sun\istack\istack-commons-runtime\2.16\istack-commons-runtime-2.16.jar
C:\Users\mhussaini\.m2\repository\com\sun\xml\bind\jaxb-core\2.2.7\jaxb-core-2.2.7.jar
C:\Users\mhussaini\.m2\repository\com\sun\xml\bind\jaxb-impl\2.2.7\jaxb-impl-2.2.7.jar
C:\Users\mhussaini\.m2\repository\com\sun\xml\fastinfoset\FastInfoset\1.2.12\FastInfoset-1.2.12.jar
C:\Users\mhussaini\.m2\repository\commons-beanutils\commons-beanutils-core\1.8.3\commons-beanutils-core-1.8.3.jar
C:\Users\mhussaini\.m2\repository\commons-beanutils\commons-beanutils\1.9.2\commons-beanutils-1.9.2.jar
C:\Users\mhussaini\.m2\repository\commons-codec\commons-codec\1.9\commons-codec-1.9.jar
C:\Users\mhussaini\.m2\repository\commons-collections\commons-collections\3.2.2\commons-collections-3.2.2.jar
C:\Users\mhussaini\.m2\repository\commons-configuration\commons-configuration\1.10\commons-configuration-1.10.jar
C:\Users\mhussaini\.m2\repository\commons-digester\commons-digester\1.8.1\commons-digester-1.8.1.jar
C:\Users\mhussaini\.m2\repository\commons-fileupload\commons-fileupload\1.3.1\commons-fileupload-1.3.1.jar
C:\Users\mhussaini\.m2\repository\commons-httpclient\commons-httpclient\3.1\commons-httpclient-3.1.jar
C:\Users\mhussaini\.m2\repository\commons-io\commons-io\1.3.2\commons-io-1.3.2.jar
C:\Users\mhussaini\.m2\repository\commons-lang\commons-lang\2.6\commons-lang-2.6.jar
C:\Users\mhussaini\.m2\repository\commons-logging\commons-logging\1.2\commons-logging-1.2.jar
C:\Users\mhussaini\.m2\repository\commons-validator\commons-validator\1.5.1\commons-validator-1.5.1.jar
C:\Users\mhussaini\.m2\repository\dom4j\dom4j\1.6.1\dom4j-1.6.1.jar
C:\Users\mhussaini\.m2\repository\javax\activation\activation\1.1.1\activation-1.1.1.jar
C:\Users\mhussaini\.m2\repository\javax\inject\javax.inject\1\javax.inject-1.jar
C:\Users\mhussaini\.m2\repository\javax\mail\javax.mail-api\1.5.4\javax.mail-api-1.5.4.jar
C:\Users\mhussaini\.m2\repository\javax\servlet\javax.servlet-api\3.1.0\javax.servlet-api-3.1.0.jar
C:\Users\mhussaini\.m2\repository\javax\servlet\jsp\javax.servlet.jsp-api\2.3.1\javax.servlet.jsp-api-2.3.1.jar
C:\Users\mhussaini\.m2\repository\javax\servlet\jstl\1.2\jstl-1.2.jar
C:\Users\mhussaini\.m2\repository\javax\xml\bind\jaxb-api\2.2.7\jaxb-api-2.2.7.jar
C:\Users\mhussaini\.m2\repository\javax\xml\bind\jsr173_api\1.0\jsr173_api-1.0.jar
C:\Users\mhussaini\.m2\repository\joda-time\joda-time\2.9.3\joda-time-2.9.3.jar
C:\Users\mhussaini\.m2\repository\log4j\log4j\1.2.17\log4j-1.2.17.jar
C:\Users\mhussaini\.m2\repository\mysql\mysql-connector-java\5.1.31\mysql-connector-java-5.1.31.jar
C:\Users\mhussaini\.m2\repository\net\jcip\jcip-annotations\1.0\jcip-annotations-1.0.jar
C:\Users\mhussaini\.m2\repository\net\minidev\json-smart\1.3.1\json-smart-1.3.1.jar
C:\Users\mhussaini\.m2\repository\net\sourceforge\jexcelapi\jxl\2.6.12\jxl-2.6.12.jar
C:\Users\mhussaini\.m2\repository\net\sourceforge\nekohtml\nekohtml\1.9.16\nekohtml-1.9.16.jar
C:\Users\mhussaini\.m2\repository\org\apache\httpcomponents\httpclient\4.5.2\httpclient-4.5.2.jar
C:\Users\mhussaini\.m2\repository\org\apache\httpcomponents\httpcore\4.4.4\httpcore-4.4.4.jar
C:\Users\mhussaini\.m2\repository\org\apache\poi\poi-ooxml-schemas\3.9\poi-ooxml-schemas-3.9.jar
C:\Users\mhussaini\.m2\repository\org\apache\poi\poi-ooxml\3.9\poi-ooxml-3.9.jar
C:\Users\mhussaini\.m2\repository\org\apache\poi\poi\3.9\poi-3.9.jar
C:\Users\mhussaini\.m2\repository\org\apache\xmlbeans\xmlbeans\2.3.0\xmlbeans-2.3.0.jar

C:\Users\mhussaini\.m2\repository\org\apache\xmlgraphics\batik-css\1.8\batik-css-1.8.jar
C:\Users\mhussaini\.m2\repository\org\apache\xmlgraphics\batik-ext\1.8\batik-ext-1.8.jar
C:\Users\mhussaini\.m2\repository\org\apache\xmlgraphics\batik-util\1.8\batik-util-1.8.jar
C:\Users\mhussaini\.m2\repository\org\aspectj\aspectjrt\1.8.1\aspectjrt-1.8.1.jar
C:\Users\mhussaini\.m2\repository\org\aspectj\aspectjweaver\1.8.6\aspectjweaver-1.8.6.jar
C:\Users\mhussaini\.m2\repository\org\beanshell\bsh-core\2.0b4\bsh-core-2.0b4.jar
C:\Users\mhussaini\.m2\repository\org\bouncycastle\bcprov-ext-jdk15on\1.53\bcprov-ext-jdk15on-1.53.jar
C:\Users\mhussaini\.m2\repository\org\bouncycastle\bcprov-jdk15on\1.53\bcprov-jdk15on-1.53.jar
C:\Users\mhussaini\.m2\repository\org\codehaus\jackson\jackson-core-asl\1.9.12\jackson-core-asl-1.9.12.jar
C:\Users\mhussaini\.m2\repository\org\codehaus\jackson\jackson-jaxrs\1.9.12\jackson-jaxrs-1.9.12.jar
C:\Users\mhussaini\.m2\repository\org\codehaus\jackson\jackson-mapper-asl\1.9.12\jackson-mapper-asl-1.9.12.jar
C:\Users\mhussaini\.m2\repository\org\codehaus\jackson\jackson-xc\1.9.12\jackson-xc-1.9.12.jar
C:\Users\mhussaini\.m2\repository\org\codehaus\jettison\jettison\1.3.2\jettison-1.3.2.jar
C:\Users\mhussaini\.m2\repository\org\hibernate\common\hibernate-commons-annotations\4.0.2.Final\hibernate-commons-annotations-4.0.2.Final.jar
C:\Users\mhussaini\.m2\repository\org\hibernate\hibernate-core\4.2.7.Final\hibernate-core-4.2.7.Final.jar
C:\Users\mhussaini\.m2\repository\org\hibernate\hibernate-entitymanager\4.1.7.Final\hibernate-entitymanager-4.1.7.Final.jar
C:\Users\mhussaini\.m2\repository\org\hibernate\hibernate-envers\4.1.7.Final\hibernate-envers-4.1.7.Final.jar
C:\Users\mhussaini\.m2\repository\org\hibernate\javax\persistence\hibernate-jpa-2.0-api\1.0.1.Final\hibernate-jpa-2.0-api-1.0.1.Final.jar
C:\Users\mhussaini\.m2\repository\org\jasypt\jasypt\1.9.2\jasypt-1.9.2.jar
C:\Users\mhussaini\.m2\repository\org\javassist\javassist\3.18.1-GA\javassist-3.18.1-GA.jar
C:\Users\mhussaini\.m2\repository\org\javers\javers-core\1.6.7\javers-core-1.6.7.jar
C:\Users\mhussaini\.m2\repository\org\javers\javers-hibernate\1.3.2\javers-hibernate-1.3.2.jar
C:\Users\mhussaini\.m2\repository\org\javers\javers-persistence-sql\1.6.7\javers-persistence-sql-1.6.7.jar
C:\Users\mhussaini\.m2\repository\org\javers\javers-spring\1.6.7\javers-spring-1.6.7.jar
C:\Users\mhussaini\.m2\repository\org\jboss\logging\jboss-logging\3.1.0.GA\jboss-logging-3.1.0.GA.jar
C:\Users\mhussaini\.m2\repository\org\jboss\resteasy\resteasy-client\3.0.13.Final\resteasy-client-3.0.13.Final.jar
C:\Users\mhussaini\.m2\repository\org\jboss\resteasy\resteasy-jackson-provider\3.0.13.Final\resteasy-jackson-provider-3.0.13.Final.jar
C:\Users\mhussaini\.m2\repository\org\jboss\resteasy\resteasy-jaxb-provider\3.0.13.Final\resteasy-jaxb-provider-3.0.13.Final.jar
C:\Users\mhussaini\.m2\repository\org\jboss\resteasy\resteasy-jaxrs\3.0.13.Final\resteasy-jaxrs-3.0.13.Final.jar
C:\Users\mhussaini\.m2\repository\org\jboss\resteasy\resteasy-jettison-provider\3.0.13.Final\resteasy-jettison-provider-3.0.13.Final.jar
C:\Users\mhussaini\.m2\repository\org\jboss\resteasy\resteasy-spring\3.0.13.Final\resteasy-spring-3.0.13.Final.jar
C:\Users\mhussaini\.m2\repository\org\jboss\spec\javax\annotation\jboss-annotations-api_1.2_spec\1.0.0.Final\jboss-annotations-api_1.2_spec-1.0.0.Final.jar
C:\Users\mhussaini\.m2\repository\org\jboss\spec\javax\transaction\jboss-transaction-api_1.1_spec\1.0.1.Final\jboss-transaction-api_1.1_spec-1.0.1.Final.jar
C:\Users\mhussaini\.m2\repository\org\jboss\spec\javax\transaction\jboss-transaction-api_1.2_spec\1.0.0.Final\jboss-transaction-api_1.2_spec-1.0.0.Final.jar
C:\Users\mhussaini\.m2\repository\org\jboss\spec\javax\ws\rs\jboss-jaxrs-api_2.0_spec\1.0.0.Final\jboss-jaxrs-api_2.0_spec-1.0.0.Final.jar
C:\Users\mhussaini\.m2\repository\org\jsoup\jsoup\1.8.3\jsoup-1.8.3.jar
C:\Users\mhussaini\.m2\repository\org\owasp\antisamy\antisamy\1.5.3\antisamy-1.5.3.jar
C:\Users\mhussaini\.m2\repository\org\owasp\esapi\esapi\2.1.0.1\esapi-2.1.0.1.jar
C:\Users\mhussaini\.m2\repository\org\picocontainer\picocontainer\2.14.3\picocontainer-2.14.3.jar
C:\Users\mhussaini\.m2\repository\org\polyjdbc\polyjdbc\0.6.2\polyjdbc-0.6.2.jar
C:\Users\mhussaini\.m2\repository\org\slf4j\jcl-over-slf4j\1.7.12\jcl-over-slf4j-1.7.12.jar
C:\Users\mhussaini\.m2\repository\org\slf4j\slf4j-api\1.7.12\slf4j-api-1.7.12.jar
C:\Users\mhussaini\.m2\repository\org\slf4j\slf4j-log4j12\1.7.12\slf4j-log4j12-1.7.12.jar

C:\Users\mhussaini\.m2\repository\org\springframework\data\spring-data-commons\1.12.1.RELEASE\spring-data-commons-1.12.1.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\data\spring-data-envers\1.0.1.RELEASE\spring-data-envers-1.0.1.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\data\spring-data-jpa\1.10.1.RELEASE\spring-data-jpa-1.10.1.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\security\spring-security-config\4.1.0.RELEASE\spring-security-config-4.1.0.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\security\spring-security-core\4.1.0.RELEASE\spring-security-core-4.1.0.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\security\spring-security-web\4.1.0.RELEASE\spring-security-web-4.1.0.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\spring-aop\4.1.6.RELEASE\spring-aop-4.1.6.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\spring-beans\4.1.6.RELEASE\spring-beans-4.1.6.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\spring-context\4.1.6.RELEASE\spring-context-4.1.6.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\spring-core\4.1.6.RELEASE\spring-core-4.1.6.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\spring-expression\4.1.6.RELEASE\spring-expression-4.1.6.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\spring-jdbc\4.1.6.RELEASE\spring-jdbc-4.1.6.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\spring-orm\4.1.6.RELEASE\spring-orm-4.1.6.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\spring-tx\4.1.6.RELEASE\spring-tx-4.1.6.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\spring-web\4.1.6.RELEASE\spring-web-4.1.6.RELEASE.jar
C:\Users\mhussaini\.m2\repository\org\springframework\spring-webmvc\4.1.6.RELEASE\spring-webmvc-4.1.6.RELEASE.jar
C:\Users\mhussaini\.m2\repository\stax\stax-api\1.0.1\stax-api-1.0.1.jar
C:\Users\mhussaini\.m2\repository\xalan\xalan\2.7.0\xalan-2.7.0.jar
C:\Users\mhussaini\.m2\repository\xerces\xercesImpl\2.8.0\xercesImpl-2.8.0.jar
C:\Users\mhussaini\.m2\repository\xml-apis\xml-apis-ext\1.3.04\xml-apis-ext-1.3.04.jar
C:\Users\mhussaini\.m2\repository\xml-apis\xml-apis\1.3.03\xml-apis-1.3.03.jar
C:\Users\mhussaini\.m2\repository\xom\xom\1.2.5\xom-1.2.5.jar
C:\Users\mhussaini\Downloads\ojdbc7.jar
C:\Users\mhussaini\Eclipse Luna With Git\eclipse\plugins\org.hamcrest.core_1.3.0.v201303031735.jar
C:\Users\mhussaini\Eclipse Luna With Git\eclipse\plugins\org.junit_4.11.0.v201303080030\junit.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\activation\api\main\activation-1.1.1-redhat-2.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\annotation\api\main\jboss-annotations-api_1.1_spec-1.0.1.Final-redhat-2.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\ejb\api\main\jboss-ejb-api_3.1_spec-1.0.2.Final-redhat-2.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\el\api\main\jboss-el-api_2.2_spec-1.0.4.Final-redhat-1.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\enterprise\api\main\cdi-api-1.0-SP4-redhat-4.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\enterprise\deploy\api\main\jboss-jad-api_1.2_spec-1.0.1.Final-redhat-2.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\faces\api\main\jboss-jsf-api_2.1_spec-2.1.28.Final-redhat-1.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\inject\api\main\javax.inject-1.redhat-4.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\interceptor\api\main\jboss-interceptors-api_1.1_spec-1.0.1.Final-redhat-2.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\jms\api\main\jboss-jms-api_1.1_spec-1.0.1.Final-redhat-2.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\jws\api\main\jsr181-api-1.0-MR1-redhat-6.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\mail\api\main\mail-1.4.5-redhat-1.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\management\j2ee\api\main\jboss-j2eemgmt-api_1.1_spec-1.0.1.Final-redhat-2.jar
C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\persistence\api\main\hibernate-jpa-2.0-api-1.0.1.Final-redhat-2.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\resource\api\main\jboss-connector-api_1.6_spec-1.0.1.Final-redhat-2.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\rmi\api\main\jboss-rmi-api_1.0_spec-1.0.4.Final-redhat-2.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\security\auth\message\api\main\jboss-jaspi-api_1.0_spec-1.0.1.Final-redhat-2.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\security\jacc\api\main\jboss-jacc-api_1.4_spec-1.0.3.Final-redhat-1.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\servlet\api\main\jboss-servlet-api_3.0_spec-1.0.2.Final-redhat-1.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\servlet\jsp\api\main\jboss-jsp-api_2.2_spec-1.0.1.Final-redhat-2.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\servlet\jstl\api\main\jboss-jstl-api_1.2_spec-1.0.6.Final-redhat-1.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\transaction\api\main\jboss-transaction-api_1.1_spec-1.0.1.Final-redhat-2.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\validation\api\main\validation-api-1.0.0.GA-redhat-2.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\ws\rs\api\main\jboss-jaxrs-api_1.1_spec-1.0.1.Final-redhat-2.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\wsdl4j\api\main\wsdl4j-1.6.3.redhat-1.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\xml\bind\api\main\jboss-jaxb-api_2.2_spec-1.0.4.Final-redhat-2.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\xml\registry\api\main\jboss-jaxr-api_1.0_spec-1.0.2.Final-redhat-2.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\xml\rpc\api\main\jboss-jaxrpc-api_1.1_spec-1.0.1.Final-redhat-3.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\xml\soap\api\main\jboss-saaj-api_1.3_spec-1.0.3.Final-redhat-1.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\javax\xml\ws\api\main\jboss-jaxws-api_2.2_spec-2.0.2.Final-redhat-1.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\hibernate\validator\main\hibernate-validator-4.3.1.Final-redhat-1.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\jboss\as\controller-client\main\jboss-as-controller-client-7.4.0.Final-redhat-19.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\jboss\dmr\main\jboss-dmr-1.2.0.Final-redhat-1.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\jboss\ejb3\main\jboss-ejb3-ext-api-2.1.0.redhat-1.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\jboss\logging\main\jboss-logging-3.1.4.GA-redhat-1.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\jboss\resteasy\resteasy-jaxb-provider\main\resteasy-jaxb-provider-2.3.8.Final-redhat-3.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\jboss\resteasy\resteasy-jaxrs\main\async-http-servlet-3.0-2.3.8.Final-redhat-3.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\jboss\resteasy\resteasy-jaxrs\main\resteasy-jaxrs-2.3.8.Final-redhat-3.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\jboss\resteasy\resteasy-multipart-provider\main\resteasy-multipart-provider-2.3.8.Final-redhat-3.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\picketbox\main\picketbox-4.0.19.SP8-redhat-1.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\picketbox\main\picketbox-commons-1.0.0.final-redhat-2.jar

C:\Users\mhussaini\jboss-eap\modules\system\layers\base\org\picketbox\main\picketbox-infinispan-4.0.19.SP8-redhat-1.jar

Libdirs:

No libdirs specified during translation

Rulepacks

Valid Rulepacks:

Name: HPE Security Fortify Secure Coding Rules, Core, ABAP

Version: 2016.1.0.0008

ID: 5A663288-B1F7-416A-AEED-E5F00DC3596F

SKU: RUL13095

Name: Fortify Secure Coding Rules, Core Preview, ABAP

Version: 2014.4.0.0008

ID: 5249BACE-3D49-4937-BFFF-48BA414E14DD

SKU: RUL13187

Name: HPE Security Fortify Secure Coding Rules, Core, ActionScript 3.0

Version: 2016.1.0.0008

ID: 92127AA2-E666-4F28-B1C1-C0F6A939A089

SKU: RUL13094

Name: HPE Security Fortify Secure Coding Rules, Core, Android

Version: 2016.1.0.0008

ID: FF9890E6-D119-4EE8-A591-83DCF4CA6952

SKU: RUL13093

Name: HPE Security Fortify Secure Coding Rules, Core, Annotations

Version: 2016.1.0.0008

ID: 14EE50EB-FA1C-4AE8-8B59-39F952E21E3B

SKU: RUL13078

Name: HPE Security Fortify Secure Coding Rules, Core, ColdFusion

Version: 2016.1.0.0008

ID: EEA7C678-058E-462A-8A59-AF925F7B7164

SKU: RUL13024

Name: HPE Security Fortify Secure Coding Rules, Core, COBOL

Version: 2016.1.0.0008

ID: 9EB21F2C-ED22-440B-82A3-E38DC2533F03

SKU: RUL13088

Name: HPE Security Fortify Secure Coding Rules, Core, C/C++

Version: 2016.1.0.0008

ID: 711E0652-7494-42BE-94B1-DB3799418C7E

SKU: RUL13001

Name: HPE Security Fortify Secure Coding Rules, Core, .NET

Version: 2016.1.0.0008

ID: D57210E5-E762-4112-97DD-019E61D32D0E

SKU: RUL13002

Name: HPE Security Fortify Secure Coding Rules, Core, Java

Version: 2016.1.0.0008
ID: 06A6CC97-8C3F-4E73-9093-3E74C64A2AAF
SKU: RUL13003

Name: HPE Security Fortify Secure Coding Rules, Core, JavaScript
Version: 2016.1.0.0008
ID: BD292C4E-4216-4DB8-96C7-9B607BFD9584
SKU: RUL13059

Name: HPE Security Fortify Secure Coding Rules, Core, Objective-C
Version: 2016.1.0.0008
ID: B18E58BA-8B2D-4FC5-83BF-378594CAD260
SKU: RUL13099

Name: HPE Security Fortify Secure Coding Rules, Core, PHP
Version: 2016.1.0.0008
ID: 343CBB32-087C-4A4E-8BD8-273B5F876069
SKU: RUL13058

Name: HPE Security Fortify Secure Coding Rules, Core, Python
Version: 2016.1.0.0008
ID: FD15CBE4-E059-4CBB-914E-546BDCEB422B
SKU: RUL13083

Name: HPE Security Fortify Secure Coding Rules, Core, Ruby
Version: 2016.1.0.0008
ID: CA8013D5-11DE-44EF-9563-182F9FCB87BC
SKU: RUL13135

Name: HPE Security Fortify Secure Coding Rules, Core, SQL
Version: 2016.1.0.0008
ID: 6494160B-E1DB-41F5-9840-2B1609EE7649
SKU: RUL13004

Name: HPE Security Fortify Secure Coding Rules, Core, Swift
Version: 2016.1.0.0008
ID: A977528A-B2C7-412D-9691-F1668E05154B
SKU: RUL13147

Name: HPE Security Fortify Secure Coding Rules, Core, Classic ASP, VBScript, and VB6
Version: 2016.1.0.0008
ID: 1D426B6F-8D33-4AD6-BBCE-237ABAFAB924
SKU: RUL13060

Name: HPE Security Fortify Secure Coding Rules, Extended, Configuration
Version: 2016.1.0.0008
ID: CD6959FC-0C37-45BE-9637-BAA43C3A4D56
SKU: RUL13005

Name: HPE Security Fortify Secure Coding Rules, Extended, Content
Version: 2016.1.0.0008

ID: 9C48678C-09B6-474D-B86D-97EE94D38F17

SKU: RUL13067

Name: HPE Security Fortify Secure Coding Rules, Extended, C/C++

Version: 2016.1.0.0008

ID: BD4641AD-A6FF-4401-A8F4-6873272F2748

SKU: RUL13006

Name: HPE Security Fortify Secure Coding Rules, Extended, .NET

Version: 2016.1.0.0008

ID: 557BCC56-CD42-43A7-B4FE-CDD00D58577E

SKU: RUL13027

Name: HPE Security Fortify Secure Coding Rules, Extended, Java

Version: 2016.1.0.0008

ID: AAAC0B10-79E7-4FE5-9921-F4903A79D317

SKU: RUL13007

Name: HPE Security Fortify Secure Coding Rules, Extended, JavaScript

Version: 2016.1.0.0008

ID: C4D1969E-B734-47D3-87D4-73962C1D32E2

SKU: RUL13141

Name: HPE Security Fortify Secure Coding Rules, Extended, JSP

Version: 2016.1.0.0008

ID: 00403342-15D0-48C9-8E67-4B1CFBDEFCD2

SKU: RUL13026

Name: HPE Security Fortify Secure Coding Rules, Extended, SQL

Version: 2016.1.0.0008

ID: 4BC5B2FA-C209-4DBC-9C3E-1D3EEFAF135A

SKU: RUL13025

External Metadata:

Name: CWE

ID: 3ADB9EE4-5761-4289-8BD3-CBFCC593EBBC

Name: FISMA

ID: B40F9EE0-3824-4879-B9FE-7A789C89307C

Name: NIST SP 800-53 Rev.4

ID: 1114583B-EA24-45BE-B7F8-B61201BACDD0

Name: OWASP Mobile 2014

ID: EEE3F9E7-28D6-4456-8761-3DA56C36F4EE

Name: OWASP Top 10 2004

ID: 771C470C-9274-4580-8556-C023E4D3ADB4

Name: OWASP Top 10 2007

ID: 1EB1EC0E-74E6-49A0-BCE5-E6603802987A

Name: OWASP Top 10 2010

ID: FDCECA5E-C2A8-4BE8-BB26-76A8ECD0ED59

Name: OWASP Top 10 2013

ID: 1A2B4C7E-93B0-4502-878A-9BE40D2A25C4

Name: PCI 1.1

ID: CBDB9D4D-FC20-4C04-AD58-575901CAB531

Name: PCI 1.2

ID: 57940BDB-99F0-48BF-BF2E-CFC42BA035E5

Name: PCI 2.0

ID: 8970556D-7F9F-4EA7-8033-9DF39D68FF3E

Name: PCI 3.0

ID: E2FB0D38-0192-4F03-8E01-FE2A12680CA3

Name: PCI 3.1

ID: AC0D18CF-C1DA-47CF-9F1A-E8EC0A4A717E

Name: SANS Top 25 2009

ID: 939EF193-507A-44E2-ABB7-C00B2168B6D8

Name: SANS Top 25 2010

ID: 72688795-4F7B-484C-88A6-D4757A6121CA

Name: SANS Top 25 2011

ID: 92EB4481-1FD9-4165-8E16-F2DE6CB0BD63

Name: STIG 3.1

ID: F2FA57EA-5AAA-4DDE-90A5-480BE65CE7E7

Name: STIG 3.10

ID: 788A87FE-C9F9-4533-9095-0379A9B35B12

Name: STIG 3.4

ID: 58E2C21D-C70F-4314-8994-B859E24CF855

Name: STIG 3.5

ID: DD18E81F-3507-41FA-9DFA-2A9A15B5479F

Name: STIG 3.6

ID: 000CA760-0FED-4374-8AA2-6FA3968A07B1

Name: STIG 3.7

ID: E69C07C0-81D8-4B04-9233-F3E74167C3D2

Name: STIG 3.9

ID: 1A9D736B-2D4A-49D1-88CA-DF464B40D732

Name: WASC 2.00

ID: 74f8081d-dd49-49da-880f-6830cebe9777

Name: WASC 24 + 2

ID: 9DC61E7F-1A48-4711-BBFD-E9DFF537871F

Properties

WinForms.CollectionMutationMonitor.Label=WinFormsDataSource
WinForms.ExtractEventHandlers=true
WinForms.TransformChangeNotificationPattern=true
WinForms.TransformDataBindings=true
WinForms.TransformMessageLoops=true
awt.toolkit=sun.awt.windows.WToolkit
com.fortify.AuthenticationKey=C:\Users\mhussaini\AppData\Local\Fortify/config/tools
com.fortify.Core=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\Core
com.fortify.InstallRoot=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30
com.fortify.InstallationUserName=MHussaini
com.fortify.SCAExecutablePath=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\bin\sourceanalyzer.exe
com.fortify.TotalPhysicalMemory=16971313152
com.fortify.VS.DefaultFramework.10.0=DotNetFrameworkv40
com.fortify.VS.DefaultFramework.11.0=DotNetFrameworkv45
com.fortify.VS.DefaultFramework.12.0=DotNetFrameworkv451
com.fortify.VS.DefaultFramework.14.0=DotNetFrameworkv451
com.fortify.VS.Frameworks.DotNetFrameworkv11.SDKRegistry="SOFTWARE\Microsoft\NETFramework", "sdkInstallRootv1.1", "bin"
com.fortify.VS.Frameworks.DotNetFrameworkv11.VSProjectVersionCode=1;
com.fortify.VS.Frameworks.DotNetFrameworkv20.SDKRegistry="SOFTWARE\Microsoft\NETFramework", "sdkInstallRootv2.0", "bin"
com.fortify.VS.Frameworks.DotNetFrameworkv20.VSProjectVersionCode=131072
com.fortify.VS.Frameworks.DotNetFrameworkv30.SDKRegistry="SOFTWARE\Microsoft\Microsoft SDKs\Windows\v6.0A", "InstallationFolder"
com.fortify.VS.Frameworks.DotNetFrameworkv30.VSProjectVersionCode=196608
com.fortify.VS.Frameworks.DotNetFrameworkv35.SDKRegistry="SOFTWARE\Microsoft\Microsoft SDKs\Windows\v6.0A", "InstallationFolder"
com.fortify.VS.Frameworks.DotNetFrameworkv35.VSProjectVersionCode=196613
com.fortify.VS.Frameworks.DotNetFrameworkv40.DotNetFolder="v4.0.30319"
com.fortify.VS.Frameworks.DotNetFrameworkv40.SDKRegistry="SOFTWARE\Microsoft\Microsoft SDKs\Windows\v7.0A\WinSDK-NetFx40Tools-x86", "InstallationFolder"
com.fortify.VS.Frameworks.DotNetFrameworkv40.VSProjectVersionCode=262144
com.fortify.VS.Frameworks.DotNetFrameworkv45.DotNetFolder="v4.0.30319"
com.fortify.VS.Frameworks.DotNetFrameworkv45.SDKPaths="Microsoft SDKs\Windows\v8.0A\bin\NETFX 4.0 Tools\"; "Microsoft SDKs\Windows\v8.0A\bin\"; "Microsoft SDKs\Windows\v8.0\bin\NETFX 4.0 Tools\"; "Microsoft SDKs\Windows\v8.0\bin\
com.fortify.VS.Frameworks.DotNetFrameworkv45.SDKRegistry="SOFTWARE\Microsoft\Microsoft SDKs\Windows\v8.0A\WinSDK-NetFx40Tools-x86", "InstallationFolder"
com.fortify.VS.Frameworks.DotNetFrameworkv45.VSProjectVersionCode=262149
com.fortify.VS.Frameworks.DotNetFrameworkv451.DotNetFolder="v4.0.30319"

```
com.fortify.VS.Frameworks.DotNetFrameworkv451.SDKPaths="Microsoft SDKs\Windows\v8.1A\bin\NETFX 4.5.1
Tools\";"Microsoft SDKs\Windows\v8.1A\bin\";"Microsoft SDKs\Windows\v8.1\bin\NETFX 4.5.1 Tools\";"Microsoft
SDKs\Windows\v8.1\bin\"
com.fortify.VS.Frameworks.DotNetFrameworkv451.SDKRegistry="SOFTWARE\Microsoft\Microsoft
SDKs\Windows\v8.1A\WinSDK-NetFx40Tools-x86","InstallationFolder"
com.fortify.VS.Frameworks.DotNetFrameworkv451.VSProjectVersionCode=451
com.fortify.VS.Frameworks.default.SDKRegistry="SOFTWARE\Microsoft\Microsoft SDKs\Windows\v8.0A\WinSDK-
NetFx35Tools-x86","InstallationFolder";"SOFTWARE\Microsoft\Microsoft SDKs\Windows\v7.0A\WinSDK-NetFx35Tools-
x86","InstallationFolder";"SOFTWARE\Microsoft\Microsoft SDKs\Windows\v6.1","InstallationFolder","\bin"
com.fortify.VS.Frameworks.default.VSProjectVersionCode=-1
com.fortify.VS.RequireASPPrecompilation=true
com.fortify.WorkingDirectory=C:\Users\mhussaini\AppData\Local\Fortify
com.fortify.locale=en
com.fortify.sca.AddImpliedMethods=true
com.fortify.sca.AntCompilerClass=com.fortify.dev.ant.SCACompiler
com.fortify.sca.BuildID=SpringSecurityEPDS
com.fortify.sca.BundleControlflowIssues=true
com.fortify.sca.BytecodePreview=true
com.fortify.sca.CollectPerformanceData=true
com.fortify.sca.CustomRulesDir=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\Core\config\customrules
com.fortify.sca.DaemonCompilers=com.fortify.sca.util.compilers.GppCompiler,com.fortify.sca.util.compilers.GccCompiler,com.f
ortify.sca.util.compilers.AppleGppCompiler,com.fortify.sca.util.compilers.AppleGccCompiler,com.fortify.sca.util.compilers.Micr
osoftCompiler,com.fortify.sca.util.compilers.MicrosoftLinker,com.fortify.sca.util.compilers.LdCompiler,com.fortify.sca.util.com
pilers.ArUtil,com.fortify.sca.util.compilers.SunCCompiler,com.fortify.sca.util.compilers.SunCppCompiler,com.fortify.sca.util.co
mpilers.IntelCompiler,com.fortify.sca.util.compilers.ExternalCppAdapter,com.fortify.sca.util.compilers.ClangCompiler
com.fortify.sca.DeadCodeFilter=true
com.fortify.sca.DeadCodeIgnoreTrivialPredicates=true
com.fortify.sca.DefaultAnalyzers=semantic:dataflow:controlflow:nullptr:configuration:content:structural:buffer
com.fortify.sca.DefaultFileTypes=java,rb,jsp,jsp,tag,tagx,tld,sql,cfm,php,phtml,ctp,pks,pkh,pkb,xml,config,settings,properties,dl
l,exe,inc,asp,vbscript,js,ini,bas,cls,vbs,frm,ctl,html,htm,xsd,wsdd,xmi,py,cfml,cfc,abap,xhtml,cpx,xcfg,jsff,as,mxml,cbl,cscfg,csde
f,wadcfg,appxmanifest,wsdl,plist
com.fortify.sca.DefaultJarsDirs=default_jars
com.fortify.sca.DefaultRulesDir=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\Core\config\rules
com.fortify.sca.DisableDeadCodeElimination=false
com.fortify.sca.DisableFunctionPointers=false
com.fortify.sca.DisableGlobals=false
com.fortify.sca.DisableInferredConstants=false
com.fortify.sca.DisplayProgress=true
com.fortify.sca.EnableInterproceduralConstantResolution=true
com.fortify.sca.EnableNestedWrappers=true
com.fortify.sca.EnableStructuralMatchCache=true
com.fortify.sca.EnableWrapperDetection=true
com.fortify.sca.FVDLDisableDescriptions=false
com.fortify.sca.FVDLDisableProgramData=false
com.fortify.sca.FVDLDisableSnippets=false
com.fortify.sca.FVDLStylesheet=C:\Program
Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\Core/resources/sca/fvdl2html.xsl
com.fortify.sca.IndirectCallGraphBuilders=WinFormsAdHocFunctionBuilder,VirtualCGBuilder,J2EEIndirectCGBuilder,JNICG
Builder,StoredProcedureResolver,JavaWSCGBuilder,StrutsCGBuilder,DotNetWSCGBuilder,SqlServerSPResolver,ASPCGBuild
er,ScriptedCGBuilder,NewJspCustomTagCGBuilder,DotNetCABCGBuilder,StateInjectionCGBuilder,SqlServerSPResolver2,PH
PLambdaResolver,JavaWebCGBuilder
```

```
com.fortify.sca.JVMArgs=-Djava.awt.headless=true -Dcom.sun.management.jmxremote=true -
XX:SoftRefLRUPolicyMSPerMB=3000 -Xss16M -Xmx1800M -Xms300M -server
com.fortify.sca.JavaNewBeta=true
com.fortify.sca.JdkVersion=1.5
com.fortify.sca.LowSeverityCutoff=1.0
com.fortify.sca.MachineOutputMode=
com.fortify.sca.NoNestedOutTagOutput=org.apache.taglibs.standard.tag.rt.core.RemoveTag,org.apache.taglibs.standard.tag.rt.co
e.SetTag
com.fortify.sca.PID=2356
com.fortify.sca.Phase0HigherOrder.Languages=python,ruby
com.fortify.sca.Phase0HigherOrder.Level=1
com.fortify.sca.Phase0HigherOrder.Limiter.Values=16
com.fortify.sca.PidFile=C:\Users\MHUSSA~1\AppData\Local\Temp\1\PID3830111980560557543.tmp
com.fortify.sca.PrintPerformanceDataAfterScan=false
com.fortify.sca.ProjectRoot=C:\Users\mhussaini\AppData\Local\Fortify
com.fortify.sca.ProjectRoot=C:\Users\mhussaini\AppData\Local\Fortify
com.fortify.sca.Renderer=fpr
com.fortify.sca.RequireMapKeys=classrule
com.fortify.sca.ResultsFile=C:\AmersFiles\Gitworkspace\SpringSecurityEPDS\SpringSecurityEPDS_scan.fpr
com.fortify.sca.SolverTimeout=15
com.fortify.sca.SqlLanguage=TSQL
com.fortify.sca.SuppressLowSeverity=true
com.fortify.sca.ThreadCount.NameTableLoading=1
com.fortify.sca.ThreadCount.PreTransform=1
com.fortify.sca.TypeInferenceFunctionTimeout=60
com.fortify.sca.TypeInferenceLanguages=javascript,python,ruby
com.fortify.sca.TypeInferencePhase0Timeout=300
com.fortify.sca.UnicodeInputFile=true
com.fortify.sca.UniversalBlacklist=.*yyparse.*
com.fortify.sca.WrapperHeuristic=moderate
com.fortify.sca.analyzer.controlflow.EnableLivenessOptimization=false
com.fortify.sca.analyzer.controlflow.EnableMachineFiltering=false
com.fortify.sca.analyzer.controlflow.EnableRefRuleOptimization=false
com.fortify.sca.analyzer.controlflow.EnableTimeOut=true
com.fortify.sca.compilers.ant=com.fortify.sca.util.compilers.AntAdapter
com.fortify.sca.compilers.ar=com.fortify.sca.util.compilers.ArUtil
com.fortify.sca.compilers.armcc=com.fortify.sca.util.compilers.ArmCcCompiler
com.fortify.sca.compilers.armcpp=com.fortify.sca.util.compilers.ArmCppCompiler
com.fortify.sca.compilers.c++=com.fortify.sca.util.compilers.GppCompiler
com.fortify.sca.compilers.c89=com.fortify.sca.util.compilers.C89Compiler
com.fortify.sca.compilers.cc=com.fortify.sca.util.compilers.GccCompiler
com.fortify.sca.compilers.cl=com.fortify.sca.util.compilers.MicrosoftCompiler
com.fortify.sca.compilers.clearmake=com.fortify.sca.util.compilers.TouchlessCompiler
com.fortify.sca.compilers.devenv=com.fortify.sca.util.compilers.DevenvNetAdapter
com.fortify.sca.compilers.fortify=com.fortify.sca.util.compilers.FortifyCompiler
com.fortify.sca.compilers.g++=com.fortify.sca.util.compilers.GppCompiler
com.fortify.sca.compilers.g++*=com.fortify.sca.util.compilers.GppCompiler
com.fortify.sca.compilers.g++2*=com.fortify.sca.util.compilers.GppCompiler
com.fortify.sca.compilers.g++3*=com.fortify.sca.util.compilers.GppCompiler
com.fortify.sca.compilers.g++4*=com.fortify.sca.util.compilers.GppCompiler
com.fortify.sca.compilers.gcc=com.fortify.sca.util.compilers.GccCompiler
```

com.fortify.sca.compilers.gcc*=com.fortify.sca.util.compilers.GccCompiler
com.fortify.sca.compilers.gcc2*=com.fortify.sca.util.compilers.GccCompiler
com.fortify.sca.compilers.gcc3*=com.fortify.sca.util.compilers.GccCompiler
com.fortify.sca.compilers.gcc4*=com.fortify.sca.util.compilers.GccCompiler
com.fortify.sca.compilers.gmake=com.fortify.sca.util.compilers.TouchlessCompiler
com.fortify.sca.compilers.icc=com.fortify.sca.util.compilers.IntelCompiler
com.fortify.sca.compilers.icl=com.fortify.sca.util.compilers.MicrosoftCompiler
com.fortify.sca.compilers.icpc=com.fortify.sca.util.compilers.IntelCompiler
com.fortify.sca.compilers.jam=com.fortify.sca.util.compilers.TouchlessCompiler
com.fortify.sca.compilers.javac=com.fortify.sca.util.compilers.JavacCompiler
com.fortify.sca.compilers.ld=com.fortify.sca.util.compilers.LdCompiler
com.fortify.sca.compilers.link=com.fortify.sca.util.compilers.MicrosoftLinker
com.fortify.sca.compilers.make=com.fortify.sca.util.compilers.TouchlessCompiler
com.fortify.sca.compilers.msbuild=com.fortify.sca.util.compilers.MSBuildAdapter
com.fortify.sca.compilers.msdev=com.fortify.sca.util.compilers.DevenvAdapter
com.fortify.sca.compilers.mvn=com.fortify.sca.util.compilers.MavenAdapter
com.fortify.sca.compilers.nmake=com.fortify.sca.util.compilers.TouchlessCompiler
com.fortify.sca.compilers.tcc=com.fortify.sca.util.compilers.ArmCcCompiler
com.fortify.sca.compilers.tcpp=com.fortify.sca.util.compilers.ArmCppCompiler
com.fortify.sca.compilers.touchless=com.fortify.sca.util.compilers.FortifyCompiler
com.fortify.sca.compilers.xilink=com.fortify.sca.util.compilers.MicrosoftLinker
com.fortify.sca.cpfe.441.command=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\Core/private-bin/sca/cpfe441.rfct
com.fortify.sca.cpfe.command=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\Core/private-bin/sca/cpfe48.exe
com.fortify.sca.cpfe.file.option=--gen_c_file_name
com.fortify.sca.cpfe.options=--remove_unneeded_entities --suppress_vtbl -tused
com.fortify.sca.cpfe.options=--remove_unneeded_entities --suppress_vtbl -tused
com.fortify.sca.env.exesearchpath=C:\Users\mhussaini\Eclipse Luna With Git\eclipse;C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\bin;C:\ProgramData\Oracle\Java\javapath;C:\WINDOWS\system32;C:\WINDOWS;C:\WINDOWS\System32\Wbem;C:\WINDOWS\System32\WindowsPowerShell\v1.0;C:\Program Files (x86)\ActivIdentity\ActivClient;C:\Program Files\ActivIdentity\ActivClient;C:\WINDOWS\System32\WindowsPowerShell\v1.0;C:\Users\mhussaini\apache-maven-3.3.9\bin;C:\Users\mhussaini\nodejs;C:\Program Files (x86)\Riverbed\Steelhead Mobile;C:\Program Files (x86)\PuTTY;C:\Users\mhussaini\AppData\Local\atom\bin;C:\Users\mhussaini\AppData\Roaming\npm
com.fortify.sca.fileextensions.ABAP=ABAP
com.fortify.sca.fileextensions.abap=ABAP
com.fortify.sca.fileextensions.appxmanifest=XML
com.fortify.sca.fileextensions.as=ACTIONSCRIPT
com.fortify.sca.fileextensions.asp=ASP
com.fortify.sca.fileextensions.bas=VB6
com.fortify.sca.fileextensions.cfc=CFML
com.fortify.sca.fileextensions.cfm=CFML
com.fortify.sca.fileextensions.cfml=CFML
com.fortify.sca.fileextensions.cls=VB6
com.fortify.sca.fileextensions.config=XML
com.fortify.sca.fileextensions.cpx=XML
com.fortify.sca.fileextensions.cs=CSHARP
com.fortify.sca.fileextensions.cscfg=XML
com.fortify.sca.fileextensions.csdef=XML
com.fortify.sca.fileextensions.ctl=VB6
com.fortify.sca.fileextensions.ctp=PHP

com.fortify.sca.fileextensions.dll=MSIL
com.fortify.sca.fileextensions.erb=RUBY_ERB
com.fortify.sca.fileextensions.exe=MSIL
com.fortify.sca.fileextensions.faces=JSPX
com.fortify.sca.fileextensions.frm=VB6
com.fortify.sca.fileextensions.htm=HTML
com.fortify.sca.fileextensions.html=HTML
com.fortify.sca.fileextensions.ini=JAVA_PROPERTIES
com.fortify.sca.fileextensions.java=JAVA
com.fortify.sca.fileextensions.js=JAVASCRIPT
com.fortify.sca.fileextensions.jsff=JSPX
com.fortify.sca.fileextensions.jsp=JSP
com.fortify.sca.fileextensions.jspx=JSPX
com.fortify.sca.fileextensions.mdl=MSIL
com.fortify.sca.fileextensions.mod=MSIL
com.fortify.sca.fileextensions.mxml=MXML
com.fortify.sca.fileextensions.php=PHP
com.fortify.sca.fileextensions.phtml=PHP
com.fortify.sca.fileextensions.pkb=PLSQL
com.fortify.sca.fileextensions.pkh=PLSQL
com.fortify.sca.fileextensions.pks=PLSQL
com.fortify.sca.fileextensions.plist=XML
com.fortify.sca.fileextensions.properties=JAVA_PROPERTIES
com.fortify.sca.fileextensions.py=PYTHON
com.fortify.sca.fileextensions.rb=RUBY
com.fortify.sca.fileextensions.settings=XML
com.fortify.sca.fileextensions.sql=SQL
com.fortify.sca.fileextensions.tag=JSP
com.fortify.sca.fileextensions.tagx=JSP
com.fortify.sca.fileextensions.tld=TLN
com.fortify.sca.fileextensions.vb=VB
com.fortify.sca.fileextensions.vbs=VBSCRIPT
com.fortify.sca.fileextensions.vbscript=VBSCRIPT
com.fortify.sca.fileextensions.wadcfg=XML
com.fortify.sca.fileextensions.wsdd=XML
com.fortify.sca.fileextensions.wsdl=XML
com.fortify.sca.fileextensions.xcfg=XML
com.fortify.sca.fileextensions.xhtml=JSPX
com.fortify.sca.fileextensions.xmi=XML
com.fortify.sca.fileextensions.xml=XML
com.fortify.sca.fileextensions.xsd=XML
com.fortify.sca.jsp.UseNativeParser=true
com.fortify.sca.parser.python.ignore.module.1=test.badsyntax_future3
com.fortify.sca.parser.python.ignore.module.2=test.badsyntax_future4
com.fortify.sca.parser.python.ignore.module.3=test.badsyntax_future5
com.fortify.sca.parser.python.ignore.module.4=test.badsyntax_future6
com.fortify.sca.parser.python.ignore.module.5=test.badsyntax_future7
com.fortify.sca.parser.python.ignore.module.6=test.badsyntax_future8
com.fortify.sca.parser.python.ignore.module.7=test.badsyntax_future9
com.fortify.sca.parser.python.ignore.module.8=test.badsyntax_nocaret
com.fortify.search.defaultSyntaxVer=2

```
com.sun.management.jmxremote=true
dotnet.install.dir=C:\Windows\Microsoft.NET\Framework64
dotnet.v30.referenceAssemblies=C:\Program Files\Reference Assemblies\Microsoft\Framework\v3.0
dotnet.v35.referenceAssemblies=C:\Program Files\Reference Assemblies\Microsoft\Framework\v3.5
file.encoding=Cp1252
file.encoding.pkg=sun.io
file.separator=\
java.awt.graphicsenv=sun.awt.Win32GraphicsEnvironment
java.awt.headless=true
java.awt.printerjob=sun.awt.windows.WPrinterJob
java.class.path=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\Core\lib\exe\sca-exe.jar
java.class.version=51.0
java.endorsed.dirs=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\lib\endorsed
java.ext.dirs=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\lib\ext;C:\WINDOWS\Sun\Java\lib\ext
java.home=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre
java.io.tmpdir=C:\Users\MHUSSA~1\AppData\Local\Temp\1\
java.library.path=C:\Program
Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\bin;C:\WINDOWS\Sun\Java\bin;C:\WINDOWS\system32;C:\WINDOW
S;C:\Program
Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\bin;C:\ProgramData\Oracle\Java\javapath;C:\WINDOWS\system32;C:\WIN
DOWS;C:\WINDOWS\System32\Wbem;C:\WINDOWS\System32\WindowsPowerShell\v1.0\;C:\Program Files
(x86)\ActivIdentity\ActivClient\;C:\Program
Files\ActivIdentity\ActivClient\;C:\WINDOWS\System32\WindowsPowerShell\v1.0\;C:\Users\mhussaini\apache-maven-
3.3.9\bin;C:\Users\mhussaini\nodejs\;C:\Program Files (x86)\Riverbed\Steelhead Mobile\;C:\Program Files
(x86)\PuTTY\;C:\Users\mhussaini\AppData\Local\atom\bin;C:\Users\mhussaini\AppData\Roaming\npm;.
java.rmi.server.randomIDs=true
java.runtime.name=Java(TM) SE Runtime Environment
java.runtime.version=1.7.0_45-b18
java.specification.name=Java Platform API Specification
java.specification.vendor=Oracle Corporation
java.specification.version=1.7
java.vendor=Oracle Corporation
java.vendor.url=http://java.oracle.com/
java.vendor.url.bug=http://bugreport.sun.com/bugreport/
java.version=1.7.0_45
java.vm.info=mixed mode
java.vm.name=Java HotSpot(TM) 64-Bit Server VM
java.vm.specification.name=Java Virtual Machine Specification
java.vm.specification.vendor=Oracle Corporation
java.vm.specification.version=1.7
java.vm.vendor=Oracle Corporation
java.vm.version=24.45-b08
line.separator=

max.file.path.length=255
os.arch=amd64
os.name=Windows 7
os.version=6.1
path.separator=;
stderr.isatty=false
stdout.isatty=false
```


sun.arch.data.model=64
sun.boot.class.path=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\lib\resources.jar;C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\lib\rt.jar;C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\lib\sunrsasign.jar;C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\lib\jsse.jar;C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\lib\jce.jar;C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\lib\charsets.jar;C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\lib\jfr.jar;C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\classes
sun.boot.library.path=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\jre\bin
sun.cpu.endian=little
sun.cpu.isalist=amd64
sun.desktop=windows
sun.io.unicode.encoding=UnicodeLittle
sun.java.command=C:\Program Files\HP_Fortify\HP_Fortify_SCA_and_Apps_4.30\Core\lib\exe\sca-exe.jar -scan -pid-file C:\Users\MHUSSA~1\AppData\Local\Temp\1\PID3830111980560557543.tmp
@C:\Users\mhussaini\AppData\Local\Fortify\Eclipse.Plugin-4.30\C__Users_mhussaini_Gitworkspace_SpringSecurityEPDS\SpringSecurityEPDSScan.txt
sun.java.launcher=SUN_STANDARD
sun.jnu.encoding=Cp1252
sun.management.compiler=HotSpot 64-Bit Tiered Compilers
sun.os.patch.level=Service Pack 1
user.country=US
user.dir=C:\Users\mhussaini\Eclipse Luna With Git\eclipse
user.home=C:\Users\mhussaini
user.language=en
user.name=MHussaini
user.script=
user.timezone=America/Denver
user.variant=
win32.LocalAppdata=C:\Users\mhussaini\AppData\Local

Commandline Arguments

-scan
-pid-file
C:\Users\MHUSSA~1\AppData\Local\Temp\1\PID3830111980560557543.tmp
-b
SpringSecurityEPDS
-machine-output
-format
fpr
-f
C:\AmersFiles\Gitworkspace\SpringSecurityEPDS\SpringSecurityEPDS_scan.fpr

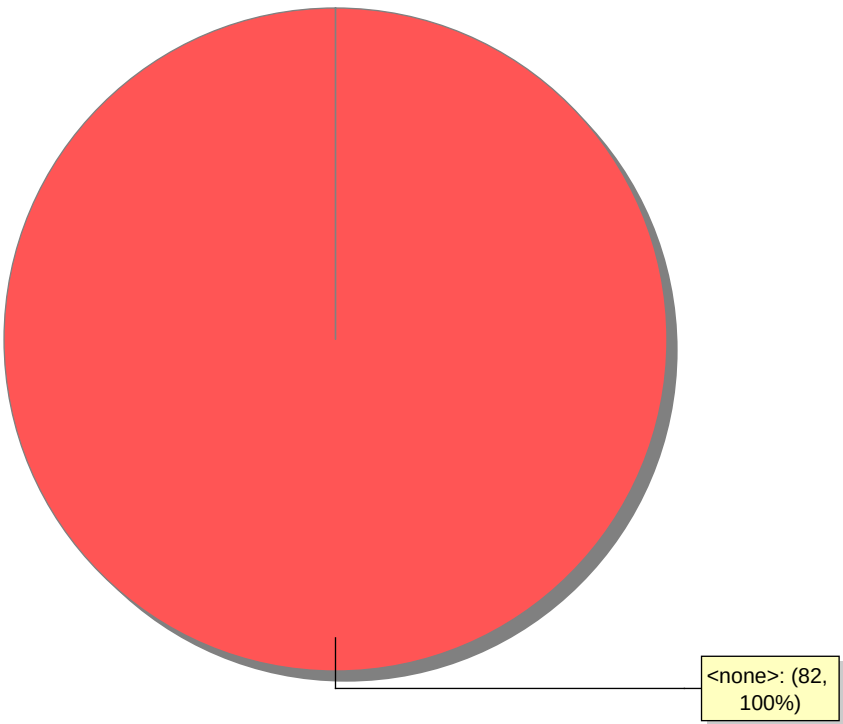
Warnings

[236] Your license does not allow access to Fortify SCA for Python

Issue Count by Category	
Issues by Category	
Password Management: Password in Configuration File	32
Mass Assignment: Insecure Binder Configuration	18
Path Manipulation	16
Mass Assignment: Sensitive Field Exposure	7
JSON Injection	5
Log Forging	4

Issue Breakdown by Analysis

Issues by Analysis



● <none>

New Issues

Issues by New Issue

The following issues have been discovered since the last scan.

