


In one line: A WebView runs *someone's* JavaScript inside your app. The **bridge** (WebKit message handlers, React Native `postMessage`, Android `addJavaScriptInterface`) hands that JavaScript native powers — and it is reachable by **every script in every frame** of whatever page is loaded. Treat each message as untrusted input: **check the origin and frame, allowlist commands, restrict navigation**, pass data to JS as *values*, never as code.

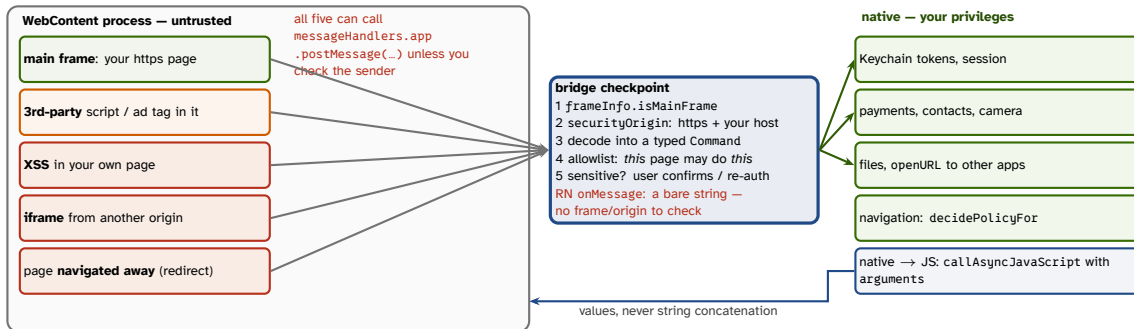

Isolation: a `WKContentWorld.world(name:)` gives your injected script its own JS globals + handlers the page can't see — but the **DOM is shared**, so a named world hides *your* code, it does not make the page trustworthy.

ios

- UIWebView** (deprecated iOS 12) ran web content *in your process*; the App Store refused new apps using it from Apr 2020. **WKWebView**: separate WebContent process, Safari's engine + JIT.
- Bridge: `userContentController.add(handler, name: "app")` → JS `window.webkit.messageHandlers.app.postMessage(obj)` (JSON-like types). The handler gets a `WKScriptMessage`: `body`, `frameInfo` (`isMainFrame`, `request`, `securityOrigin`), `world`. Reply: `WKScriptMessageHandlerWithReply` (iOS 14) — JS gets a Promise.
- Content worlds** (iOS 14): `.page`, `.defaultClient`, `.world(name:)`; `add(:contentWorld:name:)` exposes a handler *only* in that world.
- Native** → **JS**: `evaluateJavaScript("show('\'(name)')")` is injection (a quote in name ends the string). `callAsynchronousJavaScript(:arguments:in:contentWorld:)` passes *values*.
- Navigation**: `decidePolicyFor` — allow https + your hosts; others → Safari; cancel `javascript:`, `file:`, `data:`, custom schemes. iOS 14 `WKAppBoundDomains` + `LimitsNavigationsToAppBoundDomains` disable script injection / handlers elsewhere.
- Files**: `loadFileURL(:allowingReadAccessTo:)` — the narrowest directory, never the whole container. **Debug**: `isInspectable` (iOS 16.4, default false) — keep it off in release.
- The controller **retains** its handlers → handler → VC → WebView cycle: weak proxy, or `removeScriptMessageHandler(forName:)`.

Android

`addJavaScriptInterface`: every `@JavascriptInterface` method, to every frame and origin (before API 17: reflection → RCE). Prefer `AndroidX` `WebViewCompat.addWebMessageListener` with `allowedOriginRules` — the listener gets `sourceOrigin` + `isMainFrame`. `setAllowFileAccess` defaults false from API 30. `shouldOverrideUrlLoading = decidePolicyFor`.

Example — a checked bridge (Swift) and RN

```
final class Bridge: NSObject, WKScriptMessageHandlerWithReply {
    func userContentController(_ c: WKUserContentController,
        didReceive m: WKScriptMessage) async -> (Any?, String?) {
```

```
let o = m.frameInfo.securityOrigin
guard m.frameInfo.isMainFrame, o.protocol == "https",
      o.host == "app.example.com",
      let cmd = Command(json: m.body) // typed, allowlisted
else { return (nil, "denied") }
return (await perform(cmd), nil)
}

cfg.userContentController.addScriptMessageHandler(Bridge(),
    contentWorld: .page, name: "app")
try await web.callAsynchronousJavaScript("render(item)",
    arguments: ["item": title], contentWorld: .page)

<WebView source={{ uri: 'https://app.example.com' }}
    originWhitelist={['https://app.example.com']} // navigation only
    onStartLoadWithRequest={r =>
        new URL(r.url).origin === 'https://app.example.com' }
    onMessage={e => { const m = parseCommand(e.nativeEvent.data)
        if (m && allowed(m)) run(m) }} // string in
    javaScriptEnabled setSupportMultipleWindows /* keep true */ />
```

React Native WebView — the traps

- `onMessage` receives `window.ReactNativeWebView.postMessage(string)` — a **string only**, with no verified sender: any script the page runs can post.
- `originWhitelist` (default `http://*`, `https://*`) lists origins the WebView may **navigate** to; others are handed to the OS. It does *not* filter messages.
- `onShouldStartLoadWithRequest: false` blocks; not called on Android's first load.
- `injectedJavaScriptObject` is visible to *all* frames; `injectedJavaScriptForMainFrameOnly` defaults true.
- GHSA-36j3-xxf7-4pqg / CVE-2020-6506** (Sep 2020, moderate): Android WebView before 83.0.4103.106 let a cross-origin **iframe** run code in the top document (UXSS); `react-native-webview` ≤ 10.10.2 exposed, 11.0.0 mitigates — `setSupportMultipleWindows=false` re-opens it.

Traps

- ! "It's our own page" — until a CDN script, an ad or one XSS runs on it.
- ! Login / OAuth in an embedded WebView: the app can read the password; RFC 8252 says use the system browser (`ASWebAuthenticationSession`).
- ! Injecting the refresh token into JS for the web part — any page script can read it.

Remember

"Who sent it, may they, is it well-formed?" — then values out, never code.