

Proyecto Final de Ciberseguridad

Resumen para el Informe (FASE 1) (imagenes desde las paginas 3 a la 15)

1. Identificación del Objetivo y Servicios

Tras un escaneo de red inicial, se identifica la máquina víctima con la dirección IP 192.168.18.219. El análisis de puertos revela los siguientes servicios activos:

Puerto 21 (FTP): Servicio vsftpd 3.0.3 con acceso anónimo permitido.

Puerto 22 (SSH): Servicio OpenSSH habilitado manualmente.

Puerto 80 (HTTP): Servidor Apache/2.4.62 ejecutando un CMS WordPress.

2. Hallazgos Forenses (Análisis de Intrusión)

Mediante el acceso al servicio FTP, se localizó y exfiltró el archivo de historial de comandos `.bash_history` del usuario `debian`. El análisis del archivo revela:

Instalación manual del stack LAMP (Linux, Apache, MariaDB, PHP).

Configuración de WordPress mediante la descarga directa del repositorio oficial.

Mala praxis administrativa: El administrador cometió errores de escritura al crear archivos de diagnóstico (`info.php.php`) y dejó archivos de configuración de ejemplo expuestos.

3. Vulnerabilidades Críticas Detectadas

Se han confirmado y explotado las siguientes debilidades de seguridad:

V01 - Reutilización de Credenciales Débiles: Las credenciales del usuario `debian` son idénticas para los servicios FTP y SSH. La contraseña es extremadamente débil, permitiendo el acceso total al sistema.

V02 - Escalada de Privilegios Inmediata: El usuario `debian` tiene permisos de ejecución en el archivo `/etc/sudoers` definidos como `(ALL : ALL) ALL`. Esto permite a cualquier atacante que comprometa esta cuenta obtener privilegios de ROOT instantáneamente.

V03 - Exposición de Credenciales de Base de Datos: El archivo `/var/www/html/wp-config.php` es legible por usuarios locales y contiene la contraseña de la base de datos en texto plano (123456).

V04 - Fuga de Información Técnica (Information Leakage): El sistema permite la ejecución de scripts que revelan versiones exactas del software (PHP 8.2.20, Kernel 6.1.0-25-amd64), facilitando la búsqueda de exploits específicos.

4. Evidencias de Compromiso

Acceso Remoto: Sesión establecida vía SSH desde la IP 192.168.18.218.

Control de Aplicación: Acceso total a la estructura de archivos de WordPress y capacidad de ejecución de código PHP en el servidor.

Resumen para el Informe (FASE 2) (imagenes desde las paginas 16 a la 28)

Vulnerabilidad Explotada: Acceso no autorizado a la Base de Datos y Exfiltración de PII (Información de Identificación Personal).

Descripción: Utilizando las credenciales obtenidas en la Fase 1 (wordpressuser / 123456), se realizó una conexión local al motor MariaDB.

Impacto: Se ha demostrado la capacidad de extraer la tabla wp_users, obteniendo los hashes de las contraseñas de los usuarios de la aplicación web. Esto permite ataques de descifrado offline y compromiso total de las cuentas de usuario de la plataforma.

Evidencia: Captura de pantalla de la ejecución del comando SQL que muestra el hash del usuario wordpress-user.

Resumen para el Informe (FASE 3) (imagenes desde las paginas 29 a la 34)

Plan de Recuperación y Medidas de Seguridad (SGSI):

Acción 1: Saneamiento de Privilegios. Se eliminó al usuario debian del archivo sudoers para evitar que un compromiso de cuenta escalara a control total del sistema (Principio de Mínimo Privilegio).

Acción 2: Hardening de Servicios. Se desactivó el acceso anónimo al servidor FTP, cerrando el vector de exfiltración de información del sistema.

Acción 3: Protección de Datos Sensibles. Se ajustaron los permisos del archivo wp-config.php a 600, impidiendo la lectura de credenciales de la base de datos por usuarios no autorizados.

```
kali@kali:~$ ping 192.168.18.219
PING 192.168.18.219 (192.168.18.219) 56(84) bytes of data:
64 bytes from 192.168.18.219: icmp_seq=1 ttl=64 time=0.368 ms
64 bytes from 192.168.18.219: icmp_seq=2 ttl=64 time=0.285 ms
64 bytes from 192.168.18.219: icmp_seq=3 ttl=64 time=0.252 ms
64 bytes from 192.168.18.219: icmp_seq=4 ttl=64 time=0.272 ms
64 bytes from 192.168.18.219: icmp_seq=5 ttl=64 time=0.259 ms
64 bytes from 192.168.18.219: icmp_seq=6 ttl=64 time=0.286 ms
^C
--- 192.168.18.219 ping statistics ---
6 packets transmitted, 6 received, 0% packet loss, time 5124ms
rtt min/avg/max/mdev = 0.252/0.287/0.369/0.038 ms

kali@kali:~$ nmap 192.168.18.219
Starting Nmap 7.99 ( https://nmap.org ) at 2026-04-22 10:31 +0200
Nmap scan report for 192.168.18.219
Host is up (0.00014s latency).
Not shown: 997 closed tcp ports (reset)
PORT      STATE SERVICE
21/tcp    open  ftp
22/tcp    open  ssh
80/tcp    open  http
MAC Address: 08:00:27:08:0E:76 (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 0.73 seconds

kali@kali:~$ nmap -sn 192.168.18.219
Starting Nmap 7.99 ( https://nmap.org ) at 2026-04-22 10:32 +0200
Nmap scan report for 192.168.18.219
Host is up (0.00032s latency).
MAC Address: 08:00:27:08:0E:76 (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 1.58 seconds

kali@kali:~$ nmap -sC 192.168.18.219
Starting Nmap 7.99 ( https://nmap.org ) at 2026-04-22 10:32 +0200
Nmap scan report for 192.168.18.219
Host is up (0.00039s latency).
Not shown: 997 closed tcp ports (reset)
PORT      STATE SERVICE
21/tcp    open  ftp
|_ ftp-syst:
|_ STAT:
|_ FTP server status:
|_   Connected to ::ffff:192.168.18.218
|_   Logged in as ftp
|_   TYPE: ASCII
|_   No session bandwidth limit
|_   Session timeout in seconds is 300
|_   Control connection is plain text
|_   Data connections will be plain text
|_   At session startup, client count was 3
|_   vsFTPd 3.0.3 - secure, fast, stable
|_ End of status
|_ ftp-anon: Anonymous FTP login allowed (FTP code 230)
22/tcp    open  ssh
|_ ssh-hostkey:
|_   256 aa:f8:39:b3:ce:e6:3a:c9:08:79:bc:6c:06:47:ff:5a (ECDSA)
|_   256 43:ca:a9:c9:31:7b:82:d9:03:ff:40:f2:a3:71:40:83 (ED25519)
80/tcp    open  http
|_ http-robots.txt: 1 disallowed entry
|_ /wp-admin/
|_ http-title: Apache2 Debian Default Page: It works
MAC Address: 08:00:27:08:0E:76 (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 3.88 seconds
```

```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali@kali:~$ nmap 192.168.18.219
Starting Nmap 7.99 ( https://nmap.org ) at 2026-04-22 10:32 +0200
Nmap scan report for 192.168.18.219
Host is up (0.00014s latency).
Not shown: 997 closed tcp ports (reset)
PORT      STATE SERVICE
21/tcp    open  ftp
22/tcp    open  ssh
80/tcp    open  http
MAC Address: 08:00:27:08:0E:76 (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 0.73 seconds

kali@kali:~$ nmap -sn 192.168.18.219
Starting Nmap 7.99 ( https://nmap.org ) at 2026-04-22 10:32 +0200
Nmap scan report for 192.168.18.219
Host is up (0.00032s latency).
MAC Address: 08:00:27:08:0E:76 (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 1.58 seconds

kali@kali:~$ nmap -sC 192.168.18.219
Starting Nmap 7.99 ( https://nmap.org ) at 2026-04-22 10:32 +0200
Nmap scan report for 192.168.18.219
Host is up (0.00039s latency).
Not shown: 997 closed tcp ports (reset)
PORT      STATE SERVICE
21/tcp    open  ftp
|_ ftp-syst:
|_ STAT:
|_ FTP server status:
|_   Connected to ::ffff:192.168.18.218
|_   Logged in as ftp
|_   TYPE: ASCII
|_   No session bandwidth limit
|_   Session timeout in seconds is 300
|_   Control connection is plain text
|_   Data connections will be plain text
|_   At session startup, client count was 3
|_   vsFTPd 3.0.3 - secure, fast, stable
|_ End of status
|_ ftp-anon: Anonymous FTP login allowed (FTP code 230)
22/tcp    open  ssh
|_ ssh-hostkey:
|_   256 aa:f8:39:b3:ce:e6:3a:c9:08:79:bc:6c:06:47:ff:5a (ECDSA)
|_   256 43:ca:a9:c9:31:7b:82:d9:03:ff:40:f2:a3:71:40:83 (ED25519)
80/tcp    open  http
|_ http-robots.txt: 1 disallowed entry
|_ /wp-admin/
|_ http-title: Apache2 Debian Default Page: It works
MAC Address: 08:00:27:08:0E:76 (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 3.88 seconds
```

```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali@kali:~$ nmap -sC -sV -iL 192.168.18.219
Starting Nmap 7.99 ( https://nmap.org ) at 2026-04-22 10:41:02
Nmap scan report for 192.168.18.219
Host is up (0.00026s latency).
PORT      STATE SERVICE
21/tcp    open  ftp
22/tcp    open  ssh
|_ftp-anon: Anonymous FTP login allowed (FTP code 230)
|_ssh-hostkey:
|_ 256 aa:f8:39:b3:ce:e6:3a:c9:68:79:bc:6c:86:47:ff:5a (ECDSA)
|_ 256 43:ca:a9:c9:31:7b:82:d9:03:ff:40:f2:a3:71:40:83 (ED25519)
|_http-robots.txt: 1 disallowed entry
|_wp-admin/
|_http-title: Apache2 Debian Default Page: It works
MAC Address: 08:00:27:08:0E:76 (Oracle VirtualBox virtual NIC)
Nmap done: 1 IP address (1 host up) scanned in 3.88 seconds

kali@kali:~$ nmap -sC -sV -iL 192.168.18.219
Starting Nmap 7.99 ( https://nmap.org ) at 2026-04-22 10:41:02
Nmap scan report for 192.168.18.219
Host is up (0.00026s latency).
PORT      STATE SERVICE
21/tcp    open  ftp
22/tcp    open  ssh
|_ftp-anon: Anonymous FTP login allowed (FTP code 230)
|_ssh-hostkey:
|_ 256 aa:f8:39:b3:ce:e6:3a:c9:68:79:bc:6c:86:47:ff:5a (ECDSA)
|_ 256 43:ca:a9:c9:31:7b:82:d9:03:ff:40:f2:a3:71:40:83 (ED25519)
|_http-robots.txt: 1 disallowed entry
|_wp-admin/
|_http-title: Apache2 Debian Default Page: It works
MAC Address: 08:00:27:08:0E:76 (Oracle VirtualBox virtual NIC)
Service Info: OS: Unix, Linux; CPE: cpe:/o:linux:linux_kernel
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 7.72 seconds
```



```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali@kali:~$ nmap -sC -sV -iL 192.168.18.219
Starting Nmap 7.99 ( https://nmap.org ) at 2026-04-22 10:43:02
Nmap scan report for 192.168.18.219
Host is up (0.00026s latency).
PORT      STATE SERVICE
21/tcp    open  ftp
22/tcp    open  ssh
|_ftp-anon: Anonymous FTP login allowed (FTP code 230)
|_ssh-hostkey:
|_ 256 aa:f8:39:b3:ce:e6:3a:c9:68:79:bc:6c:86:47:ff:5a (ECDSA)
|_ 256 43:ca:a9:c9:31:7b:82:d9:03:ff:40:f2:a3:71:40:83 (ED25519)
|_http-robots.txt: 1 disallowed entry
|_wp-admin/
|_http-title: Apache2 Debian Default Page: It works
MAC Address: 08:00:27:08:0E:76 (Oracle VirtualBox virtual NIC)
Service Info: OS: Unix, Linux; CPE: cpe:/o:linux:linux_kernel
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 7.72 seconds

kali@kali:~$ ftp 192.168.18.219
Connected to 192.168.18.219.
220 (vsFTPd 3.0.3)
Name (192.168.18.219:kali): kali
331 Please specify the password.
Password:
330 Login incorrect.
ftp: Login failed
ftp> exit
221 Goodbye.

kali@kali:~$ ftp 192.168.18.219
Connected to 192.168.18.219.
220 (vsFTPd 3.0.3)
Name (192.168.18.219:kali): debian
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls -la
150 Here comes the directory listing.
drwxr-xr-x 3 0 0 4096 Apr 22 04:29 .
drwxr-xr-x 1 1000 1000 51 Apr 22 04:29 .Xauthority
-rw-r--r-- 1 1000 1000 2192 Sep 30 2024 .bash_history
-rw-r--r-- 1 1000 1000 228 Jul 31 2024 .bash_logout
-rw-r--r-- 1 1000 1000 3526 Jul 31 2024 .bashrc
drwxr-xr-x 10 1000 1000 4096 Jul 31 2024 .cache
drwxr-xr-x 8 1000 1000 4096 Jul 31 2024 .config
-rw-r--r-- 1 1000 1000 35 Jul 31 2024 .dmrc
-rw-r--r-- 1 1000 1000 5298 Jul 31 2024 .face
-rwxrwxrwx 1 1000 1000 5 Jul 31 2024 .face.icon -> .face
drwxr-xr-x 3 1000 1000 4096 Jul 31 2024 .local
drwxr-xr-x 4 1000 1000 4096 Jul 31 2024 .mozilla
-rw-r--r-- 1 1000 1000 807 Jul 31 2024 .profile
-rw-r--r-- 1 1000 1000 3516 Apr 22 04:29 .session-errors
-rw-r--r-- 1 1000 1000 3838 Oct 08 2024 .session-errors.old
drwxr-xr-x 2 1000 1000 4096 Jul 31 2024 Desktop
drwxr-xr-x 2 1000 1000 4096 Sep 28 2024 Downloads
drwxr-xr-x 2 1000 1000 4096 Jul 31 2024 Music
drwxr-xr-x 2 1000 1000 4096 Jul 31 2024 Pictures
drwxr-xr-x 2 1000 1000 4096 Jul 31 2024 Public
drwxr-xr-x 2 1000 1000 4096 Jul 31 2024 Templates
drwxr-xr-x 2 1000 1000 4096 Jul 31 2024 Videos
226 Directory send OK.
ftp>
```

```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```
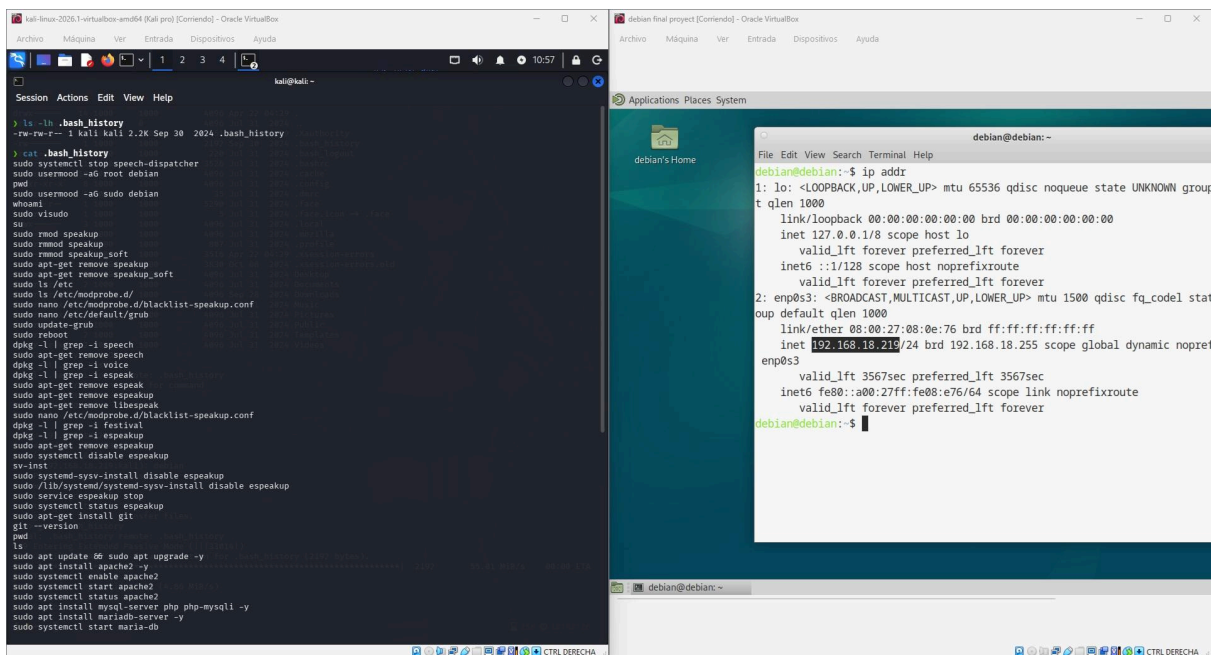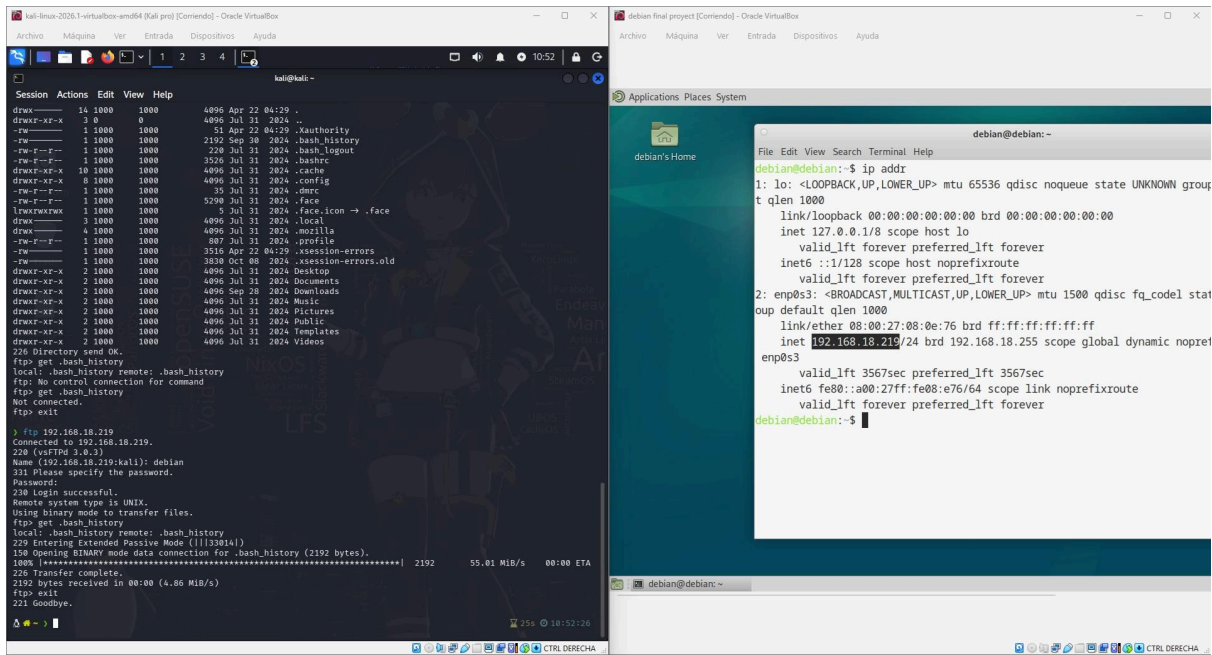
```
kali@kali:~$ sudo apt-get remove espeakup
sudo systemctl disable espeakup
zy-inst
sudo system-sysv-install disable espeakup
sudo /lib/systemd/systemd-sysv-install disable espeakup
sudo service espeakup stop
sudo systemctl status espeakup
sudo apt-get install git
git --version
pwd
ls
sudo apt update
sudo apt upgrade -y
sudo apt install apache2 -y
sudo systemctl enable apache2
sudo systemctl start apache2
sudo systemctl status apache2
sudo apt install mysql-server php php-mysqli -y
sudo apt install mariadb-server -y
sudo systemctl start mariadb
sudo apt install mariadb-server
sudo systemctl start mariadb-server
sudo systemctl enable mariadb
sudo mysql_secure_installation
sudo mysql -u root -p
cd /tmp
curl -O https://wordpress.org/latest.tar.gz
sudo apt install curl
curl -O https://wordpress.org/latest.tar.gz
tar xzf latest.tar.gz
sudo cp -a /tmp/wordpress/. /var/www/html/
sudo chown -R www-data:www-data /var/www/html/
cd /var/www/html/
sudo mv wp-config-sample.php wp-config.php
sudo nano wp-config.php
ip a
sudo systemctl restart apache2
sudo systemctl status apache2
sudo apt install php libapache2-mod-php php-mysqli php-gd php-xml php-strings php-curl -y
cd ~
sudo nano /etc/apache2/sites-available/000-default.conf
sudo nano /var/www/html/info.php
ls /var/www/html
sudo apt install openssh-server -y
sudo systemctl start ssh
sudo systemctl enable ssh
sudo systemctl status ssh
sudo systemctl start apache2
```

```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali@kali:~$ sudo systemctl enable apache2
sudo systemctl start apache2
sudo systemctl status apache2
sudo apt install mysql-server php php-mysqli -y
sudo apt install mariadb-server -y
sudo systemctl start mariadb
sudo apt install mariadb-server
sudo systemctl start mariadb-server
sudo systemctl enable mariadb
sudo mysql_secure_installation
sudo mysql -u root -p
cd /tmp
curl -O https://wordpress.org/latest.tar.gz
sudo apt install curl
curl -O https://wordpress.org/latest.tar.gz
tar xzf latest.tar.gz
sudo cp -a /tmp/wordpress/. /var/www/html/
sudo chown -R www-data:www-data /var/www/html/
cd /var/www/html/
sudo mv wp-config-sample.php wp-config.php
sudo nano wp-config.php
ip a
sudo systemctl restart apache2
sudo systemctl status apache2
sudo apt install php libapache2-mod-php php-mysqli php-gd php-xml php-strings php-curl -y
cd ~
sudo nano /etc/apache2/sites-available/000-default.conf
sudo nano /var/www/html/info.php
ls /var/www/html
sudo apt install openssh-server -y
sudo systemctl start ssh
sudo systemctl enable ssh
sudo systemctl status ssh
sudo systemctl start apache2
```

```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$
Session Actions Edit View Help
sudo mysql_secure_installation
sudo mysql -u root -p
cd /tmp
curl -O https://wordpress.org/latest.tar.gz
sudo apt install curl
curl -O https://wordpress.org/latest.tar.gz
tar xzvf latest.tar.gz
sudo cp -a /tmp/wordpress/ /var/www/html/
sudo chown -R www-data:www-data /var/www/html/
sudo chmod -R 755 /var/www/html/
cd /var/www/html/
sudo mv wp-config-sample.php wp-config.php
sudo nano wp-config.php
ip a
sudo systemctl restart apache2
sudo systemctl status apache2
sudo apt install php libapache2-mod-php php-mysql php-gd php-xml php-imagick php-curl -y
cd -
sudo nano /etc/apache2/sites-available/000-default.conf
sudo systemctl restart apache2
sudo nano /var/www/html/info.php
ls /var/www/html
sudo apt install openssh-server -y
sudo systemctl start ssh
sudo systemctl enable ssh
sudo systemctl status ssh
sudo systemctl start apache2

$ ssh 192.168.18.219
The authenticity of host '192.168.18.219 (192.168.18.219)' can't be established.
ED25519 key fingerprint is: SHA256:y+azU5JLX3WV8EJMaTB4WbybvwH7XBLCT7pJ2vlg
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '192.168.18.219' (ED25519) to the list of known hosts.
kali@192.168.18.219's password:
Permission denied, please try again.
kali@192.168.18.219's password:
Permission denied, please try again.
kali@192.168.18.219's password:

$ ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
debian@debian:~$
```

```
debian final project [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$
File Edit View Search Terminal Help
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$
Session Actions Edit View Help
sudo cp -a /tmp/wordpress/ /var/www/html/
sudo chown -R www-data:www-data /var/www/html/
sudo chmod -R 755 /var/www/html/
cd /var/www/html/
sudo mv wp-config-sample.php wp-config.php
sudo nano wp-config.php
ip a
sudo systemctl restart apache2
sudo systemctl status apache2
sudo apt install php libapache2-mod-php php-mysql php-gd php-xml php-imagick php-curl -y
cd -
sudo nano /etc/apache2/sites-available/000-default.conf
sudo systemctl restart apache2
sudo nano /var/www/html/info.php
ls /var/www/html
sudo apt install openssh-server -y
sudo systemctl start ssh
sudo systemctl enable ssh
sudo systemctl status ssh
sudo systemctl start apache2

$ ssh 192.168.18.219
The authenticity of host '192.168.18.219 (192.168.18.219)' can't be established.
ED25519 key fingerprint is: SHA256:y+azU5JLX3WV8EJMaTB4WbybvwH7XBLCT7pJ2vlg
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '192.168.18.219' (ED25519) to the list of known hosts.
kali@192.168.18.219's password:
Permission denied, please try again.
kali@192.168.18.219's password:
Permission denied, please try again.
kali@192.168.18.219's password:

$ ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
debian@debian:~$ sudo -l
[sudo] password for debian:
Matching Defaults entries for debian on debian:
    env_reset, mail_badpass, secure_path=/usr/local/sbin::/usr/local/bin::/usr/sbin::/usr/bin::/sbin::/bin, use_pty

User debian may run the following commands on debian:
    (ALL : ALL) ALL
debian@debian:~$
```

```
debian final project [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$
File Edit View Search Terminal Help
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```



```
kali-linux-2026.1-virtualbox-amd64 [Kali pro] [Comandos] - Oracle VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$ cd /var/www/html/
debian@debian:~$ sudo mv wp-config-sample.php wp-config.php
debian@debian:~$ sudo nano wp-config.php
debian@debian:~$ ip a
debian@debian:~$ sudo systemctl restart apache2
debian@debian:~$ sudo systemctl status apache2
debian@debian:~$ sudo apt install php libapache2-mod-php php-mysql php-gd php-xml php-mbstring php-curl -y
debian@debian:~$ cd -
debian@debian:~$ sudo nano /etc/apache2/sites-available/000-default.conf
debian@debian:~$ sudo systemctl restart apache2
debian@debian:~$ sudo nano /var/www/html/info.php
debian@debian:~$ ls /var/www/html
debian@debian:~$ sudo apt install openssl-server -y
debian@debian:~$ sudo systemctl start ssh
debian@debian:~$ sudo systemctl enable ssh
debian@debian:~$ sudo systemctl status ssh
debian@debian:~$ sudo systemctl start apache2

$ ssh 192.168.18.219
The authenticity of host '192.168.18.219 (192.168.18.219)' can't be established.
ED25519 key fingerprint is: SHA256:Yaz0U5LX3W8+EJMaT84WbVwM7XBLCT7vp3zVlg
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '192.168.18.219' (ED25519) to the list of known hosts.
kali@192.168.18.219's password:
Permission denied, please try again.
kali@192.168.18.219's password:
Permission denied, please try again.
kali@192.168.18.219's password:

$ ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
debian@debian:~$ sudo -l
[sudo] password for debian:
Matching Defaults entries for debian on debian:
env_reset, mail_badpass, secure_path=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin, use_pty

User debian may run the following commands on debian:
(ALL : ALL) ALL
debian@debian:~$ who
debian tty7 2026-04-22 04:29 (10)
debian pts/2 2026-04-22 05:21 (192.168.18.219)
debian@debian:~$
```

```
debian final project [Comandos] - Oracle VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali-linux-2026.1-virtualbox-amd64 [Kali pro] [Comandos] - Oracle VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$ cd /var/www/html/
debian@debian:~$ sudo nano /etc/apache2/sites-available/000-default.conf
debian@debian:~$ sudo systemctl restart apache2
debian@debian:~$ sudo nano /var/www/html/info.php
debian@debian:~$ ls /var/www/html
debian@debian:~$ sudo apt install openssl-server -y
debian@debian:~$ sudo systemctl start ssh
debian@debian:~$ sudo systemctl enable ssh
debian@debian:~$ sudo systemctl status ssh
debian@debian:~$ sudo systemctl start apache2

$ ssh 192.168.18.219
The authenticity of host '192.168.18.219 (192.168.18.219)' can't be established.
ED25519 key fingerprint is: SHA256:Yaz0U5LX3W8+EJMaT84WbVwM7XBLCT7vp3zVlg
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '192.168.18.219' (ED25519) to the list of known hosts.
kali@192.168.18.219's password:
Permission denied, please try again.
kali@192.168.18.219's password:
Permission denied, please try again.
kali@192.168.18.219's password:

$ ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.





Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
debian@debian:~$ sudo -l
[sudo] password for debian:
Matching Defaults entries for debian on debian:
env_reset, mail_badpass, secure_path=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin, use_pty





User debian may run the following commands on debian:
(ALL : ALL) ALL
debian@debian:~$ who
debian tty7 2026-04-22 04:29 (10)
debian pts/2 2026-04-22 05:21 (192.168.18.219)
debian@debian:~$ cat /var/www/html/wp-config.php | grep DB_
define( 'DB_NAME', 'wordpress' );
define( 'DB_USER', 'wordpressuser' );
define( 'DB_PASSWORD', '123456' );
define( 'DB_HOST', 'localhost' );
define( 'DB_CHARSET', 'utf8' );
define( 'DB_COLLATE', '' );
debian@debian:~$
```

```
debian final project [Comandos] - Oracle VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

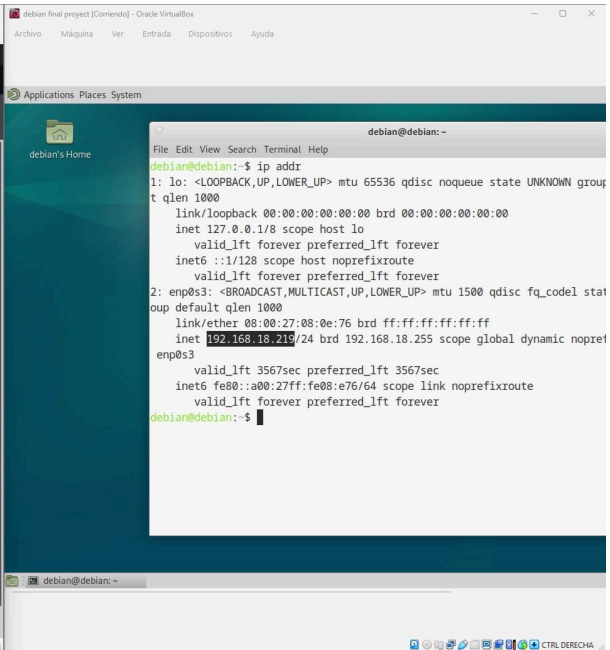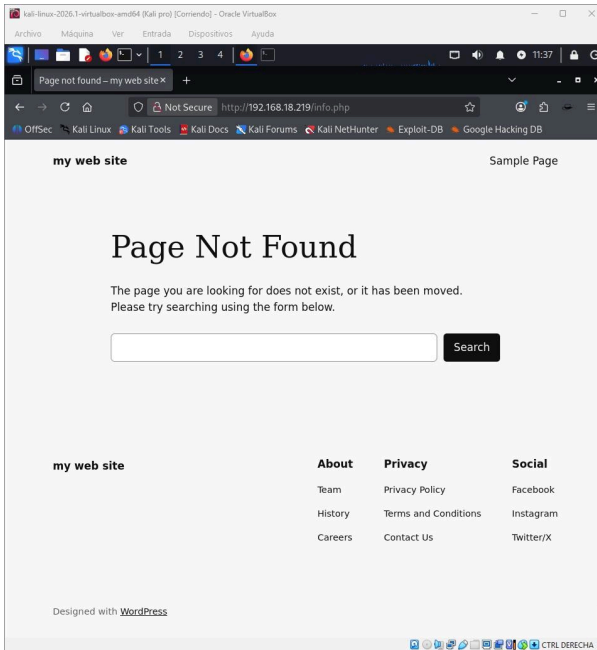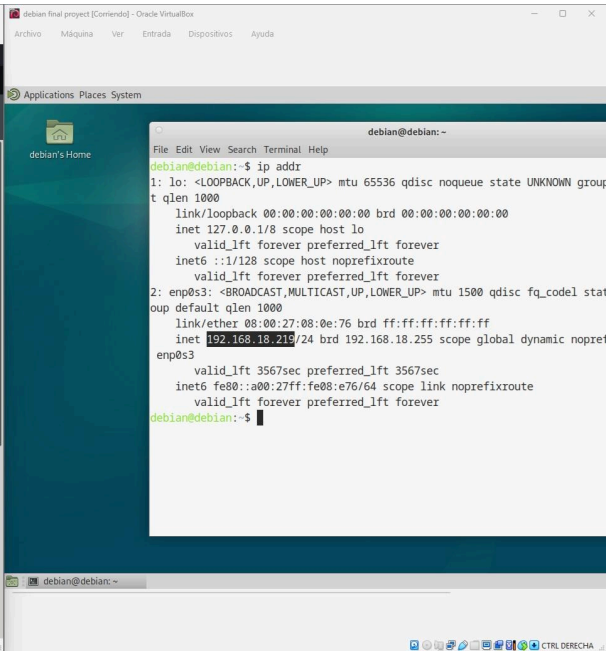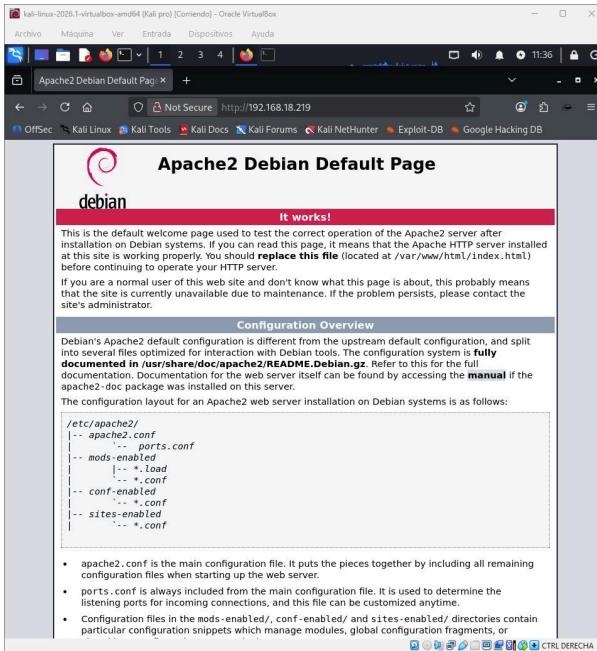

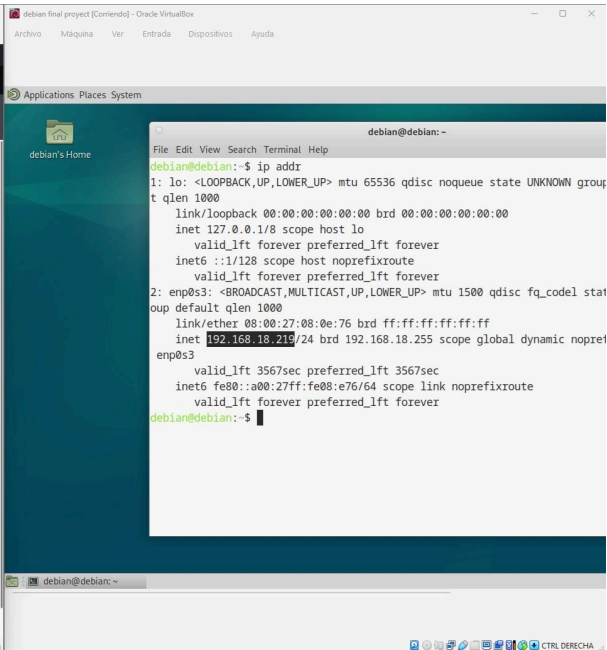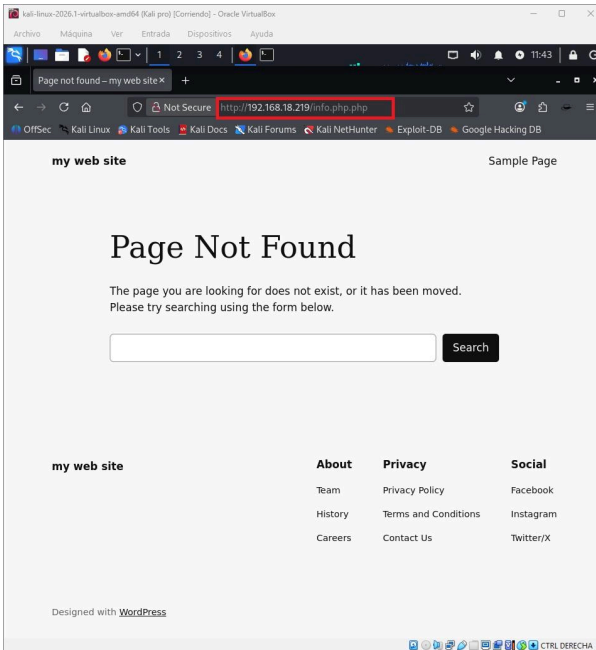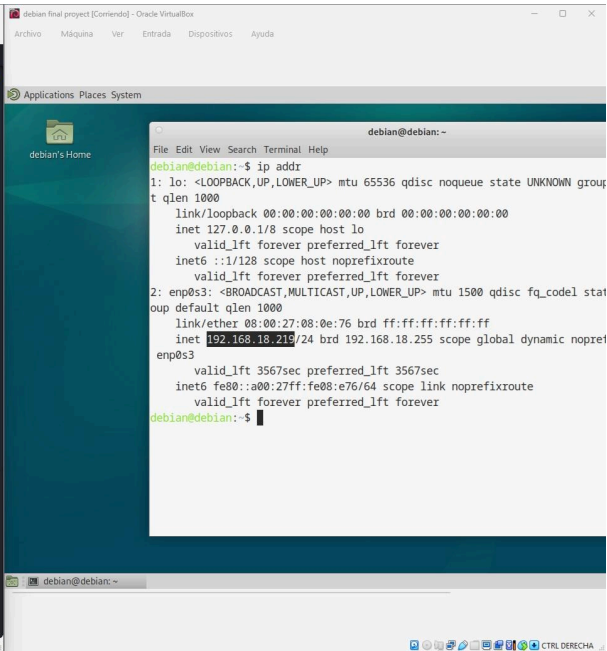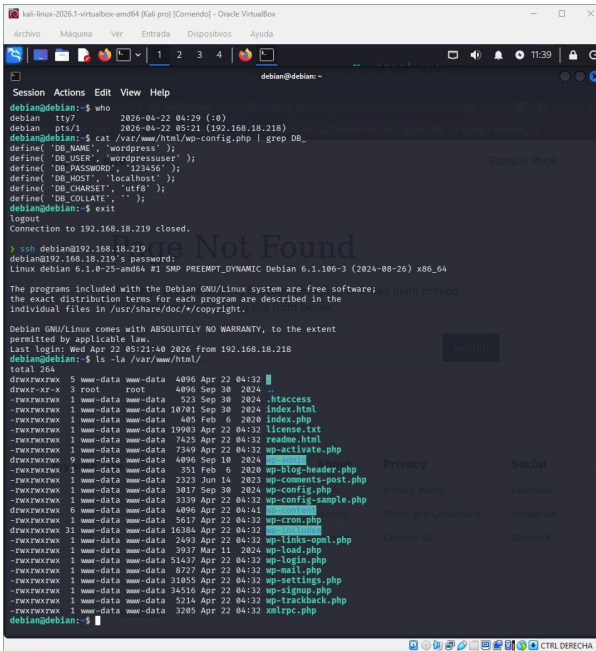


```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Connected] - Oracle VM VirtualBox
Session Actions Edit View Help
define('DB_USER','wordpressuser');
define('DB_PASSWORD','123456');
define('DB_HOST','localhost');
define('DB_CHARSET','utf8');
define('DB_COLLATE','');
debiandebian:~$ exit
logout
Connection to 192.168.18.219 closed.
> ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Wed Apr 22 05:21:40 2026 from 192.168.18.218
debiandebian:~$ ls -la /var/www/html/
total 264
drwxr-xr-x 5 www-data www-data 4096 Apr 22 04:32 .
drwxr-xr-x 3 root root 4096 Sep 30 2024 ..
-rwxr-xr-x 1 www-data www-data 523 Sep 30 2024 .htaccess
-rwxr-xr-x 1 www-data www-data 10781 Sep 30 2024 index.html
-rwxr-xr-x 1 www-data www-data 405 Feb 6 2020 index.php
-rwxr-xr-x 1 www-data www-data 19983 Apr 22 04:32 license.txt
-rwxr-xr-x 1 www-data www-data 7425 Apr 22 04:32 readme.html
-rwxr-xr-x 1 www-data www-data 7349 Apr 22 04:32 wp-activate.php
drwxr-xr-x 9 www-data www-data 4096 Sep 10 2024 wp-admin
-rwxr-xr-x 1 www-data www-data 351 Feb 6 2020 wp-blog-header.php
-rwxr-xr-x 1 www-data www-data 2323 Jun 16 2023 wp-comments-post.php
-rwxr-xr-x 1 www-data www-data 3017 Sep 30 2024 wp-config.php
-rwxr-xr-x 1 www-data www-data 3339 Apr 22 04:32 wp-config-sample.php
-rwxr-xr-x 6 www-data www-data 4096 Apr 22 04:41 wp-content
-rwxr-xr-x 1 www-data www-data 5617 Apr 22 04:32 wp-cron.php
drwxr-xr-x 31 www-data www-data 16384 Apr 22 04:32 wp-includes
-rwxr-xr-x 1 www-data www-data 2493 Apr 22 04:32 wp-links-opml.php
-rwxr-xr-x 1 www-data www-data 3937 Mar 11 2024 wp-load.php
-rwxr-xr-x 1 www-data www-data 31517 Apr 22 04:32 wp-login.php
-rwxr-xr-x 1 www-data www-data 8727 Apr 22 04:32 wp-mail.php
-rwxr-xr-x 1 www-data www-data 31055 Apr 22 04:32 wp-settings.php
-rwxr-xr-x 1 www-data www-data 34516 Apr 22 04:32 wp-signup.php
-rwxr-xr-x 1 www-data www-data 5214 Apr 22 04:32 wp-trackback.php
-rwxr-xr-x 1 www-data www-data 3245 Apr 22 04:32 xmlrpc.php
debiandebian:~$ sudo mv /var/www/html/info.php.php /var/www/html/test.php
[sudo] password for debian:
mv: cannot stat '/var/www/html/info.php.php': No such file or directory
debiandebian:~$ echo "<?php phpinfo();" > /var/www/html/evidencia.php
<?php phpinfo();
debiandebian:~$
```

```
debian final project [Connected] - Oracle VM VirtualBox
Applications Places System
debiandebian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debiandebian:~$
```

```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Connected] - Oracle VM VirtualBox
Session Actions Edit View Help
total 264
drwxr-xr-x 5 www-data www-data 4096 Apr 22 04:32 .
drwxr-xr-x 3 root root 4096 Sep 30 2024 ..
-rwxr-xr-x 1 www-data www-data 523 Sep 30 2024 .htaccess
-rwxr-xr-x 1 www-data www-data 10781 Sep 30 2024 index.html
-rwxr-xr-x 1 www-data www-data 405 Feb 6 2020 index.php
-rwxr-xr-x 1 www-data www-data 19983 Apr 22 04:32 license.txt
-rwxr-xr-x 1 www-data www-data 7425 Apr 22 04:32 readme.html
-rwxr-xr-x 1 www-data www-data 7349 Apr 22 04:32 wp-activate.php
drwxr-xr-x 9 www-data www-data 4096 Sep 10 2024 wp-admin
-rwxr-xr-x 1 www-data www-data 351 Feb 6 2020 wp-blog-header.php
-rwxr-xr-x 1 www-data www-data 2323 Jun 16 2023 wp-comments-post.php
-rwxr-xr-x 1 www-data www-data 3017 Sep 30 2024 wp-config.php
-rwxr-xr-x 1 www-data www-data 3339 Apr 22 04:32 wp-config-sample.php
-rwxr-xr-x 6 www-data www-data 4096 Apr 22 04:41 wp-content
-rwxr-xr-x 1 www-data www-data 5617 Apr 22 04:32 wp-cron.php
drwxr-xr-x 31 www-data www-data 16384 Apr 22 04:32 wp-includes
-rwxr-xr-x 1 www-data www-data 2493 Apr 22 04:32 wp-links-opml.php
-rwxr-xr-x 1 www-data www-data 3937 Mar 11 2024 wp-load.php
-rwxr-xr-x 1 www-data www-data 31517 Apr 22 04:32 wp-login.php
-rwxr-xr-x 1 www-data www-data 8727 Apr 22 04:32 wp-mail.php
-rwxr-xr-x 1 www-data www-data 31055 Apr 22 04:32 wp-settings.php
-rwxr-xr-x 1 www-data www-data 34516 Apr 22 04:32 wp-signup.php
-rwxr-xr-x 1 www-data www-data 5214 Apr 22 04:32 wp-trackback.php
-rwxr-xr-x 1 www-data www-data 3245 Apr 22 04:32 xmlrpc.php
debiandebian:~$ sudo mv /var/www/html/info.php.php /var/www/html/test.php
[sudo] password for debian:
mv: cannot stat '/var/www/html/info.php.php': No such file or directory
debiandebian:~$ echo "<?php phpinfo();" > /var/www/html/evidencia.php
<?php phpinfo();
debiandebian:~$ php /var/www/html/evidencia.php | head -n 20
phpinfo()
PHP Version => 8.2.20

System => Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64
Build Date => Jun 17 2024 13:33:14
Build System => Linux
Server API => Command Line Interface
Virtual Directory Support => disabled
Configuration File (php.ini) Path => /etc/php/8.2/cli
Loaded Configuration File => /etc/php/8.2/cli/php.ini
Scan this dir for additional .ini files => /etc/php/8.2/cli/conf.d
Additional .ini files parsed => /etc/php/8.2/cli/conf.d/10-mysqlnd.ini,
/etc/php/8.2/cli/conf.d/10-opcache.ini,
/etc/php/8.2/cli/conf.d/10-pdo.ini,
/etc/php/8.2/cli/conf.d/25-mb.ini,
/etc/php/8.2/cli/conf.d/25-xml.ini,
/etc/php/8.2/cli/conf.d/20-calendar.ini,
/etc/php/8.2/cli/conf.d/20-ctype.ini,
/etc/php/8.2/cli/conf.d/20-curl.ini,
/etc/php/8.2/cli/conf.d/20-dom.ini,
/etc/php/8.2/cli/conf.d/20-exif.ini,
/etc/php/8.2/cli/conf.d/20-gd.ini,
/etc/php/8.2/cli/conf.d/20-iconv.ini,
/etc/php/8.2/cli/conf.d/20-sockets.ini,
/etc/php/8.2/cli/conf.d/20-zip.ini
debiandebian:~$
```

```
debian final project [Connected] - Oracle VM VirtualBox
Applications Places System
debiandebian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debiandebian:~$
```

```
kali@kali:~$ wpscan --url http://192.168.18.219 --enumerate vp,vt,u --api-token
Scan Aborted: missing argument: --api-token

kali@kali:~$ wpscan --url http://192.168.18.219 --enumerate vp,vt,u --no-banner
[*] Updating the Database ...
[*] Update completed.
[*] URL: http://192.168.18.219/ [192.168.18.219]
[*] Started: Wed Apr 22 11:57:54 2026

Interesting Finding(s):

[*] Headers
| Interesting Entry: Server: Apache/2.4.62 (Debian)
| Found By: Headers (Passive Detection)
| Confidence: 100%

[*] Robots.txt found: http://192.168.18.219/robots.txt
| Interesting Entries:
| - /wp-admin/
| - /wp-admin/admin-ajax.php
| Found By: Robots Txt (Aggressive Detection)
| Confidence: 100%

[*] XML-RPC seems to be enabled: http://192.168.18.219/xmlrpc.php
| Found By: Direct Access (Aggressive Detection)
| Confidence: 100%
| References:
| - http://codex.wordpress.org/XML-RPC_Pingback_API
| - https://www.rapid7.com/db/modules/auxiliary/scanner/http/wordpress_ghost_scanner/
| - https://www.rapid7.com/db/modules/auxiliary/dos/http/wordpress_xmlrpc_dos/
| - https://www.rapid7.com/db/modules/auxiliary/scanner/http/wordpress_xmlrpc_login/
| - https://www.rapid7.com/db/modules/auxiliary/scanner/http/wordpress_pingback_access/

[*] WordPress readme found: http://192.168.18.219/readme.html
| Found By: Direct Access (Aggressive Detection)
| Confidence: 100%

[*] Upload directory has listing enabled: http://192.168.18.219/wp-content/uploads/
| Found By: Direct Access (Aggressive Detection)
| Confidence: 100%

[*] The external WP-Cron seems to be enabled: http://192.168.18.219/wp-cron.php
| Found By: Direct Access (Aggressive Detection)
| Confidence: 60%
| References:
| - https://www.iplocation.net/defend-wordpress-from-ddos
| - https://github.com/wpscantam/wpscan/issues/1399

[*] WordPress version 6.9.4 identified (latest, released on 2026-03-11).
| Found By: Meta Generator (Passive Detection)
```

```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
    oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
    enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali@kali:~$ wpscan --url http://192.168.18.219 --enumerate vp,vt,u --no-banner
[*] WordPress version 6.9.4 identified (latest, released on 2026-03-11).
| Found By: Meta Generator (Passive Detection)
| - http://192.168.18.219/0b96d02.html, Match: 'WordPress 6.9.4'
| Confirmed By: Opm Generator (Aggressive Detection)
| - http://192.168.18.219/wp-links-opml.php, Match: 'generator="WordPress/6.9.4"'

[*] WordPress theme in use: twentytwentyfour
| Location: http://192.168.18.219/wp-content/themes/twentytwentyfour/
| Last Updated: 2025-12-03T08:00:00.000Z
| Readme: http://192.168.18.219/wp-content/themes/twentytwentyfour/readme.txt
| [!] The version is out of date, the latest version is 1.4
| [!] Directory listing is enabled
| Style URL: http://192.168.18.219/wp-content/themes/twentytwentyfour/style.css
| Style Name: Twenty Twenty-Four
| Style URI: https://wordpress.org/themes/twentytwentyfour/
| Description: Twenty Twenty-Four is designed to be flexible, versatile and applicable to any website. Its collect
...
| Author: the WordPress team
| Author URI: https://wordpress.org
| Found By: Urls In 404 Page (Passive Detection)
|
| Version: 1.2 (80% confidence)
| Found By: Style (Passive Detection)
| - http://192.168.18.219/wp-content/themes/twentytwentyfour/style.css, Match: 'Version: 1.2'

[*] Enumerating Vulnerable Plugins (via Passive Methods)
[*] Checking Plugin Versions (via Passive and Aggressive Methods)
[*] No plugins Found.

[*] Enumerating Vulnerable Themes (via Passive and Aggressive Methods)
| Checking Known Locations - Time: 00:00:05
[*] Checking Theme Versions (via Passive and Aggressive Methods)
| (652 / 652) 100.00% Time: 00:00:05
[*] No themes Found.

[*] Enumerating Users (via Passive and Aggressive Methods)
| Bruteforcing Author IDs - Time: 00:00:00
| (10 / 10) 100.00% Time: 00:00:00
[*] User(s) Identified:

[*] wordpress-user
| Found By: wp-json Api (Aggressive Detection)
| - http://192.168.18.219/wp-json/wp/v2/users/?per_page=100&page=1
| Confirmed By: Login Error Messages (Aggressive Detection)

[*] No WPScan API Token given, as a result vulnerability data has not been output.
| You can get a free API token with 25 daily requests by registering at https://wpscan.com/register

[*] Finished: Wed Apr 22 11:58:04 2026
| Requests Done: 739
```

```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
    oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
    enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali@kali:~$ curl -s http://192.168.18.219/wp-content/themes/twentytwentyfour/
Last updated: 2025-12-03T08:00:00.000Z
Reader: http://192.168.18.219/wp-content/themes/twentytwentyfour/readme.txt
[!] The version is out of date, the latest version is 1.4
Directory listing is enabled
Style URI: http://192.168.18.219/wp-content/themes/twentytwentyfour/style.css
Style Name: Twenty Twenty-Four
Style URI: https://wordpress.org/themes/twentytwentyfour/
Description: Twenty Twenty-Four is designed to be flexible, versatile and applicable to any website. Its collect
...
Author: the WordPress team
Author URI: https://wordpress.org
Found By: Urls In 404 Page (Passive Detection)
Version: 1.2 (88% confidence)
Found By: Style (Passive Detection)
- http://192.168.18.219/wp-content/themes/twentytwentyfour/style.css, Match: 'Version: 1.2'

[*] Enumerating Vulnerable Plugins (via Passive Methods)
[*] Checking Plugin Versions (via Passive and Aggressive Methods)

[!] No plugins Found.

[*] Enumerating Vulnerable Themes (via Passive and Aggressive Methods)
Checking Known Locations - Time: 00:00:05 ← (652 / 652) 100.00% Time: 00:00:05
[*] Checking Theme Versions (via Passive and Aggressive Methods)

[!] No themes Found.

[*] Enumerating Users (via Passive and Aggressive Methods)
Brute Forcing Author IDs - Time: 00:00:00 ← (10 / 10) 100.00% Time: 00:00:00

[!] User(s) Identified:

[*] wordpress-user
Found By: Wp Json Api (Aggressive Detection)
- http://192.168.18.219/wp-json/wp/v2/users/?per_page=100&page=1
Confirmed By: Login Error Messages (Aggressive Detection)

[!] No WPScan API Token given, as a result vulnerability data has not been output.
[!] You can get a free API token with 25 daily requests by registering at https://wpscan.com/register

[*] Finished: Wed Apr 22 11:58:04 2026
[*] Requests Done: 739
[*] Cached Requests: 12
[*] Data Sent: 194.187 KB
[*] Data Received: 24.137 MB
[*] Memory used: 286.363 MB
[*] Elapsed time: 00:00:09
```

```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
    valid_lft forever preferred_lft forever
debian@debian:~$
```

```
debian@debian:~$ curl -s http://192.168.18.219/wp-content/themes/twentytwentyfour/style.css, Match: 'Version: 1.2'

[*] Enumerating Vulnerable Plugins (via Passive Methods)
[*] Checking Plugin Versions (via Passive and Aggressive Methods)

[!] No plugins Found.

[*] Enumerating Vulnerable Themes (via Passive and Aggressive Methods)
Checking Known Locations - Time: 00:00:05 ← (652 / 652) 100.00% Time: 00:00:05
[*] Checking Theme Versions (via Passive and Aggressive Methods)

[!] No themes Found.

[*] Enumerating Users (via Passive and Aggressive Methods)
Brute Forcing Author IDs - Time: 00:00:00 ← (10 / 10) 100.00% Time: 00:00:00

[!] User(s) Identified:

[*] wordpress-user
Found By: Wp Json Api (Aggressive Detection)
- http://192.168.18.219/wp-json/wp/v2/users/?per_page=100&page=1
Confirmed By: Login Error Messages (Aggressive Detection)

[!] No WPScan API Token given, as a result vulnerability data has not been output.
[!] You can get a free API token with 25 daily requests by registering at https://wpscan.com/register

[*] Finished: Wed Apr 22 11:58:04 2026
[*] Requests Done: 739
[*] Cached Requests: 12
[*] Data Sent: 194.187 KB
[*] Data Received: 24.137 MB
[*] Memory used: 286.363 MB
[*] Elapsed time: 00:00:09

$ ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Wed Apr 22 05:38:44 2026 from 192.168.18.218
debian@debian:~$ mysql -u wordpressuser -p123456 -e "USE wordpress; SELECT user_login, user_pass FROM wp_users;"
+-----+-----+
| user_login | user_pass |
+-----+-----+
| wordpress-user | $P$BM4LABxc0aw7Zfuh8QRU5dcnKT21C. |
+-----+-----+
debian@debian:~$
```

```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
    valid_lft forever preferred_lft forever
debian@debian:~$
```



```
debian@debian:~$ nano /etc/sudoers
# This file MUST be edited with the 'visudo' command as root.
# Please consider adding local content in /etc/sudoers.d/ instead of
# directly modifying this file.
# See the man page for details on how to write a sudoers file.
Defaults        env_reset
Defaults        mail_badpass
Defaults        secure_path="/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin"
# This fixes CVE-2005-4898 and possibly breaks some versions of kdesu
# (#1011624, https://bugs.kde.org/show_bug.cgi?id=452532)
Defaults        use_pty
# This preserves proxy settings from user environments of root
#Equivalent users (group sudo)
#Defaults:ksudo env_keep += "http_proxy https_proxy ftp_proxy all_proxy no_proxy"
# This allows running arbitrary commands, but so does ALL, and it means
# different sudoers have their choice of editor respected.
#Defaults:ksudo env_keep += "EDITOR"
# Completely harmless preservation of a user preference.
#Defaults:ksudo env_keep += "GREP_COLOR"
# While you shouldn't normally run git as root, you need to with etckeeper
#Defaults:ksudo env_keep += "GIT_AUTHOR_* GIT_COMMITTER_*"
# Per-user preferences; root won't have sensible values for them.
#Defaults:ksudo env_keep += "EMAIL DEEMAIL DEFULLNAME"
# "sudo scp" or "sudo rsync" should be able to use your SSH agent.
#Defaults:ksudo env_keep += "SSH_AGENT_PID SSH_AUTH_SOCK"
# Ditto for GPG agent
#Defaults:ksudo env_keep += "GPG_AGENT_INFO"
# Host alias specification
# User alias specification
# Cmnd alias specification
# User privilege specification
root    ALL=(ALL:ALL) ALL
debian  ALL=(ALL:ALL) ALL
# Help
# Exit
```

```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
debian@debian:~$ nano /etc/sudoers
# This file MUST be edited with the 'visudo' command as root.
# Please consider adding local content in /etc/sudoers.d/ instead of
# directly modifying this file.
# See the man page for details on how to write a sudoers file.
Defaults        env_reset
Defaults        mail_badpass
Defaults        secure_path="/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin"
# This fixes CVE-2005-4898 and possibly breaks some versions of kdesu
# (#1011624, https://bugs.kde.org/show_bug.cgi?id=452532)
Defaults        use_pty
# This preserves proxy settings from user environments of root
#Equivalent users (group sudo)
#Defaults:ksudo env_keep += "http_proxy https_proxy ftp_proxy all_proxy no_proxy"
# This allows running arbitrary commands, but so does ALL, and it means
# different sudoers have their choice of editor respected.
#Defaults:ksudo env_keep += "EDITOR"
# Completely harmless preservation of a user preference.
#Defaults:ksudo env_keep += "GREP_COLOR"
# While you shouldn't normally run git as root, you need to with etckeeper
#Defaults:ksudo env_keep += "GIT_AUTHOR_* GIT_COMMITTER_*"
# Per-user preferences; root won't have sensible values for them.
#Defaults:ksudo env_keep += "EMAIL DEEMAIL DEFULLNAME"
# "sudo scp" or "sudo rsync" should be able to use your SSH agent.
#Defaults:ksudo env_keep += "SSH_AGENT_PID SSH_AUTH_SOCK"
# Ditto for GPG agent
#Defaults:ksudo env_keep += "GPG_AGENT_INFO"
# Host alias specification
# User alias specification
# Cmnd alias specification
# User privilege specification
root    ALL=(ALL:ALL) ALL
# Allow members of group sudo to execute any command
debian  ALL=(ALL:ALL) ALL
# Help
# Exit
```

```
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```



```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$

Session Actions Edit View Help
[*] Enumerating Vulnerable Plugins (via Passive Methods)
[*] Checking Plugin Versions (via Passive and Aggressive Methods)
[+] No plugins Found.
[*] Enumerating Vulnerable Themes (via Passive and Aggressive Methods)
Checking Known Locations - Time: 00:00:05 (652 / 652) 100.00% Time: 00:00:05
[*] Checking Theme Versions (via Passive and Aggressive Methods)
[+] No themes Found.
[*] Enumerating Users (via Passive and Aggressive Methods)
Brute Forcing Author IDs - Time: 00:00:00 (10 / 10) 100.00% Time: 00:00:00
[+] User(s) Identified:
[*] wordpress-user
  Found By: Wp 3son Api (Aggressive Detection)
  - http://192.168.18.219/wp-json/wp/v2/users/?per_page=100&page=1
  Confirmed By: Login Error Messages (Aggressive Detection)
[+] No WPScan API Token given, as a result vulnerability data has not been output.
[+] You can get a free API token with 25 daily requests by registering at https://wpscan.com/register
[*] Finished: Wed Apr 22 11:58:04 2026
[*] Requests Done: 739
[*] Cached Requests: 12
[*] Data Sent: 194.187 KB
[*] Data Received: 24.137 MB
[*] Memory used: 286.363 MB
[*] Elapsed time: 00:00:09

> ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Wed Apr 22 05:38:44 2026 from 192.168.18.218
debian@debian:~$ mysql -u wordpressuser -p123456 -e "USE wordpress; SELECT user_login, user_pass FROM wp_users;"
+-----+-----+
| user_login | user_pass |
+-----+-----+
| wordpress-user | $P$BMALABXcoawTzfuhBQRU5dcnKT2IC. |
+-----+-----+

debian@debian:~$ sudo nano /etc/sudoers
[sudo] password for debian:
debian@debian:~$
```

```
debian final project [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
    oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
    enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$

Session Actions Edit View Help
[*] Enumerating Vulnerable Plugins (via Passive Methods)
[*] Checking Plugin Versions (via Passive and Aggressive Methods)
[+] No plugins Found.
[*] Enumerating Vulnerable Themes (via Passive and Aggressive Methods)
Checking Known Locations - Time: 00:00:05 (652 / 652) 100.00% Time: 00:00:05
[*] Checking Theme Versions (via Passive and Aggressive Methods)
[+] No themes Found.
[*] Enumerating Users (via Passive and Aggressive Methods)
Brute Forcing Author IDs - Time: 00:00:00 (10 / 10) 100.00% Time: 00:00:00
[+] User(s) Identified:
[*] wordpress-user
  Found By: Wp 3son Api (Aggressive Detection)
  - http://192.168.18.219/wp-json/wp/v2/users/?per_page=100&page=1
  Confirmed By: Login Error Messages (Aggressive Detection)
[+] No WPScan API Token given, as a result vulnerability data has not been output.
[+] You can get a free API token with 25 daily requests by registering at https://wpscan.com/register
[*] Finished: Wed Apr 22 11:58:04 2026
[*] Requests Done: 739
[*] Cached Requests: 12
[*] Data Sent: 194.187 KB
[*] Data Received: 24.137 MB
[*] Memory used: 286.363 MB
[*] Elapsed time: 00:00:09

> ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.





Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Wed Apr 22 05:38:44 2026 from 192.168.18.218
debian@debian:~$ mysql -u wordpressuser -p123456 -e "USE wordpress; SELECT user_login, user_pass FROM wp_users;"
+-----+-----+
| user_login | user_pass |
+-----+-----+
| wordpress-user | $P$BMALABXcoawTzfuhBQRU5dcnKT2IC. |
+-----+-----+

debian@debian:~$ sudo nano /etc/sudoers
[sudo] password for debian:
debian@debian:~$
```

```
debian final project [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
    oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
    enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

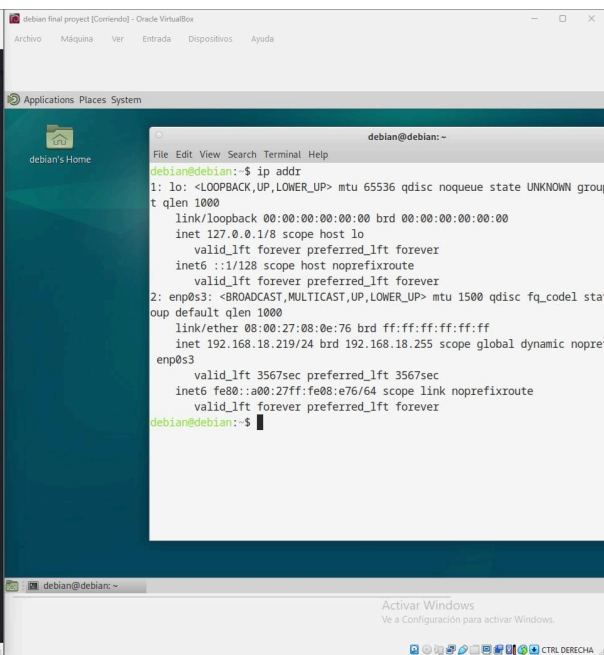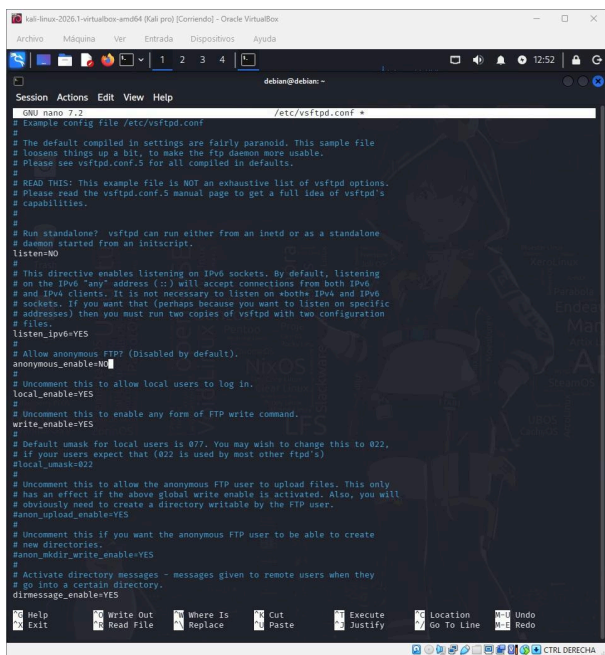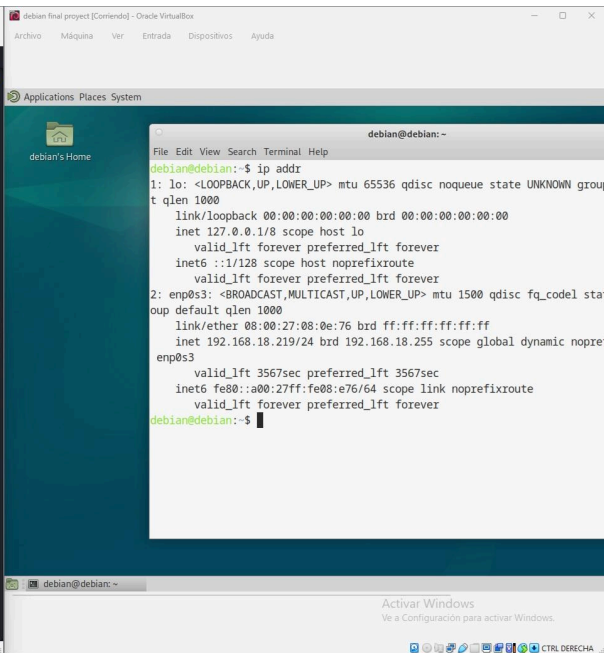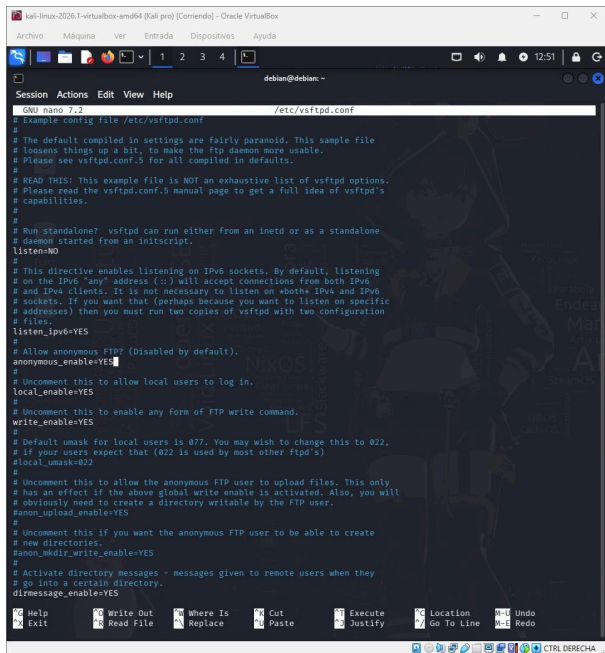

```
kali-linux-2023.1-virtualbox-amd64 [Kali pro] [Contenido] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$
Session Actions Edit View Help
[+] Checking Theme Versions (via Passive and Aggressive Methods)
[+] No themes Found.
[+] Enumerating Users (via Passive and Aggressive Methods)
Brute Forcing Author IDs - Time: 00:00:00 (10 / 10) 100.00% Time: 00:00:00
[+] User(s) Identified:
[+] wordpress-user
[+] Found By: Wp Json Api (Aggressive Detection)
[+] http://192.168.18.219/wp-json/wp/v2/users/?per_page=100&page=1
[+] Confirmed By: Login Error Messages (Aggressive Detection)
[+] No WPScan API Token given, as a result vulnerability data has not been output.
[+] You can get a free API token with 25 daily requests by registering at https://wpscan.com/register
[+] Finished: Wed Apr 22 11:58:04 2026
[+] Requests Done: 739
[+] Cached Requests: 12
[+] Data Sent: 194.187 KB
[+] Data Received: 24.137 MB
[+] Memory used: 286.363 MB
[+] Elapsed time: 00:00:09
> ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Wed Apr 22 05:38:44 2026 from 192.168.18.218
debian@debian:~$ mysql -u wordpressuser -p123456 -e "USE wordpress; SELECT user_login, user_pass FROM wp_users;"
+-----+-----+
| user_login | user_pass |
+-----+-----+
| wordpress-user | $P$BM6LABXcoawT2FuH8QRUSdcnK72IC. |
+-----+-----+
debian@debian:~$ sudo nano /etc/sudoers
[sudo] password for debian:
debian@debian:~$ sudo nano /etc/vsftpd.conf
debian is not in the sudoers file.
debian@debian:~$ su -
Password:
root@debian:~# sudo nano /etc/vsftpd.conf
root@debian:~# systemctl restart vsftpd
root@debian:~#
```

```
debian final project [Contenido] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali-linux-2023.1-virtualbox-amd64 [Kali pro] [Contenido] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$
Session Actions Edit View Help
[+] Checking Theme Versions (via Passive and Aggressive Methods)
[+] No themes Found.
[+] Enumerating Users (via Passive and Aggressive Methods)
Brute Forcing Author IDs - Time: 00:00:00 (10 / 10) 100.00% Time: 00:00:00
[+] User(s) Identified:
[+] wordpress-user
[+] Found By: Wp Json Api (Aggressive Detection)
[+] http://192.168.18.219/wp-json/wp/v2/users/?per_page=100&page=1
[+] Confirmed By: Login Error Messages (Aggressive Detection)
[+] No WPScan API Token given, as a result vulnerability data has not been output.
[+] You can get a free API token with 25 daily requests by registering at https://wpscan.com/register
[+] Finished: Wed Apr 22 11:58:04 2026
[+] Requests Done: 739
[+] Cached Requests: 12
[+] Data Sent: 194.187 KB
[+] Data Received: 24.137 MB
[+] Memory used: 286.363 MB
[+] Elapsed time: 00:00:09
> ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Wed Apr 22 05:38:44 2026 from 192.168.18.218
debian@debian:~$ mysql -u wordpressuser -p123456 -e "USE wordpress; SELECT user_login, user_pass FROM wp_users;"
+-----+-----+
| user_login | user_pass |
+-----+-----+
| wordpress-user | $P$BM6LABXcoawT2FuH8QRUSdcnK72IC. |
+-----+-----+
debian@debian:~$ sudo nano /etc/sudoers
[sudo] password for debian:
debian@debian:~$ sudo nano /etc/vsftpd.conf
debian is not in the sudoers file.
debian@debian:~$ su -
Password:
root@debian:~# sudo nano /etc/vsftpd.conf
root@debian:~# systemctl restart vsftpd
root@debian:~# chmod 600 /var/www/html/wp-config.php
root@debian:~#
```

```
debian final project [Contenido] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```



```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Connected] - Oracle VM VirtualBox
Archivos Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$
[+] No themes found.
[+] Enumerating Users (via Passive and Aggressive Methods)
Brute Forcing Author IDs - Time: 00:00:00 (10 / 10) 100.00% Time: 00:00:00
[+] User(s) Identified:
[+] wordpress-user
| Found By: Wp 35on Api (Aggressive Detection)
| - http://192.168.18.219/wp-json/wp/v2/users/?per_page=100&page=1
| Confirmed By: Login Error Messages (Aggressive Detection)
[+] No WPScan API Token given, as a result vulnerability data has not been output.
[+] You can get a free API token with 25 daily requests by registering at https://wpscan.com/register
[+] Finished: Wed Apr 22 11:58:04 2026
[+] Requests Done: 739
[+] Cached Requests: 12
[+] Data Sent: 194.187 KB
[+] Data Received: 24.137 MB
[+] Memory used: 286.363 MB
[+] Elapsed time: 00:00:09
> ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Wed Apr 22 05:38:44 2026 from 192.168.18.218
debian@debian:~$ mysql -u wordpressuser -p123456 -e "USE wordpress; SELECT user_login, user_pass FROM wp_users;"
+-----+-----+
| user_login | user_pass |
+-----+-----+
| wordpress-user | $P$BMALABXc0awTzfuh8QRUSdcnKT2IC. |
+-----+-----+
debian@debian:~$ sudo nano /etc/sudoers
[sudo] password for debian:
debian@debian:~$ sudo nano /etc/vsftpd.conf
debian is not in the sudoers file.
debian@debian:~$ su -
Password:
root@debian:~# sudo nano /etc/vsftpd.conf
root@debian:~# systemctl restart vsftpd
root@debian:~# chmod 600 /var/www/html/wp-config.php
root@debian:~# ls -la /var/www/html/wp-config.php
-rw-r--r-- 1 www-data www-data 3017 Sep 30 2024 /var/www/html/wp-config.php
root@debian:~#
```

```
debian final project [Connected] - Oracle VM VirtualBox
Archivos Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$
File Edit View Search Terminal Help
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Connected] - Oracle VM VirtualBox
Archivos Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$
[+] User(s) Identified:
[+] wordpress-user
| Found By: Wp 35on Api (Aggressive Detection)
| - http://192.168.18.219/wp-json/wp/v2/users/?per_page=100&page=1
| Confirmed By: Login Error Messages (Aggressive Detection)
[+] No WPScan API Token given, as a result vulnerability data has not been output.
[+] You can get a free API token with 25 daily requests by registering at https://wpscan.com/register
[+] Finished: Wed Apr 22 11:58:04 2026
[+] Requests Done: 739
[+] Cached Requests: 12
[+] Data Sent: 194.187 KB
[+] Data Received: 24.137 MB
[+] Memory used: 286.363 MB
[+] Elapsed time: 00:00:09
> ssh debian@192.168.18.219
debian@192.168.18.219's password:
Linux debian 6.1.0-25-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.106-3 (2024-08-26) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Wed Apr 22 05:38:44 2026 from 192.168.18.218
debian@debian:~$ mysql -u wordpressuser -p123456 -e "USE wordpress; SELECT user_login, user_pass FROM wp_users;"
+-----+-----+
| user_login | user_pass |
+-----+-----+
| wordpress-user | $P$BMALABXc0awTzfuh8QRUSdcnKT2IC. |
+-----+-----+
debian@debian:~$ sudo nano /etc/sudoers
[sudo] password for debian:
debian@debian:~$ sudo nano /etc/vsftpd.conf
debian is not in the sudoers file.
debian@debian:~$ su -
Password:
root@debian:~# sudo nano /etc/vsftpd.conf
root@debian:~# systemctl restart vsftpd
root@debian:~# chmod 600 /var/www/html/wp-config.php
root@debian:~# ls -la /var/www/html/wp-config.php
-rw-r--r-- 1 www-data www-data 3017 Sep 30 2024 /var/www/html/wp-config.php
root@debian:~# passwd debian
New password:
Retype new password:
passwd: password updated successfully
root@debian:~#
```

```
debian final project [Connected] - Oracle VM VirtualBox
Archivos Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$
File Edit View Search Terminal Help
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```



```
root@kali:~# ssh root@10.10.10.10 [C]ommand - Oracle VirtualBox
```

Archivos | Maquina | Ver | Entradas | Discos virtuales | Ayuda

debian@debian: ~\$

```
[sudo] password for debian:
debian@sudo nano /etc/vsftpd.conf
debian is not in the sudoers file.
Use ! to bypass.
```

```
debian@debian:~$ su -
Password:
root@debian:~# sudo nano /etc/vsftpd.conf
root@debian:~# systemctl restart vsftpd
root@debian:~# cmmid 60 /var/www/html/wp-config.php
root@debian:~# ls -la /var/www/html/wp-config.php
-rw-r--r-- 1 www-data www-data 3817 Sep 30 2024 /var/www/html/wp-config.php
root@debian:~# passed debian
New password:
Retype new password:
passed: password updated successfully
root@debian:~# apt update && apt upgrade -y
[get http://deb.debian.org/debian bookworm/main InRelease [151 kB]]
[get http://security.debian.org/debian-security bookworm-security InRelease [48.0 kB]]
[get http://deb.debian.org/debian bookworm-updates InRelease [59.4 kB]]
[get http://security.debian.org/debian-security bookworm-security/main amd64 Packages [188 kB]]
[get http://security.debian.org/debian-security bookworm-security/non-free-firmware Sources [796 B]]
[get http://security.debian.org/debian-security bookworm-security/main amd64 Packages [296 kB]]
[get http://security.debian.org/debian-security bookworm-security/main Translation-en [180 kB]]
[get http://security.debian.org/debian-security bookworm-security/non-free-firmware amd64 Packages [688 B]]
[get http://deb.debian.org/debian bookworm/main Sources [9.495 KB]]
[get http://deb.debian.org/debian bookworm-updates/main Sources [21.8 kB]]
[get http://deb.debian.org/debian bookworm-updates/main Sources diff/Index [6.45 KB]]
[get http://deb.debian.org/debian bookworm-updates/main amd64 Packages diff/Index [21.8 kB]]
[get http://deb.debian.org/debian bookworm-updates/main Translation-en diff/Index [20.7 kB]]
[get http://deb.debian.org/debian bookworm-updates/main Translation-en amd64 Packages [5,924 B]]
[get http://deb.debian.org/debian bookworm-non-free-firmware Sources [7,152 B]]
[get http://deb.debian.org/debian bookworm/main amd64 Packages [9,792 kB]]
[get http://deb.debian.org/debian bookworm/main Translation-en [6,108 kB]]
[get http://deb.debian.org/debian bookworm-non-free-firmware amd64 Packages [3,368 B]]
[get http://deb.debian.org/debian bookworm-non-free-firmware Translation-en [25.8 kB]]
[get http://deb.debian.org/debian bookworm-updates/main Sources [3,288 B]]
[get http://deb.debian.org/debian bookworm-updates/main amd64 Packages [5,924 B]]
[get http://deb.debian.org/debian bookworm-updates/main Translation-en [5,448 B]]
Fetched 25.4 MB in 4s (6,860 kB/s)
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
112 packages can be upgraded. Run 'apt list --upgradeable' to see them.
N: Repository 'http://security.debian.org/debian-security bookworm-security InRelease' changed its 'Suite' value from 'stable' to 'stable-updates'
N: Repository 'http://deb.debian.org/debian bookworm InRelease' changed its 'Version' value from '12.7' to '12.13'.
N: Repository 'http://deb.debian.org/debian bookworm InRelease' changed its 'Suite' value from 'stable' to 'stable-ldistrib'
N: Repository 'http://deb.debian.org/debian bookworm-updates InRelease' changed its 'Suite' value from 'stable-updates' to 'stable-ldistrib'
Reading package lists... Done
Building dependency tree... Done
```

debian@debian:~\$

[illegible][illegible]

The screenshot shows a Kali Linux desktop environment. At the top, there is a taskbar with icons for 'debian final project [Cortado]', 'Oracle VM VirtualBox', and a window titled 'debian@debian: ~'. Below the taskbar is a panel with icons for 'Archivo', 'Máquina', 'Ver', 'Entrada', 'Dispositivos', and 'Ayuda'. The main desktop area has a dark blue background with a terminal window titled 'Applications Places System' and 'debian's Home'. The terminal window shows the following commands and output:

```

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp8s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic noprefr
        valid_lft 3567sec preferred_lft 3567sec
        inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
  
```

At the bottom of the terminal window, there is a status bar that says 'Activar Windows' and 'Ve a Configuración para activar Windows.'.

```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$
312 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 513 MB of archives.
After this operation, 487 MB of additional disk space will be used.
Get:1 http://security.debian.org/debian-security bookworm-security/main amd64 libssl3 amd64 3.0.19-1-debian12 [2,032 kB]
Get:2 http://deb.debian.org/debian bookworm/main amd64 base-files amd64 12.4+deb12u13 [70.9 kB]
Get:3 http://deb.debian.org/debian bookworm/main amd64 bash amd64 5.2.15-2+b0 [1,490 kB]
Get:4 http://deb.debian.org/debian bookworm/main amd64 bootutils amd64 1:2.38.1-5-debian12 [94.4 kB]
Get:5 http://deb.debian.org/debian bookworm/main amd64 login amd64 1:4.11+dfsg1-1-debian12 [846 kB]
Get:6 http://deb.debian.org/debian bookworm/main amd64 libperl5.36 amd64 5.36.0-7-debian12 [4,196 kB]
Get:7 http://security.debian.org/debian-security bookworm-security/main amd64 libpng16 amd64 1.6.39-2+deb12u4 [27.8 kB]
Get:8 http://security.debian.org/debian-security bookworm-security/main amd64 libnss3 amd64 2:3.87.1-1-debian12 [1,332 kB]
Get:9 http://security.debian.org/debian-security bookworm-security/main amd64 libtiff6 amd64 4.5.0-6+deb12u4 [316 kB]
Get:10 http://security.debian.org/debian-security bookworm-security/main amd64 libgmp10 amd64 3:7.9-2+deb12u0 [1,488 kB]
Get:11 http://deb.debian.org/debian bookworm/main amd64 perl amd64 5.36.0-7+deb12u2 [239 kB]
Get:12 http://deb.debian.org/debian bookworm/main amd64 perl-base amd64 5.36.0-7+deb12u3 [1,688 kB]
Get:13 http://security.debian.org/debian-security bookworm-security/main amd64 imagemagick-core-common all 8:6.9.11-60+dfsg-1+deb12u8 [1,984 kB]
Get:14 http://deb.debian.org/debian bookworm/main amd64 perl-modules-5.36 all 5.36.0-7+deb12u3 [2,815 kB]
Get:15 http://security.debian.org/debian-security bookworm-security/main amd64 libmagickcore-6.q16-6 amd64 8:6.9.11-60+dfsg-1+deb12u8 [1,984 kB]
Get:16 http://deb.debian.org/debian bookworm/main amd64 cpio amd64 12.2.0-14+deb12u1 [9,768 kB]
Get:17 http://security.debian.org/debian-security bookworm-security/main amd64 libmagickwand-6.q16-6 amd64 8:6.9.11-60+dfsg-1+deb12u8 [415 kB]
Get:18 http://security.debian.org/debian-security bookworm-security/main amd64 openssl-sftplib-server amd64 1:9.2pl-2+deb12u0 [60.9 kB]
Get:19 http://security.debian.org/debian-security bookworm-security/main amd64 openssl-server amd64 1:9.2pl-2+deb12u0 [457 kB]
Get:20 http://security.debian.org/debian-security bookworm-security/main amd64 openssl-client amd64 1:9.2pl-2+deb12u0 [993 kB]
Get:21 http://security.debian.org/debian-security bookworm-security/main amd64 bind9-dhutils amd64 1:9.18.47-1-debian12 [154.8 kB]
Get:22 http://security.debian.org/debian-security bookworm-security/main amd64 bind9-host amd64 1:9.18.47-1-debian12 [1,148 kB]
Get:23 http://security.debian.org/debian-security bookworm-security/main amd64 bind9-libs amd64 1:9.18.47-1-debian12 [1,148 kB]
Get:24 http://security.debian.org/debian-security bookworm-security/main amd64 openssl amd64 3.0.19-1-debian12 [1,435 kB]
Get:25 http://security.debian.org/debian-security bookworm-security/main amd64 inetutils-telnet amd64 2:2.4-2+deb12u3 [121 kB]
Get:26 http://security.debian.org/debian-security bookworm-security/main amd64 libgdk-pixbuf2.0-common all 2.42.10-2+fs-1+deb12u4 [387 kB]
Get:27 http://security.debian.org/debian-security bookworm-security/main amd64 libgdk-pixbuf-2.0 amd64 2.42.10-2+fs-1+deb12u4 [139 kB]
Get:28 http://deb.debian.org/debian bookworm/main amd64 libquadmath amd64 12.2.0-14+deb12u1 [145 kB]
Get:29 http://security.debian.org/debian-security bookworm-security/main amd64 libwp7 amd64 1.12.0-1-debian12 [1,003 kB]
Get:30 http://deb.debian.org/debian bookworm/main amd64 libgomp1 amd64 12.2.0-14+deb12u1 [116 kB]
```

```
debian final project [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```



```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda



debian@debian:~$
Get:30 http://deb.debian.org/debian bookworm/main amd64 libgomp1 amd64 12.2.0-14+deb12u1 [116 kB]
Get:31 http://deb.debian.org/debian bookworm/main amd64 libfortrans amd64 12.2.0-14+deb12u1 [793 kB]
Get:32 http://deb.debian.org/debian bookworm/main amd64 gcc-12-base amd64 12.2.0-14+deb12u1 [37.6 kB]
Get:33 http://deb.debian.org/debian bookworm/main amd64 libgcc-s1 amd64 12.2.0-14+deb12u1 [45.9 kB]
Get:34 http://deb.debian.org/debian bookworm/main amd64 libatomic1 amd64 12.2.0-14+deb12u1 [9,376 B]
Get:35 http://security.debian.org/debian-security bookworm-security/main amd64 firefox-esr amd64 140.9.1esr-1-debian12 [1,761.1 MB]
Get:36 http://deb.debian.org/debian bookworm/main amd64 libstdc++6 amd64 12.2.0-14+deb12u1 [613 kB]
Get:37 http://deb.debian.org/debian bookworm/main amd64 libc6 amd64 2.36-9+deb12u13 [2,754 kB]
Get:38 http://deb.debian.org/debian bookworm/main amd64 libsmartcols1 amd64 2.38.1-5+deb12u3 [187 kB]
Get:39 http://deb.debian.org/debian bookworm/main amd64 util-linux-extra amd64 2.38.1-5+deb12u3 [111 kB]
Get:40 http://deb.debian.org/debian bookworm/main amd64 util-linux amd64 2.38.1-5+deb12u3 [1,137 kB]
Get:41 http://deb.debian.org/debian bookworm/main amd64 init-system-helpers all 1.65.2+deb12u1 [39.0 kB]
Get:42 http://deb.debian.org/debian bookworm/main amd64 libc-bin amd64 2.36-9+deb12u13 [669 kB]
Get:43 http://deb.debian.org/debian bookworm/main amd64 libpam0g amd64 1.5.2-6+deb12u2 [92.1 kB]
Get:44 http://deb.debian.org/debian bookworm/main amd64 libpam-modules-bin amd64 1.5.2-6+deb12u2 [75.7 kB]
Get:45 http://deb.debian.org/debian bookworm/main amd64 libpam-modules amd64 1.5.2-6+deb12u2 [291 kB]
Get:46 http://deb.debian.org/debian bookworm/main amd64 logsave amd64 1.47.0-2+b2 [19.9 kB]
Get:47 http://deb.debian.org/debian bookworm/main amd64 initramfs-tools all 0.142+deb12u3 [16.0 kB]
Get:48 http://deb.debian.org/debian bookworm/main amd64 initramfs-tools-core all 0.142+deb12u3 [48.3 kB]
Get:49 http://deb.debian.org/debian bookworm/main amd64 libxft2 amd64 1.47.0-2+b2 [285 kB]
Get:50 http://deb.debian.org/debian bookworm/main amd64 xz-utils amd64 1:47.0-2+b2 [572 kB]
Get:51 http://deb.debian.org/debian bookworm/main amd64 libcap2 amd64 1:2.66-4+deb12u2+b2 [27.5 kB]
Get:52 http://deb.debian.org/debian bookworm/main amd64 libnss-systemd amd64 252.39-1-debian12 [163 kB]
Get:53 http://deb.debian.org/debian bookworm/main amd64 xserver-common all 2:21.1.7-3+deb12u1 [2,283 kB]
Get:54 http://deb.debian.org/debian bookworm/main amd64 xserver-xorg-legacy amd64 2:21.1.7-3+deb12u1 [2,389 kB]
Get:55 http://deb.debian.org/debian bookworm/main amd64 liblzm3 amd64 5.4.1-1 [285 kB]
Get:56 http://deb.debian.org/debian bookworm/main amd64 systemd-timesyncd amd64 252.39-1-debian12 [63.8 kB]
Get:57 http://deb.debian.org/debian bookworm/main amd64 libsystemd-shared amd64 252.39-1-debian12 [1,695 kB]
Get:58 http://deb.debian.org/debian bookworm/main amd64 xserver-xorg-core amd64 2:21.1.7-3+deb12u1 [3,720 kB]
Get:59 http://deb.debian.org/debian bookworm/main amd64 libpam-systemd amd64 252.39-1-debian12 [225 kB]
Get:60 http://deb.debian.org/debian bookworm/main amd64 systemd amd64 252.39-1-debian12 [3,842 kB]
Get:61 http://deb.debian.org/debian bookworm/main amd64 libsystemd amd64 252.39-1-debian12 [233 kB]
Get:62 http://deb.debian.org/debian bookworm/main amd64 udev amd64 252.39-1-debian12 [1,720 kB]
Get:63 http://deb.debian.org/debian bookworm/main amd64 libudev1 amd64 252.39-1-debian12 [189 kB]
Get:64 http://deb.debian.org/debian bookworm/main amd64 libblkid1 amd64 2.38.1-5+deb12u3 [147 kB]
Get:65 http://deb.debian.org/debian bookworm/main amd64 libmount1 amd64 2.38.1-5+deb12u3 [166 kB]
Get:66 http://deb.debian.org/debian bookworm/main amd64 libpam-runtime all 1:5.2-6+deb12u2 [458 kB]
Get:67 http://deb.debian.org/debian bookworm/main amd64 systemd-sysv amd64 252.39-1-debian12 [42.6 kB]
Get:68 http://deb.debian.org/debian bookworm/main amd64 libuuid1 amd64 2.38.1-5+deb12u3 [28.8 kB]
Get:69 http://deb.debian.org/debian bookworm/main amd64 libfdisk1 amd64 2.38.1-5+deb12u3 [194 kB]
Get:70 http://deb.debian.org/debian bookworm/main amd64 mount amd64 2.38.1-5+deb12u3 [134 kB]
Get:71 http://deb.debian.org/debian bookworm/main amd64 init amd64 1.65-2+deb12u1 [5,600 B]
Get:72 http://deb.debian.org/debian bookworm/main amd64 libpam1 amd64 1:7.2-3+deb12u1 [182 kB]
Get:73 http://deb.debian.org/debian bookworm/main amd64 curl amd64 7.88.1-10+deb12u4 [116 kB]
Get:74 http://deb.debian.org/debian bookworm/main amd64 libgssapi-krb5-2 amd64 1.20.1-2+deb12u4 [135 kB]
Get:75 http://deb.debian.org/debian bookworm/main amd64 libkrb5-3 amd64 1.20.1-2+deb12u4 [334 kB]
Get:76 http://deb.debian.org/debian bookworm/main amd64 libkrb5support amd64 1.20.1-2+deb12u4 [33.2 kB]
Get:77 http://deb.debian.org/debian bookworm/main amd64 libcrypto3 amd64 1.20.1-2+deb12u4 [1,794.8 kB]
Get:78 http://deb.debian.org/debian bookworm/main amd64 libcom-err2 amd64 1.47.0-2+b2 [28.0 kB]
Get:79 http://deb.debian.org/debian bookworm/main amd64 libnftd14 amd64 1.52.0-1+deb12u2 [73.0 kB]
Get:80 http://deb.debian.org/debian bookworm/main amd64 libcurl4 amd64 7.88.1-10+deb12u4 [392 kB]
```

```
debian final project [Comandos] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

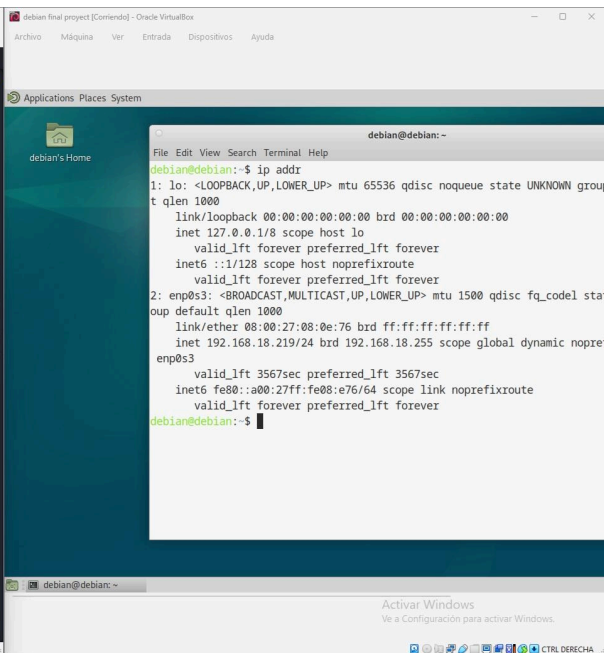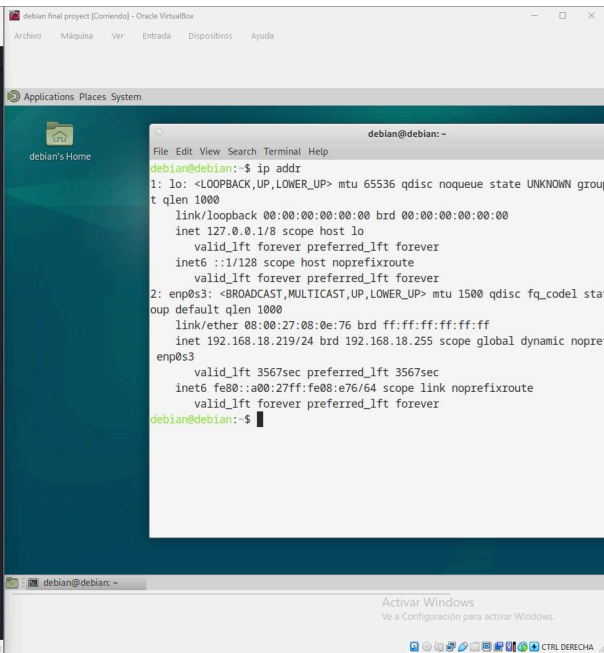

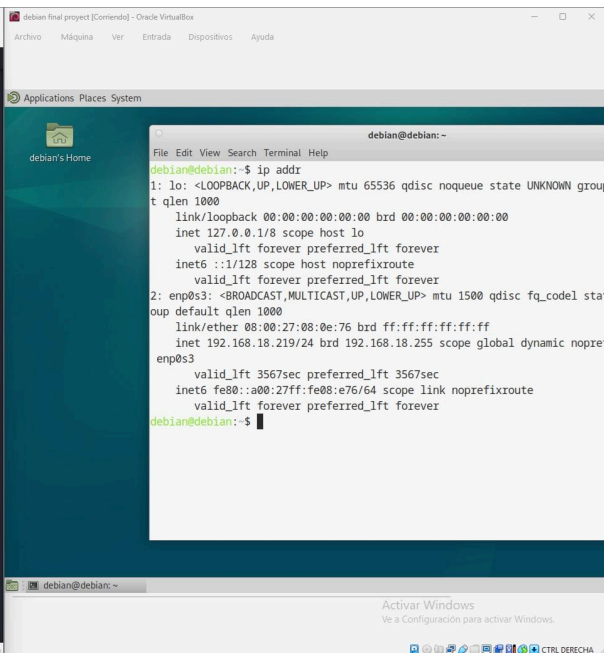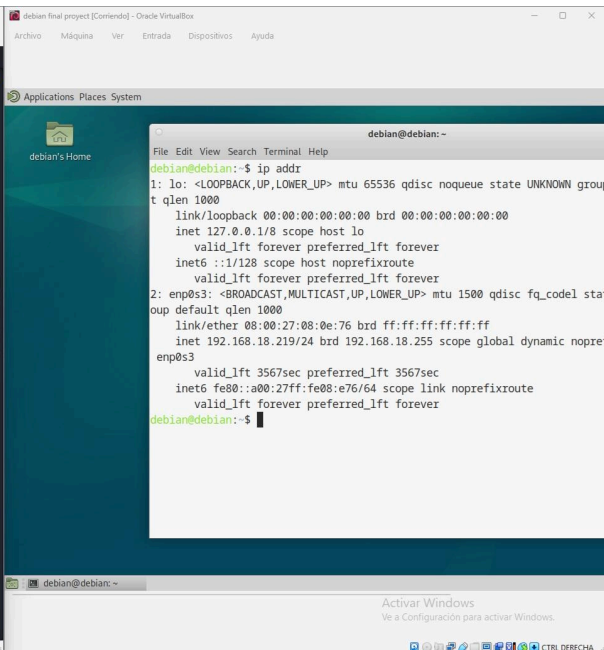
```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Cortado] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$
Session Actions Edit View Help

Without an SNI provided by the client, there is nothing httpd
can do to determine which vhost/configuration should be
used to provide the correct certificate (and TLS authentication
eventually) whenever multiple vhosts listen on the same IP:port.

That's because reading the HTTP Host header necessarily has to
happen after the TLS handshake/auth/decryption (and later
renegotiation is not an option with TLSv1.3).

So those connections fall back to the first vhost declared on
the IP:port for the TLS handshake part, and if the request
Host header finally matches a different vhost with a different
TLS configuration it's rejected with AH02032.

Before 2.4.64 the check was not accurate and would allow that,
with security implications.

As a workaround, you may (after a risk analysis) generate a
wildcard certificate. If you're managing multiple domains,
consolidate them into a single certificate by including each
wildcard domain as an alias. Then, update the Apache configuration
to reference this unified certificate.

Another possible workaround is to configure each virtual host to
listen on a separate port. This approach avoids SNI-related issues
by ensuring that each vhost is uniquely addressed through its own
connection endpoint, thereby allowing distinct TLS configurations
without ambiguity.

This error may also stem from a misconfigured HAProxy setup.
In such cases, enabling dynamic SNI handling on HAProxy might be
necessary to ensure that the correct hostname is passed through
during the TLS handshake. After risk analysis, it could be done
by using "sni req.hdr(Host)" directive.

-- Bastien Roucaries <crouca@debian.org> Fri, 25 Jul 2025 20:33:38 +0200

Extracting templates from packages: 100%
Preconfiguring packages ...
Setting xserver-xorg-input-synaptics from configuration file
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../base-files.12.4+deb12u13.amd64.deb ...
Unpacking base-files (12.4+deb12u13) over (12.4+deb12u7) ...
Setting up base-files (12.4+deb12u13) ...
Installing new version of config file /etc/debian_version ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../bash.5.2.15-2+b10.amd64.deb ...
Unpacking bash (5.2.15-2+b10) over (5.2.15-2+b7) ...
Setting up bash (5.2.15-2+b10) ...
update-alternatives: using /usr/share/man/man7/bash-builtins.7.gz to provide /usr/share/man/man7/builtins.7.gz (builtins.7.gz) in auto mode
(Reading database ... 170695 files and directories currently installed.)
```

```
debian final project [Cortado] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$
File Edit View Search Terminal Help

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Cortado] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$
Session Actions Edit View Help

Setting up bash (5.2.15-2+b10) ...
update-alternatives: using /usr/share/man/man7/bash-builtins.7.gz to provide /usr/share/man/man7/builtins.7.gz (builtins.7.gz) in auto mode
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../bsdutils.1:3.32.38.1-5+deb12u3.amd64.deb ...
Unpacking bsdutils (1:3.32.38.1-5+deb12u3) over (1:3.32.38.1-5+deb12u1) ...
Setting up bsdutils (1:3.32.38.1-5+deb12u3) ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../login.1:4.13+dfsg1-1+deb12u2.amd64.deb ...
Unpacking login (1:4.13+dfsg1-1+deb12u2) over (1:4.13+dfsg1-1+b1) ...
Setting up login (1:4.13+dfsg1-1+deb12u2) ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../libperl5.36.5.36.0-7+deb12u3.amd64.deb ...
Unpacking libperl5.36.5.36.0-7+deb12u3 over (5.36.0-7+deb12u1) ...
Preparing to unpack .../perl.5.36.0-7+deb12u3.amd64.deb ...
Unpacking perl (5.36.0-7+deb12u3) over (5.36.0-7+deb12u1) ...
Preparing to unpack .../perl-base.5.36.0-7+deb12u3.amd64.deb ...
Unpacking perl-base (5.36.0-7+deb12u3) over (5.36.0-7+deb12u1) ...
Setting up perl-base (5.36.0-7+deb12u3) ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../0-perl-modules-5.36.5.36.0-7+deb12u3.all.deb ...
Unpacking perl-modules-5.36.5.36.0-7+deb12u3 over (5.36.0-7+deb12u1) ...
Preparing to unpack .../1-cpp-12.2.0-14+deb12u1.amd64.deb ...
Unpacking cpp-12 (12.2.0-14+deb12u1) over (12.2.0-14) ...
Preparing to unpack .../2-libquadmath0+amd64.12.2.0-14+deb12u1.amd64.deb ...
Unpacking libquadmath0+amd64 (12.2.0-14+deb12u1) over (12.2.0-14) ...
Preparing to unpack .../3-libgomp1.12.2.0-14+deb12u1.amd64.deb ...
Unpacking libgomp1+amd64 (12.2.0-14+deb12u1) over (12.2.0-14) ...
Preparing to unpack .../4-libgfortran5.12.2.0-14+deb12u1.amd64.deb ...
Unpacking libgfortran5+amd64 (12.2.0-14+deb12u1) over (12.2.0-14) ...
Preparing to unpack .../5-gcc-12-base.12.2.0-14+deb12u1.amd64.deb ...
Unpacking gcc-12-base+amd64 (12.2.0-14+deb12u1) over (12.2.0-14) ...
Setting up gcc-12-base+amd64 (12.2.0-14+deb12u1) ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../libgcc-s1.12.2.0-14+deb12u1.amd64.deb ...
Unpacking libgcc-s1+amd64 (12.2.0-14+deb12u1) over (12.2.0-14) ...
Setting up libgcc-s1+amd64 (12.2.0-14+deb12u1) ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../libatomic1.12.2.0-14+deb12u1.amd64.deb ...
Unpacking libatomic1+amd64 (12.2.0-14+deb12u1) over (12.2.0-14) ...
Preparing to unpack .../libstdc++6.12.2.0-14+deb12u1.amd64.deb ...
Unpacking libstdc++6+amd64 (12.2.0-14+deb12u1) over (12.2.0-14) ...
Setting up libstdc++6+amd64 (12.2.0-14+deb12u1) ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../libc_2.36-9+deb12u3.amd64.deb ...
Unpacking libc_2.36-9+deb12u3 over (2.36-9+deb12u8) ...
Setting up libc_2.36-9+deb12u3 ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../libsmartcols1+amd64.2.38.1-5+deb12u3 ...
Unpacking libsmartcols1+amd64 (2.38.1-5+deb12u3) over (2.38.1-5+deb12u1) ...
Setting up libsmartcols1+amd64 (2.38.1-5+deb12u3) ...
(Reading database ... 170695 files and directories currently installed.)
```

```
debian final project [Cortado] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$
File Edit View Search Terminal Help

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```







```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Connected] - Oracle VM VirtualBox
debian@debian:~$
Session Actions Edit View Help
(Reading database ... 170694 files and directories currently installed.)
Preparing to unpack .../util-linux-extra_2.38.1-5+deb12u1_amd64.deb ...
Unpacking util-linux-extra (2.38.1-5+deb12u1) over (2.38.1-5+deb12u1) ...
Setting up util-linux-extra (2.38.1-5+deb12u1) ...
(Reading database ... 170694 files and directories currently installed.)
Preparing to unpack .../util-linux_2.38.1-5+deb12u1_amd64.deb ...
Unpacking util-linux (2.38.1-5+deb12u1) over (2.38.1-5+deb12u1) ...
Setting up util-linux (2.38.1-5+deb12u1) ...
fstim.service is a disabled or a static unit not running, not starting it.
(Reading database ... 170694 files and directories currently installed.)
Preparing to unpack .../init-system-helpers_1.65.2+deb12u1_all.deb ...
Unpacking init-system-helpers (1.65.2+deb12u1) over (1.65.2) ...
Setting up init-system-helpers (1.65.2+deb12u1) ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../libc-bin_2.36-9+deb12u13_amd64.deb ...
Unpacking libc-bin (2.36-9+deb12u13) over (2.36-9+deb12u8) ...
Setting up libc-bin (2.36-9+deb12u13) ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../libpan6g_1.5.2-6+deb12u2_amd64.deb ...
Unpacking libpan6g:amd64 (1.5.2-6+deb12u2) over (1.5.2-6+deb12u1) ...
Setting up libpan6g:amd64 (1.5.2-6+deb12u2) ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../libpan-modules-bin_1.5.2-6+deb12u2_amd64.deb ...
Unpacking libpan-modules-bin (1.5.2-6+deb12u2) over (1.5.2-6+deb12u1) ...
Setting up libpan-modules-bin (1.5.2-6+deb12u2) ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../libpan-modules_1.5.2-6+deb12u2_amd64.deb ...
Unpacking libpan-modules:amd64 (1.5.2-6+deb12u2) over (1.5.2-6+deb12u1) ...
Setting up libpan-modules:amd64 (1.5.2-6+deb12u2) ...
(Reading database ... 170695 files and directories currently installed.)
Preparing to unpack .../logsave_1.47.0-2+b2_amd64.deb ...
Unpacking logsave (1.47.0-2+b2) over (1.47.0-2) ...
Preparing to unpack .../intrafs-tools_0.142+deb12u1_all.deb ...
Unpacking intrafs-tools (0.142+deb12u1) over (0.142+deb12u1) ...
Preparing to unpack .../intrafs-tools-core_0.142+deb12u1_all.deb ...
Unpacking intrafs-tools-core (0.142+deb12u1) over (0.142+deb12u1) ...
Preparing to unpack .../libext2fs2_1.47.0-2+b2_amd64.deb ...
Unpacking libext2fs2:amd64 (1.47.0-2+b2) over (1.47.0-2) ...
Setting up libext2fs2:amd64 (1.47.0-2+b2) ...
(Reading database ... 170697 files and directories currently installed.)
Preparing to unpack .../e2fsprogs_1.47.0-2+b2_amd64.deb ...
Unpacking e2fsprogs (1.47.0-2+b2) over (1.47.0-2) ...
Preparing to unpack .../libcap2_2.32-6+deb12u2_amd64.deb ...
Unpacking libcap2:amd64 (2.32-6+deb12u2) over (2.32-6+deb12u1) ...
Setting up libcap2:amd64 (2.32-6+deb12u2) ...
(Reading database ... 170699 files and directories currently installed.)
Preparing to unpack .../libnss-systemd_252.39-1+deb12u1_amd64.deb ...
Unpacking libnss-systemd:amd64 (252.39-1+deb12u1) over (252.38-1+deb12u2) ...
Preparing to unpack .../xserver-common_2:21.1.7-3+deb12u1_all.deb ...
Unpacking xserver-common (2:21.1.7-3+deb12u1) over (2:21.1.7-3+deb12u1) ...
Preparing to unpack .../xserver-xorg-legacy_2:21.1.7-3+deb12u1_amd64.deb ...
Unpacking xserver-xorg-legacy (2:21.1.7-3+deb12u1) over (2:21.1.7-3+deb12u1) ...
```



```
debian final project [Connected] - Oracle VM VirtualBox
Applications Places System
debian@debian:~$
File Edit View Search Terminal Help
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```



```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Connected] - Oracle VM VirtualBox
debian@debian:~$
Session Actions Edit View Help
Unpacking xserver-xorg-legacy (2:21.1.7-3+deb12u1) over (2:21.1.7-3+deb12u1) ...
Preparing to unpack .../liblzm5_5.4.1-1+deb12u1_amd64.deb ...
Unpacking liblzm5:amd64 (5.4.1-1) over (5.4.1-0-2) ...
Setting up liblzm5:amd64 (5.4.1-1) ...
(Reading database ... 170699 files and directories currently installed.)
Unpacking systemd-timesyncd (252.39-1+deb12u1) over (252.38-1+deb12u2) ...
Preparing to unpack .../libsystemd-shared_252.39-1+deb12u1_amd64.deb ...
Unpacking libsystemd-shared:amd64 (252.39-1+deb12u1) over (252.38-1+deb12u2) ...
Preparing to unpack .../2-xserver-xorg-core_2:21.1.7-3+deb12u1_amd64.deb ...
Unpacking xserver-xorg-core (2:21.1.7-3+deb12u1) over (2:21.1.7-3+deb12u1) ...
Preparing to unpack .../3-libpan-systemd_252.39-1+deb12u1_amd64.deb ...
Unpacking libpan-systemd:amd64 (252.39-1+deb12u1) over (252.38-1+deb12u2) ...
Preparing to unpack .../4-systemd_252.39-1+deb12u1_amd64.deb ...
Unpacking systemd (252.39-1+deb12u1) over (252.38-1+deb12u2) ...
Preparing to unpack .../5-libsystemd0_252.39-1+deb12u1_amd64.deb ...
Unpacking libsystemd0:amd64 (252.39-1+deb12u1) over (252.38-1+deb12u2) ...
Setting up libsystemd0:amd64 (252.39-1+deb12u1) ...
(Reading database ... 170700 files and directories currently installed.)
Unpacking udev (252.39-1+deb12u1) over (252.38-1+deb12u2) ...
Preparing to unpack .../libudev1_252.39-1+deb12u1_amd64.deb ...
Unpacking libudev1:amd64 (252.39-1+deb12u1) over (252.38-1+deb12u2) ...
Setting up libudev1:amd64 (252.39-1+deb12u1) ...
(Reading database ... 170701 files and directories currently installed.)
Unpacking libblkid1:amd64 (2.38.1-5+deb12u3) over (2.38.1-5+deb12u1) ...
Setting up libblkid1:amd64 (2.38.1-5+deb12u3) ...
(Reading database ... 170701 files and directories currently installed.)
Preparing to unpack .../libmount1_2.38.1-5+deb12u3_amd64.deb ...
Unpacking libmount1:amd64 (2.38.1-5+deb12u3) over (2.38.1-5+deb12u1) ...
Setting up libmount1:amd64 (2.38.1-5+deb12u3) ...
(Reading database ... 170701 files and directories currently installed.)
Preparing to unpack .../libssl3_3.0.10-1+deb12u2_amd64.deb ...
Unpacking libssl3:amd64 (3.0.10-1+deb12u2) over (3.0.10-1+deb12u2) ...
Setting up libssl3:amd64 (3.0.10-1+deb12u2) ...
Unpacking libpan-runtime (1.5.2-6+deb12u2) over (1.5.2-6+deb12u1) ...
Setting up libpan-runtime (1.5.2-6+deb12u2) ...
Setting up libsystemd-shared:amd64 (252.39-1+deb12u1) ...
(Reading database ... 170701 files and directories currently installed.)
Preparing to unpack .../systemd-sysv_252.39-1+deb12u1_amd64.deb ...
Unpacking systemd-sysv (252.39-1+deb12u1) over (252.38-1+deb12u2) ...
Preparing to unpack .../libuid1_2.38.1-5+deb12u3_amd64.deb ...
Unpacking libuid1:amd64 (2.38.1-5+deb12u3) over (2.38.1-5+deb12u1) ...
Setting up libuid1:amd64 (2.38.1-5+deb12u3) ...
(Reading database ... 170701 files and directories currently installed.)
Preparing to unpack .../libidn1_2.38.1-5+deb12u3_amd64.deb ...
Unpacking libidn1:amd64 (2.38.1-5+deb12u3) over (2.38.1-5+deb12u1) ...
Preparing to unpack .../mount_2.38.1-5+deb12u3_amd64.deb ...
Unpacking mount (2.38.1-5+deb12u3) over (2.38.1-5+deb12u1) ...
```



```
debian final project [Connected] - Oracle VM VirtualBox
Applications Places System
debian@debian:~$
File Edit View Search Terminal Help
debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```



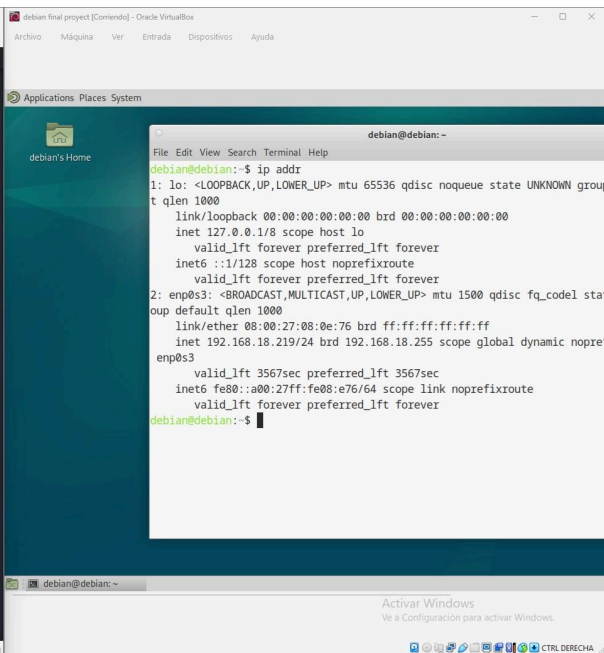
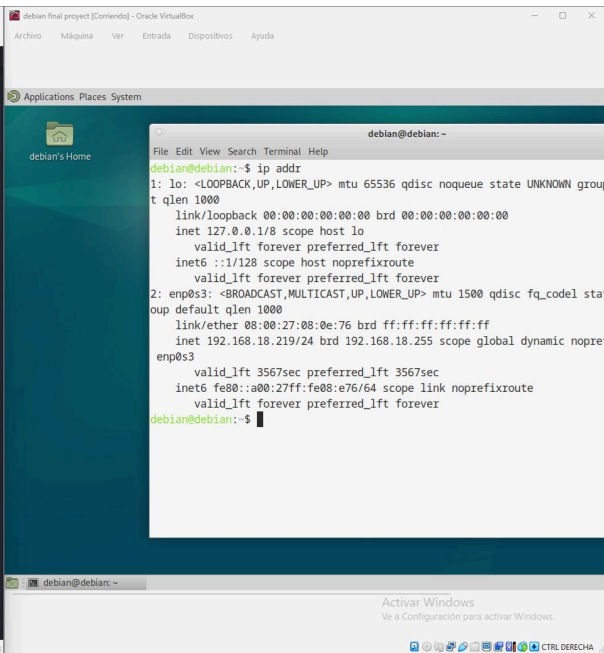


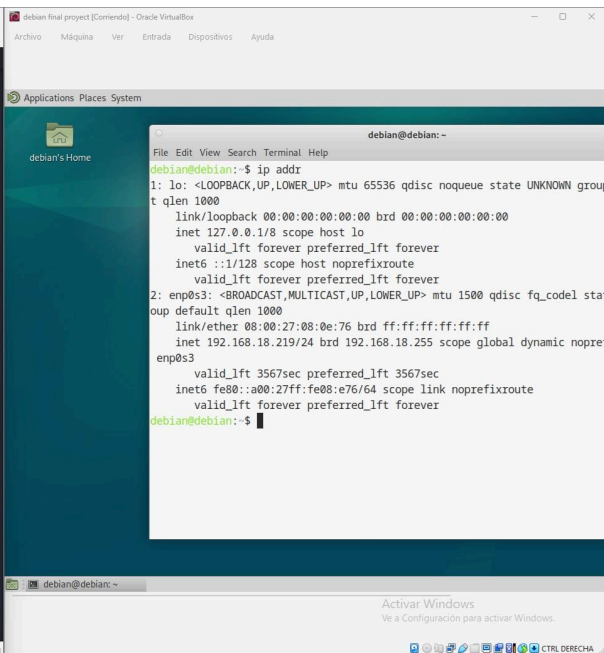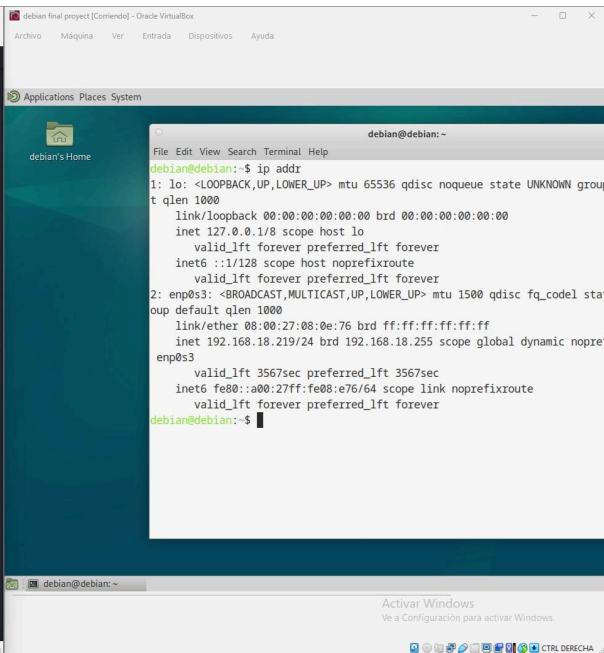

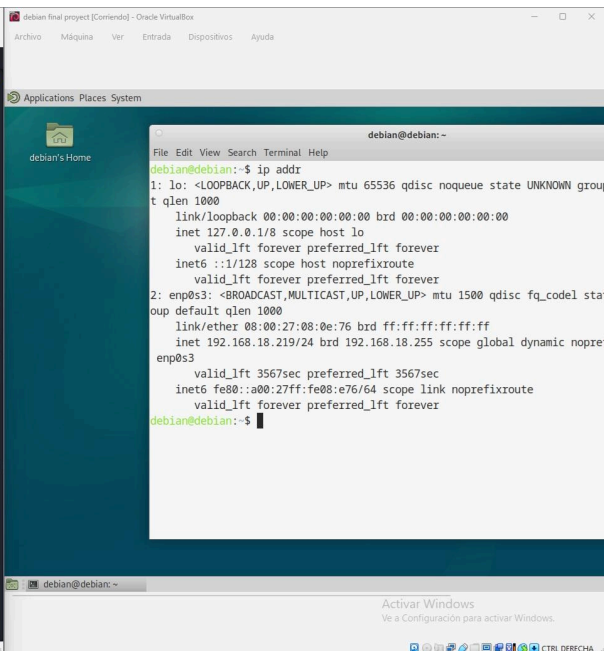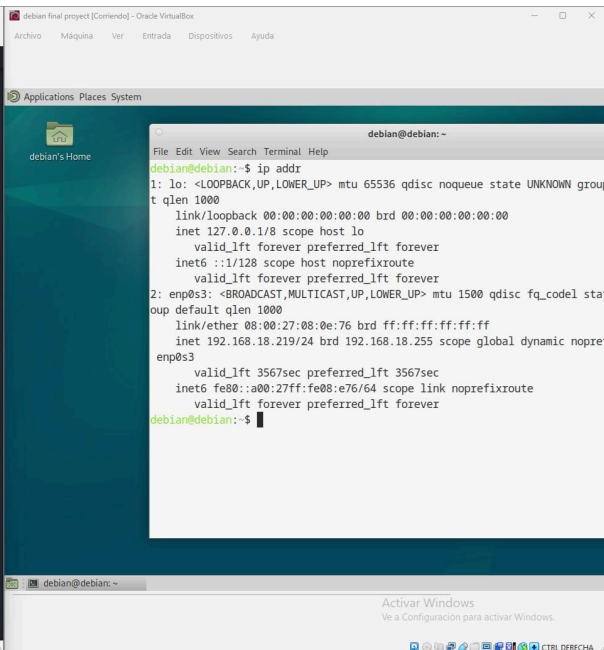

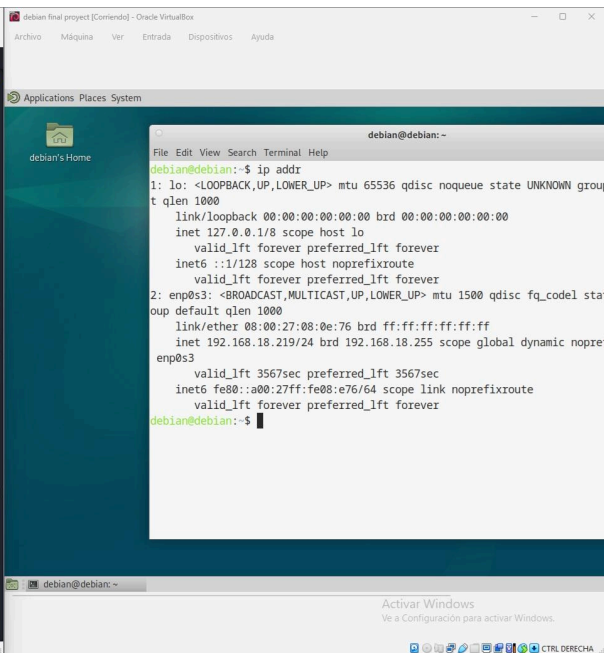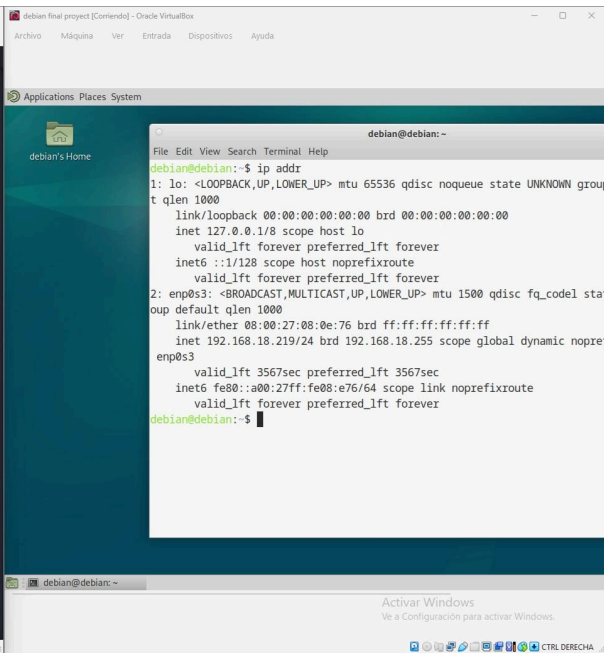

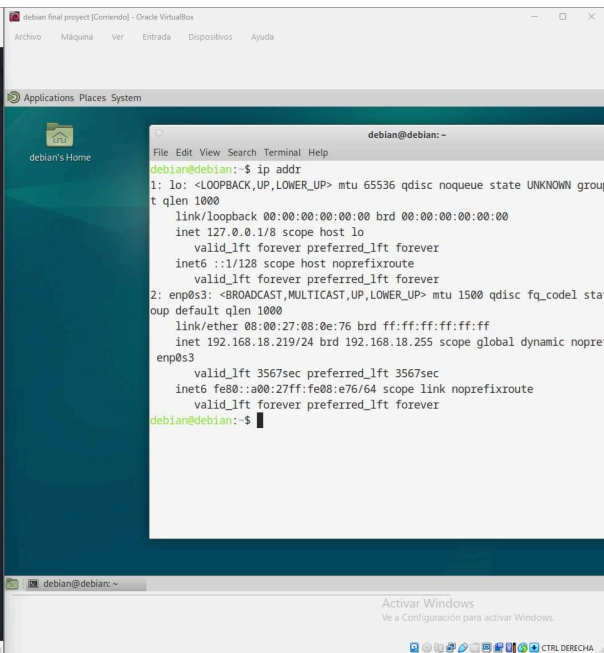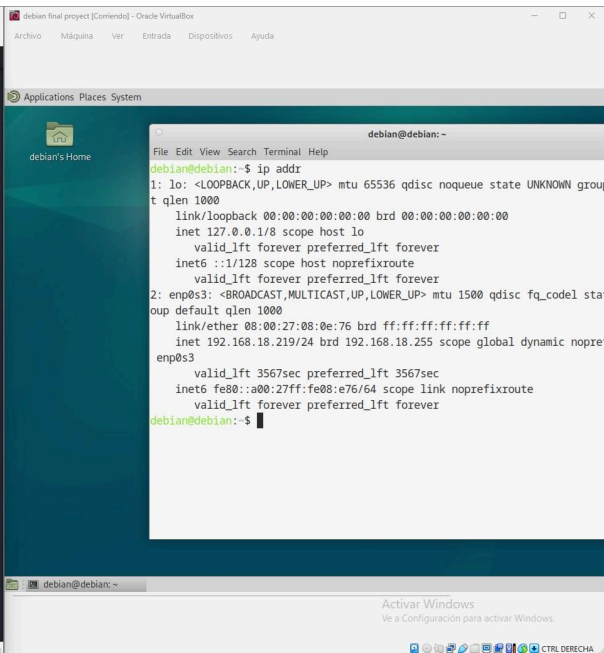

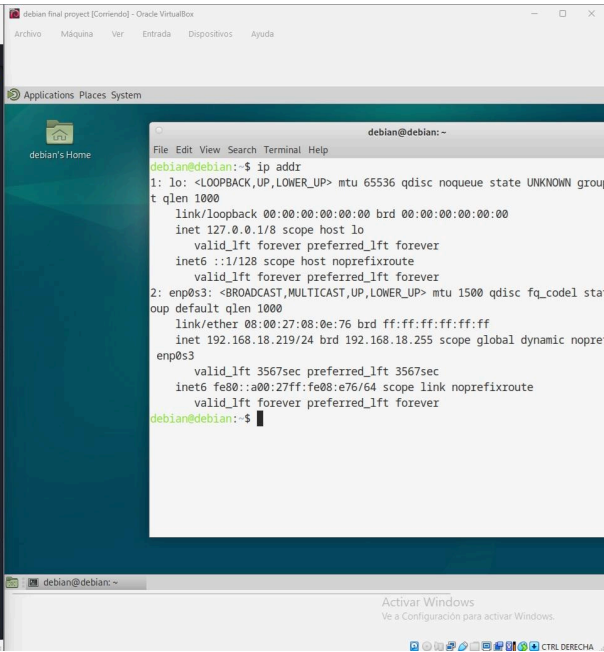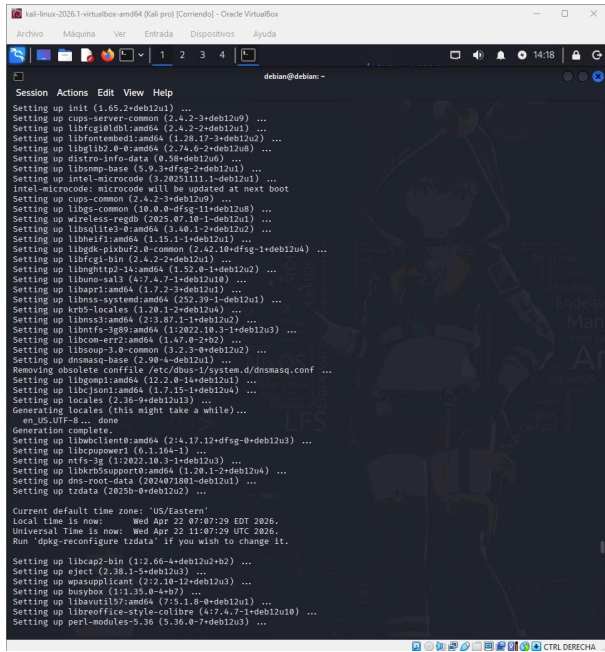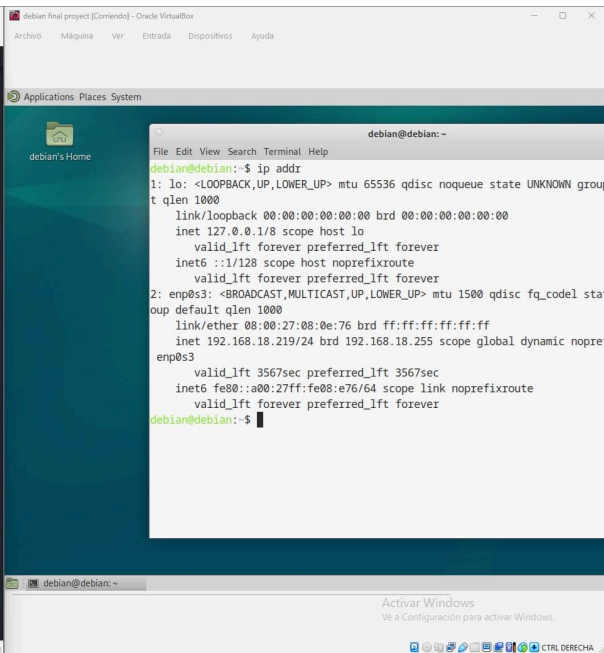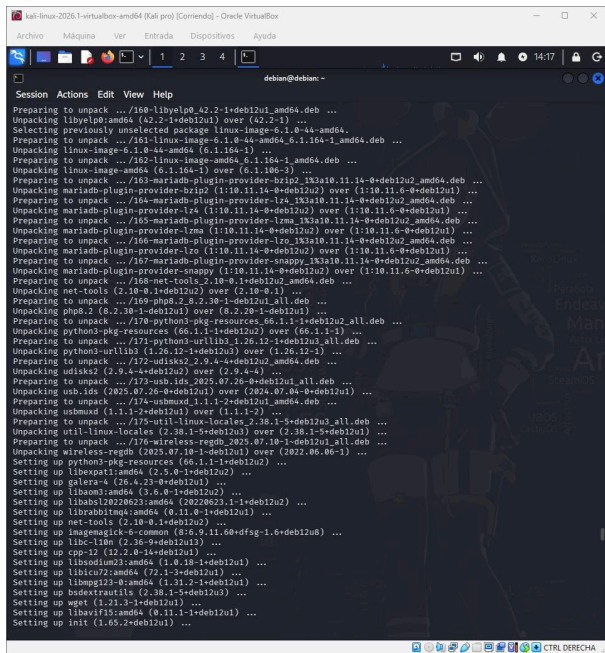



```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Connected] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$
Session Actions Edit View Help
Setting up libl1b2-0-bin (2.74.0-2+deb12u8) ...
Setting up liblockdev-loop2:amd64 (2.28-2+deb12u1) ...
Setting up libstreamer-plugins-base1.0:amd64 (1.22.0-3+deb12u6) ...
Setting up e2fsprogs (1.47.0-2+b2) ...
update-initramfs: deferring update (trigger activated)
clicmd: all service is a disabled or a static unit not running, not starting it.
Setting up liblockdev2:amd64 (2.28-2+deb12u1) ...
Setting up libdespeak-ng1:amd64 (1.51-4+dfsg-1+deb12u2) ...
Setting up vim-tiny (2.9.0-1392-1+deb12u2) ...
Setting up fdisk (2.38.1-5+deb12u3) ...
Setting up mariadb-client-core (1:10.11.14-0+deb12u2) ...
Setting up dmidekg (2.2.40-1+deb12u2) ...
Setting up ca-certificates (20230311+deb12u1) ...
Updating certificates in /etc/ssl/certs...
rehash: warning: skipping ca-certificates.crt, it does not contain exactly one certificate or CRL
2 added, 0 removed, done.
Setting up perl (5.36.0-7+deb12u3) ...
Setting up libssm4:amd64 (5.9.3+dfsg-2+deb12u1) ...
Setting up libstreamer-glib1.0:amd64 (1.22.0-3+deb12u6) ...
Setting up libjavascriptcoregtk-4.1:amd64 (2.50.6-1+deb12u1) ...
Setting up librestgtk-4:amd64 (2.12.1+dfsg-5+deb12u2) ...
Setting up libouno-cppu3 (4:7.4.7-1+deb12u8) ...
Setting up libgasp-kn2-2:amd64 (1.20.1-2+deb12u4) ...
Setting up liblockdev-fs2:amd64 (2.28-2+deb12u1) ...
Setting up libpoppler126:amd64 (22.12.0-2+deb12u1) ...
Setting up linux-image-6.1.0-44-amd64 (6.1.14-1) ...
I: /vmlinuz.old is now a symlink to boot/vmlinuz-6.1.0-25-amd64
I: /initrd.img.old is now a symlink to boot/initrd.img-6.1.0-25-amd64
I: /vmlinuz is now a symlink to boot/vmlinuz-6.1.0-44-amd64
I: /initrd.img is now a symlink to boot/initrd.img-6.1.0-44-amd64
/etc/kernel/postinst.d/initramfs-tools
update-initramfs: Generating /boot/initrd.img-6.1.0-44-amd64
/etc/kernel/postinst.d/zz-update-grub
Generating grub configuration file ...
Found background image: /usr/share/images/desktop-base/desktop-grub.png
Found linux image: /boot/vmlinuz-6.1.0-44-amd64
Found initrd image: /boot/initrd.img-6.1.0-44-amd64
Found linux image: /boot/vmlinuz-6.1.0-25-amd64
Found initrd image: /boot/initrd.img-6.1.0-25-amd64
Found linux image: /boot/vmlinuz-6.1.0-23-amd64
Found initrd image: /boot/initrd.img-6.1.0-23-amd64
Found linux image: /boot/vmlinuz-6.1.0-22-amd64
Found initrd image: /boot/initrd.img-6.1.0-22-amd64
Warning: os-prober will not be executed to detect other bootable partitions.
Systems on them will not be added to the GRUB boot configuration.
Check GRUB_DISABLE_OS_PROBER documentation entry.
done.
Setting up gpg-wks-server (2.2.40-1+deb12u2) ...
Setting up libgdk-pixbuf2.0-bin (2.42.10+dfsg-1+deb12u4) ...
Setting up libcurl1:amd64 (7.88.1-10+deb12u3) ...
Setting up libcurl4:amd64 (7.88.1-10+deb12u4) ...
```

```
debian final project [Connected] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali-linux-2023.1-virtualbox-amd64 [kali prj] [Connected] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

debian@debian:~$
Session Actions Edit View Help
Setting up libcurl1:amd64 (7.88.1-10+deb12u3) ...
Setting up libstreamer1.0-plugins-ugly:amd64 (1.22.0-2+deb12u2) ...
Setting up libavahi-glib1:amd64 (0.8-10+deb12u1) ...
Setting up php8.2-gd (8.2.30-1+deb12u1) ...
Setting up curl (7.88.1-10+deb12u4) ...
Setting up poppler-utils (22.12.0-2+deb12u1) ...
Setting up php8.2-cli (8.2.30-1+deb12u1) ...
Setting up libavahi-core7:amd64 (0.8-10+deb12u1) ...
Setting up libpoppler-cpp4:amd64 (22.12.0-2+deb12u1) ...
Setting up libavahi-clients:amd64 (0.8-10+deb12u1) ...
Setting up libssn-gcrypt-4:amd64 (0.10.6-8+deb12u2) ...
Setting up gstreamer1.0-gl:amd64 (1.22.0-3+deb12u6) ...
Setting up libxml-parser-perl (2.46-4+deb12u1) ...
Setting up python3-ii (0.11.2-6+deb12u2) ...
Setting up libuno-purpenhvelpergcc3-3 (4:7.4.7-1+deb12u10) ...
Setting up gstreamer1.0-x:amd64 (1.22.0-3+deb12u6) ...
Setting up libpoppler-glib:amd64 (22.12.0-2+deb12u1) ...
Setting up libssoup2.4:amd64 (2.74.3-1+deb12u1) ...
Setting up uno-libs-private (4:7.4.7-1+deb12u10) ...
Setting up libpython3.11:amd64 (3.11.2-6+deb12u6) ...
Setting up mariadb-client (1:10.11.14-0+deb12u2) ...
Setting up libavformat59:amd64 (7:5.1.8-0+deb12u1) ...
Setting up gpg-wks-client (2.2.40-1+deb12u2) ...
Setting up bind9-libs:amd64 (1:9.18.47-1+deb12u1) ...
Setting up openssh-client (1:9.9p1-2+deb12u9) ...
Setting up gstreamer1.0-plugins-good:amd64 (1.22.0-5+deb12u3) ...
Setting up libssoup-3.0:amd64 (3.2.3-8+deb12u2) ...
Setting up samba-libs:amd64 (2:4.17.12+dfsg-0+deb12u3) ...
Setting up libcurl3-gnutls:amd64 (7.88.1-10+deb12u4) ...
Setting up network-manager (1.42.4-1+deb12u1) ...
Setting up linux-image-amd64 (6.1.14-1) ...
Setting up liblockdev-part2:amd64 (2.28-2+deb12u1) ...
Setting up apache2-bin (2.4.46-1+deb12u1) ...
Setting up libavfilters:amd64 (7:5.1.8-0+deb12u1) ...
Setting up mariadb-server (1:10.11.14-0+deb12u2) ...
Installing new version of config file /etc/init.d/mariadb ...
Installing new version of config file /etc/mysql/debian-start ...
Setting up libmarickcore-4.016-6:amd64 (816.9.11.08+dfsg-1+deb12u2) ...
Setting up mariadb-plugin-provider-brp2 (1:10.11.14-0+deb12u2) ...
Setting up mariadb-plugin-provider-libs (1:10.11.14-0+deb12u2) ...
Setting up php8.2-curl (8.2.30-1+deb12u1) ...
Setting up php8.2-xml (8.2.30-1+deb12u1) ...
Setting up libapache2-mod-php8.2 (8.2.30-1+deb12u1) ...
Package apache2 is not configured yet. Will defer actions by package libapache2-mod-php8.2.
libapache2-mod-php8.2: not switching MPM - already enabled
Setting up git (1:2.39.5-0+deb12u3) ...
Setting up libssmclient:amd64 (2:4.17.12+dfsg-0+deb12u3) ...
Setting up libcupst2:amd64 (2.4.2-3+deb12u9) ...
Setting up avahi-daemon (0.8-10+deb12u1) ...
Setting up mariadb-plugin-provider-libs (1:10.11.14-0+deb12u2) ...
Setting up gnuag (2.2.40-1+deb12u2) ...
```

```
debian final project [Connected] - Oracle VM VirtualBox
Archivo Máquina Ver Entrada Dispositivos Ayuda

Applications Places System

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali-linux-2020.1-virtualbox-amd64 [kali pro] [Comandos] - Oracle VirtualBox
Archivo  Máquina  Ver  Entrada  Dispositivos  Ayuda

debian@debian:~$
Session Actions Edit View Help
Setting up gnupg (2.2.40-1+deb12u2) ...
Setting up libmagickwand-6.q16-6:amd64 (8:6.9.11.68+dfsg-1.6+deb12u8) ...
Setting up bind9-host (1:9.18.47-1+deb12u2) ...
Setting up libsigsegv-0.4-0:amd64 (1:0.4.42-2+deb12u2) ...
Setting up libcupsfilters1:amd64 (1.28.17-3+deb12u2) ...
Setting up cups-ipp-utils (2.4.2-3+deb12u9) ...
Setting up libgs10:amd64 (10.0.0-0+deb12u2) ...
Setting up libpango-cpp0.40:amd64 (2.42.4-1+deb12u1) ...
Setting up openssl-sfp-server (1:9.201-2+deb12u9) ...
Setting up udisk2 (2.9.4-4+deb12u2) ...
Setting up cups-gppd (2.4.2-3+deb12u9) ...
Setting up openssh-server (1:9.201-2+deb12u9) ...
Configuring openssh-server

A new version (/tmp/tmp.HMSnK3Ww) of configuration file /etc/ssh/sshd_config is available, but the version installed currently has been locally modified.

1. install the package maintainer's version      5. show a 3-way difference between available versions
2. keep the local version currently installed    6. do a 3-way merge between available versions
3. show the differences between the versions    7. start a new shell to examine the situation
4. show a side-by-side difference between the versions

What do you want to do about modified configuration file sshd_config? 2

rescue-ssh.target is a disabled or a static unit not running, not starting it.
ssh.socket is a disabled or a static unit not running, not starting it.
Setting up libmagickcore-6.q16-6-extra:amd64 (8:6.9.11.68+dfsg-1.6+deb12u8) ...
Setting up mariadb-plugin-provider-124 (1:10.11.14-0+deb12u2) ...
Setting up mariadb-plugin-provider-snappy (1:10.11.14-0+deb12u2) ...
Setting up libgtk-3-0:amd64 (3.24.38-2+deb12u3) ...
Setting up apache2 (2.4.46-1+deb12u2) ...
apache2.service is a disabled or a static unit not running, not starting it.
Setting up liberror2-0:amd64 (2.0.15-4+deb12u1) ...
Setting up gir1.2-gtk-3.0:amd64 (3.24.38-2+deb12u3) ...
Setting up libgtk-3-bin (3.24.38-2+deb12u3) ...
Setting up gstreamer1.0-gtk3:amd64 (1.22.4-5+deb12u1) ...
Setting up ghostscript (10.0.0-0+deb12u8) ...
Setting up cups-filters-core-drivers (1.28.17-3+deb12u2) ...
Setting up cups-client (2.4.2-3+deb12u9) ...
Setting up libgal-3-0:amd64 (3.24.38-2+deb12u3) ...
Setting up gstreamer1.0-plugins-bad:amd64 (1.22.4-4+deb12u7) ...
Setting up php8.2 (8.2.30-1+deb12u1) ...
Setting up cups-daemon (2.4.2-3+deb12u9) ...
Setting up ure (4:7.4.7-1+deb12u10) ...
Setting up libimp2.0:amd64 (2.10.34-1+deb12u10) ...
Setting up cups-filters (1.28.17-3+deb12u2) ...
Setting up bind9-dnsscripts (1:9.18.47-1+deb12u2) ...
Setting up firefox-esr (140.9.1esr-1+deb12u1) ...
Setting up gimp (2.10.34-1+deb12u10) ...
Setting up cups-browsed (1.28.17-3+deb12u2) ...
Setting up libwebkit2gtk-4.1-0:amd64 (2.58.6-1+deb12u1) ...
Setting up cups-core-drivers (2.4.2-3+deb12u9) ...
Setting up cups (2.4.2-3+deb12u9) ...
Updating PPD files for cups ...
Setting up liblouis:amd64 (4:2.2-1+deb12u1) ...
Setting up libreoffice-common (4:7.4.7-1+deb12u10) ...
Replacing config file /etc/libreoffice/registry/main.xcd with new version
Setting up libreoffice-core (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-math (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-gtk3 (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-draw (4:7.4.7-1+deb12u10) ...
Setting up yelp (4:2.2-1+deb12u1) ...
Setting up libreoffice-help-common (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-impress (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-base-core (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-help-en-us (4:7.4.7-1+deb12u10) ...
Setting up python3-uno (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-calc (4:7.4.7-1+deb12u10) ...
Processing triggers for mate-menus (1.26.0-3) ...
Processing triggers for libc-bin (2.36-9+deb12u3) ...
Processing triggers for systemd (252.39-1+deb12u1) ...
Processing triggers for man-db (2.11.2-2) ...
Processing triggers for dbus (1.14.10-1+deb12u1) ...
Processing triggers for shared-mime-info (2.2-1) ...
Processing triggers for debiandutils (5.7-0.5+deb12u1) ...
Processing triggers for mailcap (3.70+mmul) ...
Processing triggers for fontconfig (2.14.1-4) ...
Processing triggers for desktop-file-utils (0.26-1) ...
Processing triggers for hicolor-icon-theme (0.17-2) ...
Processing triggers for initramfs-tools (0.142+deb12u1) ...
update-initramfs: Generating /boot/initrd.img-6.1.0-44-amd64
Processing triggers for ca-certificates (20230311+deb12u1) ...
Updating certificates in /etc/ca-certificates...
0 added, 0 removed; done.
Running hooks in /etc/ca-certificates/update.d...
done.
Processing triggers for php8.2-cli (8.2.30-1+deb12u1) ...
Processing triggers for libapache2-mod-php8.2 (8.2.30-1+deb12u1) ...
root@debian:~#
```

```
debian final project [Comandos] - Oracle VirtualBox
Archivo  Máquina  Ver  Entrada  Dispositivos  Ayuda

debian@debian:~$
Applications Places System

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```

```
kali-linux-2020.1-virtualbox-amd64 [kali pro] [Comandos] - Oracle VirtualBox
Archivo  Máquina  Ver  Entrada  Dispositivos  Ayuda

debian@debian:~$
Session Actions Edit View Help
Setting up gstreamer1.0-plugins-bad:amd64 (1.22.4-4+deb12u7) ...
Setting up php8.2 (8.2.30-1+deb12u1) ...
Setting up cups-daemon (2.4.2-3+deb12u9) ...
Setting up ure (4:7.4.7-1+deb12u10) ...
Setting up libimp2.0:amd64 (2.10.34-1+deb12u10) ...
Setting up cups-filters (1.28.17-3+deb12u2) ...
Setting up bind9-dnsscripts (1:9.18.47-1+deb12u2) ...
Setting up firefox-esr (140.9.1esr-1+deb12u1) ...
Setting up gimp (2.10.34-1+deb12u10) ...
Setting up cups-browsed (1.28.17-3+deb12u2) ...
Setting up libwebkit2gtk-4.1-0:amd64 (2.58.6-1+deb12u1) ...
Setting up cups-core-drivers (2.4.2-3+deb12u9) ...
Setting up cups (2.4.2-3+deb12u9) ...
Updating PPD files for cups ...
Setting up liblouis:amd64 (4:2.2-1+deb12u1) ...
Setting up libreoffice-common (4:7.4.7-1+deb12u10) ...
Replacing config file /etc/libreoffice/registry/main.xcd with new version
Setting up libreoffice-core (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-math (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-gtk3 (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-draw (4:7.4.7-1+deb12u10) ...
Setting up yelp (4:2.2-1+deb12u1) ...
Setting up libreoffice-help-common (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-impress (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-base-core (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-help-en-us (4:7.4.7-1+deb12u10) ...
Setting up python3-uno (4:7.4.7-1+deb12u10) ...
Setting up libreoffice-calc (4:7.4.7-1+deb12u10) ...
Processing triggers for mate-menus (1.26.0-3) ...
Processing triggers for libc-bin (2.36-9+deb12u3) ...
Processing triggers for systemd (252.39-1+deb12u1) ...
Processing triggers for man-db (2.11.2-2) ...
Processing triggers for dbus (1.14.10-1+deb12u1) ...
Processing triggers for shared-mime-info (2.2-1) ...
Processing triggers for debiandutils (5.7-0.5+deb12u1) ...
Processing triggers for mailcap (3.70+mmul) ...
Processing triggers for fontconfig (2.14.1-4) ...
Processing triggers for desktop-file-utils (0.26-1) ...
Processing triggers for hicolor-icon-theme (0.17-2) ...
Processing triggers for initramfs-tools (0.142+deb12u1) ...
update-initramfs: Generating /boot/initrd.img-6.1.0-44-amd64
Processing triggers for ca-certificates (20230311+deb12u1) ...
Updating certificates in /etc/ca-certificates...
0 added, 0 removed; done.
Running hooks in /etc/ca-certificates/update.d...
done.
Processing triggers for php8.2-cli (8.2.30-1+deb12u1) ...
Processing triggers for libapache2-mod-php8.2 (8.2.30-1+deb12u1) ...
root@debian:~#
```

```
debian final project [Comandos] - Oracle VirtualBox
Archivo  Máquina  Ver  Entrada  Dispositivos  Ayuda

debian@debian:~$
Applications Places System

debian@debian:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
t qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel stat
oup default qlen 1000
    link/ether 08:00:27:08:0e:76 brd ff:ff:ff:ff:ff:ff
    inet 192.168.18.219/24 brd 192.168.18.255 scope global dynamic nopre
enp0s3
        valid_lft 3567sec preferred_lft 3567sec
    inet6 fe80::a00:27ff:fe08:e76/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
debian@debian:~$
```