




POSIZIONE DEGLI ELEMENTI

Posizione degli elementi



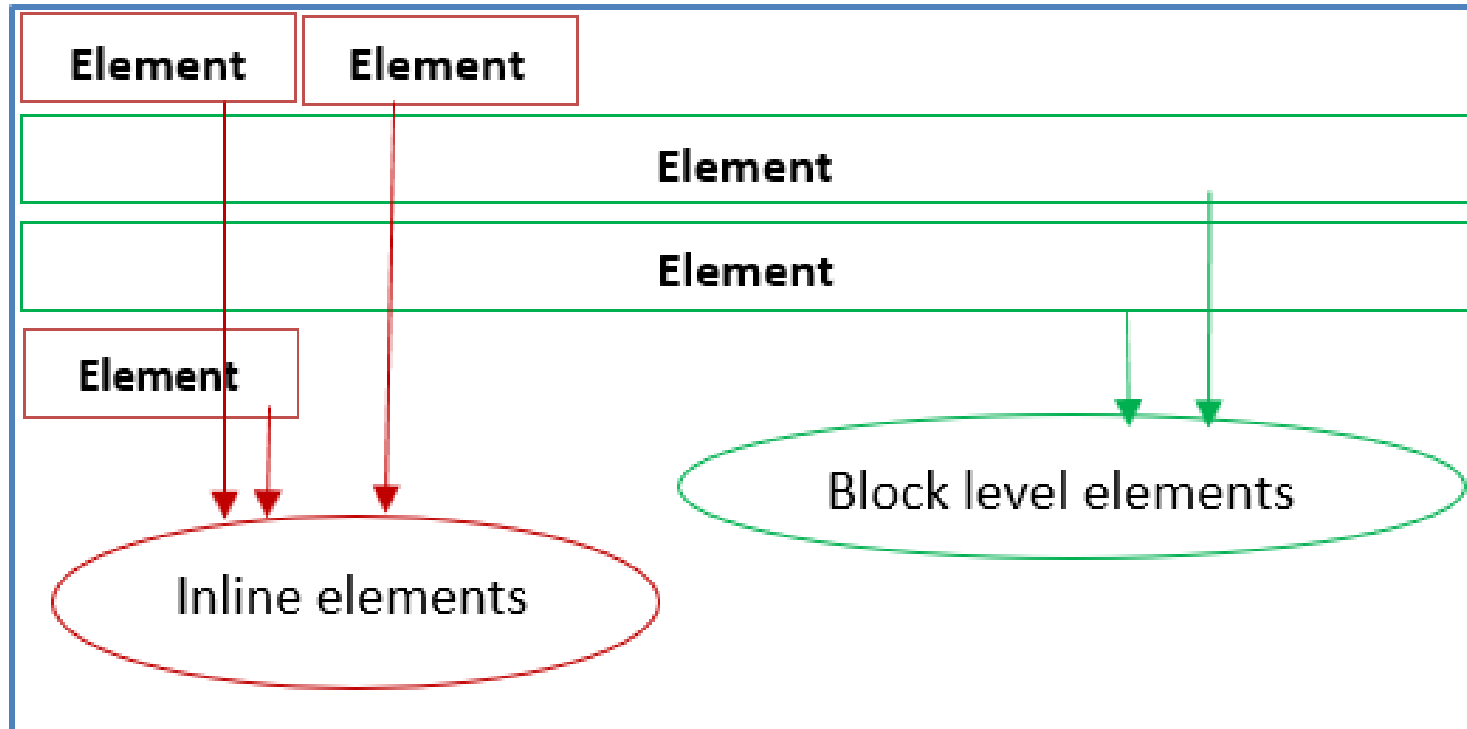

Cambiare il flusso

- position
 - top, bottom, left, right
 - z-index

<https://developer.mozilla.org/en-US/docs/Web/CSS/position>

https://www.w3schools.com/css/css_positioning.asp

<https://www.csssolid.com/css-position.html>

- float
 - clear

<https://developer.mozilla.org/en-US/docs/Web/CSS/float>

https://www.w3schools.com/css/css_float.asp



Proprietà position

position

Values: static | relative | absolute | fixed | inherit

Default: static

Applies to: all elements

Inherits: no

- **static:** posizione normale
- **relative:** posizionabile rispetto al suo posto
- **absolute:** posizionabile rispetto al suo contenitore
- **fixed:** posizionabile rispetto al viewport



Specificare la posizione

top, right, bottom, left

Values: *length measurement | percentage | auto | inherit*

Default: *auto*

Applies to: *positioned elements (where position value is relative, absolute, **or** fixed)*

Inherits: *no*

- Specifica la distanza rispetto all'**elemento o blocco contenitore**
- **Containing block:** primo antenato con **position non static** (o il **body**)


Modalità di posizionamento




Static Position




Relative Position

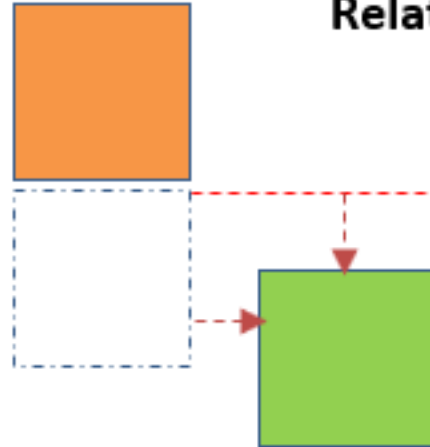

Absolute Position

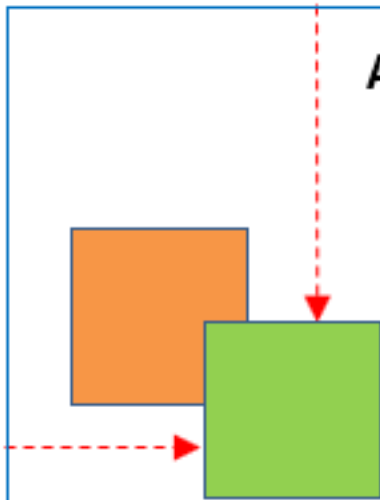

Fixed Position

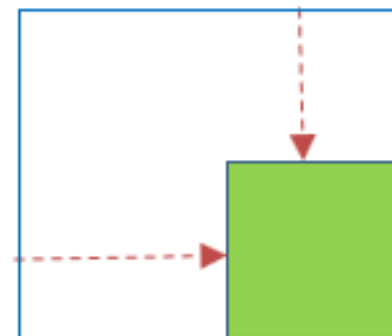

Gestire sovrapposizioni



z-index

Values: *number* | auto | inherit

Default: auto


Applies to: *positioned elements*

Inherits: *no*

```
#A {  
  z-index: 10;  
  position: absolute;  
  top: 200px;  
  left: 200px;  
}
```

```
#B {  
  z-index: 5;  
  position: absolute;  
  top: 225px;  
  left: 175px;  
}
```

```
#C {  
  z-index: 1;  
  position: absolute;  
  top: 250px;  
  left: 225px;  
}
```

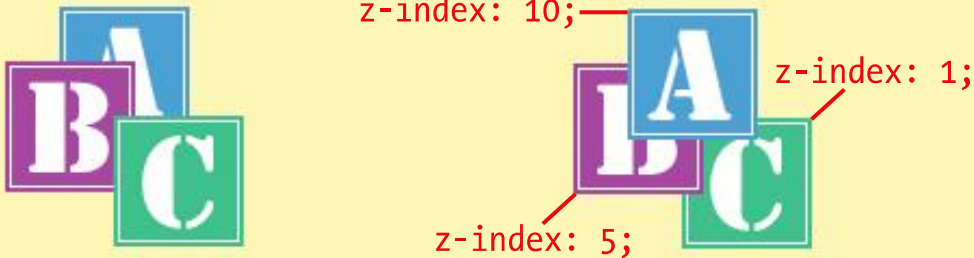

By default, elements later in the document stack on top of preceding elements.

You can change the stacking order with the z-index property. Higher values stack on top of lower values.

Esempi



- Dropdown

https://www.w3schools.com/css/css_dropdowns.asp

https://www.w3schools.com/css/tryit.asp?filename=trycss_dropdown_button

https://www.w3schools.com/css/tryit.asp?filename=trycss_dropdown_image

- Altri

https://developer.mozilla.org/en-US/docs/Learn/CSS/CSS_layout/Practical_positioning_examples

- Fixed

<https://www.w3.org/Style/Examples/007/menus.en.html#L384>

https://www.w3schools.com/howto/howto_css_fixed_menu.asp



float



float

Values: left | right | none | inherit

Default: none

Applies to: all elements

Inherits: no

- muove un elemento tutto a destra o tutto a sinistra permettendo agli altri elementi di circondarlo

Esempio



Inline image in the normal flow

space next to the image is held clear



They went down, down, down, till at last they came to a passage with a door at one end, which was only fastened with a latch. The eldest Princess opened it, and they found themselves immediately in a lovely little wood, where the leaves were spangled with drops of silver which shone in the brilliant light of the moon. They next crossed another wood where the leaves were sprinkled with gold, and after that another still, where the leaves glittered with diamonds.

Inline image floated to the right.

They went down, down, down, till at last they came to a passage with a door at one end, which was only fastened with a latch. The eldest Princess opened it, and they found themselves immediately in a lovely little wood, where the leaves were spangled with drops of silver which shone in the brilliant light of the moon. They next crossed another wood where the leaves were sprinkled with gold, and after that another still, where the leaves glittered with diamonds.




image moves over and text wraps around it

```
img {  
  float: right;  
}  
p {  
  padding: 15px;  
  background-color: #F0F0F0;  
  border: 2px solid #C0C0C0;  
}
```

Esempio



*Indicates outer margin edge
(this rule would not appear in the actual web page)*

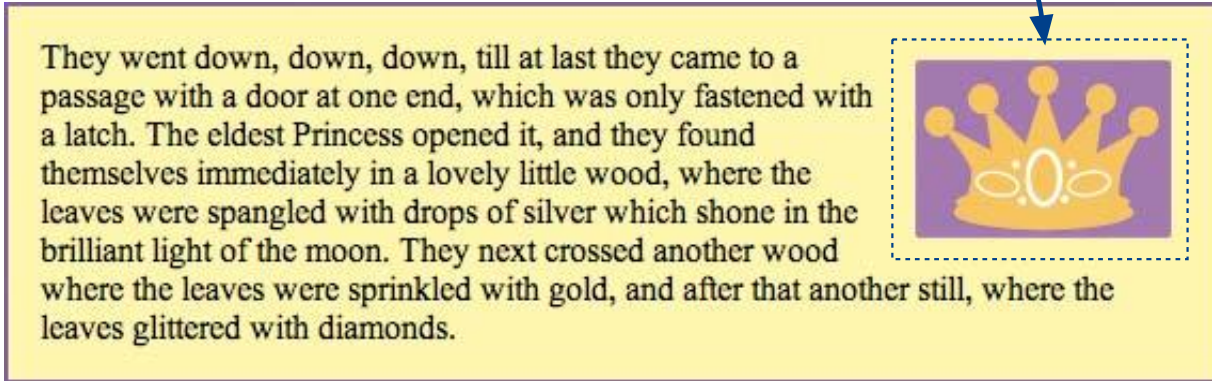

```
img {  
    float: right;  
    margin: 10px;  
}
```

Esempio: ogre-fl.html



Caratteristiche

- Si staccano dal flusso normale ma influenzano il contenuto dei blocchi intorno
- Sono contenuti nell'area del contenuto dell'elemento che li contiene
- I margini sono mantenuti



clear dei float



clear


Values: left | right | both | none | inherit

Default: none

Applies to: *block-level elements only*

Inherits: no

```
img {  
  float: left;  
  margin-right: 10px;  
}  
h2 {  
  clear: left;  
  margin-top: 2em;  
}
```

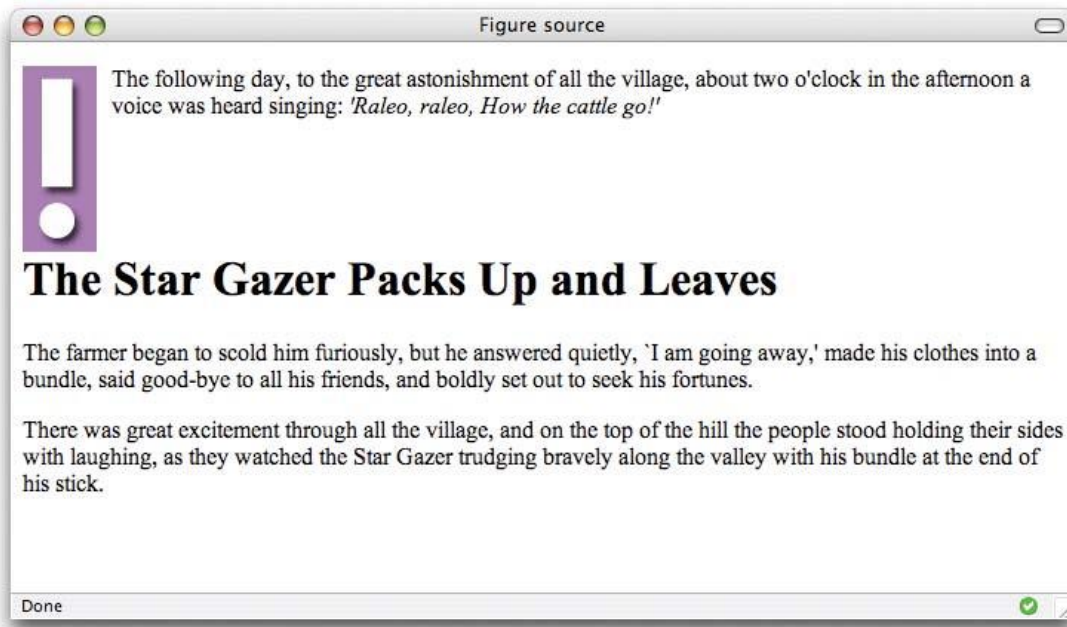

Contenere i float



Hand-stitched iPhone motif

[More info](#)



L'elemento contenitore non si allunga per contenere il float

Nell'elemento contenitore devo dichiarare
overflow auto o hidden

```
#container {  
  overflow: auto;  
  width: 100%;  
  background-color: #GGG;  
  padding: 1em;  
}
```

ipsum purus imperdiet tellus, ut ultrices massa
tortor vitae nulla. Fusce non arcu quam. Nullam
lacinia facilisis lacus, et varius ligula imperdiet
ut. Morbi molestie auctor magna, quis venenatis
felis adipiscing sed. Aliquam ipsum nibh,
dapibus sit amet tristique at, tincidunt in leo.
Quisque accumsan lobortis lacus, id gravida
tortor luctus et. Donec quis diam et odio
volutpat blandit nec nec enim. Nam vitae
vestibulum risus. Cras in adipiscing odio. Nam
vel dolor id purus pretium suscipit quis in quam.

lectus quis vulputate. Ut teneo, bibendum at
blandit non, luctus ac lorem. Nunc vitae ligula
ut neque convallis sagittis. Quisque consequat
orci sed arcu tincidunt et volutpat tellus tempor.
Nulla vulputate ante nec felis elementum auctor.
Duis magna neque, posuere eu hendrerit sit
amet, dapibus quis quam. Pellentesque habitant
morbi tristique senectus et netus et malesuada
fames ac turpis egestas. Class aptent taciti
sociosqu ad litora torquent per conubia nostra,
per inceptos himenaeos. Nunc dapibus dui

Esempio: float-test.html

Esempi



- Navbar float

https://www.w3schools.com/css/tryit.asp?filename=trycss_dropdown_navbar

https://www.w3schools.com/css/css_image_gallery.asp




FLEXBOX DISPLAY

<https://css-tricks.com/snippets/css/a-guide-to-flexbox/>

Flexbox




container

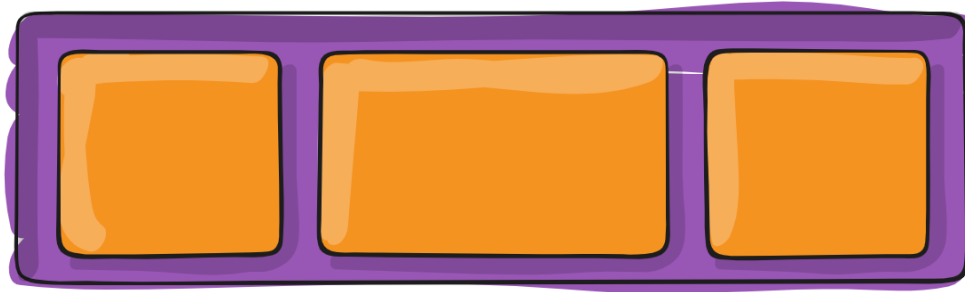


```
.container {  
  display: flex; /* or inline-flex */  
}
```

items

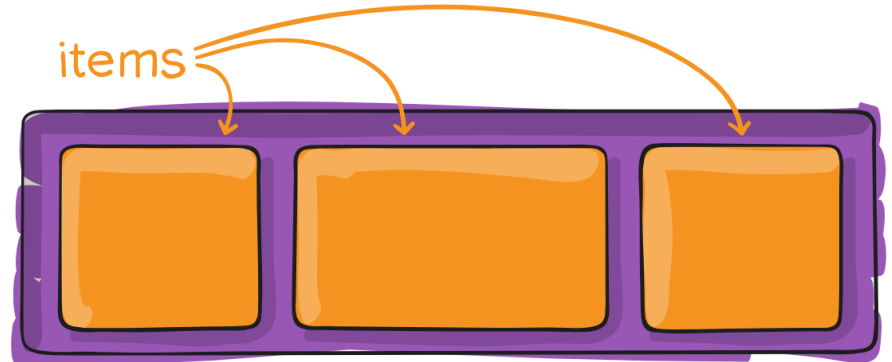


https://www.w3schools.com/css/css3_flexbox.asp

Flex geometry

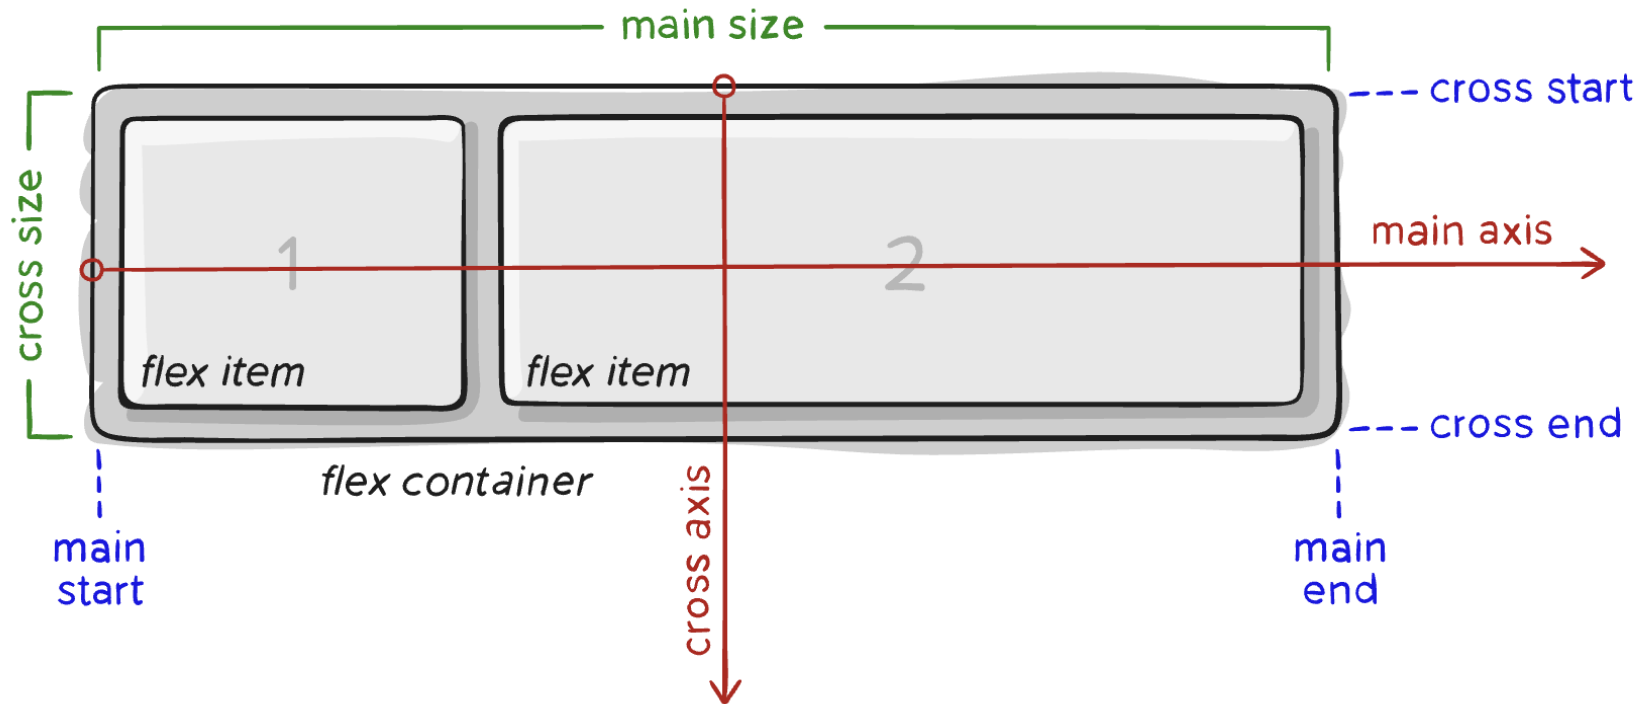


flex-direction

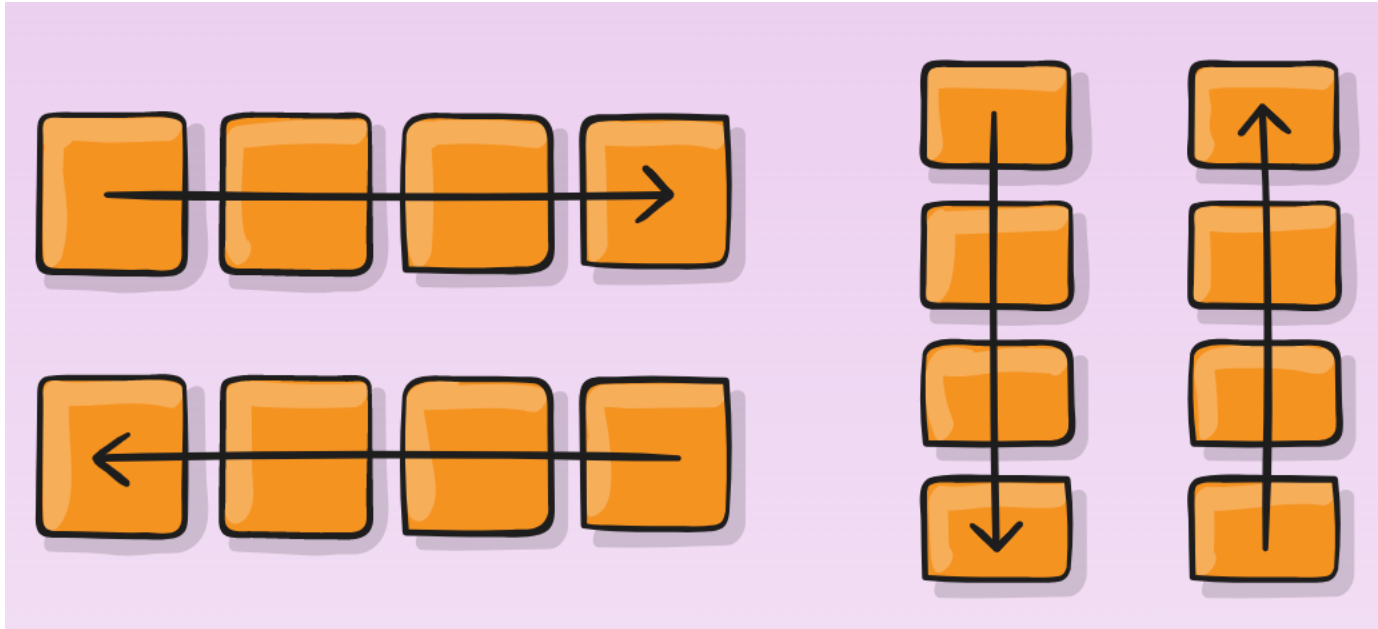

```
.container {  
  flex-direction: row | row-reverse | column | column-reverse;  
}
```

fex-wrap

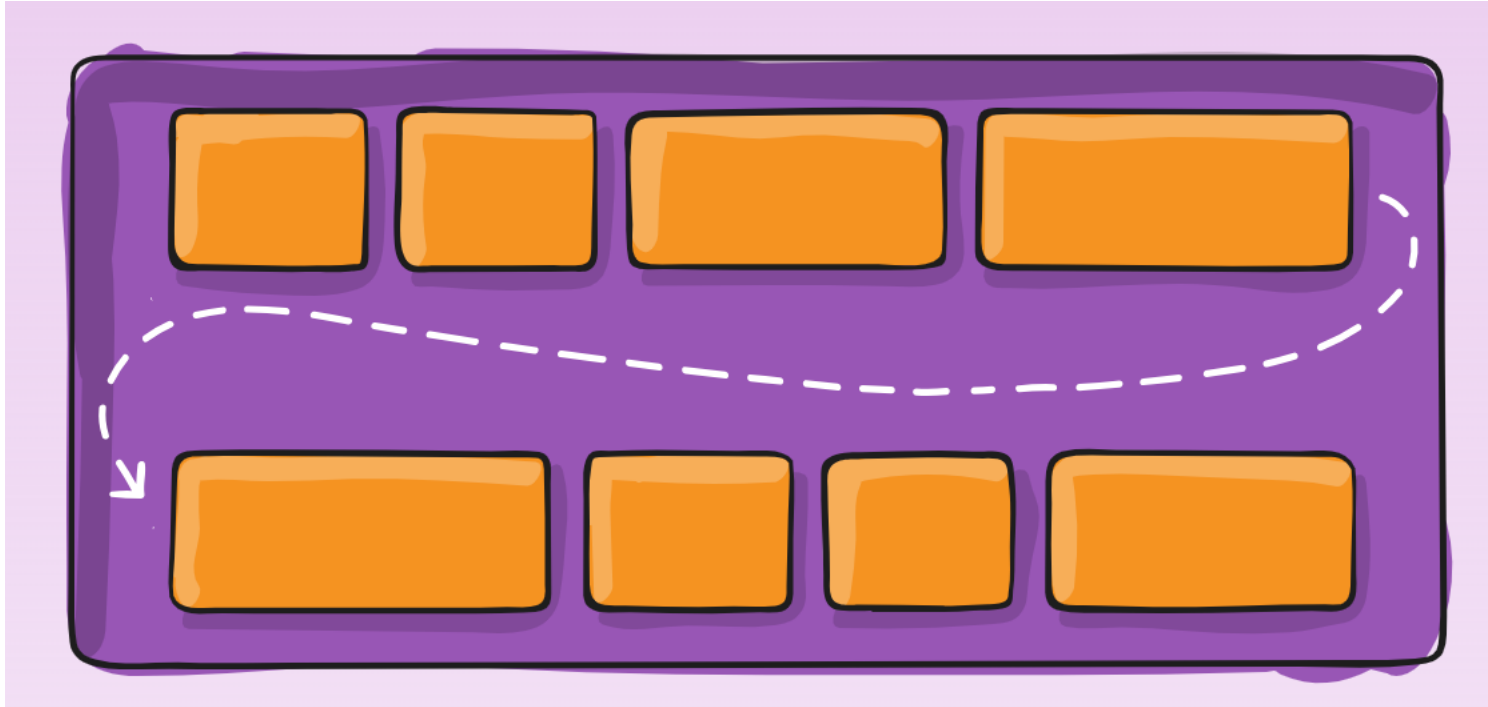

```
.container{  
  flex-wrap: nowrap | wrap | wrap-reverse;  
}
```

justify-content

```
.container {  
  justify-content: ...  
}
```

flex-start



flex-end



center



space-between



space-around




space-evenly



align-items & align-content



align-items:

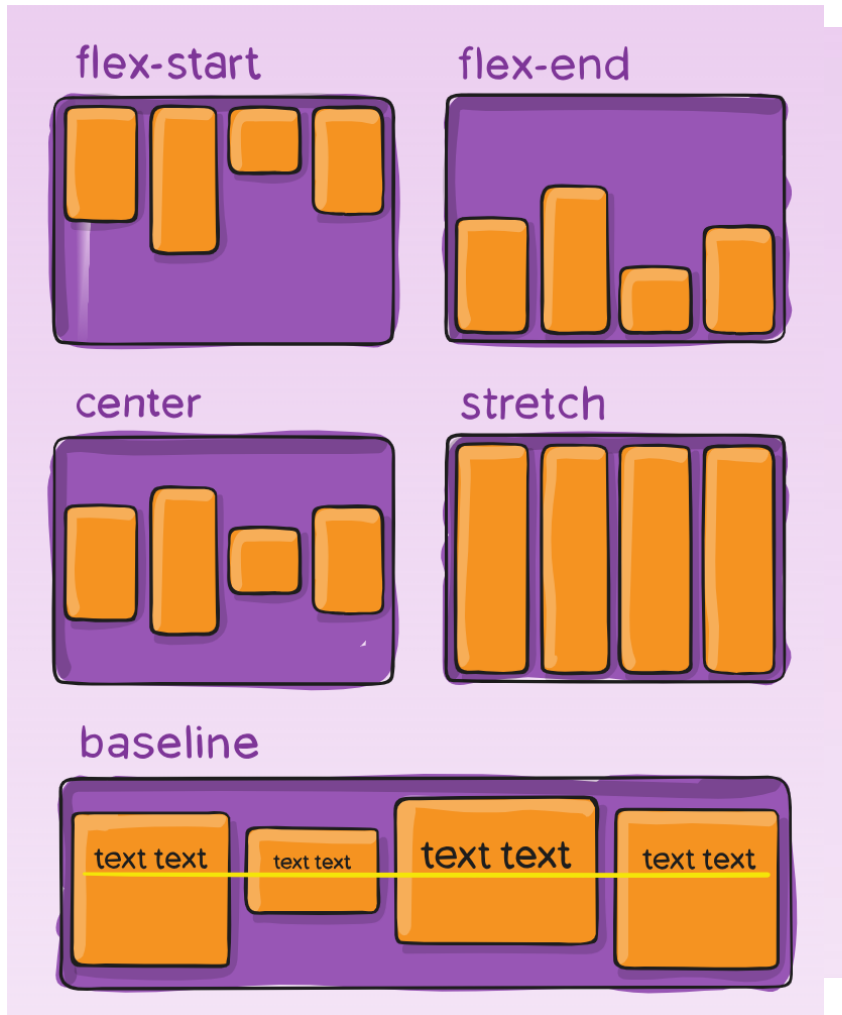


align-content:

order




```
.item {  
    order: <integer>; /* default is 0 */  
}
```

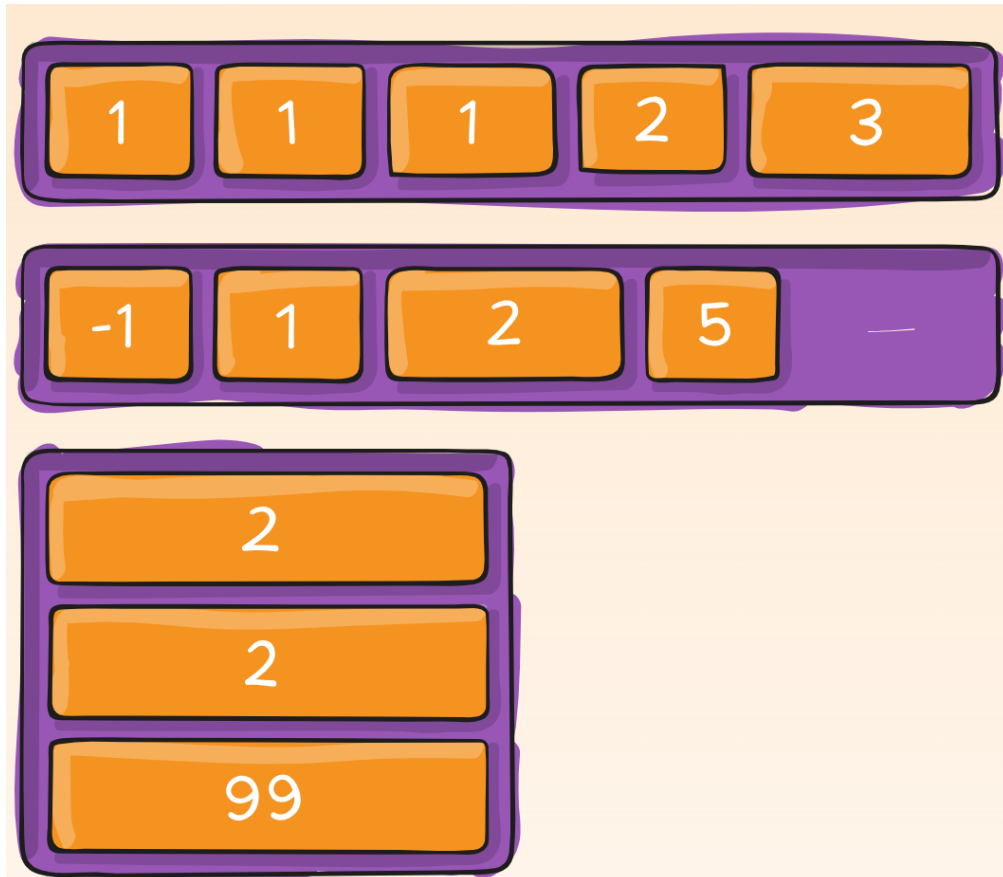

align-self



```
.item {  
    align-self: auto | flex-start | flex-end | center | baseline |  
    stretch;  
}
```

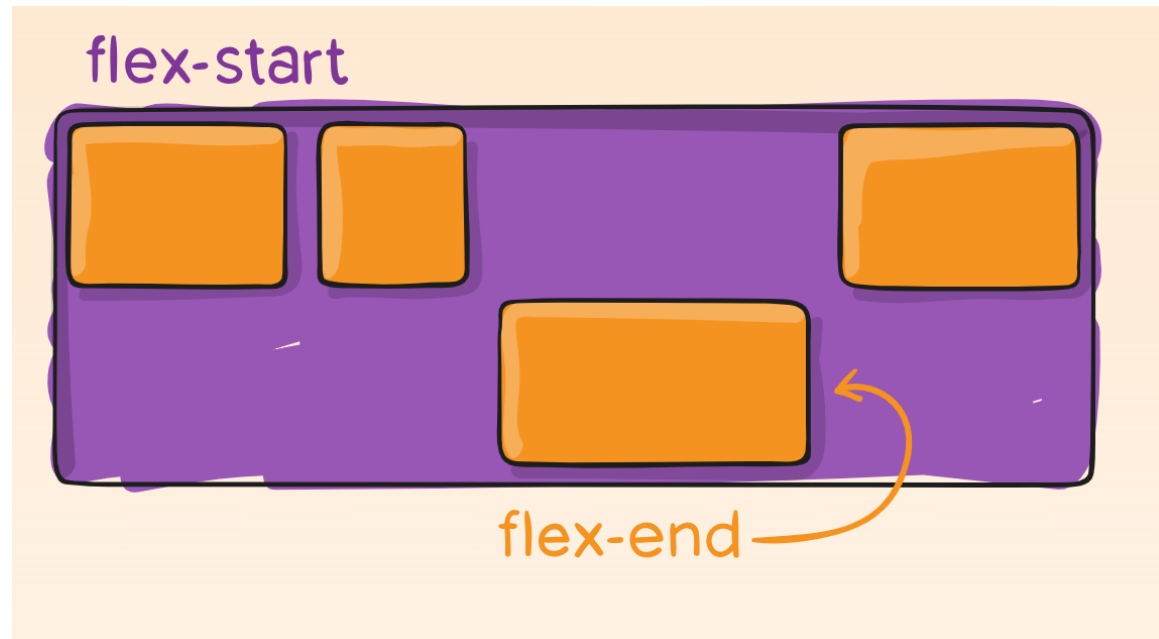



Examples

- <https://blog.logrocket.com/responsive-image-gallery-css-flexbox/>

Menu



serif

sans-serif

script

display

dingbats

- Navigazione verticale o orizzontale
- tipicamente si applica uno stile ad una lista ul

Esempio: [test-menu.html](#)

Esempio: [test-menu-sub.html](#)