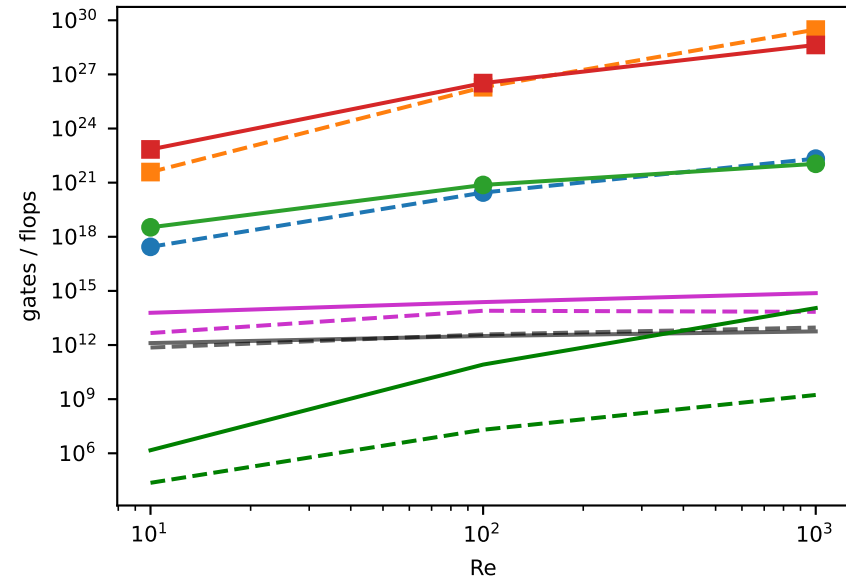
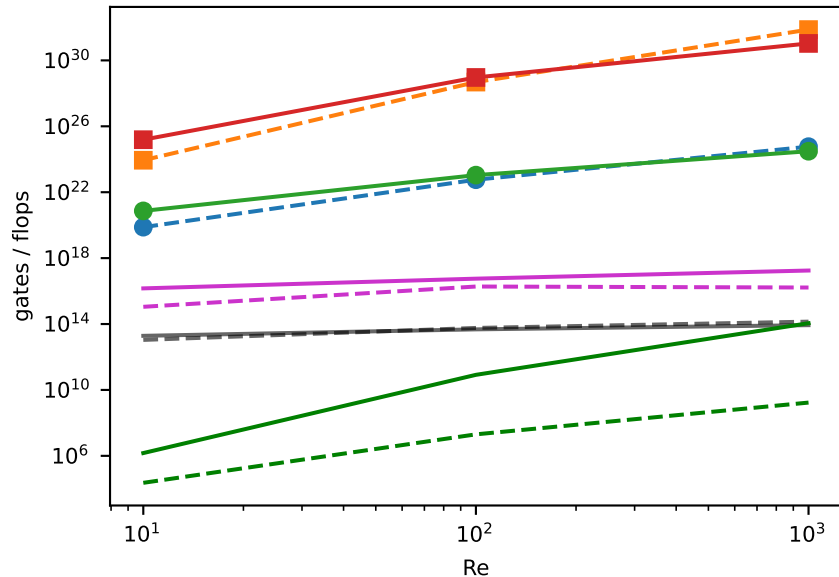


$\varepsilon = 10^{-2}$  $\varepsilon = 10^{-3}$ 

● inversion $N_C=1$, overlap (L_2 error)

■ inversion $N_C=1$, observable (KE decay)

— block-encoding QLSA $N_C=1$

- - classical FV flops $N_C=1$

- - Schrödingerisation arm $N_C=1$ (bound)

● inversion $N_C=2$, overlap (L_2 error)

■ inversion $N_C=2$, observable (KE decay)

— block-encoding QLSA $N_C=2$

— classical FV flops $N_C=2$

- - Schrödingerisation arm $N_C=2$ (bound)