


Spring Boot Architecture

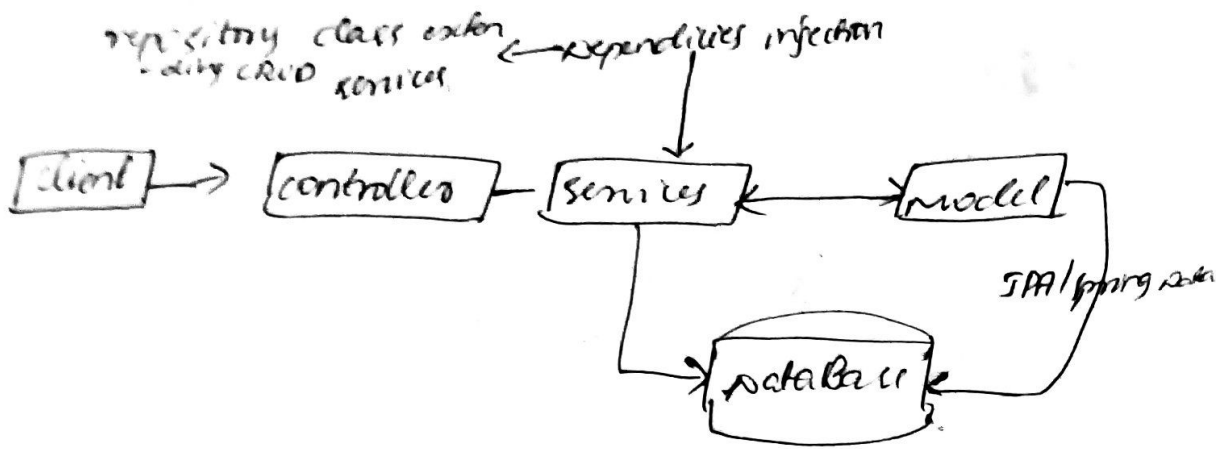

1) client layer

- user interacts with application by sending HTTP request.

2) controller layer (presentation layer)

- Handles incoming HTTP request from client.
- process & sends a response.

3) Service layer (Business logic layer)

- contains business logic & service classes.
- communicates with repository layer to fetch or update data.
- uses dependency injection to get required repository service.

4) Repository layer (data access layer)

- Handles crud operations on the db.

5) model layer (Entity layer)

- represents database entities & domain classes.
- maps tables in db using JPA / spring data.

6) DB Layer

- actual db that stores application data
- Spring boot interacts with it through JPA (spring data).

JDK :- ^{etc}
• Java C. ^{provides} ^{bytecode} Computer, accepts the source code & provides bytecode
• Java.exe. (launcher, launching application during execution)

JRE :- contains JVM + Java standard library (class library) ^{importing packages}

JVM :- enables the computer to run Java program.
↳ loads all the classes files needed for execution.

xxx

Interpreter :- converts bytecode instructions to machine code (binary digits).

xxx

→ double > long > int > short

whole numbers :- 0, 1, 2, ... ∞

Natural n :- 1, 2, 3, 4, ... ∞

Digits :- 0-9

Camel Case Ex :- userName (first word lower case, next word upper case)

Pascal case :- UserName

snake case :- user_name

* Identifiers :- name given to class, variable or method to uniquely identify it.

→ Operator precedence.

xxx