


```

$ docker-compose up
Creating dockerlb3_php_1 ... done
Creating dockerlb3_db_1 ... done
Creating dockerlb3_phpmyadmin_1 ... done
Attaching to dockerlb3_db_1, dockerlb3_php_1, dockerlb3_phpmyadmin_1
db_1 | Initializing database
db_1 | 2019-05-20T13:53:49.859905Z 0 [warning] TIMESTAMP with implicit DEFAULT value is deprecated. Please use --explicit_defaults_for_timestamp server option (see documentation for mor
db_1 | details).
db_1 | 2019-05-20T13:53:50.161510Z 0 [warning] InnoDB: New log files created, LSN=45790
db_1 | 2019-05-20T13:53:50.229527Z 0 [warning] InnoDB: Creating foreign key constraint system tables.
db_1 | 2019-05-20T13:53:50.307359Z 0 [warning] No existing UUID has been found, so we assume that this is the first time that this server has been started. Generating a new UUID: b24f4f
72-7b06-11e9-93d2-0242ac130002.
db_1 | 2019-05-20T13:53:50.312087Z 0 [warning] Gtid table is not ready to be used. Table 'mysql.gtid_executed' cannot be opened.
db_1 | 2019-05-20T13:53:50.312606Z 1 [warning] root@localhost is created with an empty password ! Please consider switching off the --initialize-insecure option.
php_1 | AH00558: apache2: could not reliably determine the server's fully qualified domain name, using 172.19.0.3. Set the 'ServerName' directive globally to suppress this message
php_1 | AH00558: apache2: could not reliably determine the server's fully qualified domain name, using 172.19.0.3. Set the 'ServerName' directive globally to suppress this message
php_1 | [Mon May 20 13:53:50.154795 2019] [mon_prefork:notice] [pid 1] AH00163: Apache/2.4.25 (Debian) PHP/7.1.29 configured -- resuming normal operations
php_1 | [Mon May 20 13:53:50.155195 2019] [core:notice] [pid 1] AH00094: Command line: 'apache2 -D FOREGROUND'
phpmyadmin_1 | phpMyAdmin not found in /var/www/html - copying now...
phpmyadmin_1 | Complete! phpMyAdmin has been successfully copied to /var/www/html
phpmyadmin_1 | /usr/lib/python2.7/site-packages/supervisor/options.py:461: UserWarning: Supervisor is running as root and it is searching for its configuration file in default locations (inclu
ding its current working directory); you probably want to specify a "-c" argument specifying an absolute path to a configuration file for improved security.
phpmyadmin_1 | Supervisor is running as root and it is searching
phpmyadmin_1 | 2019-05-20 13:53:54.530 CRIT Supervisor is running as root. Privileges were not dropped because no user is specified in the config file. If you intend to run as root, you can s
et user=root in the config file to avoid this message.
phpmyadmin_1 | 2019-05-20 13:53:54.530 INFO Included extra file "/etc/supervisor.d/nginx.ini" during parsing
phpmyadmin_1 | 2019-05-20 13:53:54.531 INFO Included extra file "/etc/supervisor.d/php.ini" during parsing
phpmyadmin_1 | 2019-05-20 13:53:54.548 INFO RPC interface 'supervisor' initialized
phpmyadmin_1 | 2019-05-20 13:53:54.548 CRIT Server 'unix_http_server' running without any HTTP authentication checking
phpmyadmin_1 | 2019-05-20 13:53:54.549 INFO supervisor started with pid 1
db_1 | Database initialized
db_1 | Initializing certificates
db_1 | Generating a RSA private key
db_1 | .....+++++
db_1 | .....+++++
db_1 | writing new private key to 'ca-key.pem'
db_1 | -----
db_1 | Generating a RSA private key
phpmyadmin_1 | 2019-05-20 13:53:55.551 INFO spawned: 'php-fpm' with pid 21

```

localhost:8080/index.php
Suchen

Prices, Squad ...
Persönliche Startseite ...
OneDrive
Google Drive
Noten - Ecolm - TBZIT



Willkommen bei phpMyAdmin

Sprache - Language


Deutsch - German

Anmeldung

Benutzername: root

Passwort:

OK

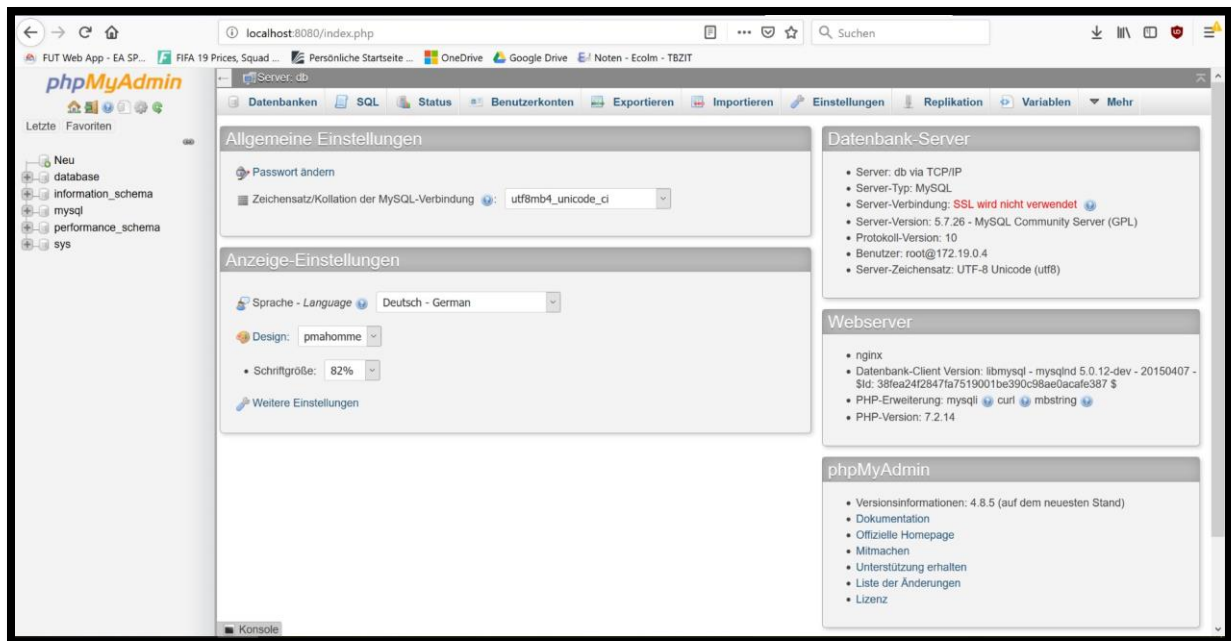

LEGENDE(Reihenfolge von oben nach unten):

Bild 1:	Nach dem Befehl docker-compose up
Bild 2:	Das Login des phpmyadmin
Bild 3:	Mphpmyadmin SQL Server
Bild 4:	Apache Webserver