

The Rise of Verbal Reinforcement Learning: A Survey

KSHITIJ TAYAL

ARUN SHARMA, University of Minnesota, Twin Cities, USA

GENTA INDRA WINATA

ANIRBAN DAS

SAMBIT SAHU

Large language models turned natural language from a task description into a learning signal: critiques, rubrics, reflections, and debates now steer agents where scalar rewards once did. We survey this practice as verbal reinforcement learning (VRL), organizing methods by the signal itself: what linguistic artifact is consumed, which decision-problem component it modifies, and when it takes effect. A formal framework with explicit inclusion criteria separates VRL from scalarized preference learning. We synthesize credit assignment for verbal signals, the verbal reward stack, language-space optimizers, embodied settings, evaluation, and feedback-channel safety, and distill decision rules for practitioners.

CCS Concepts: • **Computing methodologies** → **Reinforcement learning**; *Natural language processing*; *Intelligent agents*.

Additional Key Words and Phrases: verbal reinforcement learning, language feedback, large language model agents, credit assignment, reinforcement learning from feedback

1 Introduction

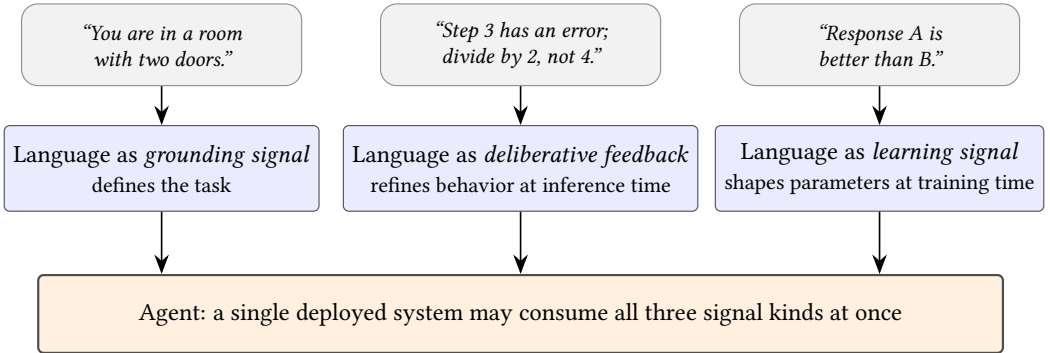


Fig. 1. Language plays three complementary roles as a signal in agentic systems: grounding the task and environment, scaffolding intermediate deliberation, and serving as a learning signal for training. The three roles classify signals, not system stages; a single deployed system may consume all three (§3).

Classical reinforcement learning assumes a specified environment, action space, and reward. Its landmark successes therefore depend on substantial domain engineering and on objectives whose optima match their designers’ intent [187, 231, 256]. This specification burden is most acute for ambiguous, context-dependent tasks that resist scalar rewards [7].

Large language models open a second supervisory channel: language can express task intent, diagnose an output, preserve a lesson, or supply training feedback in a form an agent can consume directly [2, 23, 180]. The central question is no longer only how to derive a better scalar reward, but when retaining the structure of a critique, rubric, or instruction changes what can be learned.

Authors’ Contact Information: Kshitij Tayal; Arun Sharma, University of Minnesota, Twin Cities, Minneapolis, Minnesota, USA, sharm485@umn.edu; Genta Indra Winata; Anirban Das; Sambit Sahu.

We call the resulting family **verbal reinforcement learning (VRL)** and impose two membership criteria. First, feedback is expressed in natural language and its linguistic structure is functionally consumed, rather than collapsed to a scalar or preference bit before use. Second, it participates in an improvement loop through output revision, memory write, parameter update, or construction of a decision-problem component that later drives such an update. Both criteria are required. Plain instruction following fails the second. Vanilla RLHF [48, 195] and DPO [209] fail the first because the rationale is discarded before learning. Language-conditioned RL treats language as policy input while an ordinary scalar reward drives improvement. Reward-code generation remains inside the fence because a compiler consumes the language before the resulting reward drives optimization. Only feedback must be textual, so agents with visual observations remain in scope when their corrections are verbal (§10). Section 2 formalizes this fence.

We organize qualifying signals by when they take effect and what they modify. A *grounding signal* defines goals, states, actions, or reward structure at problem-definition time. *Deliberative feedback* revises context, output, or memory during inference without changing weights. A *learning signal* changes parameters or training data. These are roles of signals, not mutually exclusive system types or lifecycle stages: one agent can consume all three. Existing surveys usually organize by correction mechanism, agent component, or optimization family [199, 269, 355]; our signal-centric axis instead connects problem definition, inference, training, credit assignment, evaluation, and feedback-channel safety.

This article makes four contributions.

- (1) **Formalism and taxonomy.** A language-augmented decision framework locates linguistic artifacts at six entry points, while an explicit assignment rule resolves hybrid methods by the component modified when a signal takes effect (§2, §3).
- (2) **Mechanism synthesis.** We connect the three pillars to the verbal reward stack, credit assignment, and language-space optimization, distinguishing outcome, process, token, context, memory, and parameter updates (§7, §8, §9).
- (3) **Evaluation and safety.** We separate feedback quality from feedback utilization and analyze attacks and defenses at the feedback channel rather than treating the signal as trusted input (§11, §12).
- (4) **Practice and positioning.** We provide mechanism-selection rules, compare eighteen neighboring surveys and frameworks on fixed dimensions, and derive a focused research agenda (§13).

Sections 2 and 3 establish the formalism and taxonomy; Sections 4 through 6 develop the pillars. The remaining sections treat rewards, credit, optimization, embodiment, evaluation, safety, and practitioner decisions before Section 14 concludes.

2 A Formal Framework for Verbal Reinforcement Learning

The surveyed methods share a decision-theoretic skeleton but attach language to different components. We define that skeleton, identify where a linguistic artifact can enter it, and state the two criteria that separate verbal reinforcement learning (VRL) from neighboring paradigms.

2.1 The Language-Augmented Decision Process

Begin with a POMDP $\mathcal{M} = (S, \mathcal{A}, \Omega, T, R, O, \gamma)$ [123, 248]. Let $\mathcal{L}$ be the set of finite natural-language strings. A *linguistic artifact* $\ell \in \mathcal{L}$ is a string produced or consumed as a signal, such as a task description, critique, rationale, stored lesson, or reward-code fragment. The agent configuration $\kappa = (\theta, c, m)$ comprises model parameters θ , working context c , and persistent memory m ; policy π_κ maps interaction histories to action distributions.

The construct that distinguishes VRL from ordinary language-conditioned control is an *improvement operator*

$$\mathcal{I} : (\kappa, \ell) \mapsto \kappa', \quad (1)$$

which consumes an artifact and modifies the agent. Three realizations recur. An *output revision* changes c , for example by appending critique and regenerating [180]. A *memory write* changes m , preserving a lesson across episodes without changing weights [228, 367]. A *parameter update* changes θ and therefore future behavior. Operators may compose these effects, as when critique-generated revisions later become training data [12].

Language can enter the augmented process at six points.

- (i) *Goal specification*. A task description $g \in \mathcal{L}$ defines success when the true objective is latent.
- (ii) *State and observation*. Text environments, tool outputs, error traces, or verbalized sensor state provide the observation substrate.
- (iii) *Action prior*. Instructions or generated subgoals reshape the action distribution before learning [95].
- (iv) *Reward*. A generator may compile ℓ into $\hat{R} = C(\ell)$ at specification time [177], or a judge may evaluate trajectories at runtime [363].
- (v) *Transition prior*. Pretrained knowledge supplies predictions about action consequences, elicited in language [95].
- (vi) *Improvement*. Critiques, reflections, and rationales serve directly as the argument to $\mathcal{I}$.

The taxonomy maps signals acting on points (i) through (iv) at problem-definition time to grounding; output revisions and memory writes at inference time to deliberative feedback; and parameter updates to learning signals. The transition prior is a formal coordinate that the surveyed literature does not yet occupy with an explicit artifact. This POMDP is an organizing vocabulary, not a claim that every agent setting supplies a known transition kernel, reward function, Markov state, or stationary environment. In open-ended tool use and dialogue, those objects may be latent or undefined, so we do not import POMDP theorems merely because the notation is useful.

2.2 The Definitional Fence

A method belongs to VRL if and only if two conditions hold. First, feedback is expressed in natural language and its linguistic structure is functionally consumed rather than collapsed to a scalar or preference bit before use. Second, the feedback participates in an improvement loop through output revision, memory write, parameter update, or construction of a decision-problem component that later drives one of those updates.

Criterion (i) can be tested with a scalarization map $\sigma : \mathcal{L} \rightarrow \mathbb{R}^k$. If replacing ℓ by $\sigma(\ell)$ everywhere leaves the distribution over updated configurations κ' unchanged, the method does not functionally consume the language. Here k is fixed per judged unit: a preference bit, grade, rubric vector, or score per reasoning step is scalarized even when a trajectory contains many steps. Retaining text is not. Criterion (ii) requires that ℓ enter $\mathcal{I}$ directly or construct a component of $\mathcal{M}$ that subsequently drives improvement.

Because this test is counterfactual, we apply a dataflow inspection rule. Trace the artifact from producer to consumer and mark its *scalarization boundary*, where linguistic structure collapses into the numbers received by the learner. The criterion holds if a downstream consumer reads the artifact's structure, such as a compiler parsing reward code [177], a reviser conditioning on critique [180], a retriever matching stored lessons [228], or a loss computed over feedback text. It fails when the sole downstream interface receives only a score. A rationale-annotated preference therefore qualifies only if the rationale enters revision or training; a step critique qualifies only if

its text, rather than only its score, reaches the improvement machinery. The rule settles mechanism membership while leaving an empirical question: whether a consumer capable of reading linguistic structure actually exploits it.

Both criteria exclude familiar neighbors. Plain instruction following fails criterion (ii), since it conditions behavior without an improvement loop. Vanilla RLHF [195] and DPO [209] fail criterion (i) when the annotator’s rationale is discarded before the update. Language-conditioned RL [170] uses language as policy input while scalar reward drives improvement. Reward-code generation qualifies because a compiler consumes the full artifact before the resulting function trains a policy [177]. The feedback must be text, but observations need not be, which admits embodied agents receiving verbal corrections.

2.3 What Is Formally Guaranteed, and What Is Not

Formal results are recent and localized. Xu et al. [307] formalize learning from language feedback under latent rewards, define the transfer eluder dimension as a measure of feedback informativeness, and give the no-regret HELIX algorithm. Their separation result shows that rich language feedback can be exponentially more sample efficient than reward alone under their assumptions. He et al. [95] analyze hierarchical planning inside a POMDP: imitation of language subgoals can incur linear regret, while exploration restores sublinear regret when pretraining error is small. LLF-Bench operationalizes a related setting by replacing numeric rewards with varied natural-language instructions and feedback [41].

These results do not establish a general theory of VRL. No policy-improvement theorem covers $\mathcal{I}$, no convergence result covers language-space Bellman operators, and no bound covers self-generated, noisy, strategic, or adversarial feedback. Existing separations compare rich language with scalar reward but do not characterize intermediate formats such as step critiques or rationale-annotated preferences. Criterion (i) also lacks a measurable certificate of how much linguistic structure a learner uses. The framework therefore makes its claim boundary explicit: it supports classification and exposes the missing quantities, but it does not guarantee that critique, memory, or language-shaped reward improves a policy.

3 Taxonomy

The framework of §2 identifies where a linguistic artifact can enter an agent. We organize qualifying signals by *when* they take effect and *what* they modify, yielding the three pillars in Figure 2. The pillars classify signals, not systems: one agent may consume several roles at once. They are not lifecycle stages, and the definitional fence still applies at every leaf. In particular, grounding must feed an improvement loop, while scalar-only preference optimization remains outside VRL.

The leaves name one representative anchor per mechanism: SayCan [4], Closed-Loop State Feedback [20], Inner Monologue [112], Eureka [177], Self-Refine [180], ChatEval [29], Reflexion [228], Tree of Thoughts [319], FCP [172], STaR [332], DeepCritic [314], MALT [188], GenPRM [360], and DPO [209].

Grounding signals act at problem-definition time and specify goals, state descriptions, action interfaces, or rewards. They qualify only when the constructed component subsequently drives revision or learning; a one-shot instruction to a frozen policy does not. Reward-code generation is the clearest case because language constructs the reward that trains the policy [177]. **Deliberative feedback** acts at inference time through critique, memory retrieval, debate, or search, changing context or output without updating parameters [180, 228]. **Learning signals** act at training time, where feedback changes parameters or training data and thus persists across future interactions [329, 332]. Persistence distinguishes the roles: grounding defines the task, deliberation changes an episode or memory state, and learning changes the policy.

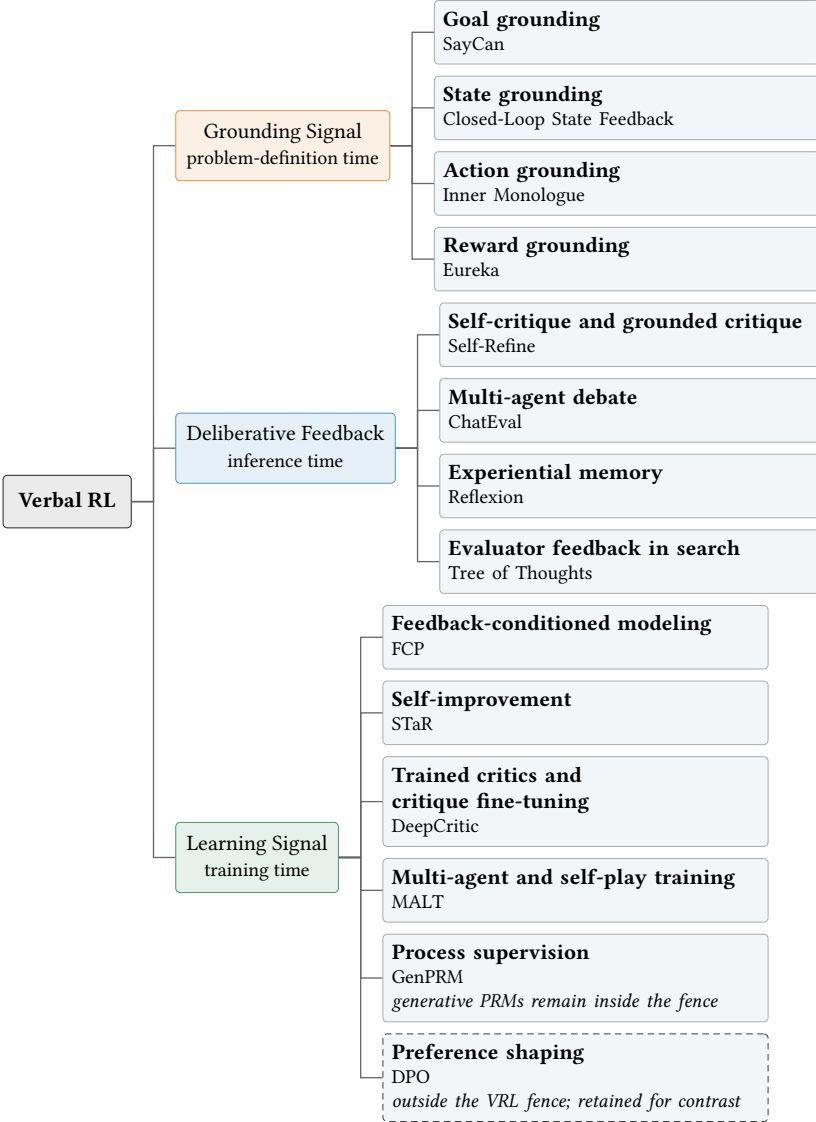


Fig. 2. The three-pillar taxonomy of VRL, organized by when a signal takes effect and what it modifies. Grounding examples qualify only when the constructed component drives an improvement loop. The dashed preference-shaping leaf is outside the VRL fence because the linguistic judgment is scalarized before learning.

3.1 An Explicit Assignment Rule for Hybrid Methods

Hybrid methods require a reproducible placement procedure. We use one rule:

A method is placed by what its linguistic signal modifies at the moment the signal takes effect.

Table 1 applies the rule and tags secondary roles rather than suppressing them. Reward code is grounding when language constructs the task objective, even though that objective later trains

Table 1. The assignment rule applied to recurring hybrid cases. Placement follows what the linguistic signal modifies at the moment it takes effect; secondary roles are tagged, not suppressed. P1 denotes grounding signal, P2 deliberative feedback, and P3 learning signal.

Hybrid case	Primary	Secondary role
Reward-code generation [177, 300]	P1	Constructed reward later trains a policy (P3)
Experiential memory [228, 249]	P2	Lessons persist across episodes, bordering long-term adaptation
Constitutional AI [12]	P3	Self-critique generates the revisions at inference time (P2)
Feedback-conditioned fine-tuning [172]	P3	Critique persists as conditioning context for generation (P2)

a policy. Retrieved experience is deliberative because it changes inference context, even when memory persists across episodes. Constitutional critique and feedback-conditioned fine-tuning are learning signals when their durable effect is a parameter update. The same system may therefore appear under several pillars, but each artifact receives one primary placement at each point of use.

The temporal axis is preferable to source or modality because identical language can have different effects at different points of use. “The gripper pressure is too high” can constrain a task, revise a plan, or shape a compiled reward. Grouping by effect keeps together methods that share failure modes: grounding fidelity, deliberative feedback quality, or loss of information during training-time scalarization.

4 Pillar 1: Language as Grounding Signal

The first pillar contains signals that define the decision problem before behavior is evaluated. Language can specify the goal, abstract the state, constrain the action interface, or construct the reward. A method belongs here when the linguistic artifact modifies one of those task components and the resulting component drives an improvement loop. This placement distinguishes grounding from one-shot instruction following and from feedback that revises an existing trajectory. Across all four mechanisms, the binding constraint is not descriptive detail but whether language maps precisely enough to an executable component of the decision process [179, 248].

4.1 Goal Grounding

Goal grounding turns a verbal specification into target conditions that later optimization or revision can pursue. It must resolve objects and relations, filter plans by physical feasibility, and decompose an open-ended request into checkable subgoals. Systems such as SayCan combine linguistic relevance with affordance estimates, while language-specification methods train policies without a manually written reward [4, 144]. The central failure mode is compositional generalization: familiar primitives remain difficult when combined into a novel goal.

4.2 State Grounding

State grounding uses language as an observation abstraction. Text environments make this role explicit, while embodied agents obtain it by translating visual or physical state into descriptions. Transfer from verbal environments to embodied settings suggests that language can provide a modality-invariant representation, and closed-loop descriptions can support replanning [20, 229].

The relevant test is sufficiency, not fluency: a description fails when it omits history or state variables needed to distinguish actions with different values.

4.3 Action Grounding

Action grounding maps instructions to skills, tool calls, programs, or motor commands and returns execution outcomes to the planner. Inner Monologue illustrates the closed loop, using verbalized success and scene feedback to revise plans, while ProgPrompt constrains generation with program-like descriptions of available objects and actions [112, 233]. The principal design choice is granularity. A phrase may denote a long skill, a discrete subgoal, or a motor adjustment, and that choice fixes both the interface and the horizon over which credit must be assigned.

4.4 Reward Grounding: From Language to Reward Functions

Reward grounding compiles a verbal description of success into an executable objective. It is the key boundary case in the definitional fence: linguistic structure is consumed when the reward is constructed, even though the resulting function later emits scalars. Eureka searches over generated reward programs using textual reflection, and Text2Reward produces dense reward code that people can refine [177, 300]. When state is not directly available, learned vision-language judges can instead ground a text goal in observations [277]. These mechanisms fail differently from ordinary reward estimators. A miscompiled reward is a specification error that can be optimized confidently, so fidelity and hacking resistance must be tested before policy performance is trusted.

4.5 Synthesis: Shared Failure Modes and When to Ground

Three risks recur. The grounding gap separates a fluent description from an executable mapping. Compositionality failures appear when individually understood pieces interact. Fidelity failures arise when a valid task component does not mean what its author intended. Grounding is therefore the right first move when the task is not yet well posed: no programmatic objective exists, observations lack a useful encoding, or the action interface is unsettled. Once language has produced a testable problem, deliberative feedback can revise episodes and learning signals can reshape the policy. Detailed systems, quantitative comparisons, and secondary grounding variants are collected in the electronic supplement. The four roles also fail on different timescales. Goal and reward errors can contaminate an entire training run, state omissions recur at every observation, and action mismatches surface during execution. Validation should therefore occur at the interface each role constructs, before downstream optimization obscures the original grounding error.

5 Pillar 2: Language as Deliberative Feedback

Deliberative feedback refines behavior within an episode without updating model parameters, the regime closest to test-time compute scaling [234]. The four mechanisms differ mainly in where feedback originates: the acting model or an external tool, peer models, stored experience, or an evaluator inside search. A signal belongs here when its text is consumed in the current context; if the same artifact is converted into training data or weights, it becomes a learning signal. The organizing trade-off is among feedback quality, circularity, and inference cost.

5.1 Self-Critique and Externally Grounded Critique

Self-critique asks a model to diagnose and revise its own output. Self-Refine established the basic loop, but correction is limited when generator and critic share the same blind spots [124, 180]. External grounding changes the evidence available to the critic. Unit tests, execution traces, search results, and tool responses can expose errors that introspection cannot, as CRITIC demonstrates across reasoning and tool-use tasks [80]. This shift improves reliability but introduces latency,

infrastructure cost, and a new interpretation problem: the tool may report the right symptom while the model infers the wrong cause. Grounded critique is therefore strongest where an inexpensive and auditable oracle exists.

5.2 Multi-Agent Debate

Debate distributes critique across model instances. Its benefit comes from genuine diversity rather than agent count alone: heterogeneous roles or models can reveal distinct errors, while identical debaters often converge to redundant consensus [63, 344]. Debate can also support scalable oversight when a weaker judge evaluates stronger participants, but it multiplies tokens and model calls. It is most defensible for problems that are hard relative to the base model and for which diverse reasoning paths are available; otherwise self-consistency or a single grounded critic is usually cheaper. Communication topology matters as much as participant count. Sparse exchange, selective retention of disagreements, and explicit confidence can reduce cost or prevent premature consensus. The relevant baseline is therefore not another debate protocol alone, but the strongest single-agent method at the same inference budget.

5.3 Experiential Memory

Experiential memory stores linguistic feedback for later episodes. The classification follows consumption: a retrieved lesson that conditions the current context remains deliberative even though the store persists. Reflexion anchors the raw-reflection regime, while ExpeL distills portable lessons from contrasts between successful and failed trajectories [228, 359]. What should persist depends on recurrence. Raw episodes suit closely repeated tasks, abstract principles transfer across related tasks, and executable procedures suit behavior that must be reproduced reliably. Store management becomes part of the mechanism as experience accumulates: selective writing, retrieval, pruning, and evidence-backed admission prevent stale or incorrect lessons from dominating. Memory differs from a language-space optimizer when the agent writes and reads its own store during episodes; an outer loop that edits a prompt or playbook against a task metric instead treats text as a system parameter. Because retrieval changes the effective context, memory evaluation must test more than recall. A useful store should improve behavior on later tasks, reject irrelevant lessons, preserve raw evidence when summaries are uncertain, and forget entries whose utility has decayed.

5.4 Evaluator Feedback in Search

Search methods branch over candidate trajectories and use linguistic evaluation to choose which nodes to expand or abandon. Tree of Thoughts and Reasoning via Planning are representative designs [93, 319]. Their advantage is early rejection of unproductive paths; their cost is repeated evaluation across many states. Sampling or voting without a verbal evaluator is outside the survey’s fence. Search is preferable when partial trajectories can be judged before completion and when that early pruning saves more computation than the evaluator consumes. Otherwise, evaluator noise can discard the correct branch while adding cost.

Synthesis: when this pillar wins: Feedback quality is the first decision variable. Self-critique is cheap but circular, debate helps only when participants contribute distinct evidence, tools are reliable only where a verifier exists, and memory can entrench early mistakes. Compute is the second variable: debate and search spend additional calls within an episode, while memory amortizes prior deliberation across episodes. Deliberative feedback is therefore the preferred mechanism when weights are inaccessible, tasks are difficult enough to justify iteration, or recurring tasks let stored lessons pay for themselves. When training access and a stable task distribution are available, the same critiques are often better internalized as learning signals. Extended system catalogs,

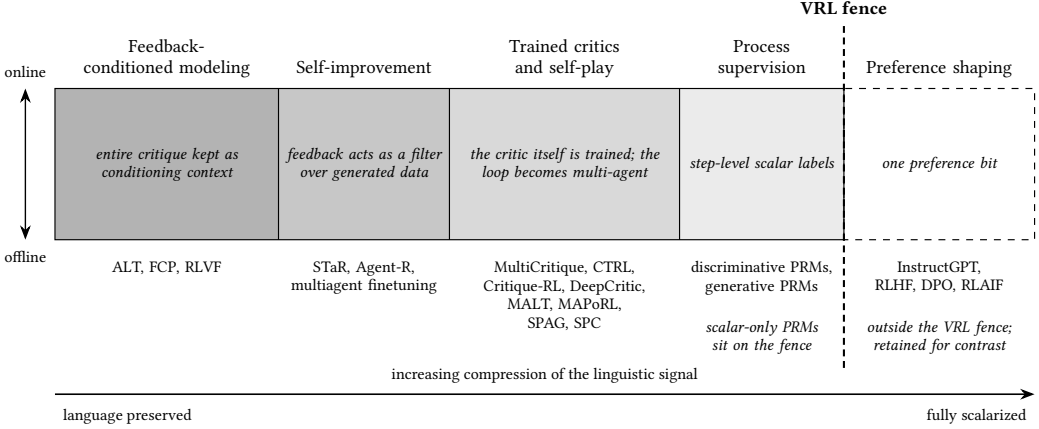


Fig. 3. Training-time methods ordered by how much linguistic structure survives into the parameter update. The dashed fence places scalar-only preference optimization outside VRL and scalar-only process supervision on its boundary. Online and offline collection cut across every band.

benchmark results, memory-management variants, and the full mechanism diagram appear in the electronic supplement.

6 Pillar 3: Language as Learning Signal

The third pillar covers signals that persist through parameter updates. We organize its methods by how much linguistic structure survives into training. Feedback-conditioned modeling retains an entire critique; self-improvement uses feedback to filter generated data; trained critics and multi-agent learning optimize the producer of feedback; process supervision localizes judgments to steps; and preference shaping compresses a judgment to one comparative bit. Richer signals preserve actionable information but require a learner capable of consuming text, while scalar compression enables mature optimization machinery at the cost of expressiveness. An orthogonal online-offline axis records whether feedback is collected from the current policy or inherited from a fixed corpus. Figure 3 summarizes both distinctions.

6.1 Feedback-Conditioned Modeling

At the least-compressed end, the learner receives the critique together with the response it should produce. ALT shows why retaining the critique matters, and the feedback-conditional policy formalizes training as maximum likelihood over response-feedback pairs followed by optional online bootstrapping [166, 172]. This family preserves corrective detail and supports targeted scope, but it also risks teaching indiscriminate compliance with inaccurate feedback.

6.2 Self-Improvement

Self-improvement uses language as a filter over model-generated trajectories. STaR retains reasoning paths that reach correct answers, while Constitutional AI filters revisions against written principles [12, 332]. The approach scales cheaply because training consumes ordinary supervised examples. Its bottleneck is filter quality: when the same model generates and judges candidates, systematic errors can compound across rounds.

6.3 Trained Critics and Critique-Based Fine-Tuning

A trained critic makes feedback production an explicit capability. CTRL optimizes a critic for the downstream correction it induces, while DeepCritic combines deliberate critique with reinforcement learning over step labels [302, 314]. The design is useful when a frozen general-purpose judge limits improvement, but critic evaluation must separate helpfulness from discriminability. A critic that produces persuasive but poorly localized feedback can improve revisions while remaining an unreliable training signal.

6.4 Multi-Agent and Self-Play Training

Jointly training feedback producers and consumers turns the loop into a multi-agent learning problem. MALT propagates outcome credit through generator, verifier, and refiner roles, while MAPoRL co-trains discussion participants for corrective and persuasive contributions [188, 202]. Self-play can reduce external annotation, but co-adaptation creates its own instability and may reward persuasion rather than truth. The transcript’s destination determines placement: context-only debate is deliberative, while transcripts or rewards that alter weights belong here.

6.5 Process Supervision

Process supervision attaches judgments to intermediate reasoning steps. Scalar click labels alone fail the linguistic-structure criterion, even when one score is provided per step. Generative process reward models remain inside the fence because language is consumed during reward computation, and free-form step critiques qualify when their content determines where credit lands [151, 360]. Finer granularity improves localization but raises annotation and verification cost, especially outside mathematics and code.

6.6 Preference Shaping: The Scalar Endpoint

Preference shaping collapses a comparative judgment to one bit. InstructGPT established the reward-model plus policy-optimization recipe, and DPO trains directly from preference pairs [195, 209]. These methods are retained as the compression endpoint, not as VRL proper, because the learner never consumes the rationale. Online collection can follow new policy failures; offline objectives inherit the coverage and biases of a fixed corpus.

Synthesis: compression versus optimizability: The spectrum is a conditional design rule. Preserve critiques when feedback is trustworthy and a consumer can use their structure; filter generated data when a cheap verifier exists; train critics when feedback production is the bottleneck; use process signals when localization justifies their cost; and scalarize only when throughput matters more than explanatory content. Rich feedback can improve sample efficiency, but stale offline feedback and self-generated judgments introduce coupled bias. The electronic supplement records the secondary systems, algorithmic variants, and benchmark evidence behind each band.

7 The Verbal Reward Stack

Training-time VRL depends on how an evaluation becomes the reward consumed by an optimizer. Four constructions form a progression: verifiable outcome rewards, rubric rewards, generative reward models, and process reward models (PRMs). The rungs are ordered by two properties: where linguistic structure collapses into a scalar, which we call the *scalarization boundary*, and the granularity at which the resulting signal attaches to a trajectory. Moving upward retains language later and localizes credit more finely, but increases verification cost. Table 2 summarizes the stack.

Table 2. The verbal reward stack, ordered by scalarization boundary and signal granularity.

Rung	Reward computation	Scalarization boundary	Granularity	Representative work
Verifiable outcome	Programmatic check against ground truth	At the environment; no linguistic structure in the reward	Episode	[86, 137]
Rubric reward	Judge checks instance-specific criteria; item scores pooled	At aggregation of criterion verdicts	Response	[85, 257]
Generative reward model	Judge writes principles and critique, then a verdict	At verdict emission; critique retained as an audit trail	Response	[165, 348]
Process reward	Step-level verification, increasingly verbalized	Per step, or per token at the limit	Step or token	[126, 266]

7.1 Verifiable Outcome Rewards

Reinforcement learning with verifiable rewards uses programmatic correctness checks. Tulu 3 established the open post-training recipe, and DeepSeek-R1 showed that outcome-only reinforcement can elicit verification behavior without labeled reasoning traces [86, 137]. This is the degenerate rung: scalarization occurs in the environment and no language appears in the reward. Its strengths are exactness and low cost; its limits are sparse feedback, narrow domain coverage, and evaluation sensitivity to compute budgets. Outcome verification is therefore the default only when correctness is both mechanically testable and difficult for the policy to game. Otherwise it supplies a reliable terminal label but little guidance about how a failed trajectory should change.

7.2 Rubric Rewards

Rubrics extend verification to open-ended tasks by decomposing success into instance-specific criteria. Rubrics as Rewards demonstrates that structured criteria can outperform direct holistic judging, while checklist rewards apply the same idea to instruction following [85, 257]. Static banks amortize authoring cost, dynamic criteria adapt to policy drift, and selective checking saves judge calls. In every case, scalarization occurs when criterion verdicts are aggregated, so any omitted requirement becomes invisible to the optimizer. A rubric should therefore be treated as a versioned specification, with coverage audits and updates tied to new policy failures rather than as a fixed scoring prompt.

7.3 Generative Reward Models

Generative reward models verbalize the evaluation before emitting a verdict. Generative verifiers write a rationale and benefit from sampling or voting, while DeepSeek-GRM generates principles and critiques before scoring [165, 348]. Their text can improve judgment and provide an audit trail, but the optimizer still receives a scalar unless the critique is separately routed into revision or training. Correct verdicts do not guarantee sound explanations, so critique quality must be supervised or evaluated independently. Their extra inference cost is justified when hard cases require adaptive reasoning or when the retained critique supports auditing, downstream revision, or later credit assignment.

7.4 Process Reward Models

PRMs move evaluation inside the trajectory. Math-Shepherd automated step labeling, and ThinkPRM generates a verification rationale for each step [126, 266]. Fine granularity can localize the first error and improve credit assignment, but noisy step labels and weak transfer beyond curated reasoning tasks remain central limitations. Generative PRMs connect this rung to verbal feedback because their linguistic reasoning participates in computing each local score. They are most useful when intermediate steps have stable semantics and can be checked independently; otherwise the apparent precision of a per-step score can exceed the reliability of its annotation.

7.5 The Scalarization Boundary

Every rung ultimately sends numbers to the optimizer. Verifiers scalarize at the environment, rubrics after criterion aggregation, generative judges at verdict emission, and PRMs per step. What disappears is the repair information carried by language: which failure occurred, where it occurred, and what should change. Finer granularity narrows that loss but does not eliminate it; language-space optimizers do so by applying the critique as text.

The boundary is also where exploitation concentrates. A policy can target whatever a verifier, rubric, or judge fails to communicate through its scalar output. Outcome checks invite shortcut reasoning, static rubrics leave exploitable omissions, generative judges can pair correct verdicts with unsound critiques, and noisy step labels corrupt PRM training. The practitioner rule is therefore to choose the lowest-cost rung that captures the distinctions the task requires, then test the scalarization boundary for omitted criteria, judge error, and hacking. Extended reward-model variants, quantitative results, and defense evidence appear in the electronic supplement.

8 Credit Assignment and Optimization with Verbal Signals

Credit assignment asks which parts of an agent’s behavior deserve blame or praise for a delayed outcome. Language makes this problem harder because an LLM action may span thousands of tokens and several turns, yet it also offers a distinctive solution: a critique can name the faulty step and the needed repair, information that no scalar carries. We organize the literature by the granularity at which credit lands (outcome, step, turn, token, or memory operation) and by its carrier (redistributed scalar, model-internal attribution, or critique text). These choices determine which optimizer can consume the signal and which assumptions must hold.

8.1 Outcome, Process, and Reflective Credit

Three levels recur. *Outcome credit* scores only the final trajectory. It is cheap and exact for verifiable tasks, which makes it suitable for group-comparison methods, but broadcasting one scalar over every token is maximally coarse [86]. *Process credit* judges intermediate steps; process supervision and process reward models make a delayed outcome locally actionable [151, 255]. *Reflective credit* uses the content of an evaluation ℓ , rather than only its scalarization $\sigma(\ell)$, to determine where and how an update lands. Stored reflections steer later attempts, critiques can be aligned to the spans they indict, and feedback-conditioned policies can retain text as a conditioning variable instead of compressing it [172, 228, 263]. Outcome credit ranks trajectories, process credit ranks steps, and reflective credit can state what to change.

8.2 Mechanisms and Selection Rules

Four mechanisms push sparse outcomes toward the responsible behavior. Temporal abstraction shortens the horizon by treating token spans or turns as macro actions [28, 377]. Reward redistribution preserves a trusted sequence-level scorer but reallocates its value across tokens or time

Table 3. Families of credit-assignment mechanisms in VRL, ordered by how much linguistic content the credit carrier consumes.

Family	Credit carrier	Granularity	Representative work
Temporal abstraction	scalar reward over macro actions or turns	span, turn	[28, 282, 377]
Reward redistribution	holistic scalar re-allocated after the fact	token or time step	[145, 208]
Model-internal attribution	explainability scores or attention flow	token	[58, 133]
Information-theoretic	belief update about the final answer	turn	[261]
Generative process critique	step-wise critique converted to credit	step, token	[163, 263, 299, 372]
LLM-as-annotator	subgoal and action judgments by an external LLM	action, sub-goal	[153, 206, 364]
Memory-conditioned	credit assigned to memory operations	memory write	[308, 367]

steps [145, 208]. Model-internal attribution derives token importance from additive explanations or information flow, which makes the shaping signal inspectable but ties it to the reward model’s internals [58, 133]. Critique-derived methods generate stepwise diagnoses and convert them into token or step credit, gaining semantic localization without a separately labeled dense reward model [163, 299, 372].

The choice follows the artifacts available before training. Temporal abstraction is the cheapest first move when a trusted outcome reward exists. Redistribution is appropriate when the reward model is the only trusted component; attribution is preferable when the credit trace must be inspected. Critique-derived credit is the only family that can both localize and name an error, but it is justified only when critic quality can be audited. LLM annotation extends the same idea to non-language policies by judging subgoals, transitions, or team contributions, moving the principal failure risk into the annotator [153, 206, 364].

8.3 Long Horizons and Memory

Multi-turn interaction introduces two nested questions: which turn helped, and which tokens within it. Hierarchical learners combine turn-level values with within-turn policy gradients; explicit turn rewards are lighter when intermediate outcomes are checkable; information-gain rewards use the policy’s belief update when no external reward model is available [261, 282, 377]. Persistent memory adds a state-conditioned credit problem. Because memory writes change the effective environment seen by later rollouts, group-relative comparisons become biased unless memory operations are compared from a shared intermediate state [308, 367]. Turn-level rewards are therefore an optional refinement, but memory-conditioned credit is mandatory once the agent writes persistent state.

8.4 Optimizer Pairing

Feedback form constrains the optimizer. Executable rewards pair naturally with online policy gradients; pairwise judgments with offline preference objectives; filtered or feedback-conditioned text with supervised fine-tuning; and step-level judgments with process reward models [151, 172, 209, 220]. Group comparison adds an assumption that rollouts share an environment and reward scale, which turn structure and memory writes can violate [86, 282, 308]. Language-mediated

states also risk information loss, and language-generated actions alter exploration. Planner-imitated subgoals, for example, require explicit exploration to avoid linear regret [95]. The practitioner should therefore choose the feedback carrier first and treat the optimizer as a downstream consequence.

8.5 The State of Theory

General theory remains thin. The main formal anchor is learning from language feedback through transfer eluder dimension [307]. Partial results cover regret for language-mediated hierarchies, optimality preservation under feature-additive shaping, redundancy reduction for latent rewards, and the derivation of implicit step rewards [95, 133, 163, 208]. Missing are conditions under which critique-derived token credit preserves the optimal outcome policy and bounds on how verbal localization errors compound through training. This gap is central to the research agenda in §13.

9 Language-Space Optimizers

The improvement operator of §2 can revise one output, write persistent memory, or update model parameters. Language-space optimization occupies the middle ground: an outer optimizer treats a prompt, context, playbook, or scaffold as an editable system parameter and improves it against a task metric. It is therefore not a fourth pillar. The optimized text persists across episodes like a learning artifact, but a frozen model consumes it through the context window. This semi-parametric view also clarifies the analogy to numerical optimization: critique supplies directional information, text is the parameter, an LLM edit is the update, and execution traces route credit through compound systems [42, 297].

9.1 Mechanism Families

Four families differ in the information supplied to the update. *Score-driven search* proposes candidates and retains those with higher task scores; OPRO places previous candidates and scores in context so the optimizer can exploit its search history [311]. *Textual-gradient methods* replace a scalar score with a diagnosis and propagate it to the responsible prompt or program component; TextGrad is the canonical realization, while trace-based methods extend the idea to compound graphs [331]. *Reflective and evolutionary methods* maintain diverse candidates, diagnose failures, and select complementary improvements; GEPA shows that richer diagnoses can achieve stronger sample efficiency than policy-gradient updates when rollouts are scarce [3]. *Hybrid methods* alternate text edits with weight updates, using prompt evolution to escape failures and then distilling the gain into the model; P²O exemplifies this division of labor [169]. Detailed systems and quantitative comparisons appear in the electronic supplement.

The families also assign credit at different resolutions. Score-only search credits a whole candidate, which is simple but expensive when pipelines contain many coupled prompts. Textual gradients use execution traces to localize blame to a component. Reflective populations trade precise attribution for diversity, retaining several explanations or solutions when no single update dominates every objective. Hybrids add a second choice: whether a discovered improvement should remain explicit in context or become procedural knowledge in weights. This credit unit, candidate, component, population, or parameter update, is often more consequential than the particular LLM used as optimizer.

9.2 Selection Rules and Failure Modes

Language-space optimization is preferred when weights or gradients are inaccessible, supervision is scarce enough that explanatory feedback must extract more information per rollout, or the learned artifact must remain inspectable and editable. Trace-aware textual gradients are especially useful when a compound pipeline needs component-level credit. Population methods help when several

objectives or qualitatively different solutions must be retained. Weight updates remain preferable when abundant data amortizes training, the target knowledge is procedural, or deployment cannot afford a growing context. Hybrid methods fit the intermediate case, where an interpretable prompt discovers a behavior that must later be internalized.

The same properties create predictable failures. A reflective optimizer can misdiagnose the cause of an error and move in the wrong direction [176]; wholesale context rewriting can collapse useful detail [350]; multi-objective critiques can dilute task focus [54]; and poisoned feedback directly poisons the update channel. Two contrast cases mark the definitional fence: text optimized by actual numeric gradients or by selection signals with no linguistic meaning is prompt optimization, but not verbal reinforcement learning [55, 265]. The verbal channel primarily buys sample efficiency, audibility, and an interface for structured credit, not a guarantee of higher attainable performance.

10 Language Feedback in Embodied and Multimodal Settings

Embodied systems receive images, video, and proprioception and emit motor actions, so language may appear only in the feedback channel. Here *verbal* denotes the structure of the consumed signal, not its carrier: typed text, transcribed speech, or a vision-language model’s explanation qualifies when compositional language changes behavior. A score derived from the same observation does not. Language-conditioned control also remains outside scope when the instruction specifies the task but does not evaluate prior behavior.

10.1 Four Embodied Roles

Corrections map a phrase to a policy change during execution. LILAC grounds real-time utterances in a low-dimensional control space, illustrating the central challenge: the system must identify both what failed and which motor degree of freedom should change [51]. Corrections can persist as memory or training data, but their taxonomy assignment follows where the language is consumed.

Language-to-reward uses linguistic feedback to define or revise an objective before policy optimization. Eureka verbalizes training statistics and mutates reward code, making reward design itself a language-space optimization loop [177]. This family fits simulators that expose state and optimization, but inherits reward misspecification and hacking risk.

Vision-language rewards and critics judge behavior when only pixels are available. RL-VLM-F learns rewards from vision-language preference labels over observations [277]; process variants provide denser temporal credit. Their main risk is partial observability: a judge may recognize objects while missing sequence, motion, or causal progress.

Failure reasoning produces an explanation that a planner or controller can use for recovery. AHA detects failures in free-form language and improves downstream planning, verification, and reward refinement when inserted into the loop [64]. Unlike a scalar reward, the explanation can identify the failed subtask and suggest a repair, but it still requires grounding back into action.

These roles can coexist in one system without becoming interchangeable. A spoken correction first steers the current action, then becomes memory if stored, and finally becomes a learning signal if logged for retraining. Likewise, a vision-language explanation remains deliberative while it guides replanning, but becomes objective-side supervision when converted into reward code. Classification follows the consumed representation and update locus at each use, not the sensor or model that produced it.

10.2 Selection Rule

Choose human corrections when a person can intervene online; generated rewards when a simulator exposes state; vision-language rewards when observation is pixel-only and scalable supervision is required; and failure critics when autonomous recovery matters. These roles enter different parts

of the decision problem: corrections and explanations change the policy-side decision, generated rewards define the objective, and learned visual judges supply a training signal. Across all four, feedback phrasing and diversity are design variables rather than presentation details [292]. The modality changes the grounding burden, not the survey’s inclusion rule. Extended real-robot, reward-model, and failure-recovery evidence appears in the electronic supplement.

11 Evaluation and Benchmarks

Evaluation must separate feedback *quality*, whether a signal is accurate, calibrated, and unbiased, from feedback *utilization*, whether the receiving system improves when that signal is supplied. The axes are independent: a correct critique can be ignored, while a reward model can score well on held-out preferences yet train a worse policy [129]. Treating end-task accuracy as a single summary obscures whether failure lies in the signal, the receiver, or their interface.

11.1 Measuring Feedback Quality

Quality benchmarks should match the signal’s granularity and operational role. Outcome-preference benchmarks test reward-model ranking; RewardBench 2 is an anchor because it validates benchmark scores against best-of- N selection and PPO outcomes rather than assuming pairwise accuracy transfers [182]. Judge meta-evaluation tests verdict consistency and bias; JudgeBench ties labels to objective correctness and finds even strong judges only slightly above chance on hard pairs [252]. Critique benchmarks score error identification and correction; CriticBench evaluates generation, critique, and repair jointly [155]. Process benchmarks localize step-level errors; ProcessBench asks for the first erroneous reasoning step, directly testing the signal consumed by process supervision [362]. Embodied instruments test whether vision-language judges understand trajectories rather than final frames; ViSTa exposes severe weakness on sequential tasks [291]. These families are not interchangeable: a judge validated for reranking is not automatically a sound training reward or a useful critic.

Validity requires more than difficulty. Pairwise accuracy should predict the downstream use, and test distributions should expose length, style, refusal, and format. Process evaluation must separate error localization from final verdict because a wrong location misassigns credit. Generative critiques should separate factual correctness from actionable specificity. Report uncertainty and judge disagreement when small differences determine system selection.

11.2 Measuring Feedback Utilization

Utilization benchmarks score the receiver under a controlled signal. RealCritic measures a critique through the correction it induces and shows that plausible open-loop critiques can fail to improve self-revision [253]. Interactive environments isolate feedback uptake across attempts; LLF-Bench uses post-action language as the learning signal and paraphrases feedback to prevent task recognition from masquerading as learning [41]. Feedback Friction supplies near-oracle feedback yet finds that solvers still resist incorporating it, demonstrating that utilization can remain the bottleneck after quality is nearly solved [120]. Long-horizon settings add retrieval and temporal credit: MemoryAgentBench tests whether accumulated verbal experience is retrieved, used, and selectively forgotten across episodes [104]. The detailed benchmark matrix and evidence catalog are provided in the electronic supplement.

A clean utilization study varies the signal while holding task, receiver, and budget fixed. A no-feedback control measures prior capability; an oracle condition estimates attainable gain; irrelevant feedback tests resistance to persuasive noise. Report improvement per interaction or token, and test several receivers because one critique can help a capable model yet overwhelm a weaker one.

11.3 Measurement Gaps and Minimum Reporting Protocol

Current evidence is strongest for short, verifiable, English, single-turn tasks and weakest for personalized, multilingual, long-horizon, adversarial, and embodied feedback. Judge-scored results inherit the judge’s consistency, bias, and aggregation uncertainty. Embodied benchmarks largely grade signal quality and rarely test whether a motor policy can use verbal feedback. Static evaluation also misses failures that emerge only when outputs change later observations or rewards.

These gaps limit claims of generality. Results from a short answer verifier do not establish trajectory-level credit, and an English critique benchmark does not establish that the same feedback interface transfers across languages or cultures. Evaluation should therefore state the intended deployment regime and treat movement beyond the benchmark’s signal type, horizon, modality, or interaction structure as an explicit extrapolation.

A minimum reporting protocol follows. (1) Report feedback quality and utilization separately. (2) Validate a quality benchmark against its downstream use, such as best-of- N selection, policy optimization, correction success, or task completion. (3) Audit judges and verifiers for consistency, bias, and adversarial robustness before using their verdicts as evaluation or reward. (4) State the signal type, granularity, interaction stage, and receiver, so results transfer only to mechanisms with the same role. When possible, include a no-feedback control and an oracle-feedback upper bound; their gap separates absent information from failed uptake. This protocol does not yet solve the lack of standardized utilization metrics, but it prevents quality and utilization failures from being conflated.

12 Safety and Robustness of Feedback Channels

Language is both supervision and an attack surface. Threats differ by who corrupts the signal and where it is consumed: an external adversary can manipulate a judge, observation, or training record; the policy can exploit its evaluator; and preference learning can inherit sycophancy without a deliberate attacker. The decomposition identifies which link of the verbal reward stack must be audited and why static capability evaluation is insufficient.

Downstream authority determines severity. A manipulated leaderboard changes a ranking; the same verdict used for learning changes a policy; an injected observation can trigger an external action. Medical, email, coding, and computer-use agents therefore need stricter controls because a linguistic error can become physical, financial, or privacy harm.

12.1 Robustness of LLM Judges

Injected phrases can force an LLM judge to prefer attacker-controlled outputs regardless of substance, corrupting evaluation, search, and training rewards. Optimized attacks outperform manual injections and known-answer or perplexity defenses [225]. Comparative scoring and judge committees reduce exposure, but do not remove transferable artifacts or prompt-template sensitivity.

12.2 Injection into the Observation Loop

Tool outputs, webpages, and retrieved documents can carry indirect instructions that redirect an agent. InjecAgent demonstrates this attack against tool-integrated ReAct agents [337]. The defense boundary is therefore not the model prompt alone: untrusted observations require provenance, privilege separation, and constrained tool execution.

12.3 Poisoning of Training and Optimizer Feedback

Preference pairs and verbal optimizer feedback can be poisoned upstream. DPO backdoors succeed at lower poisoning rates than PPO-based pipelines in controlled comparisons [204], while language-space optimizers are especially exposed because a manipulated critique is their update direction. Data provenance and feedback-source trust must be reported with performance.

12.4 Policy Exploitation and Sycophancy

Even a clean channel can be exploited. Interactive feedback loops enable in-context reward hacking that static datasets cannot reveal [198]; underspecified rubrics similarly reward partial or superficial satisfaction. Sycophancy is the systemic counterpart: human and learned preference models can favor convincing agreement over correctness, steering optimization away from truthfulness [222]. Both require behavioral stress tests, not only held-out reward accuracy.

12.5 Defense Synthesis

Defenses fall into detection, signal reshaping, and system design. Detection alone is brittle because adaptive attacks optimize against the detector. Signal reshaping hardens what the reward credits, as adversarial verifier training does against master-key responses [361]. System design limits what corrupted text can cause through instruction hierarchy, provenance marking, least-privilege tools, and independent checks. Three rules survive across studies: comparative judgments are generally safer than absolute scores; stronger or multiple judges reduce but do not eliminate exploitation; and feedback-channel robustness must be measured under interaction, where attacks and reward hacking compound. A minimum safety report should name the trusted source, attack surface, downstream authority, stress tests, and residual failure mode. The electronic supplement catalogs the supporting attacks, quantitative results, and defenses.

Defense should follow the channel from source to effect. At ingestion, authenticate sources and preserve provenance instead of mixing trusted instructions with untrusted observations. At interpretation, compare independent judgments and test decisions under paraphrase and stylistic changes. At execution, gate high-impact tools, restrict permissions, and confirm irreversible actions. At learning time, inspect poisoning sensitivity and train rewards against high-scoring low-quality outputs. Evaluate the complete loop because reasonable filters, judges, and policies can still compose into an exploitable system. Report the adaptive attacker, utility cost, and authority available after compromise.

13 Practitioner Guide, Related Surveys, and Research Agenda

This section turns the taxonomy into a mechanism-selection rule, positions the survey against eighteen neighboring frameworks, and distills the open questions exposed by the synthesis.

13.1 Choosing a Verbal-Feedback Mechanism

Choose the feedback form before the optimizer. Four questions determine the mechanism in Figure 4. First, are model weights accessible? If so, use a compiled reward or rubric when outcomes are mechanically verifiable, monitoring objective hacking; otherwise, if verbal feedback is plentiful, train on it directly and monitor sycophancy and filter bias [172]. Second, if weights are inaccessible but latency permits iteration, use deliberative feedback and ground the critic in tools or tests rather than relying on circular self-critique [80, 124]. Third, when iteration is too costly but tasks recur, persist distilled lessons and audit memory for stale or poisoned entries. Finally, if none of these preconditions holds, invest in grounding the task, state, or action interface before building a feedback loop. Each choice fixes a dominant risk as well as an optimization family.

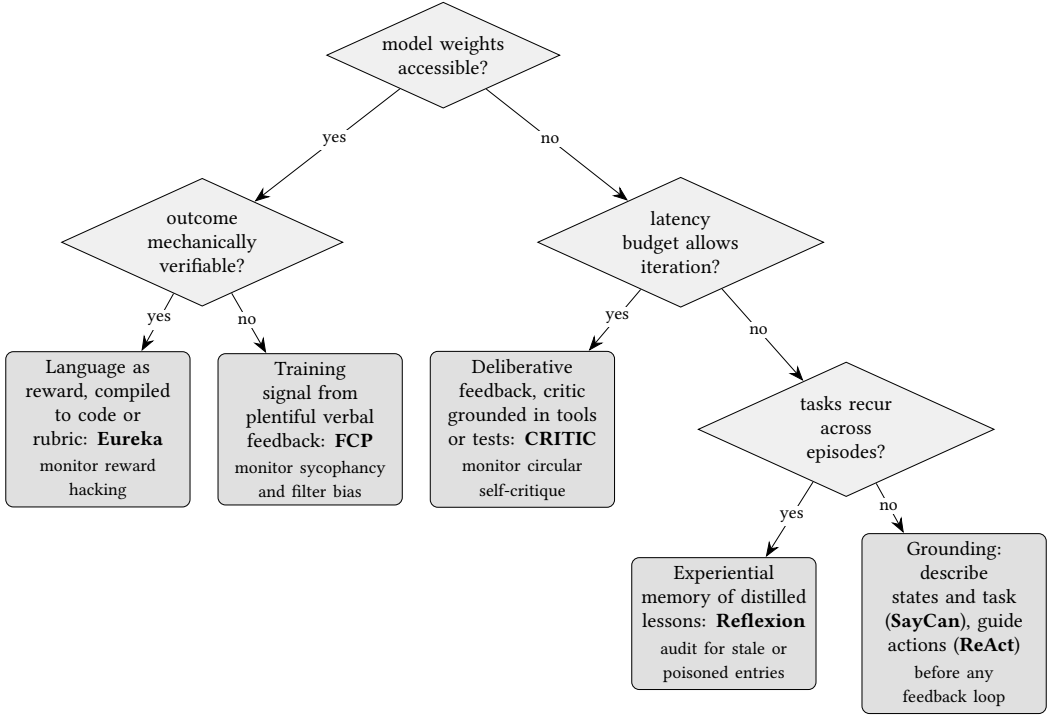


Fig. 4. Choosing a verbal-feedback mechanism through four ordered questions. Each leaf names a representative mechanism and its principal monitoring burden; the final leaf covers grounding before any feedback loop.

13.2 Comparison with Prior Surveys

To our knowledge, this survey is the first organized around the verbal signal itself: which component of the decision problem a linguistic artifact modifies and when it takes effect. Table 4 makes the positioning explicit against eighteen prior surveys and frameworks. Most shelf neighbors organize by mechanism (correction timing, evolution phase, rollout stage), by agent component (memory, capability, module under optimization), or by algorithm family (RLHF, preference optimization, agentic RL); the nearest exception, the feedback typing of Fernandes et al. [74], does take the signal as its axis but predates the agentic signals surveyed here. None combines a signal-centric axis with a formal framework, coverage of all three stages (problem definition, inference, and training), and treatment of the feedback channel’s safety; that fourfold combination is the position this survey occupies.

Table 4. Positioning against prior surveys and frameworks. Feedback types: S = scalar, P = preference, V = verbal; a letter in parentheses marks a feedback type the work treats only partially. Stages: D = problem definition and grounding, I = inference, T = training. Formal (formal framework), Guide (prescriptive practitioner guidance), and Safety (feedback-channel safety): Y = yes, P = partial, N = not claimed. All cells are graded from each work’s abstract and stated contributions, so N records the absence of a claim there, not a judgment of the work’s full text.

Survey	Scope	Organizing axis	Feedb.	Stages	Formal	Guide	Safety
Luketina et al. [170]	language-informed RL (pre-LLM)	task setting	S	T	N	N	N
Pan et al. [199]	LLM self-correction	correction timing	V, (S)	I, T	N	P	N
Kamoi et al. [124]	self-correction critique	research question $\times$ feedback source	V	I, T	N	Y	N
Fernandes et al. [74]	feedback for generation	format $\times$ objective $\times$ use	S, P, V	I, T	Y	P	P
Wang et al. [269]	RL-enhanced LLMs	training technique (RLHF, RLAI, DPO)	S, P	T	N	P	N
Xiao et al. [298]	preference optimization	research questions	P	T	P	P	N
Zhang et al. [355]	agent memory	design, evaluation, application	(V)	I	P	P	N
Zhang et al. [351]	test-time scaling	what/how/where/how well	(S), (V)	I	P	Y	N
Gao et al. [78]	self-evolving agents	what/when/how to evolve	S, V	I, T	P	P	Y
Fang et al. [69]	self-evolving agents	component under optimization	(S), (V)	I, T	Y	P	Y
Du et al. [62]	LLM-agent optimization	parameter-driven vs. parameter-free	S, (V)	I, T	N	P	N
Zhang et al. [342]	agentic RL	capability $\times$ domain	S, (P)	T	Y	P	N
Srivastava and Aggarwal [237]	RL for LLMs	reward $\times$ feedback $\times$ optimization	S, P, (V)	T	Y	Y	P
Zhang [339]	LLM-RL credit assignment	granularity $\times$ methodology	S	T	N	Y	N
Ji et al. [118]	alignment	reward-mechanism dimensions	S, P	T	Y	Y	N
Wu [289]	learning from rewards	reward model $\times$ strategy $\times$ stage	S, P, (V)	I, T	N	P	N
Surana et al. [247]	RL rollout design	rollout stage	S, (V)	T	Y	Y	P
Feng et al. [72]	NLRL (framework)	RL-component analogues in language	V	I, T	Y	N	N
This survey	verbal RL	the signal: what it modifies, when it acts	V, (S), (P)	D, I, T	Y	Y	Y

13.3 Research Agenda

The synthesis exposes ten linked gaps. Theory must identify what language contributes beyond scalarization, while systems work must make feedback trustworthy and usable.

- (1) Characterize when verbal feedback is more sample efficient than scalar reward and extend current separations to intermediate formats [307].
- (2) Establish convergence conditions for compiled and rubric-shaped rewards under objective mis-specification.
- (3) Assign free-form critiques to the responsible spans, steps, and decisions rather than only to outcomes [263].
- (4) Measure information lost when a critique is compressed to a preference label or score.
- (5) Authenticate feedback provenance and evaluate adaptive injection, memory poisoning, and reward manipulation [336].
- (6) Report feedback quality separately from the receiving model’s ability to use accurate feedback [120].
- (7) Train calibrated critics for error localization and actionable correction instead of reusing the generator uncritically [184].
- (8) Standardize machine-readable tool feedback that separates task errors from infrastructure failures.
- (9) Formalize when persistent memory or replay crosses the boundary from inference to training.
- (10) Test transfer, validity, and affected-party harms in embodied and high-stakes deployments [222].

14 Conclusion

This survey organizes verbal reinforcement learning by where a natural-language signal enters a decision problem and what it modifies when it takes effect. The resulting pillars separate grounding at problem-definition time, deliberative feedback during inference, and learning signals that persist through training. A two-criterion fence excludes plain instruction following and feedback scalarized before use, while the assignment rule places hybrid methods by each signal’s point of effect. This signal-centric view connects topics often treated separately: reward construction, critique, memory, credit assignment, language-space optimization, evaluation, and feedback-channel safety.

The practical implication is that feedback format cannot be selected independently of its consumer. A verifier, free-form critique, stored lesson, and training rationale carry different information, require different credit mechanisms, and expose different attack surfaces. The field therefore needs theory that measures what survives scalarization, evaluations that separate feedback quality from utilization, and provenance-aware interfaces that make external feedback auditable. These priorities determine whether language becomes a dependable control signal rather than another unverified model output.

14.1 Limitations

This article synthesizes representative work rather than exhaustively enumerating every system. Its taxonomy is an organizing lens, not a strict partition, because one system may consume several signal roles. Scope is restricted to explicit textual feedback; spoken and richer multimodal feedback fall outside the fence even when observations are visual. The survey contributes no new benchmark or controlled comparison, and formal guarantees remain localized. Evidence for real-world transfer is still sparse, especially in embodied and high-stakes settings, so successful demonstrations do not establish broad reliability. Where the literature supplies no guarantee or comparative evidence, we state the gap rather than infer a conclusion.

A Extended Foundations and Practice

This supplement preserves detailed historical, boundary, taxonomy, practitioner, positioning, and agenda material that supports the synthesis in the main article.

A.1 Terminology and Application Breadth

The phrase *verbal reinforcement* predates machine learning. In mid-twentieth-century behavioral psychology it denoted approving utterances used to shape a subject’s responses [82, 134]. In the LLM era, Shinn et al. [228] used “verbal reinforcement learning” for agents that reflect on task feedback and preserve those reflections in episodic memory. The main article generalizes that mechanism-specific coinage through its two membership criteria.

Natural Language Reinforcement Learning [72] is the nearest adjacent formalism. It replaces scalar RL objects with language counterparts, including narrative value functions and language-space policy iteration. Earlier work on language-informed RL instead treated language as a task input or auxiliary knowledge source [22, 170]. The historical shift is therefore from language informing a scalar-reward learner to language serving as evaluation, revision, memory, and sometimes the optimizer trace itself.

The application surface is broad. Language grounds high-level instructions in physical affordances [4]; self-reflection and iterative critique improve program generation [180, 228]; and verbal-feedback mechanisms now appear in coding agents [121, 312], scientific discovery [21, 167], robotics [262], mathematical reasoning [94, 160, 224], clinical decision support [113, 375], and education [5, 207]. These examples establish breadth, not uniform maturity or evidence quality.

A.2 Neighboring Formalisms and Extended Boundary Cases

Two neighboring formalisms clarify what the framework adds. A feedback-conditional policy [172] learns a response distribution conditioned on feedback and therefore keeps the feedback string inside the objective. Memento [367] instead makes memory the learned object in a memory-augmented Markov decision process, with adaptation occurring through case writing and retrieval rather than fine-tuning. CoALA [244] organizes the location of memory, action, and decision modules inside an agent. The signal-centric view is complementary: it classifies what flows through those modules and what the signal modifies.

The POMDP notation has hard limits. Open-ended web and tool-use tasks may provide neither an explicit transition kernel nor an executable reward. Dialogue may lack a compact Markov state, and persistent memory changes later episodes, weakening stationarity. Multi-turn language interaction also has two levels, with utterance decisions layered over token decisions [1, 377]. In these regimes, the formalism supplies vocabulary rather than permission to import POMDP guarantees.

Membership is adjudicated by tracing dataflow to the scalarization boundary. A rationale-annotated preference qualifies when the rationale enters a revision or training objective, but not when only its preference bit survives. A step-level critique qualifies when downstream machinery converts its content into credit [299]; it reduces to scalar process supervision when only per-step scores survive [151]. A generative process reward model may reason in language before emitting a score [360]. Its linguistic structure is consumed inside reward computation, while the optimizer still receives scalars. Routing the critique itself into revision or supervision moves the boundary later [278].

Current theory covers only selected regimes. The transfer-eluder analysis of Xu et al. [307] separates rich feedback from scalar reward under assumptions that make latent-objective learning possible. The hierarchical analysis of He et al. [95] shows that language-mediated planning still requires exploration. Neither result proves that arbitrary critique, memory, or language-shaped

Table 5. Detailed overview of the three verbal reinforcement learning pillars.

Axis	Grounding signal	Deliberative feedback	Learning signal
When	Problem-definition time	Inference time	Training time
Modifies	Task, state, action, and reward specification	Outputs, context, or memory	Model weights and training data
Persistence	Defines the task	One episode or persistent memory	Future interactions
Mechanisms	Environment and reward specification	Prompting, critique, memory, search	Conditioned or filtered training; on-policy and multi-agent RL
Bottleneck	Grounding fidelity	Feedback quality and compute	Signal compression and filter quality

reward improves a policy. No measurable certificate yet reveals how much of a linguistic artifact a consumer actually exploits, and no general bound covers self-generated, noisy, strategic, or adversarial feedback.

A.3 Detailed Taxonomy Aids

Table 5 expands the compact three-pillar definition by making persistence, mechanisms, and bottlenecks explicit.

Temporal scope is preferable to source or modality because the same sentence can produce different effects at different points of use. “The gripper pressure is too high” constrains the problem when embedded in a task specification, repairs a plan when delivered during execution, and shapes learned behavior when consumed by a reward-code generator. A source taxonomy would place all three together even though their failure modes differ. Temporal scope instead groups grounding fidelity, deliberative circularity, and training-time information loss with the mechanisms that must address them.

A.3.1 Working Example: A Coding Agent. Consider an agent resolving a GitHub issue [275]. The issue description supplies the goal, repository files form the observable state, and tests define success. During execution, tracebacks and test messages act as deliberative feedback: the agent reads them and revises its patch. If those trajectories later enter fine-tuning, the same messages become learning signals. This is coexistence, not a required pipeline. A traceback is deliberative when the running agent conditions on it and a learning signal when a training process consumes it. Classification follows each use of the signal, not the identity of the surrounding system.

A.4 Extended Practitioner Matrix

Table 6 expands the decision tree with preconditions, cost, and monitoring obligations. Mechanism selection precedes optimizer selection because each feedback form restricts the compatible update families.

A.5 Detailed Positioning Against Prior Surveys

Two works anchor the history. Luketina et al. [170] treated language as information supplied to a scalar-reward learner. Natural Language Reinforcement Learning [72] extends RL components into language space but remains one value-centric formal instantiation. The signal-centric framework covers both while distinguishing the stage and consumer of each artifact.

Table 6. Practitioner guidance: when to use language in each role, what it costs, and what to monitor.

Language as	Preconditions	Latency and cost	Dominant risk	Representative
Reward	Success expressible as checks; simulator or executor available; training budget accessible	Offline compilation; cheap per episode	Objective mis-specification; reward hacking	Eureka [177]; Text2Reward [300]
State or task grounding	Raw observations complex or task underspecified; language abstracts them faithfully	Per-step description cost	Information loss; state aliasing	ALFWorld [229]; Say-Can [4]
Action guidance	Open action space; actions executable and checkable	Per-step generation cost	Exploration collapse; invalid actions	ReAct [320]; Prompt [233]; Code-Act [273]
Deliberative feedback	No weight access; iteration affordable; grounded critic available	Multiplies inference cost	Circular critique; unbounded loops	Self-Refine [180]; CRITIC [80]; ToT [319]
Memory	Tasks recur; lessons reusable	Cheap writes; retrieval overhead	Error persistence; poisoning	Reflexion [228]; ExpeL [359]; Voyager [262]
Training signal	Persistent improvement needed; feedback plentiful; weights accessible	Highest upfront cost	Sycophancy; filter bias	FCP [172]; STaR [332]; generative PRMs [360]

A mechanism-centered cluster fixes the feedback type and organizes its use. Pan et al. [199] classify correction timing, Kamoi et al. [124] analyze when self-correction succeeds, and Zhang et al. [351] treat feedback within test-time scaling. Fernandes et al. [74] provide the closest prior signal typing through feedback format, objective, and use, but predate agentic memory, rubric rewards, and verifiable-reward training.

A component-centered cluster organizes memory, self-evolution, or optimization location. Memory surveys treat persistence as a module [355]; self-evolution surveys classify the component that changes [69, 78]; and agent optimization surveys split parameter-driven from parameter-free updates [62]. The signal-centric view instead follows one critique across context revision, memory, and weight updates.

A reward-centered cluster begins after scalarization. Surveys of RL-enhanced language models and preference optimization emphasize RLHF, RLAIF, or DPO [269, 298]. Other treatments organize alignment by reward design [118], learning by reward model and stage [289], rollout design by pipeline location [247], or credit assignment by granularity and method [339]. These views provide depth after a reward or training mechanism has been chosen. The main article’s decision rule operates earlier by asking whether language should remain language and which consumer should receive it.

A.6 Supporting Evidence for the Research Agenda

- (1) **Sample efficiency.** The transfer-eluder result separates rich feedback from reward [307], but intermediate formats such as rationale-bearing preferences and step critiques lack comparable complexity measures. Noisy-oracle analyses could connect critic error rates to learning efficiency [155, 241].
- (2) **Optimality under language-shaped rewards.** Compiled and rubric rewards place specification error inside the optimized objective. Existing reward-hacking evidence [27] does not yet yield conditions under which the intended behavior remains optimal.

- (3) **Temporal credit assignment.** Scalar process rewards attach values to steps [151]; textual gradients attach critique to spans [263]. A general rule connecting free-form critique to responsible decisions remains absent.
- (4) **Information retention.** A rate-distortion account could measure what a scalar score or preference label discards relative to its generating critique, clarifying when DPO [209] suffices and when feedback-conditioned training [172] retains necessary structure.
- (5) **Provenance and robustness.** Adaptive attacks bypass feedback defenses [336], including injected tool output [226] and poisoned memory [57]. Systems need source authentication, trust assignment, and benchmarks that score adversarial feedback directly.
- (6) **Quality versus utilization.** Models may fail to use accurate feedback [120]. Producer-side benchmarks exist [138, 155, 362], but utilization still lacks a standard protocol.
- (7) **Feedback-tuned models.** Dedicated critics can outperform generator self-critique [184, 271]. Training objectives should target localization, actionability, and calibration rather than only verdict accuracy.
- (8) **Machine-readable interfaces.** Ambiguous tool output causes agent failures [13]; agent-oriented interfaces help [312]; and tool quality bounds refinement [192]. Interfaces should separate task errors from infrastructure failures.
- (9) **Inference versus training.** The transient-versus-durable distinction for search rewards [281] should extend to every signal. Persistent or replayed memory [355] makes the boundary particularly difficult.
- (10) **Transfer and affected parties.** Self-correction depends on reliable external signal or favorable tasks [124], while incorrect feedback induces sycophancy [222]. Embodied and high-stakes deployment therefore requires transfer studies and explicit analysis of who bears failures.

A.7 Extended Limitations and Deployment Evidence

Language feedback has failure modes that are not yet bounded. A specification compiled from language can be executable yet encode the wrong objective, and policies exploit omissions in rubrics and verifiers [181]. Generative verifiers can be fooled by superficial “master keys” [361], while preference models may reward persuasive agreement over correctness [222].

Grounding remains weak in sequential environments. Vision-language judges may recognize objects while missing task order [291], and single-frame success detectors miss failures expressed through motion [117]. Text2Reward, DrEureka, and RACER demonstrate real-robot deployments [53, 178, 300], but these platform-specific results do not establish broad transfer. High-stakes harms are also no longer hypothetical: sycophantic answer changes appear in medical-advice tasks [71], and injection attacks affect tool-calling, coding, and computer-use agents [65]. These results motivate stronger claims only after systematic cross-platform evaluation.

B Extended Pillar Catalogs

This supplement preserves the extended system catalogs, secondary variants, and benchmark evidence supporting the four pillar chapters in the main article. The organization follows those chapters, while every label is local to the supplement.

B.1 Extended Catalog: Language as Grounding Signal

B.1.1 Historical lineage and goal grounding. Grounding language in sequential decision making predates large language models. Mapping instructions to actions was formulated as a reinforcement-learning problem before pretrained interpreters existed [22, 186], policy sketches used linguistic annotations to decompose multitask learning [8], and agents acquired grounded word meanings in simulated three-dimensional worlds [97]. The earlier literature separated language-conditional from

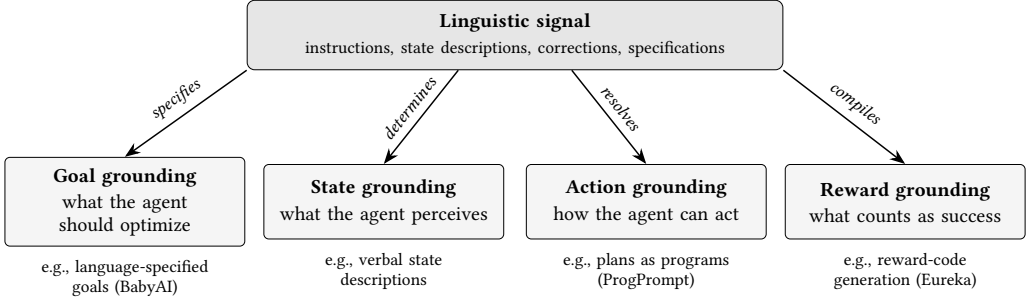


Fig. 5. Grounding signals map verbal input onto four decision-problem components at specification time.

language-assisted reinforcement learning [170], while language-conditioned imitation extended grounding to robot control [173]. Current systems inherit much of the interpreter from pretraining and use it to compile specifications.

Goal grounding requires parsing instructions into objects, relations, and target conditions [30], filtering candidate plans by executability [4, 59], and decomposing goals into verifiable subgoals. Secondary variants include multi-agent coordination [354], hierarchical goal decomposition through offline reinforcement learning [105], and policies trained directly from language specifications [144]. BabyAI isolates compositional generalization in gridworlds [45]; current models still show incomplete coverage under compositional constraints [215], while compositional policy representations improve sample efficiency on unseen combinations [49].

B.1.2 State and action grounding. Verbal state descriptions are native to text environments [50, 318], but they also arise whenever visual or physical state is summarized into language. ALFWorld shows transfer from verbal descriptions to embodied three-dimensional settings [229]. Later work adds closed-loop verbal state feedback for robot planning [20] and scene-graph-structured context [109]. These systems expose a recurring limitation: verbalization can silently violate the Markov property when omitted details carry decision-relevant history.

Action grounding ranges from corrective planning to compilation into programs. Inner Monologue feeds verbalized success detection and scene description back into planning [112], while concise corrective utterances can amend a local error without discarding the rest of a plan [223]. ProgPrompt represents available actions and objects in program-like form [233]; VoxPoser converts language into three-dimensional value maps consumed by a motion planner [111]. Secondary systems combine visual cues with grounded replanning [130], detect failures through constraint-aware visual programs [365], span physical, logical, and semantic corrections across control levels [122], or join language reasoning with feasibility checking in task-and-motion planning [352]. RT-H inserts fine-grained language motions between task and actuation so human corrections arrive in the policy’s own intermediate action space [17].

B.1.3 Reward-grounding systems and evidence. Language-to-reward methods differ in how directly text specifies the executable objective. Eureka evolves generated reward programs and uses training statistics as textual reflection [177]; Text2Reward generates dense, human-refinable code [300]. DrEureka extends generation to domain-randomization settings needed for simulation-to-real transfer [178]; CARD refines reward code from trajectory feedback without retraining a policy at every iteration [245]; PROF adapts the mechanism to offline settings [246]; and reward functions can be generated from video demonstrations [333].

Structured alternatives let language select reward parameters rather than write unrestricted code. Language to Rewards maps instructions and corrections to parameters consumed by a real-time optimizer and outperforms a primitive-skill baseline based on Code as Policies [149, 326]. When no compilable state is exposed, a learned judge grounds the objective in observations. RL-VLM-F uses vision-language preferences over image pairs [277], while purpose-trained visual reward models aim for broader reward provision [143, 219].

Reward-grounding errors are specification failures rather than ordinary estimation noise. A syntactically valid reward can encode the wrong objective and then be optimized exactly. Iterative reflection searches reward-function space, and related methods use language to redistribute sparse rewards. LaRe constructs symbolic latent-reward evaluators from language [208]; Agent-RLVR instead densifies a sparse verifier with teacher-style guidance on software-engineering tasks [52]. Controlled evidence also shows that diverse and informative feedback improves transfer and adaptation [292]. These results motivate explicit checks for executability, compositionality, and fidelity before downstream policy performance is interpreted.

B.2 Extended Catalog: Language as Deliberative Feedback

B.2.1 Self-critique and external grounding. Self-Refine formalized iterative self-critique and revision [180], building on Constitutional AI’s demonstration that written principles can guide revisions [12]. A separately trained critic improves reasoning relative to a shared generator-critic loop [205]. Other evaluations show that self-correction degrades when the critique source shares the generator’s failure modes [107, 124], especially for smaller models [193]. Socratic decomposition creates independently checkable steps [224], and parallel refinement widens the candidate pool [268], but neither supplies knowledge absent from the model.

External grounding anchors critique in deterministic evidence. Toolformer established the broader tool-use setting [218]; execution traces, tests, search results, and API responses then became reusable feedback sources [38, 81]. CRITIC, SWE-agent, and executable-code agents use such evidence to produce corrected outputs [80, 273, 312]. Reinforcement learning can train a model to exploit the same feedback more effectively [79]. The system cost shifts from critic circularity to infrastructure, latency, and correct interpretation of the external trace.

B.2.2 Debate systems and oversight evidence. Multi-agent debate assigns parallel model instances distinct perspectives or roles [101]. Identical models can improve through critique exchange [63], role diversity can strengthen evaluation [29], and models can be trained to revise under conflicting opinions [157]. Adaptive heterogeneous groups also improve mathematical reasoning [373].

The economic evidence is mixed. Debate provides limited gains over single-agent scaling on mathematical reasoning but becomes more useful as task difficulty rises and base capability falls; on safety tasks, collaborative refinement can increase vulnerability while diverse groups reduce attack success [317]. A broader evaluation across debate methods, benchmarks, and foundation models finds that debate often fails to beat chain-of-thought or self-consistency despite substantially higher inference cost, with model heterogeneity the most reliable intervention [344]. Shared biases produce redundant consensus [66, 150], and simpler single-agent strategies remain competitive [47].

Communication topology controls part of that cost. Full broadcast incurs substantial token overhead [47]; sparse connections reduce it [148]. Other methods retain only maximally disagreeing responses per round [190] or ask agents to express confidence so a knowledgeable minority does not capitulate to the group [156].

Debate also serves scalable oversight. It raises weaker model and human judge accuracy above naive baselines [127], and it can outperform consultancy under information asymmetry [125].

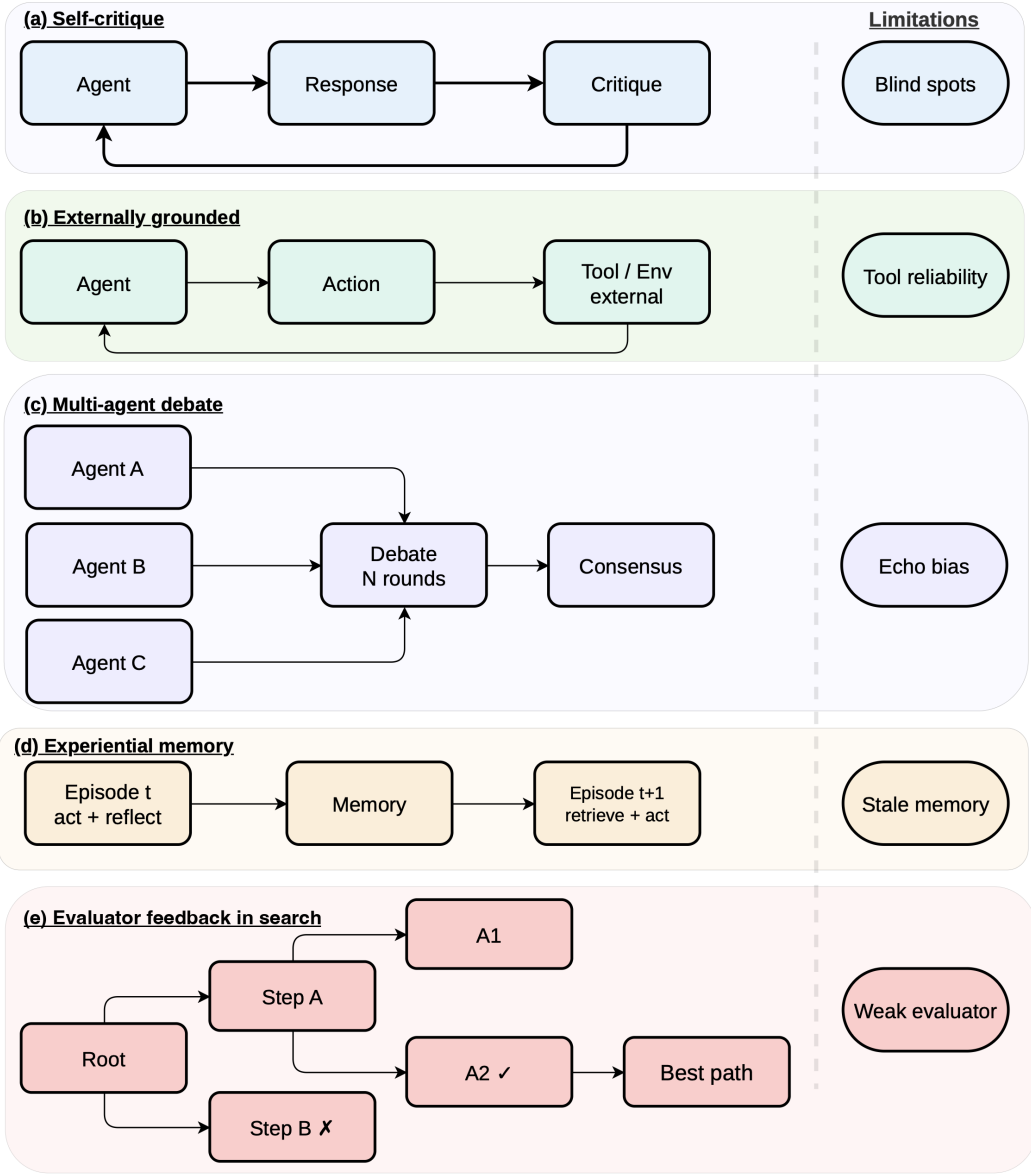


Fig. 6. Inference-time verbal feedback mechanisms: self-critique, externally grounded critique, multi-agent debate, experiential memory, and evaluator feedback in search.

When transcripts become training data, rewards, or distilled weights, the same mechanism moves from deliberation to learning [188, 202, 242, 323].

B.2.3 Experiential-memory systems. Dedicated surveys catalog episodic, semantic, and procedural memory stores [61, 355]. The narrower VRL question is whether a stored linguistic artifact is

consumed as feedback in a later context. Deployment-time learning has also been proposed as a lifecycle stage after pretraining and post-training [89].

Raw reflections are inexpensive and fit closely recurring tasks. Reflexion reports a HumanEval pass@1 of 91 percent through stored self-reflection [228]. When experience must transfer, distilled principles remove episode-specific detail. ExpeL contrasts successes and failures; MetaReflection compresses failed trials; related systems induce reusable workflows or strategy notes [90, 196, 249, 279, 359]. Structured stores become useful when scale or collaboration makes flat retrieval expensive. Interlinked notes, consolidation, team graphs, and reconstruction-time retrieval trade management overhead for selective access [46, 119, 306, 341]. Tasks requiring reliable re-execution favor code and instruction libraries whose skills can be tested and admitted with evidence [70, 152, 158, 262, 316, 356, 368].

Writing policy is a second design axis. Append-only stores suit short, stationary deployments. Longer-lived agents need utility-based pruning [26, 353]. Memory-R1, AutoMem, and SkillRL train add, update, delete, or no-op decisions [287, 295, 309]. Meta-evolution searches the entire encode, store, retrieve, and manage pipeline [159, 343, 345]. These writers can be trained by scalar outcomes while their stored text still acts through the context window.

Persistence amplifies both value and error. Large stores complicate retrieval [203]; stale knowledge misleads in changing environments [355]; and injected memories cause cross-session drift [57]. Forced consolidation can itself corrupt evidence, with raw-episode retention outperforming continual summarization in one controlled study [340]. Memory evaluation increasingly probes retrieval, test-time learning, long-range understanding, and selective forgetting [16, 104, 251, 283].

B.2.4 Evaluator feedback in search. Search systems explore several candidate paths and use language to select which to expand or prune [259]. Tree of Thoughts adds self-evaluation to a tree over intermediate thoughts [280, 319]; Reasoning via Planning and Graph of Thoughts generalize the topology and permit aggregation or refinement across branches [18, 93]. Node-level verbal evaluation can terminate bad paths early, but repeated evaluation multiplies model calls relative to single-pass generation [301]. This catalog excludes search procedures whose selection signal contains no language, including majority voting over sampled chains.

B.3 Extended Catalog: Language as Learning Signal

B.3.1 Feedback-conditioned and self-improvement systems. Feedback-conditioned modeling trains on triples containing an input, critique, and revised output. Early methods discarded the critique after using it to produce the target [31, 217]. ALT retains it as conditioning context [166], while the feedback-conditional policy learns the response posterior given feedback and adds an online positive-feedback bootstrapping stage [172]. Critique use can itself be trained: didactic multi-turn interactions teach a smaller model to predict and incorporate teacher feedback [132]. RLVF scopes a verbal instruction by generating preference data that mark where it should and should not apply [239]. The corresponding risk is over-receptiveness, since models can learn to follow incorrect critiques [222].

Self-improvement uses feedback to select generated data [232]. Filters include final-answer correctness in STaR [332], constitutional compliance [12], majority agreement [108], and a model’s own iterated judgment [329]. Generator-judge coupling can amplify systematic bias over rounds [230]. Multiagent finetuning preserves diverse reasoning by training a society of models on interaction data [242]. Agent-R replaces whole-trajectory selection with targeted recovery, using tree search to connect failed paths to adjacent successful ones [328].

B.3.2 Trained critics. Critics obtain supervision from several sources. MultiCritique distills feedback from several agents into fine-tuning and preference data [139]. CTRL trains a critic to maximize

the correction performance of a fixed code generator [302]. Critique-RL separates discriminability from helpfulness by first reinforcing rule-based error detection and then adding refinement reward [293]. DeepCritic combines long-form critique training with reinforcement over human or Monte Carlo step labels [314], while AutoMathCritique trains an actor-critic pair on automatically generated step feedback [294]. Critique-guided improvement jointly trains a critic and an actor so feedback steers exploration rather than only ranking final responses [313]. These systems show why feedback quality must be measured by both error localization and the correction it induces.

B.3.3 Multi-agent and self-play training. MALT samples role-specific search trees for a generator, verifier, and refiner, then propagates outcome rewards to each role through value iteration [188]. MAPoRL co-trains participants against correctness and collaboration incentives [202]. Self-play removes external annotation through adversarial word games [44], games a model plays against itself [135], or proposer, solver, and judge roles instantiated from one model [40]. SPC evolves a critic against a generator trained to produce difficult-to-detect reasoning errors [34].

The communication channel can itself receive reward. Influence-based rewards elicit accusation and evidence-giving in social deduction [216], while dialogue-game environments use interactive group-relative optimization [102]. Persuasion-balanced training prevents debaters from learning to reject beneficial persuasion along with adversarial persuasion [238]. Explicit debate can also be internalized: latent agents distill transcripts into a single model [323]. Related oversight systems reward prover checkability [131], use debate outcomes in sequential decision making [243], train debaters through self-play [9], or use debate for weak-to-strong supervision [141].

B.3.4 Process supervision and preference shaping. The canonical process-supervision dataset uses positive, negative, or neutral click labels for individual reasoning steps [151]. Such labels are scalar, but generative PRMs consume language before scoring [163, 360]. Step-level critique also qualifies when downstream machinery converts its content into credit. Process feedback improves localization relative to outcome-only labels [151, 255], and the cost of manual step annotation motivated automatic labeling with Math-Shepherd and OmegaPRM [171, 266]. Its practical limits remain expensive verification and difficulty defining a locally correct step outside mathematics and code.

Preference shaping is the maximally compressed endpoint. Preference-based reinforcement learning supplies the lineage [48]; InstructGPT trains a reward model and optimizes it with proximal policy optimization [195, 220, 240]; and DPO removes the explicit reward model [209]. KTO, ORPO, SimPO, and related objectives modify the implicit preference loss [10, 67, 100, 185], while RLAIIF replaces human labels with model judgments [142]. Online optimization queries fresh policy samples, fixed offline datasets inherit coverage gaps, and iterated preference collection occupies the middle ground [329]. Open problems for this scalar endpoint are surveyed separately [27].

Across the compression spectrum, quantitative evidence is method-specific rather than directly comparable. GOLF reports improved sample efficiency by injecting group-level critiques into sparse-reward regions [110]; Text2Grad converts free-form critiques into span-level rewards [263]. These results motivate controlled comparisons that hold model, data, feedback budget, and verifier strength fixed.

B.4 Extended Catalog: The Verbal Reward Stack

B.4.1 Verifiable outcomes and rubric supply. Tulu 3 combines supervised fine-tuning, preference optimization, and reinforcement learning against programmatic checks in an open post-training pipeline [137]. DeepSeek-R1 reports emergent reflection and verification under outcome-only reinforcement learning [86]. Verifiable rewards remain sparse and domain-limited. Agent-RLVR adds teacher-style plans and error feedback to failed software-engineering attempts, then trains a

reward model on the guided data [52]. Budget mismatches, attempt inflation, calibration drift, and benchmark contamination can confound headline RLVR gains [285].

Rubric rewards replace a ground-truth check with instance-specific criteria. Rubrics as Rewards reports gains over direct Likert-style judging in health and reasoning tasks [85]; checklist feedback improves hard instruction satisfaction [257]. Static banks support broad, stable task distributions, with human, synthetic, coarse-to-fine, or contrastively generated criteria [116, 147, 162]. Dynamic rubrics adapt to the current policy or case mix through online generation, policy-coupled evolution, self-rewarding, or case-conditioned criteria [84, 212, 267, 322]. Selective verification invokes external checks only for likely violations [286]; process-oriented rubrics detect invalid derivations that final-answer checks miss [330]. Prior work also surveys rubrics across evaluation, training, and safety [33].

B.4.2 Generative reward models. Generative verifiers cast reward modeling as next-token prediction and write a verification rationale before the verdict [348]. DeepSeek-GRM trains principle generation and critique, then allocates inference-time samples with a meta reward model [165]. Related systems generate rubrics or reference solutions before judging [37], spend adaptive compute on hard decisions [87], turn judgment into a verifiable-reward task [284], or separate evaluation planning from execution [214]. Other variants optimize judgment traces with offline or online reinforcement learning [106], extend judges to long-horizon reasoning [98], or pair a reasoning reward model with a dedicated benchmark [370].

Judge supervision is increasingly self-generated. Self-taught evaluators iterate without human preference labels [270]; joint critique and scalar prediction improves reward accuracy [327]; self-training produces reward models that emit labels with rationales [260]; and meta-rewarding asks the model to judge its own judgments [288]. The explanation is not automatically trustworthy. Outcome-only training can produce correct verdicts supported by unsound critiques, while explicit critique supervision improves reliability [278].

B.4.3 Process reward models. Human step annotation established the PRM lineage [151]. Math-Shepherd automates labels and applies stepwise policy optimization [266]; OmegaPRM uses divide-and-conquer search to locate the first error and build a large step-level dataset [171]. ProcessBench finds weak generalization beyond common mathematics benchmarks and cases where prompted critics outperform trained PRMs [362]. A companion analysis shows that Monte Carlo labels can underperform judge or human annotations, that best-of-N evaluation drifts toward outcome scoring, and that consensus filtering improves label quality [357].

Generative PRMs join step verification with language reasoning. ThinkPRM generates a verification chain for every step [126]; StepWiser trains stepwise reasoning with reinforcement from rollout outcomes [303]; and DG-PRM selects fine-grained criteria dynamically per step [325]. SPARK synthesizes verification data for domains without directly checkable answers [210], and related pipelines extend automatic step annotation to multimodal reasoning [60]. Response-level rubrics can also be converted to token-level credit through a relevance discriminator [305].

B.4.4 Boundary failures and defenses. The scalarization boundary creates exploitable slack at every rung. Outcome-only optimization can encourage invalid “Miracle Steps” [330]; static rubrics become stale or omit failure modes [212]; and rubric-based verifiers can prefer a trained checkpoint even when rubric-free judges prefer the base model [181]. Generative judges can reach correct verdicts from unsound critiques [278], and misestimated step labels corrupt PRM training [357]. RLVR results can also shrink under budget-matched evaluation [285].

Proposed defenses operate at the same boundary: cross-family judge panels and verifier-free diagnostics [181], peer consensus over evolving rubrics [84], format constraints on PRM-driven

reinforcement learning [210], and consensus filtering of step labels [357]. These methods reduce known failures but do not remove the information lost when critique text becomes a scalar.

C Extended Evidence on Credit Assignment

This section records implementation details and paper-specific empirical evidence that support the credit-assignment synthesis in the main article. Reported numbers are not directly comparable because the methods use different benchmarks and baselines.

C.1 Token- and Step-Level Mechanisms

MA-RLHF performs policy-gradient updates over macro actions, sequences of tokens or higher-level constructs, shrinking the temporal distance between action and reward without extra inference compute. Its authors report gains of up to 30% on summarization and code generation, 18% on dialogue, and 8% on question answering, reaching parity with vanilla RLHF 1.7–2 times faster in training time [28]. RED instead reallocates a sequence-level reward to individual tokens with an existing reward model and no additional training stage [145]. LaRe generalizes redistribution to episodic settings through a latent, multidimensional performance evaluation constructed from LLM-generated executable code [208].

Model-internal methods derive credit from the scorer itself. One approach estimates per-token rewards from SHAP and LIME attributions and uses Bayesian optimization to tune the shaping function; feature-additive attributions preserve the optimal policy of the original reward [133]. FlowTracer builds an attention-induced graph over tokens and uses information flow toward the answer as a shaping signal [58].

Critique-derived methods make localization explicit. CAPO generates all stepwise critiques in one pass, converts them into deterministic token credits, and votes over critiques for robustness [299]. T-REG uses contrastive prompting to self-generate token rewards that regularize the distribution of sequence-level preference reward [372]. iStar alternates policy optimization with an implicit process reward model and derives step rewards without extra rollouts or step labels [163]. Text2Grad aligns free-form critiques with the token spans they indict and backpropagates span-level rewards [263].

C.2 Multi-Turn and Memory-Conditioned Credit

ArCHer combines an off-policy value learner across utterances with a within-turn token-level policy-gradient learner; its authors report roughly 100 times the sample efficiency of prior methods on their agent tasks [377]. Multi-turn variants of PPO and group-relative optimization show that well-designed turn rewards can improve stability and convergence over trajectory-only rewards [282]. IGPO uses the marginal increase in the policy’s probability of the correct answer as an intrinsic turn reward, requiring no reward model or Monte Carlo estimate [261]. LMRL-Gym provides multi-turn dialogue and text-game tasks for studying this regime [1].

Memory turns write operations into actions that also require credit. Memento realizes policy improvement through memory rewriting and retrieval [367]. Memory-R2 shows that writes cause rollouts to diverge in their effective environment, violating assumptions behind group-relative baselines; it combines a global long-horizon objective with local rerollouts from the same intermediate memory state [308].

C.3 External Language Models as Credit Annotators

CALM decomposes a task into subgoals and judges whether transitions achieve them, creating auxiliary option-termination rewards without examples or fine-tuning [206]. Language feedback models learn from LLM judgments over verbalized trajectories and identify actions for imitation

Table 7. Numerical optimization concepts and their language-space counterparts.

Numerical concept	Language-space counterpart	Representative realizations
Parameters	Prompt, evolving context, or curated play-book	VML [297]; ACE [350]; token priors [25]
Gradient	Natural-language critique of the current candidate	TextGrad [331]; directional feedback [191]
Update rule	LLM edit operator applied to text	OPRO [311]; GEPA [3]
Backpropagation	Feedback routed through a computation graph	Trace/OPTO [42]; semantic backpropagation [272]; LLM-AutoDiff [324]
Momentum or curvature	History of responses and scores	REVOLVE [349]; OPRO [311]
Ensemble	Population of candidates under selection	PromptBreeder [75]; EvoPrompt [88]; GEPA [3]

learning, including in unseen environments [364]. In multi-agent RL, LLM-generated dense, agent-specific rewards can be stabilized through potential-based reward learning over multiple queries [153]. Group-level critique can also guide exploration through off-policy scaffolds rather than assign credit directly [110]. These methods are most useful when the policy is not itself a language model or when an existing RL pipeline must remain unchanged, but annotator errors then become systematic reward errors.

D Extended Systems, Evaluation, and Safety Catalogs

This supplement preserves the method catalogs, benchmark matrix, quantitative evidence, and robustness studies condensed in the main article. Its organization follows the four main-paper topics but uses independent labels so it can be compiled as part of the electronic supplement without relying on main-paper cross-references.

D.1 Language-Space Optimizer Catalog

Language-space methods instantiate a recognizable optimization loop in text. Table 7 records the correspondence used to classify them.

D.1.1 Search, Evolution, and Program Optimization. APE uses an LLM to propose instructions and selects candidates by task performance, establishing the basic score-driven recipe [374]. OPRO adds the optimization trajectory itself to the optimizer context: previous solutions and their scores become working memory, and the resulting prompts outperform human-designed prompts by up to 8% on GSM8K and 50% on Big-Bench Hard [311]. Evolutionary methods maintain populations instead of one trajectory. EvoPrompt treats LLMs as mutation and crossover operators over a prompt population [88]; PromptBreeder also evolves the mutation prompts that generate task-prompt variants [75]. At the program level, DSPy compiles declarative language-model modules toward a metric by generating and selecting demonstrations [128]. MIPROv2 jointly optimizes instructions and demonstrations across multi-stage programs without module-level labels, so its surrogate model must attribute program-level success to components [194].

D.1.2 Textual Gradients and Trace-Level Credit. TextGrad attaches natural-language critiques to variables in a compound computation and routes them backward as textual gradients; without task-specific modification it raises GPT-4o zero-shot GPQA accuracy from 51% to 55% [331]. Meta-TextGrad extends this recursion to the optimizer’s own prompts and structure [304]. Directional

feedback stabilizes updates by stating how the candidate should move, not merely why it is wrong [191]. REVOLVE retains the evolution of responses across iterations rather than reacting only to the latest critique [349]. Semantic backpropagation allocates output feedback among graph nodes that share a successor [272], and LLM-AutoDiff extends routing to cyclic, multi-component workflows [324]. Textual gradients can still explode as feedback grows with depth or vanish when repeated compression removes specificity; textual equilibrium propagation replaces one global backward pass with local critic equilibria [35].

The same machinery can optimize system structure. Agent symbolic learning jointly updates prompts, tools, and pipeline structure through language losses and gradients [371]. ADAS searches over agents expressed as code [103]. AFlow casts workflow generation as Monte Carlo tree search over code-represented workflows and reports smaller models outperforming GPT-4o on selected tasks at 4.55% of its inference cost [346]. MASS interleaves prompt and topology optimization for multi-agent systems [369].

D.1.3 Reflective, Training-Free, and Hybrid Updates. GEPA samples system trajectories, diagnoses failures in language, proposes prompt updates, and combines complementary lessons from a Pareto frontier. It reports a 6% average and up to 20% advantage over GRPO while using up to 35× fewer rollouts, plus a greater than 10% gain over MIPROv2 [3]. Self-supervised prompt optimization derives evaluation and optimization signals from pairwise output comparisons, matching leading optimizers at 1.1%–5.6% of their cost with as few as three samples [296]. Training-Free GRPO extracts a group-relative semantic advantage from rollouts and distills it into a token prior for a frozen model [25]. ACE maintains an evolving playbook through generation, reflection, and curation; incremental updates target brevity bias and context collapse in wholesale rewriting [350].

Hybrid systems decide where knowledge should live. SEAL generates finetuning data and update directives in language before changing weights [378]. Learning to Self-Evolve trains the context editor with reinforcement learning and reports a 4B editor outperforming larger self-evolution systems [39]. P²O alternates policy-gradient updates with prompt evolution, using text search when all sampled advantages collapse and then distilling prompt-induced gains into weights; it reports up to 9.5% improvement over GRPO baselines [169]. Evolutionary system-prompt learning finds declarative knowledge accumulating in prompts while procedural knowledge moves into weights [347]. SIA extends joint updating to scaffold code, prompts, and weights [96].

D.1.4 Failure Evidence and Boundary Cases. Reflective optimizers can substitute prior knowledge for causal error analysis, producing confident but misdirected edits [176]. Seed quality matters: from a defective seed, GEPA reduced GSM8K accuracy from 23.81% to 13.50%, whereas VISTA separated hypothesis generation from rewriting and verified hypotheses on minibatches, recovering 87.57% [161]. Multi-objective critics suffer gradient dilution and instruction interference; one study reports a 59% drop in task focus when a single critique addresses several criteria [54]. MASPromptBench further finds that gains vary substantially across workflows, protocols, and team sizes [11]. GReaTer uses actual numeric task-loss gradients to optimize prompts [55], while PromptQuine evolves text through a selection signal with no linguistic meaning [265]. Both optimize text but fall outside verbal reinforcement learning because their improvement signal is non-verbal.

D.2 Extended Embodied and Multimodal Evidence

D.2.1 Corrections on Real Robots. LILAC maps utterances onto a learned low-dimensional control space used for real-time shared autonomy on a Franka Emika Panda; users preferred it and achieved higher completion than with open-loop instruction following [51]. DROC accepts corrections ranging from high-level planning failures to skill parameters, distills them into a knowledge base, and retrieves them by textual and visual similarity; it required roughly half the corrections of

direct code-generation baselines in the first round and little to none after two iterations [335]. Yell At Your Robot logs fine-grained corrections and folds them into iterative retraining, improving long-horizon dexterous manipulation without additional teleoperation [227]. RT-H inserts language motions between task and action, allowing people to intervene in the same vocabulary used by the hierarchy; language interventions outperformed teleoperated ones [17]. RACER replaces the person with a vision-language supervisor that produces recovery guidance and improves over an imitation baseline in RL Bench and real-world trials [53]. Inner Monologue verbalizes success detection, scene description, and human feedback to improve instruction completion without training [112].

D.2.2 Generated and Vision-Language Rewards. Language to Rewards compiles instructions and corrections into reward parameters for a real-time optimizer [326]. Text2Reward generates dense reward code that can be refined through human feedback and transfers simulator-trained policies to the real world [300]. Eureka mutates reward programs from verbalized training statistics [177]; DrEureka adds domain-randomization generation and reports sim-to-real behaviors competitive with hand-designed setups [178].

When only pixels are available, RL-VLM-F learns rewards from vision-language preference labels over image observations [277]. VLM-RL converts contrasting language goals into dense semantic rewards for driving, reducing collision rate by 10.5% and increasing route completion by 104.6% in CARLA [115]. VLA-RL trains a robotic process reward model over automatically segmented tasks, lifting OpenVLA-7B by 4.5% over its strongest fine-tuned baseline on LIBERO [168]. RoboReward augments success-heavy robot corpora with calibrated failures and finds that no existing VLM dominates its reward-assignment tasks [143]. Robo-Dopamine combines a step-aware process reward with policy-invariant shaping; after one-shot adaptation, it improves a near-zero policy to 95% success within 150 online rollouts [250]. Large Reward Models emit process, completion, and temporal-contrastive rewards in unseen environments [290], while SOLE-R1 reasons over raw video and language goals at each step and reports zero-shot online learning on 24 unseen tasks [219].

Two benchmarks isolate perceptual limits. ViSta finds that models recognize objects but usually fail to understand task sequence [291]; MotIF shows that final-frame detectors fail when success depends on motion and improves them through trajectory-overlaid representations [117].

D.2.3 Failure Explanations and Recovery. AHA fine-tunes a vision-language model on perturbed demonstrations to explain failures in free-form language. It reports a 10.3% advantage over GPT-4o in-context learning and a 21.4% average downstream improvement when explanations guide reward refinement, planning, and verification [64]. FailSafe pairs generated failures with executable recovery actions and improves three vision-language-action models by up to 22.6% on average [154]. Guardian synthesizes failures from simulated and real trajectories with structured reasoning traces and raises manipulation success when inserted into a policy loop [197]. Controlled experiments also show that diverse and informative language improves generalization and adaptation, making feedback phrasing an experimental variable rather than incidental wording [292].

D.3 Extended Evaluation Matrix and Evidence

D.3.1 Quality Evidence. RewardBench establishes a broad outcome-preference test across chat, reasoning, and safety [138]. RewardBench 2 uses new human prompts and reports average model scores about 20 points lower while retaining correlation with best-of- N and PPO outcomes [182]. RM-Bench separates content sensitivity from style susceptibility and finds state-of-the-art reward models averaging 46.6% under style interference [164]. RewardMATH shows that single chosen-rejected comparisons can have almost no correlation with optimized-policy results, while one-to-many comparisons recover useful correlation [129]. RMB expands to more than 49 scenarios

Table 8. Benchmark families indexed by quality or utilization, signal type, stage, and principal gap.

Benchmark family	Measures	Signal	Principal gap
Reward-model benchmarks: RewardBench 1/2 [138, 182], RM-Bench [164], Reward-MATH [129], RMB [366], PPE [77]	Quality	Outcome preference	Pairwise accuracy can decorrelate from downstream utility
Judge meta-evaluation: LLM-Bar [334], JudgeBench [252], CALM [321], MM-Eval [235], Sage [73], BiasScope [136]	Quality	Verdict and rationale	Bias, inconsistency, and aggregation uncertainty
Critique benchmarks: CriticBench [155], CriticEval [140], CodeCriticBench [338], RealCritic [253]	Both	Natural-language critique	Open-loop ratings can diverge from corrective value
Process and verifier benchmarks: ProcessBench [362], PRMBench [236], ToolComp [189], VerifyBench [310]	Quality	Step-level reward or verdict	Narrow domains, false negatives, and hackability
Interactive environments: MINT [276], ConvCodeWorld [92], LLF-Bench [41]	Utilization	Turn-level feedback	No standard metric for uptake from language alone
Feedback incorporation: Feedback Friction [120], JETTS [376]	Utilization	Near-oracle or judge critique	Models under-absorb accurate feedback
Agent trajectory and memory: AgentRewardBench [174], Plan-RewardBench [264], MemoryAgentBench [104]	Both	Trajectory preference and memory	Weak long-horizon judgment and retrieval
Embodied feedback: ViSta [291], MotIF-1K [117], RoboReward [143]	Quality	Vision-language reward	No embodied utilization benchmark

[366]; Preference Proxy Evaluations validate metrics against end-to-end RLHF [77]; Personalized RewardBench tests user-specific rubrics [175].

LLMBar constructs pairs where an incorrect answer has deceptive surface appeal [334], and JudgeBench finds GPT-4o-level judges only slightly above random on correctness-grounded hard pairs [252]. CALM measures twelve judge biases through controlled perturbations [321]. BiasScope discovers biases automatically and reports error above 50% even for strong evaluators on its hardened set [136]. Sage finds inconsistent frontier-model preferences in nearly a quarter of difficult cases [73]; leaderboard audits show Elo aggregation masking ranking uncertainty [76]. MM-Eval documents weaker non-English judging across 18 languages [235].

CriticBench evaluates generation, critique, and correction together [155]; CriticEval adds human reference critiques [140]; CodeCriticBench uses checklist-scored code critique [338]. ProcessBench asks for the earliest erroneous reasoning step [362], PRMBench probes finer error dimensions [236], and ToolComp tests multi-tool trajectories where most models score below 50% [189]. VerifyBench covers reference-based RLVR checkers [310]; rule-based verifiers can reject equivalent answer formats, while model-based verifiers are more accurate but hackable [114].

D.3.2 Utilization Evidence and Coverage Gaps. RealCritic grades critiques by induced corrections and finds models falling below their own baselines in some self-critique settings [253]. JETTS finds

judges competitive with outcome reward models for reranking but worse than process reward models in beam search; their textual critiques do not reliably guide generators [376]. MINT reports tools adding 1–8% absolute performance per turn and simulated language feedback adding 2–17% [276]. ConvCodeWorld varies compilation, execution, and verbal feedback across nine code-repair scenarios, with static replay preserving Spearman correlations of 0.82–0.99 with live interaction [92]. LLF-Bench isolates learning from language across attempts [41], while LMRL Gym provides a numeric-reward complement over text states and actions [1]. Feedback Friction shows that near-complete ground-truth feedback can still fail to change solver behavior [120].

AgentRewardBench compares twelve judges with expert annotations of 1,302 web trajectories and finds no judge best across benchmarks [174]. Plan-RewardBench documents weakness across generative rewards, discriminative rewards, and judges on tool-integrated plans [264]. MemoryAgentBench tests retrieval, test-time use, and selective forgetting [104]. Coverage remains thin for non-English feedback [235], personalization [175], long-horizon agents [264], memory [104], and embodied utilization [117, 143, 291].

D.4 Extended Threat and Defense Evidence

D.4.1 Judge Manipulation. Optimized injected sequences can force a judge to select an attacker-controlled candidate across evaluation, search, tool selection, and AI-feedback training [225]. Universal phrases transfer from surrogate to unseen judges and push absolute scores toward their maximum, with comparative assessment less susceptible [211]. Generative reward models accept superficial “master keys” that elicit false positive rewards across scales [361]. Prompt-injection studies report attack success up to 73.8% and cross-judge transfer of 50.5%–62.6% [183]; robustness varies by up to 40% across prompt templates [146]. Stylistic manipulation exceeds 65% success while preserving semantics [315]. Automated bias discovery pushes strong evaluators above 50% error [136]; apologetic phrasing skews some safety evaluations by up to 98% [32]; and red-team distribution shifts can reduce judge accuracy toward chance [221].

D.4.2 Observation Injection and Feedback Poisoning. Indirect prompt injection embeds instructions in retrieved content [83]. InjecAgent reports 24% attack success against a ReAct-prompted GPT-4 agent, nearly doubling when instructions are reinforced [337]. AgentDojo separates task failure from security failure across tool-integrated scenarios [56]. Human-written web injections partially succeed in up to 86% of cases even when agents fail to complete the attacker’s full objective [68]. A public competition spanning 272,000 attempts against 13 frontier models found every model vulnerable across tool use, coding, and computer control, with 0.5%–8.5% end-to-end success and transferable strategies [65]. Injection can steer tool choice [226], and adaptive attacks bypass evaluated defenses [336].

Training-time poisoning works at low rates. Adding 1–5% poisoned preference pairs can steer target sentiment [14]; DPO backdoors succeed with 0.5% poisoning in settings where PPO requires at least 4% [204]. A model can also influence preferences constructed from its own outputs, amplifying keyword and brand biases [91]. Manipulated verbal feedback raises language-space optimizer attack success by as much as 0.48, and fake-reward attacks need no reward-model access [358].

D.4.3 Policy Exploitation and Sycophancy. When model outputs change the world and the world returns to context, output and policy refinement can produce in-context reward hacking that static evaluation misses [198]. Models trained to game harmless graders can transfer hacking to new settings and, for some models, to shutdown evasion [254]. Rubric exploitation clusters around partial satisfaction, implicit content treated as explicit, and imprecise topical matching [181]. Controlled tasks with injected judge biases [274] and verifiable hacking opportunities [213]

make the behavior measurable. Adversarial preambles can raise frozen candidates’ scores, transfer to unseen judges, and remain difficult to detect [6].

Sycophancy originates in preference data rather than an external attacker. Humans and preference models sometimes prefer convincing agreement to correctness [222]. Across mathematics and medical advice, one study reports sycophantic answer changes in 58.19% of cases and regressive flips in 14.66% [71]. Multi-turn pressure compounds the behavior, while a third-person perspective reduces it by up to 63.8% in debate [99]. Models preserve a user’s desired self-image more than humans and affirm both sides of moral conflicts [43]. Mechanistic analysis identifies a circuit that represents an answer as wrong even while the model agrees [200].

D.4.4 Defense Evidence. Perplexity filters and known-answer checks fail against optimized injections, although re-tokenization and LLM detectors are stronger among tested detection options [146, 225]. Signal reshaping acts earlier: verifier training with truncated adversarial negatives resists master keys [361]; adversarial reward-model training searches for high-reward, low-quality responses and stabilizes downstream RLHF [24]; linear-probe penalties suppress sycophancy markers [201]; and uncertainty-aware trajectory rewards reduce sycophancy without degrading general capability [15].

System defenses include instruction hierarchies [258], preference optimization against injection [36], and constrained agent-tool design patterns [19]. Highlighting untrusted optimizer feedback cuts one fake-reward attack’s success delta from 0.23 to 0.07 without reducing utility [358]. No single layer is sufficient because adaptive attacks have bypassed targeted defenses [336]. The evidence favors defense in depth: comparative scoring, independent judges, provenance marking, privilege separation, adversarially reshaped rewards, and interactive stress tests.

References

- [1] Marwa Abdulhai, Isadora White, Charlie Snell, Charles Sun, Joey Hong, Yuexiang Zhai, Kelvin Xu, and Sergey Levine. 2023. LMRL Gym: Benchmarks for Multi-Turn Reinforcement Learning with Language Models. (2023). [arXiv:2311.18232](#)
- [2] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, and Shyamal Anadkat. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774* (2023).
- [3] Lakshya A Agrawal, Shangyin Tan, Dilara Soylu, Noah Ziemis, Rishi Khare, Krista Opsahl-Ong, Arnav Singhvi, Herumb Shandilya, Michael J Ryan, and Meng Jiang. 2025. Gepa: Reflective prompt evolution can outperform reinforcement learning. *arXiv preprint arXiv:2507.19457* (2025).
- [4] Michael Ahn, Anthony Brohan, Noah Brown, Yevgen Chebotar, Omar Cortes, Byron David, Chelsea Finn, Chuyuan Fu, Keerthana Gopalakrishnan, and Karol Hausman. 2022. Do as i can, not as i say: Grounding language in robotic affordances. *arXiv preprint arXiv:2204.01691* (2022).
- [5] Bakhtawar Ahtisham, Kirk Vanacore, Jinsook Lee, Zhuqian Zhou, Doug Pietrzak, and Rene F Kizilcec. 2026. Ai annotation orchestration: Evaluating llm verifiers to improve the quality of llm annotations in learning analytics. In *Proceedings of the LAK26: 16th International Learning Analytics and Knowledge Conference*. 447–456.
- [6] Lisa Alazraki, Tan Yi-Chern, Jon Ander Campos, Maximilian Mozes, Marek Rei, and Max Bartolo. 2025. Reverse Engineering Human Preferences with Reinforcement Learning. [arXiv:2505.15795](#)
- [7] Dario Amodei, Chris Olah, Jacob Steinhardt, Paul Christiano, John Schulman, and Dan Mané. 2016. Concrete problems in AI safety. *arXiv preprint arXiv:1606.06565* (2016).
- [8] Jacob Andreas, Dan Klein, and Sergey Levine. 2017. Modular Multitask Reinforcement Learning with Policy Sketches. In *International Conference on Machine Learning*. 166–175. [arXiv:1611.01796](#)
- [9] Samuel Arnesen, David Rein, and Julian Michael. 2024. Training Language Models to Win Debates with Self-Play Improves Judge Accuracy. (2024). [arXiv:2409.16636](#)
- [10] Mohammad Gheshlaghi Azar, Zhaohan Daniel Guo, Bilal Piot, Remi Munos, Mark Rowland, Michal Valko, and Daniele Calandriello. 2024. A general theoretical paradigm to understand learning from human preferences. In *International Conference on Artificial Intelligence and Statistics*. PMLR, 4447–4455.
- [11] Juyang Bai and Laixi Shi. 2026. MAS-PromptBench: When Does Prompt Optimization Improve Multi-Agent LLM Systems? (2026). [arXiv:2606.23664](#)
- [12] Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones, Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, Carol Chen, Catherine Olsson, Christopher Olah, Danny Hernandez, Dawn Drain, Deep Ganguli, Dustin Li, Eli Tran-Johnson, Ethan Perez, Jamie Kerr, Jared Mueller, Jeffrey Ladish, Joshua Landau, Kamal Ndousse, Kamile Lukosuite, Liane Lovitt, Michael Sellitto, Nelson Elhage, Nicholas Schiefer, Noemi Mercado, Nova DasSarma, Robert Lasenby, Robin Larson, Sam Ringer, Scott Johnston, Shauna Kravec, Sheer El Showk, Stanislav Fort, Tamera Lanham, Timothy Telleen-Lawton, Tom Conerly, Tom Henighan, Tristan Hume, Samuel R Bowman, Zac Hatfield-Dodds, Ben Mann, Dario Amodei, Nicholas Joseph, Sam McCandlish, Tom Brown, and Jared Kaplan. 2022. Constitutional AI: Harmlessness from AI Feedback. *arXiv preprint arXiv:2212.08073* (2022).
- [13] Jayachandru Bandlamudi, Ritwik Chaudhuri, Neelamadhav Gantayat, Sambit Ghosh, Kushal Mukherjee, Prerna Agarwal, Renuka Sindhgatta, and Sameep Mehta. 2025. A framework for testing and adapting rest apis as llm tools. *arXiv preprint arXiv:2504.15546* (2025).
- [14] Tim Baumgärtner, Yang Gao, Dana Alon, and Donald Metzler. 2024. Best-of-Venom: Attacking RLHF by Injecting Poisoned Preference Data. [arXiv:2404.05530](#)
- [15] Mohammad Beigi, Ying Shen, Parshin Shojaei, Qifan Wang, Zichao Wang, Chandan Reddy, Ming Jin, and Lifu Huang. 2025. Sycophancy Mitigation Through Reinforcement Learning with Uncertainty-Aware Adaptive Reasoning Trajectories. [arXiv:2509.16742](#)
- [16] Julia Belikova, Rauf Parchiev, Evgeny Egorov, Grigorii Davydenko, Gleb Gusev, Andrey Savchenko, and Maksim Makarenko. 2026. Managing Procedural Memory in LLM Agents: Control, Adaptation, and Evaluation. (2026). [arXiv:2606.23127](#)
- [17] Suneel Belkhale, Tianli Ding, Ted Xiao, Pierre Sermanet, Quon Vuong, Jonathan Tompson, Yevgen Chebotar, Debidatta Dwibedi, and Dorsa Sadigh. 2024. RT-H: Action Hierarchies Using Language. (2024). [arXiv:2403.01823](#)
- [18] Maciej Besta, Nils Blach, Ales Kubicek, Robert Gerstenberger, Michal Podstawski, Lukas Gianinazzi, Joanna Gajda, Tomasz Lehmann, Hubert Niewiadomski, and Piotr Nyczyk. 2024. Graph of thoughts: Solving elaborate problems with large language models. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 38. 17682–17690.
- [19] Luca Beurer-Kellner, Beat Buesser, Ana-Maria Crețu, Edoardo Debenedetti, Daniel Dobos, Daniel Fabian, Marc Fischer, David Froelicher, Kathrin Grosse, and Daniel Naeff. 2025. Design patterns for securing llm agents against prompt injections. *arXiv preprint arXiv:2506.08837* (2025).

- [20] Vineet Bhat, Ali Umut Kaypak, Prashanth Krishnamurthy, Ramesh Karri, and Farshad Khorrami. 2024. Grounding llms for robot task planning using closed-loop state feedback. *arXiv preprint arXiv:2402.08546* (2024).
- [21] Andres Bran, Sam Cox, Oliver Schilter, Carlo Baldassari, Andrew D White, and Philippe Schwaller. 2024. Augmenting large language models with chemistry tools. *Nature machine intelligence* 6, 5 (2024), 525–535.
- [22] Satchuthanathanavale RK Branavan, Harr Chen, Luke Zettlemoyer, and Regina Barzilay. 2009. Reinforcement learning for mapping instructions to actions. In *Proceedings of the Joint Conference of the 47th Annual Meeting of the ACL and the 4th International Joint Conference on Natural Language Processing of the AFNLP*. 82–90.
- [23] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, and Amanda Askell. 2020. Language models are few-shot learners. *Advances in neural information processing systems* 33 (2020), 1877–1901.
- [24] Alexander Bukharin, Haifeng Qian, Shengyang Sun, Adithya Renduchintala, Soumye Singhal, Zhilin Wang, Oleksii Kuchaiev, Olivier Delalleau, and Tuo Zhao. 2025. Adversarial Training of Reward Models. arXiv:2504.06141
- [25] Yuzheng Cai, Siqi Cai, Yuchen Shi, Zihan Xu, Lichao Chen, Yulei Qin, Xiaoyu Tan, Gang Li, Zongyi Li, Haojia Lin, Yong Mao, Ke Li, and Xing Sun. 2025. Training-Free Group Relative Policy Optimization. (2025). arXiv:2510.08191
- [26] Zouying Cao, Jiayi Deng, Li Yu, Weikang Zhou, Zhaoyang Liu, Bolin Ding, and Hai Zhao. 2025. Remember Me, Refine Me: A Dynamic Procedural Memory Framework for Experience-Driven Agent Evolution. (2025). arXiv:2512.10696
- [27] Stephen Casper, Xander Davies, Claudia Shi, Thomas Krendl Gilbert, J  r  my Scheurer, Javier Rando, Rachel Freedman, Tomasz Korbak, David Lindner, and Pedro Freire. 2023. Open problems and fundamental limitations of reinforcement learning from human feedback. *arXiv preprint arXiv:2307.15217* (2023).
- [28] Yekun Chai, Haoran Sun, Huang Fang, Shuohuan Wang, Yu Sun, and Hua Wu. 2024. MA-RLHF: Reinforcement Learning from Human Feedback with Macro Actions. (2024). arXiv:2410.02743
- [29] Chi-Min Chan, Weize Chen, Yusheng Su, Jianxuan Yu, Wei Xue, Shanghang Zhang, Jie Fu, and Zhiyuan Liu. 2023. ChatEval: Towards Better LLM-based Evaluators through Multi-Agent Debate. arXiv:2308.07201 [cs.CL] <https://arxiv.org/abs/2308.07201>
- [30] Devendra Singh Chaplot, Kanthashree Mysore Sathyendra, Rama Kumar Pasumarthi, Dheeraj Rajagopal, and Ruslan Salakhutdinov. 2018. Gated-attention architectures for task-oriented language grounding. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 32.
- [31] Angelica Chen, J  r  my Scheurer, Jon Ander Campos, Tomasz Korbak, Jun Shern Chan, Samuel R Bowman, Kyunghyun Cho, and Ethan Perez. 2024. Learning from Natural Language Feedback. *Transactions on Machine Learning Research* (2024).
- [32] Hongyu Chen and Seraphina Goldfarb-Tarrant. 2025. Safer or Luckier? LLMs as Safety Evaluators Are Not Robust to Artifacts. arXiv:2503.09347
- [33] Hao Chen, Ziyu Han, Yukun Yan, Qingfu Zhu, Maosong Sun, and Wanxiang Che. 2026. From Holistic Evaluation to Structured Criteria: Rubrics Across the Evolving LLM Landscape. (2026). arXiv:2606.08625
- [34] Jiaqi Chen, Bang Zhang, Ruotian Ma, Peisong Wang, Xiaodan Liang, Zhaopeng Tu, Xiaolong Li, and Kwan-Yee K. Wong. 2025. SPC: Evolving Self-Play Critic via Adversarial Games for LLM Reasoning. (2025). arXiv:2504.19162
- [35] Minghui Chen, Wenlong Deng, James Zou, Han Yu, and Xiaoxiao Li. 2026. Textual Equilibrium Propagation for Deep Compound AI Systems. (2026). arXiv:2601.21064
- [36] Sizhe Chen, Arman Zharmagambetov, Saeed Mahloujifar, Kamalika Chaudhuri, David Wagner, and Chuan Guo. 2025. SecAlign: Defending Against Prompt Injection with Preference Optimization. arXiv:2410.05451 [cs.CR] doi:10.1145/3719027.3744836
- [37] Xiushi Chen, Gaotang Li, Ziqi Wang, Bowen Jin, Cheng Qian, Yu Wang, Hongru Wang, Yu Zhang, Denghui Zhang, Tong Zhang, Hanghang Tong, and Heng Ji. 2025. RM-R1: Reward Modeling as Reasoning. (2025). arXiv:2505.02387
- [38] Xinyun Chen, Maxwell Lin, Nathanael Sch  rli, and Denny Zhou. 2024. Teaching large language models to self-debug. In *International Conference on Learning Representations*, Vol. 2024. 8746–8825.
- [39] Xiaoyin Chen, Canwen Xu, Yite Wang, Boyi Liu, Zhewei Yao, and Yuxiong He. 2026. Learning to Self-Evolve. (2026). arXiv:2603.18620
- [40] Yixing Chen, Yiding Wang, Siqi Zhu, Haofei Yu, Tao Feng, Muhan Zhang, Mostofa Patwary, and Jiaxuan You. 2025. Multi-Agent Evolve: LLM Self-Improve through Co-evolution. (2025). arXiv:2510.23595
- [41] Ching-An Cheng, Andrey Kolobov, Dipendra Misra, Allen Nie, and Adith Swaminathan. 2023. LLF-Bench: Benchmark for Interactive Learning from Language Feedback. (2023). arXiv:2312.06853
- [42] Ching-An Cheng, Allen Nie, and Adith Swaminathan. 2024. Trace is the Next AutoDiff: Generative Optimization with Rich Feedback, Execution Traces, and LLMs. (2024). arXiv:2406.16218
- [43] Myra Cheng, Sunny Yu, Cinoo Lee, Pranav Khadpe, Lujain Ibrahim, and Dan Jurafsky. 2025. ELEPHANT: Measuring and understanding social sycophancy in LLMs. arXiv:2505.13995
- [44] Pengyu Cheng, Tianhao Hu, Han Xu, Zhisong Zhang, Zheng Yuan, Yong Dai, Lei Han, Nan Du, and Xiaolong Li. 2024. Self-playing Adversarial Language Game Enhances LLM Reasoning. (2024). arXiv:2404.10642

- [45] Maxime Chevalier-Boisvert, Dzmitry Bahdanau, Salem Lahlou, Lucas Willems, Chitwan Saharia, Thien Huu Nguyen, and Yoshua Bengio. 2018. Babyai: A platform to study the sample efficiency of grounded language learning. *arXiv preprint arXiv:1810.08272* (2018).
- [46] Prateek Chhikara, Dev Khant, Saket Aryan, Taranjeet Singh, and Deshraj Yadav. 2025. Mem0: Building Production-Ready AI Agents with Scalable Long-Term Memory. (2025). [arXiv:2504.19413](#)
- [47] Hyeon Kyu Choi, Xiaojin Zhu, and Yixuan Li. 2025. Debate or Vote: Which Yields Better Decisions in Multi-Agent Large Language Models? *Advances in Neural Information Processing Systems* (2025). [arXiv:2508.17536](#)
- [48] Paul F Christiano, Jan Leike, Tom Brown, Miljan Martic, Shane Legg, and Dario Amodei. 2017. Deep reinforcement learning from human preferences. *Advances in Neural Information Processing Systems* 30 (2017). [arXiv:1706.03741](#)
- [49] Vanya Cohen, Geraud Nangue Tasse, Nakul Gopalan, Steven James, Matthew Gombolay, Ray Mooney, and Benjamin Rosman. 2025. Compositional Instruction Following with Language Models and Reinforcement Learning. *arXiv preprint arXiv:2501.12539* (2025).
- [50] Marc-Alexandre Côté, Akos Kádár, Xingdi Yuan, Ben Kybartas, Tavian Barnes, Emery Fine, James Moore, Matthew Hausknecht, Layla El Asri, and Mahmoud Adada. 2018. Textworld: A learning environment for text-based games. In *Workshop on Computer Games*. Springer, 41–75.
- [51] Yuchen Cui, Siddharth Karamcheti, Raj Palleti, Nidhya Shivakumar, Percy Liang, and Dorsa Sadigh. 2023. “No, to the Right” – Online Language Corrections for Robotic Manipulation via Shared Autonomy. (2023). [arXiv:2301.02555](#)
- [52] Jeff Da, Clinton Wang, Xiang Deng, Yuntao Ma, Nikhil Barhate, and Sean Hendryx. 2025. Agent-RLVR: Training Software Engineering Agents via Guidance and Environment Rewards. (2025). [arXiv:2506.11425](#)
- [53] Yinpei Dai, Jayjun Lee, Nima Fazeli, and Joyce Chai. 2024. RACER: Rich Language-Guided Failure Recovery Policies for Imitation Learning. (2024). [arXiv:2409.14674](#)
- [54] Parth Darshan and Abhishek Divekar. 2026. When Gradients Collide: Failure Modes of Multi-Objective Prompt Optimization for LLM Judges. (2026). [arXiv:2605.26046](#)
- [55] Sarkar Snigdha Sarathi Das, Ryo Kamoi, Bo Pang, Yusen Zhang, Caiming Xiong, and Rui Zhang. 2024. GReaTer: Gradients over Reasoning Makes Smaller Language Models Strong Prompt Optimizers. (2024). [arXiv:2412.09722](#)
- [56] Edoardo Debenedetti, Jie Zhang, Mislav Balunovic, Luca Beurer-Kellner, Marc Fischer, and Florian Tramèr. 2024. Agentdojo: A dynamic environment to evaluate prompt injection attacks and defenses for llm agents. *Advances in Neural Information Processing Systems* 37 (2024), 82895–82920.
- [57] Shen Dong, Shaochen Xu, Pengfei He, Yige Li, Jiliang Tang, Tianming Liu, Hui Liu, and Zhen Xiang. 2026. Memory injection attacks on LLM agents via query-only interaction. *Advances in Neural Information Processing Systems* 38 (2026), 46697–46731.
- [58] Zhichen Dong, Yang Li, Yuhan Sun, Weixun Wang, Yijia Luo, Zinian Peng, Taiheng Ye, Chao Yang, Wenbo Su, Yu Cheng, Bo Zheng, and Junchi Yan. 2026. How Does Reasoning Flow? Tracing Attention-Induced Information Flow for Targeted RL in LLMs. (2026). [arXiv:2606.10646](#)
- [59] Danny Driess, Fei Xia, Mehdi SM Sajjadi, Corey Lynch, Aakanksha Chowdhery, Brian Ichter, Ayzaan Wahid, Jonathan Tompson, Quan Vuong, and Tianhe Yu. 2023. Palm-e: An embodied multimodal language model. *arXiv preprint arXiv:2303.03378* (2023).
- [60] Lingxiao Du, Fanqing Meng, Zongkai Liu, Zhixiang Zhou, Ping Luo, Qiaosheng Zhang, and Wenqi Shao. 2025. MM-PRM: Enhancing Multimodal Mathematical Reasoning with Scalable Step-Level Supervision. (2025). [arXiv:2505.13427](#)
- [61] Pengfei Du. 2026. Memory for autonomous llm agents: Mechanisms, evaluation, and emerging frontiers. *arXiv preprint arXiv:2603.07670* (2026).
- [62] Shangheng Du, Jiabao Zhao, Jinxin Shi, Zhentao Xie, Xin Jiang, Yanhong Bai, and Liang He. 2026. A Survey on the Optimization of Large Language Model-based Agents. *Comput. Surveys* 58, 9 (2026). [arXiv:2503.12434](#)
- [63] Yilun Du, Shuang Li, Antonio Torralba, Joshua B Tenenbaum, and Igor Mordatch. 2024. Improving Factuality and Reasoning in Language Models through Multiagent Debate. In *International Conference on Machine Learning*.
- [64] Jiafei Duan, Wilbert Pumacay, Nishanth Kumar, Yi Ru Wang, Shulin Tian, Wentao Yuan, Ranjay Krishna, Dieter Fox, Ajay Mandilekar, and Yijie Guo. 2024. AHA: A Vision-Language-Model for Detecting and Reasoning Over Failures in Robotic Manipulation. (2024). [arXiv:2410.00371](#)
- [65] Mateusz Dziemian, Maxwell Lin, Xiaohan Fu, Micha Nowak, Nick Winter, Eliot Jones, Andy Zou, Lama Ahmad, Kamalika Chaudhuri, Sahana Chennabasappa, Xander Davies, Lauren Deason, Benjamin L. Edelman, Tanner Emek, Ivan Evtimov, Jim Gust, Maia Hamin, Kat He, Klaudia Krawiecka, Riccardo Patana, Neil Perry, Troy Peterson, Xiangyu Qi, Javier Rando, Zifan Wang, Zihan Wang, Spencer Whitman, Eric Winsor, Arman Zharmagambetov, Matt Fredrikson, and Zico Kolter. 2026. How Vulnerable Are AI Agents to Indirect Prompt Injections? Insights from a Large-Scale Public Competition. [arXiv:2603.15714](#)
- [66] Andrew Estornell and Yang Liu. 2024. Multi-llm debate: Framework, principals, and interventions. *Advances in Neural Information Processing Systems* 37 (2024), 28938–28964.

- [67] Kawin Ethayarajh, Winnie Xu, Niklas Muennighoff, Dan Jurafsky, and Douwe Kiela. 2024. Kto: Model alignment as prospect theoretic optimization. *arXiv preprint arXiv:2402.01306* (2024).
- [68] Ivan Evtimov, Arman Zharmagambetov, Aaron Grattafiori, Chuan Guo, and Kamalika Chaudhuri. 2025. WASP: Benchmarking Web Agent Security Against Prompt Injection Attacks. *arXiv:2504.18575*
- [69] Jinyuan Fang, Yanwen Peng, Xi Zhang, Yingxu Wang, Xinhao Yi, Guibin Zhang, Yi Xu, Bin Wu, Siwei Liu, Zihao Li, Zhaochun Ren, Nikos Aletras, Xi Wang, Han Zhou, and Zaiqiao Meng. 2025. A Comprehensive Survey of Self-Evolving AI Agents: A New Paradigm Bridging Foundation Models and Lifelong Agentic Systems. (2025). *arXiv:2508.07407*
- [70] Runnan Fang, Yuan Liang, Xiaobin Wang, Jialong Wu, Shuofei Qiao, Pengjun Xie, Fei Huang, Huaqun Chen, and Ningyu Zhang. 2025. Memp: Exploring Agent Procedural Memory. (2025). *arXiv:2508.06433*
- [71] Aaron Fanous, Jacob Goldberg, Ank A. Agarwal, Joanna Lin, Anson Zhou, Roxana Daneshjou, and Sanmi Koyejo. 2025. SycEval: Evaluating LLM Sycophancy. *arXiv:2502.08177*
- [72] Xidong Feng, Bo Liu, Yan Song, Haotian Fu, Ziyu Wan, Girish A. Koushik, Zhiyuan Hu, Mengyue Yang, Ying Wen, and Jun Wang. 2024. Natural Language Reinforcement Learning. (2024). *arXiv:2411.14251*
- [73] Yuanning Feng, Sinan Wang, Zhengxiang Cheng, Yao Wan, and Dongping Chen. 2025. Are We on the Right Way to Assessing LLM-as-a-Judge? (2025). *arXiv:2512.16041*
- [74] Patrick Fernandes, Aman Madaan, Emmy Liu, António Farinhas, Pedro Henrique Martins, Amanda Bertsch, José G. C. de Souza, Shuyan Zhou, Tongshuang Wu, Graham Neubig, and André F. T. Martins. 2023. Bridging the Gap: A Survey on Integrating (Human) Feedback for Natural Language Generation. (2023). *arXiv:2305.00955*
- [75] Chrisantha Fernando, Dylan Banarse, Henryk Michalewski, Simon Osindero, and Tim Rocktäschel. 2023. Prompt-breeder: Self-Referential Self-Improvement Via Prompt Evolution. *arXiv preprint arXiv:2309.16797* (2023).
- [76] Benjamin Feuer, Chiung-Yi Tseng, Astitwa Sarthak Lathe, Oussama Elachqar, and John P. Dickerson. 2025. When Judgment Becomes Noise: How Design Failures in LLM Judge Benchmarks Silently Undermine Validity. (2025). *arXiv:2509.20293*
- [77] Evan Frick, Tianle Li, Connor Chen, Wei-Lin Chiang, Anastasios N. Angelopoulos, Jiantao Jiao, Banghua Zhu, Joseph E. Gonzalez, and Ion Stoica. 2024. How to Evaluate Reward Models for RLHF. (2024). *arXiv:2410.14872*
- [78] Huan-ang Gao, Jiayi Geng, Wenyue Hua, Mengkang Hu, Xinzhe Juan, Hongzhang Liu, Shilong Liu, Jiahao Qiu, Xuan Qi, Yiran Wu, Hongru Wang, Han Xiao, Yuhang Zhou, Shaokun Zhang, Jiayi Zhang, Jinyu Xiang, Yixiong Fang, Qiwen Zhao, Dongrui Liu, Qihan Ren, Cheng Qian, Zhenhailong Wang, Minda Hu, Huazheng Wang, Qingyun Wu, Heng Ji, and Mengdi Wang. 2025. A Survey of Self-Evolving Agents: What, When, How, and Where to Evolve on the Path to Artificial Super Intelligence. (2025). *arXiv:2507.21046*
- [79] Jonas Gehring, Kunhao Zheng, Jade Copet, Vegard Mella, Quentin Carbonneaux, Taco Cohen, and Gabriel Synnaeve. 2024. Rlef: Grounding code llms in execution feedback with reinforcement learning. *arXiv preprint arXiv:2410.02089* (2024).
- [80] Zhibin Gou, Zhihong Shao, Yeyun Gong, Yelong Shen, Yujiu Yang, Nan Duan, and Weizhu Chen. 2024. CRITIC: Large Language Models Can Self-Correct with Tool-Interactive Critiquing. In *International Conference on Learning Representations*. *arXiv:2305.11738*
- [81] Zhibin Gou, Zhihong Shao, Yeyun Gong, Yelong Shen, Yujiu Yang, Minlie Huang, Nan Duan, and Weizhu Chen. 2024. ToRA: A Tool-Integrated Reasoning Agent for Mathematical Problem Solving. *arXiv:2309.17452* [cs.CL] <https://arxiv.org/abs/2309.17452>
- [82] Joel Greenspoon. 1955. The reinforcing effect of two spoken sounds on the frequency of two responses. *The American Journal of Psychology* 68, 3 (1955), 409–416.
- [83] Kai Greshake, Sahar Abdelnabi, Shailesh Mishra, Christoph Endres, Thorsten Holz, and Mario Fritz. 2023. Not what you’ve signed up for: Compromising real-world llm-integrated applications with indirect prompt injection. In *Proceedings of the 16th ACM workshop on artificial intelligence and security*. 79–90.
- [84] Xin Guan, Xiaomeng Hu, Shen Huang, Zhenyi Wang, Bo Zhang, Zijian Li, Pengjun Xie, Bo Liu, and Jiuxin Cao. 2026. EvoRubric: Self-Evolving Rubric-Driven RL for Open-Ended Generation. (2026). *arXiv:2605.29847*
- [85] Anisha Gunjal, Anthony Wang, Elaine Lau, Vaskar Nath, Yunzhong He, Bing Liu, and Sean Hendryx. 2025. Rubrics as Rewards: Reinforcement Learning Beyond Verifiable Domains. (2025). *arXiv:2507.17746*
- [86] Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Peiyi Wang, Qihao Zhu, Runxin Xu, Ruoyu Zhang, Shirong Ma, and Xiao Bi. 2025. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948* (2025).
- [87] Jiaxin Guo, Zewen Chi, Li Dong, Qingxiu Dong, Xun Wu, Shaohan Huang, and Furu Wei. 2025. Reward Reasoning Model. (2025). *arXiv:2505.14674*
- [88] Qingyan Guo, Rui Wang, Junliang Guo, Bei Li, Kaitao Song, Xu Tan, Guoqing Liu, Jiang Bian, and Yujiu Yang. 2024. Connecting Large Language Models with Evolutionary Algorithms Yields Powerful Prompt Optimizers. In *International Conference on Learning Representations*. *arXiv:2309.08532*

- [89] Siyuan Guo, Yali Du, Hechang Chen, Yi Chang, and Jun Wang. 2026. CASCADE: Case-Based Continual Adaptation for Large Language Models During Deployment. (2026). [arXiv:2605.06702](#)
- [90] Priyanshu Gupta, Shashank Kirtania, Ananya Singha, Sumit Gulwani, Arjun Radhakrishna, Sherry Shi, and Gustavo Soares. 2024. MetaReflection: Learning Instructions for Language Agents using Past Reflections. (2024). [arXiv:2405.13009](#)
- [91] Dongyoon Hahm, Dylan Hadfield-Menell, and Kimin Lee. 2026. Alignment Tampering: How Reinforcement Learning from Human Feedback Is Exploited to Optimize Misaligned Biases. [arXiv:2605.27355](#)
- [92] Hojae Han, Seung-won Hwang, Rajhans Samdani, and Yuxiong He. 2025. ConvCodeWorld: Benchmarking Conversational Code Generation in Reproducible Feedback Environments. (2025). [arXiv:2502.19852](#)
- [93] Shibo Hao, Yi Gu, Haodi Ma, Joshua Hong, Zhen Wang, Daisy Wang, and Zhiting Hu. 2023. Reasoning with language model is planning with world model. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*. 8154–8173.
- [94] Ali Hatamizadeh, Shrimai Prabhumoye, Igor Gitman, Ximing Lu, Seungju Han, Wei Ping, Yejin Choi, and Jan Kautz. 2026. iGPO: Self-feedback-driven LLM reasoning. *arXiv preprint arXiv:2602.09000* (2026).
- [95] Jianliang He, Siyu Chen, Fengzhuo Zhang, and Zhuoran Yang. 2024. From Words to Actions: Unveiling the Theoretical Underpinnings of LLM-Driven Autonomous Systems. (2024). [arXiv:2405.19883](#)
- [96] Prannay Hebbar, Yogendra Manawat, Samuel Verboomen, Alesia Ivanova, Selvam Palanimalai, Kunal Bhatia, and Vignesh Baskaran. 2026. SIA: Self Improving AI with Harness & Weight Updates. (2026). [arXiv:2605.27276](#)
- [97] Karl Moritz Hermann, Felix Hill, Simon Green, Fumin Wang, Ryan Faulkner, Hubert Soyer, David Szepesvari, Wojciech Marian Czarnecki, Max Jaderberg, and Denis Teplyashin. 2017. Grounded language learning in a simulated 3d world. *arXiv preprint arXiv:1706.06551* (2017).
- [98] Ilgee Hong, Changlong Yu, Liang Qiu, Weixiang Yan, Zhenghao Xu, Haoming Jiang, Qingru Zhang, Qin Lu, Xin Liu, Chao Zhang, and Tao Zhao. 2025. Think-RM: Enabling Long-Horizon Reasoning in Generative Reward Models. (2025). [arXiv:2505.16265](#)
- [99] Jiseung Hong, Grace Byun, Seungone Kim, Kai Shu, and Jinho D. Choi. 2025. Measuring Sycophancy of Language Models in Multi-turn Dialogues. [arXiv:2505.23840](#)
- [100] Jiwoo Hong, Noah Lee, and James Thorne. 2024. Orpo: Monolithic preference optimization without reference model. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*. 11170–11189.
- [101] Sirui Hong, Mingchen Zhuge, Jonathan Chen, Xiwu Zheng, Yuheng Cheng, Jinlin Wang, Ceyao Zhang, Steven Yau, Zijuan Lin, and Liyang Zhou. 2024. MetaGPT: Meta programming for a multi-agent collaborative framework. In *International Conference on Learning Representations*, Vol. 2024. 23247–23275.
- [102] Nicola Horst, Davide Mazzaccara, Antonia Schmidt, Michael Sullivan, Filippo Momentè, Luca Franceschetti, Philipp Sadler, Sherzod Hakimov, Alberto Testoni, Raffaella Bernardi, Raquel Fernández, Alexander Koller, Oliver Lemon, David Schlangen, Mario Giulianelli, and Alessandro Suglia. 2025. Playpen: An Environment for Exploring Learning Through Conversational Interaction. (2025). [arXiv:2504.08590](#)
- [103] Shengran Hu, Cong Lu, and Jeff Clune. 2024. Automated Design of Agentic Systems. (2024). [arXiv:2408.08435](#)
- [104] Yuanzhe Hu, Yu Wang, and Julian McAuley. 2025. Evaluating Memory in LLM Agents via Incremental Multi-Turn Interactions. (2025). [arXiv:2507.05257](#)
- [105] Zican Hu, Wei Liu, Xiaoye Qu, Xiangyu Yue, Chunlin Chen, Zhi Wang, and Yu Cheng. 2025. Divide and conquer: Grounding LLMs as efficient decision-making agents via offline hierarchical reinforcement learning. *arXiv preprint arXiv:2505.19761* (2025).
- [106] Hui Huang, Yancheng He, Hongli Zhou, Rui Zhang, Wei Liu, Weixun Wang, Jiaheng Liu, and Wenbo Su. 2025. Think-J: Learning to Think for Generative LLM-as-a-Judge. (2025). [arXiv:2505.14268](#)
- [107] Jie Huang, Xinyun Chen, Swaroop Mishra, Huaixiu Steven Zheng, Adams Yu, Xinying Song, and Denny Zhou. 2024. Large language models cannot self-correct reasoning yet. In *International conference on learning representations*, Vol. 2024. 32808–32824.
- [108] Jiaxin Huang, Shixiang Shane Gu, Le Hou, Yuexin Wu, Xuezhi Wang, Hongkun Yu, and Jiawei Han. 2022. Large Language Models Can Self-Improve. *arXiv preprint arXiv:2210.11610* (2022).
- [109] Jiani Huang, Amish Sethi, Matthew Kuo, Mayank Keoliya, Neelay Velingker, JungHo Jung, Ser-Nam Lim, Ziyang Li, and Mayur Naik. 2025. ESCA: Contextualizing Embodied Agents via Scene-Graph Generation. [arXiv:2510.15963](#) [cs.CV] <https://arxiv.org/abs/2510.15963>
- [110] Lei Huang, Xiang Cheng, Chenxiao Zhao, Guobin Shen, Junjie Yang, Xiaocheng Feng, Yuxuan Gu, Xing Yu, and Bing Qin. 2026. Bootstrapping Exploration with Group-Level Natural Language Feedback in Reinforcement Learning. (2026). [arXiv:2603.04597](#)
- [111] Wenlong Huang, Chen Wang, Ruohan Zhang, Yunzhu Li, Jiajun Wu, and Li Fei-Fei. 2023. Voxposer: Composable 3d value maps for robotic manipulation with language models. *arXiv preprint arXiv:2307.05973* (2023).

- [112] Wenlong Huang, Fei Xia, Ted Xiao, Harris Chan, Jacky Liang, Pete Florence, Andy Zeng, Jonathan Tompson, Igor Mordatch, and Yevgen Chebotar. 2022. Inner monologue: Embodied reasoning through planning with language models. *arXiv preprint arXiv:2207.05608* (2022).
- [113] Yue Huang, Yanyuan Chen, Dexuan Xu, Weihua Yue, Huamin Zhang, Meikang Qiu, and Yu Huang. 2025. MedReflect: Teaching Medical LLMs to Self-Improve via Reflective Correction. *arXiv preprint arXiv:2510.03687* (2025).
- [114] Yuzhen Huang, Weihao Zeng, Xingshan Zeng, Qi Zhu, and Junxian He. 2025. From Accuracy to Robustness: A Study of Rule- and Model-based Verifiers in Mathematical Reasoning. (2025). [arXiv:2505.22203](#)
- [115] Zilin Huang, Zihao Sheng, Yansong Qu, Junwei You, and Sikai Chen. 2024. VLM-RL: A Unified Vision Language Models and Reinforcement Learning Framework for Safe Autonomous Driving. (2024). [arXiv:2412.15544](#)
- [116] Zenan Huang, Yihong Zhuang, Guoshan Lu, Zeyu Qin, Haokai Xu, Tianyu Zhao, Ru Peng, Jiaqi Hu, Zhanming Shen, Xiaomeng Hu, Xijun Gu, Peiyi Tu, Jiaxin Liu, Wenyu Chen, Yuzhuo Fu, Zhiting Fan, Yanmei Gu, Yuanyuan Wang, Zhengkai Yang, Jianguo Li, and Junbo Zhao. 2025. Reinforcement Learning with Rubric Anchors. (2025). [arXiv:2508.12790](#)
- [117] Minyoung Hwang, Joey Hejna, Dorsa Sadigh, and Yonatan Bisk. 2024. MotIF: Motion Instruction Fine-tuning. (2024). [arXiv:2409.10683](#)
- [118] Miaomiao Ji, Yanqiu Wu, Zhibin Wu, Shoujin Wang, Jian Yang, Mark Dras, and Usman Naseem. 2025. A Survey on Progress in LLM Alignment from the Perspective of Reward Design. (2025). [arXiv:2505.02666](#)
- [119] Shuo Ji, Yibo Li, and Bryan Hooi. 2026. Memory is Reconstructed, Not Retrieved: Graph Memory for LLM Agents. (2026). [arXiv:2606.06036](#)
- [120] Dongwei Jiang, Alvin Zhang, Andrew Wang, Nicholas Andrews, and Daniel Khashabi. 2025. Feedback Friction: LLMs Struggle to Fully Incorporate External Feedback. (2025). [arXiv:2506.11930](#)
- [121] Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. 2024. SWE-bench: Can Language Models Resolve Real-World GitHub Issues? [arXiv:2310.06770 \[cs.CL\]](#) <https://arxiv.org/abs/2310.06770>
- [122] Frank Joublin, Antonello Ceravola, Pavel Smirnov, Felix Ocker, Joerg Deigmoeller, Anna Belardinelli, Chao Wang, Stephan Hasler, Daniel Tanneberg, and Michael Gienger. 2024. Copal: corrective planning of robot actions with large language models. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 8664–8670.
- [123] Leslie Pack Kaelbling, Michael L Littman, and Anthony R Cassandra. 1998. Planning and acting in partially observable stochastic domains. *Artificial Intelligence* 101, 1–2 (1998), 99–134. [doi:10.1016/S0004-3702\(98\)00023-X](#)
- [124] Ryo Kamoi, Yusen Zhang, Nan Zhang, Jiawei Han, and Rui Zhang. 2024. When can llms actually correct their own mistakes? a critical survey of self-correction of llms. *Transactions of the Association for Computational Linguistics* 12 (2024), 1417–1440.
- [125] Zachary Kenton, Noah Y. Siegel, János Kramár, Jonah Brown-Cohen, Samuel Albanie, Jannis Bulian, Rishabh Agarwal, David Lindner, Yunhao Tang, Noah D. Goodman, and Rohin Shah. 2024. On scalable oversight with weak LLMs judging strong LLMs. (2024). [arXiv:2407.04622](#)
- [126] Muhammad Khalifa, Rishabh Agarwal, Lajanugen Logeswaran, Jaekyeom Kim, Hao Peng, Moontae Lee, Honglak Lee, and Lu Wang. 2025. Process Reward Models That Think. [arXiv:2504.16828 \[cs.LG\]](#) <https://arxiv.org/abs/2504.16828>
- [127] Akbir Khan, John Hughes, Dan Valentine, Laura Ruis, Kshitij Sachan, Ansh Radhakrishnan, Edward Grefenstette, Samuel R. Bowman, Tim Rocktäschel, and Ethan Perez. 2024. Debating with More Persuasive LLMs Leads to More Truthful Answers. (2024). [arXiv:2402.06782](#)
- [128] Omar Khattab, Arnav Singhvi, Paridhi Maheshwari, Zhiyuan Zhang, Keshav Santhanam, Sri Vardhamanan, Saiful Haq, Ashutosh Sharma, Thomas T. Joshi, Hanna Moazam, Heather Miller, Matei Zaharia, and Christopher Potts. 2023. DSPy: Compiling Declarative Language Model Calls into Self-Improving Pipelines. (2023). [arXiv:2310.03714](#)
- [129] Sunghwan Kim, Dongjin Kang, Taeyoon Kwon, Hyungjoo Chae, Jungsoo Won, Dongha Lee, and Jinyoung Yeo. 2024. Evaluating Robustness of Reward Models for Mathematical Reasoning. (2024). [arXiv:2410.01729](#)
- [130] Taewoong Kim, Byeonghwi Kim, and Jonghyun Choi. 2025. Multi-modal grounded planning and efficient replanning for learning embodied agents with a few examples. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 39. 4329–4337.
- [131] Jan Hendrik Kirchner, Yining Chen, Harri Edwards, Jan Leike, Nat McAleese, and Yuri Burda. 2024. Prover-Verifier Games improve legibility of LLM outputs. (2024). [arXiv:2407.13692](#)
- [132] Martin Klissarov, Jonathan Cook, Diego Antognini, Hao Sun, Jingling Li, Natasha Jaques, Claudiu Musat, and Edward Grefenstette. 2026. Improving Interactive In-Context Learning from Natural Language Feedback. *arXiv preprint arXiv:2602.16066* (2026).
- [133] Ryan Koo, Ian Yang, Vipul Raheja, Mingyi Hong, Kwang-Sung Jun, and Dongyeop Kang. 2025. Learning Explainable Dense Reward Shapes via Bayesian Optimization. (2025). [arXiv:2504.16272](#)
- [134] Leonard Krasner. 1958. Studies of the conditioning of verbal behavior. *Psychological Bulletin* 55, 3 (1958), 148–170. [doi:10.1037/h0040492](#)

- [135] Jakub Grudzien Kuba, Mengting Gu, Qi Ma, Yuandong Tian, Vijai Mohan, and Jason Chen. 2025. Language Self-Play For Data-Free Training. (2025). [arXiv:2509.07414](#)
- [136] Peng Lai, Zhihao Ou, Yong Wang, Longyue Wang, Jian Yang, Yun Chen, and Guanhua Chen. 2026. BiasScope: Towards Automated Detection of Bias in LLM-as-a-Judge Evaluation. (2026). [arXiv:2602.09383](#)
- [137] Nathan Lambert, Jacob Morrison, Valentina Pyatkin, Shengyi Huang, Hamish Ivison, Faeze Brahman, Lester James V Miranda, Alisa Liu, Nouha Dziri, and Shane Lyu. 2024. Tulu 3: Pushing frontiers in open language model post-training. *arXiv preprint arXiv:2411.15124* (2024).
- [138] Nathan Lambert, Valentina Pyatkin, Jacob Morrison, LJ Miranda, Bill Yuchen Lin, Khyathi Chandu, Nouha Dziri, Sachin Kumar, Tom Zick, Yejin Choi, Noah A. Smith, and Hannaneh Hajishirzi. 2024. RewardBench: Evaluating Reward Models for Language Modeling. (2024). [arXiv:2403.13787](#)
- [139] Tian Lan, Wenwei Zhang, Chengqi Lyu, Shuaibin Li, Chen Xu, Heyan Huang, Dahua Lin, Xian-Ling Mao, and Kai Chen. 2024. Training Language Models to Critique With Multi-agent Feedback. (2024). [arXiv:2410.15287](#)
- [140] Tian Lan, Wenwei Zhang, Chen Xu, Heyan Huang, Dahua Lin, Kai Chen, and Xian-ling Mao. 2024. CriticEval: Evaluating Large Language Model as Critic. (2024). [arXiv:2402.13764](#)
- [141] Hao Lang, Fei Huang, and Yongbin Li. 2025. Debate Helps Weak-to-Strong Generalization. (2025). [arXiv:2501.13124](#)
- [142] Harrison Lee, Samrat Phatale, Hassan Mansoor, Thomas Mesnard, Johan Ferret, Kellie Lu, Colton Bishop, Ethan Hall, Victor Carbune, and Abhinav Rastogi. 2023. Rlaif vs. rlhf: Scaling reinforcement learning from human feedback with ai feedback. *arXiv preprint arXiv:2309.00267* (2023).
- [143] Tony Lee, Andrew Wagenmaker, Karl Pertsch, Percy Liang, Sergey Levine, and Chelsea Finn. 2026. RoboReward: General-Purpose Vision-Language Reward Models for Robotics. (2026). [arXiv:2601.00675](#)
- [144] Andrew Li, Torny Klassen, Andrew Wang, Parand A Alamdari, and Sheila McIlraith. 2026. Ground-Compose-Reinforce: Grounding Language in Agentic Behaviours using Limited Data. *Advances in Neural Information Processing Systems* 38 (2026), 160838–160874.
- [145] Jiahui Li, Lin Li, Tai-wei Chang, Kun Kuang, Long Chen, Jun Zhou, and Cheng Yang. 2024. RED: Unleashing Token-Level Rewards from Holistic Feedback via Reward Redistribution. (2024). [arXiv:2411.08302](#)
- [146] Songze Li, Chuokun Xu, Jiaying Wang, Xueluan Gong, Chen Chen, Jirui Zhang, Jun Wang, Kwok-Yan Lam, and Shouling Ji. 2025. LLMs Cannot Reliably Judge (Yet?): A Comprehensive Assessment on the Robustness of LLM-as-a-Judge. [arXiv:2506.09443](#)
- [147] Sunzhu Li, Jiale Zhao, Miteto Wei, Huimin Ren, Yang Zhou, Jingwen Yang, Shunyu Liu, Kaike Zhang, and Wei Chen. 2026. RubricHub: A Comprehensive and Highly Discriminative Rubric Dataset via Automated Coarse-to-Fine Generation. (2026). [arXiv:2601.08430](#)
- [148] Yunxuan Li, Yibing Du, Jiageng Zhang, Le Hou, Peter Grabowski, Yeqing Li, and Eugene Ie. 2024. Improving multi-agent debate with sparse communication topology. In *Findings of the Association for Computational Linguistics: EMNLP 2024*. 7281–7294.
- [149] Jacky Liang, Wenlong Huang, Fei Xia, Peng Xu, Karol Hausman, Brian Ichter, Pete Florence, and Andy Zeng. 2022. Code as policies: Language model programs for embodied control, 2023. URL <https://arxiv.org/abs/2209.07753> 3 (2022).
- [150] Tian Liang, Zhiwei He, Wenxiang Jiao, Xing Wang, Yan Wang, Rui Wang, Yujiu Yang, Shuming Shi, and Zhaopeng Tu. 2024. Encouraging Divergent Thinking in Large Language Models through Multi-Agent Debate. [arXiv:2305.19118](#) [cs.CL] <https://arxiv.org/abs/2305.19118>
- [151] Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. 2024. Let’s verify step by step. In *International Conference on Learning Representations*, Vol. 2024. 39578–39601. [arXiv:2305.20050](#)
- [152] Huawei Lin, Peng Li, Jie Song, Fuxin Jiang, and Tieying Zhang. 2026. MUSE-Autoskill: Self-Evolving Agents via Skill Creation, Memory, Management, and Evaluation. (2026). [arXiv:2605.27366](#)
- [153] Muhan Lin, Shuyang Shi, Yue Guo, Vaishnav Tadiparthi, Behdad Chalaki, Ehsan Moradi Pari, Simon Stepputtis, Woojun Kim, Joseph Campbell, and Katia Sycara. 2025. Speaking the Language of Teamwork: LLM-Guided Credit Assignment in Multi-Agent Reinforcement Learning. (2025). [arXiv:2502.03723](#)
- [154] Zijun Lin, Jiafei Duan, Haoquan Fang, Dieter Fox, Ranjay Krishna, Cheston Tan, and Bihan Wen. 2025. FailSafe: Reasoning and Recovery from Failures in Vision-Language-Action Models. (2025). [arXiv:2510.01642](#)
- [155] Zicheng Lin, Zhibin Gou, Tian Liang, Ruilin Luo, Haowei Liu, and Yujiu Yang. 2024. Criticbench: Benchmarking llms for critique-correct reasoning. In *Findings of the Association for Computational Linguistics: ACL 2024*. 1552–1587.
- [156] Zijie Lin and Bryan Hooi. 2025. Enhancing Multi-Agent Debate System Performance via Confidence Expression. (2025). [arXiv:2509.14034](#)
- [157] Chenxi Liu, Yanshuo Chen, Ruibo Chen, Tianyi Xiong, Tong Zheng, and Heng Huang. 2026. Learning from Self-Debate: Preparing Reasoning Models for Multi-Agent Debate. [arXiv:2601.22297](#) [cs.CL] <https://arxiv.org/abs/2601.22297>
- [158] Hongyi Liu, Haoyan Yang, Tao Jiang, Bo Tang, Feiyu Xiong, Yuyu Luo, and Zhiyu Li. 2026. SkillsVote: Lifecycle Governance of Agent Skills from Collection, Recommendation to Evolution. (2026). [arXiv:2605.18401](#)

- [159] Qingshan Liu, Guoqing Wang, Wen Wu, Jingqi Huang, Xinqi Tao, Dejia Song, Jie Zhou, and Liang He. 2026. MemPro: Agentic Memory Systems as Evolvable Programs. (2026). arXiv:2606.00619
- [160] ShaoZhen Liu, Xinting Huang, Houwen Peng, Xin Chen, Xinyang Song, Qi Li, and Zhenan Sun. 2026. Dual-Phase LLM Reasoning: Self-Evolved Mathematical Frameworks. *arXiv preprint arXiv:2601.05616* (2026).
- [161] Shiyan Liu, Qifeng Xia, Qiyun Xia, Yisheng Liu, Xinyu Yu, and Rui Qu. 2026. Reflection in the Dark: Exposing and Escaping the Black Box in Reflective Prompt Optimization. (2026). arXiv:2603.18388
- [162] Tianci Liu, Ran Xu, Tony Yu, Ilgee Hong, Carl Yang, Tuo Zhao, and Haoyu Wang. 2025. OpenRubrics: Towards Scalable Synthetic Rubric Generation for Reward Modeling and LLM Alignment. (2025). arXiv:2510.07743
- [163] Xiaoqian Liu, Ke Wang, Yuchuan Wu, Fei Huang, Yongbin Li, Junge Zhang, and Jianbin Jiao. 2025. Agentic Reinforcement Learning with Implicit Step Rewards. arXiv:2509.19199 [cs.CL] <https://arxiv.org/abs/2509.19199>
- [164] Yantao Liu, Zijun Yao, Rui Min, Yixin Cao, Lei Hou, and Juanzi Li. 2024. RM-Bench: Benchmarking Reward Models of Language Models with Subtlety and Style. (2024). arXiv:2410.16184
- [165] Zijun Liu, Peiyi Wang, Runxin Xu, Shirong Ma, Chong Ruan, Peng Li, Yang Liu, and Yu Wu. 2025. Inference-Time Scaling for Generalist Reward Modeling. (2025). arXiv:2504.02495
- [166] Saüc Abadal Lloret, Shehzaad Dhuliawala, Keerthiram Murugesan, and Mrinmaya Sachan. 2024. Towards aligning language models with textual feedback. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*. 20240–20266.
- [167] Chris Lu, Cong Lu, Robert Tjarko Lange, Jakob Foerster, Jeff Clune, and David Ha. 2024. The ai scientist: Towards fully automated open-ended scientific discovery. *arXiv preprint arXiv:2408.06292* (2024).
- [168] Guanxing Lu, Wenkai Guo, Chubin Zhang, Yuheng Zhou, Haonan Jiang, Zifeng Gao, Yansong Tang, and Ziwei Wang. 2025. VLA-RL: Towards Masterful and General Robotic Manipulation with Scalable Reinforcement Learning. (2025). arXiv:2505.18719
- [169] Xinyu Lu, Kaiqi Zhang, Jinglin Yang, Boxi Cao, Yaojie Lu, Hongyu Lin, Min He, Xianpei Han, and Le Sun. 2026. P²O: Joint Policy and Prompt Optimization. (2026). arXiv:2603.21877
- [170] Jelena Luketina, Nantas Nardelli, Gregory Farquhar, Jakob Foerster, Jacob Andreas, Edward Grefenstette, Shimon Whiteson, and Tim Rocktäschel. 2019. A survey of reinforcement learning informed by natural language. *arXiv preprint arXiv:1906.03926* (2019).
- [171] Liangchen Luo, Yinxiao Liu, Rosanne Liu, Samrat Phatale, Meiqi Guo, Harsh Lara, Yunxuan Li, Lei Shu, Yun Zhu, and Lei Meng. 2024. Improve mathematical reasoning in language models by automated process supervision. *arXiv preprint arXiv:2406.06592* (2024).
- [172] Renjie Luo, Zichen Liu, Xiangyan Liu, Chao Du, Min Lin, Wenhu Chen, Wei Lu, and Tianyu Pang. 2025. Language models can learn from verbal feedback without scalar rewards. *arXiv preprint arXiv:2509.22638* (2025).
- [173] Corey Lynch and Pierre Sermanet. 2021. Language Conditioned Imitation Learning over Unstructured Data. In *Robotics: Science and Systems*.
- [174] Xing Han Lü, Amirhossein Kazemnejad, Nicholas Meade, Arkil Patel, Dongchan Shin, Alejandra Zambrano, Karolina Stanczak, Peter Shaw, Christopher J. Pal, and Siva Reddy. 2025. AgentRewardBench: Evaluating Automatic Evaluations of Web Agent Trajectories. (2025). arXiv:2504.08942
- [175] Qiyao Ma, Dechen Gao, Rui Cai, Boqi Zhao, Hanchu Zhou, Junshan Zhang, and Zhe Zhao. 2026. Personalized RewardBench: Evaluating Reward Models with Human Aligned Personalization. (2026). arXiv:2604.07343
- [176] Ruotian Ma, Xiaolei Wang, Xin Zhou, Jian Li, Nan Du, Tao Gui, Qi Zhang, and Xuanjing Huang. 2024. Are Large Language Models Good Prompt Optimizers? (2024). arXiv:2402.02101
- [177] Yecheng Jason Ma, William Liang, Guanzhi Wang, De-An Huang, Osbert Bastani, Dinesh Jayaraman, Yuke Zhu, and Jim Fan. 2024. Eureka: Human-level reward design via coding large language models. In *International conference on learning Representations*, Vol. 2024. 26516–26560.
- [178] Yecheng Jason Ma, William Liang, Hung-Ju Wang, Sam Wang, Yuke Zhu, Linxi Fan, Osbert Bastani, and Dinesh Jayaraman. 2024. DrEureka: Language Model Guided Sim-To-Real Transfer. (2024). arXiv:2406.01967
- [179] James MacGlashan, Mark K Ho, Robert Loftin, Bei Peng, Guan Wang, David L Roberts, Matthew E Taylor, and Michael L Littman. 2017. Interactive learning from policy-dependent human feedback. In *International conference on machine learning*. PMLR, 2285–2294. arXiv:1701.06049
- [180] Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegrefe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, Shashank Gupta, Bodhisattwa Prasad Majumder, Katherine Hermann, Sean Welleck, Amir Yazdanbakhsh, and Peter Clark. 2023. Self-Refine: Iterative Refinement with Self-Feedback. In *Advances in Neural Information Processing Systems*.
- [181] Anas Mahmoud, MohammadHossein Rezaei, Zihao Wang, Anisha Gunjal, Bing Liu, and Yunzhong He. 2026. Reward Hacking in Rubric-Based Reinforcement Learning. (2026). arXiv:2605.12474
- [182] Saumya Malik, Valentina Pyatkin, Sander Land, Jacob Morrison, Noah A. Smith, Hannaneh Hajishirzi, and Nathan Lambert. 2025. RewardBench 2: Advancing Reward Model Evaluation. (2025). arXiv:2506.01937

- [183] Narek Maloyan and Dmitry Namiot. 2025. Adversarial Attacks on LLM-as-a-Judge Systems: Insights from Prompt Injections. [arXiv:2504.18333](#)
- [184] Nat McAleese, Rai Michael Pokorny, Juan Felipe Ceron Uribe, Evgenia Nitishinskaya, Maja Trebacz, and Jan Leike. 2024. LLM Critics Help Catch LLM Bugs. *arXiv preprint arXiv:2407.00215* (2024).
- [185] Yu Meng, Mengzhou Xia, and Danqi Chen. 2024. Simpo: Simple preference optimization with a reference-free reward. *Advances in Neural Information Processing Systems* 37 (2024), 124198–124235.
- [186] Dipendra Misra, John Langford, and Yoav Artzi. 2017. Mapping instructions and visual observations to actions with reinforcement learning. In *Proceedings of the 2017 conference on empirical methods in natural language processing*. 1004–1015.
- [187] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Andrei A Rusu, Joel Veness, Marc G Bellemare, Alex Graves, Martin Riedmiller, Andreas K Fidjeland, and Georg Ostrovski. 2015. Human-level control through deep reinforcement learning. *Nature* 518, 7540 (2015), 529–533.
- [188] Sumeet Ramesh Motwani, Chandler Smith, Rocktim Jyoti Das, Rafael Rafailov, Ivan Laptev, Philip H. S. Torr, Fabio Pizzati, Ronald Clark, and Christian Schroeder de Witt. 2024. MALT: Improving Reasoning with Multi-Agent LLM Training. (2024). [arXiv:2412.01928](#)
- [189] Vaskar Nath, Pranav Raja, Claire Yoon, and Sean Hendryx. 2025. ToolComp: A Multi-Tool Reasoning & Process Supervision Benchmark. (2025). [arXiv:2501.01290](#)
- [190] Manh Nguyen, Anh Nguyen, Dung Nguyen, Svetha Venkatesh, and Hung Le. 2026. Hear Both Sides: Efficient Multi-Agent Debate via Diversity-Aware Message Retention. (2026). [arXiv:2603.20640](#)
- [191] Allen Nie, Ching-An Cheng, Andrey Kolobov, and Adith Swaminathan. 2024. The Importance of Directional Feedback for LLM-based Optimizers. (2024). [arXiv:2405.16434](#)
- [192] Xuying Ning, Katherine Tieu, Dongqi Fu, Tianxin Wei, Zihao Li, Yuanchen Bei, Jiaru Zou, Mengting Ai, Zhining Liu, and Ting-Wei Li. 2026. Code as Agent Harness. *arXiv preprint arXiv:2605.18747* (2026).
- [193] Theo X Olausson, Jeevana Priya Inala, Chenglong Wang, Jianfeng Gao, and Armando Solar-Lezama. 2024. Is self-repair a silver bullet for code generation?. In *International Conference on Learning Representations*, Vol. 2024. 36545–36593.
- [194] Krista Opsahl-Ong, Michael J Ryan, Josh Purtell, David Broman, Christopher Potts, Matei Zaharia, and Omar Khattab. 2024. Optimizing Instructions and Demonstrations for Multi-Stage Language Model Programs. In *Conference on Empirical Methods in Natural Language Processing*.
- [195] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, and Alex Ray. 2022. Training language models to follow instructions with human feedback. *Advances in neural information processing systems* 35 (2022), 27730–27744.
- [196] Siru Ouyang, Jun Yan, I-Hung Hsu, Yanfei Chen, Ke Jiang, Zifeng Wang, Rujun Han, Long T. Le, Samira Daruki, Xiangru Tang, Vishy Tirumalashetty, George Lee, Mahsan Rofouei, Hangfei Lin, Jiawei Han, Chen-Yu Lee, and Tomas Pfister. 2025. ReasoningBank: Scaling Agent Self-Evolving with Reasoning Memory. (2025). [arXiv:2509.25140](#)
- [197] Paul Pacaud, Ricardo Garcia, Shizhe Chen, and Cordelia Schmid. 2025. Scaling Cross-Environment Failure Reasoning Data for Vision-Language Robotic Manipulation. (2025). [arXiv:2512.01946](#)
- [198] Alexander Pan, Erik Jones, Meena Jagadeesan, and Jacob Steinhardt. 2024. Feedback Loops With Language Models Drive In-Context Reward Hacking. [arXiv:2402.06627](#)
- [199] Liangming Pan, Michael Saxon, Wenda Xu, Deepak Nathani, Xinyi Wang, and William Yang Wang. 2023. Automatically Correcting Large Language Models: Surveying the landscape of diverse self-correction strategies. (2023). [arXiv:2308.03188](#)
- [200] Manav Pandey. 2026. LLMs Know They’re Wrong and Agree Anyway: The Shared Sycophancy-Lying Circuit. [arXiv:2604.19117](#)
- [201] Henry Papadatos and Rachel Freedman. 2024. Linear Probe Penalties Reduce LLM Sycophancy. [arXiv:2412.00967](#)
- [202] Chanwoo Park, Seungju Han, Xingzhi Guo, Asuman Ozdaglar, Kaiqing Zhang, and Joo-Kyung Kim. 2025. MAPoRL: Multi-Agent Post-Co-Training for Collaborative Large Language Models with Reinforcement Learning. (2025). [arXiv:2502.18439](#)
- [203] Joon Sung Park, Joseph O’Brien, Carrie Jun Cai, Meredith Ringel Morris, Percy Liang, and Michael S Bernstein. 2023. Generative Agents: Interactive Simulacra of Human Behavior. In *ACM Symposium on User Interface Software and Technology (UIST)*.
- [204] Pankayaraj Pathmanathan, Souradip Chakraborty, Xiangyu Liu, Yongyuan Liang, and Furong Huang. 2024. Is poisoning a real threat to LLM alignment? Maybe more so than you think. [arXiv:2406.12091](#)
- [205] Debjit Paul, Mete Ismayilzade, Maxime Peyrard, Beatriz Borges, Antoine Bosselut, Robert West, and Boi Faltings. 2024. REFINER: Reasoning Feedback on Intermediate Representations. *arXiv preprint arXiv:2304.01904* (2024).
- [206] Eduardo Pignatelli, Johan Ferret, Tim Rockäschel, Edward Grefenstette, Davide Paglieri, Samuel Coward, and Laura Toni. 2024. Assessing the Zero-Shot Capabilities of LLMs for Action Evaluation in RL. (2024). [arXiv:2409.12798](#)

- [207] Keyang Qian, Yixin Cheng, Rui Guan, Wei Dai, Flora Jin, Kaixun Yang, Sadia Nawaz, Zachari Swiecki, Guanliang Chen, and Lixiang Yan. 2025. Dean of LLM Tutors: A Framework for Automated Quality Review of AI-generated Feedback. *arXiv preprint arXiv:2508.05952* (2025).
- [208] Yun Qu, Yuhang Jiang, Boyuan Wang, Yixiu Mao, Cheems Wang, Chang Liu, and Xiangyang Ji. 2024. Latent Reward: LLM-Empowered Credit Assignment in Episodic Reinforcement Learning. (2024). [arXiv:2412.11120](#)
- [209] Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. 2023. Direct preference optimization: Your language model is secretly a reward model. *Advances in neural information processing systems* 36 (2023), 53728–53741.
- [210] Salman Rahman, Sruthi Gorantla, Arpit Gupta, Swastik Roy, Nanyun Peng, and Yang Liu. 2025. SPARK: Stepwise Process-Aware Rewards for Reference-Free Reinforcement Learning. (2025). [arXiv:2512.03244](#)
- [211] Vyas Raina, Adian Liusie, and Mark Gales. 2024. Is LLM-as-a-Judge Robust? Investigating Universal Adversarial Attacks on Zero-shot LLM Assessment. [arXiv:2402.14016](#)
- [212] MohammadHossein Rezaei, Robert Vacareanu, Zihao Wang, Clinton Wang, Bing Liu, Yunzhong He, and Afra Feyza Akyürek. 2025. Online Rubrics Elicitation from Pairwise Comparisons. (2025). [arXiv:2510.07284](#)
- [213] Amit Roth, Ankur Samanta, Matan Halevy, Yoav Levine, and Yonathan Efroni. 2026. Hack-Verifiable Environments: Towards Evaluating Reward Hacking at Scale. [arXiv:2605.20744](#)
- [214] Swarnadeep Saha, Xian Li, Marjan Ghazvininejad, Jason Weston, and Tianlu Wang. 2025. Learning to Plan & Reason for Evaluation with Thinking-LLM-as-a-Judge. (2025). [arXiv:2501.18099](#)
- [215] Yusuke Sakai, Hidetaka Kamigaito, and Taro Watanabe. 2025. Revisiting compositional generalization capability of large language models considering instruction following ability. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. 31219–31238.
- [216] Bidipta Sarkar, Warren Xia, C. Karen Liu, and Dorsa Sadigh. 2025. Training Language Models for Social Deduction with Multi-Agent Reinforcement Learning. (2025). [arXiv:2502.06060](#)
- [217] Jérémy Scheurer, Jon Ander Campos, Tomasz Korbak, Jun Shern Chan, Angelica Chen, Kyunghyun Cho, and Ethan Perez. 2023. Training language models with language feedback at scale. *arXiv preprint arXiv:2303.16755* (2023).
- [218] Timo Schick, Jane Dwivedi-Yu, Roberto Dessi, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. 2023. Toolformer: Language models can teach themselves to use tools. *Advances in neural information processing systems* 36 (2023), 68539–68551.
- [219] Philip Schroeder, Thomas Weng, Karl Schmeckpeper, Eric Rosen, Stephen Hart, and Ondrej Biza. 2026. SOLE-R1: Video-Language Reasoning as the Sole Reward for On-Robot Reinforcement Learning. (2026). [arXiv:2603.28730](#)
- [220] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. 2017. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347* (2017).
- [221] Leo Schwinn, Moritz Ladenburger, Tim Beyer, Mehrnaz Mofakhami, Gauthier Gidel, and Stephan Günnemann. 2026. A Coin Flip for Safety: LLM Judges Fail to Reliably Measure Adversarial Robustness. [arXiv:2603.06594](#)
- [222] Mrinank Sharma, Meg Tong, Tomek Korbak, David Duvenaud, Amanda Askell, Sam Bowman, Esin Durmus, Zac Hatfield-Dodds, Scott Johnston, and Shauna Kravec. 2024. Towards understanding sycophancy in language models. In *International Conference on Learning Representations*, Vol. 2024. 110–144.
- [223] Pratyusha Sharma, Balakumar Sundaralingam, Valts Blukis, Chris Paxton, Tucker Hermans, Antonio Torralba, Jacob Andreas, and Dieter Fox. 2022. Correcting robot plans with natural language feedback. *arXiv preprint arXiv:2204.05186* (2022).
- [224] Haizhou Shi, Ye Liu, Bo Pang, Zeyu Leo Liu, Hao Wang, Silvio Savarese, Caiming Xiong, Yingbo Zhou, and Semih Yavuz. 2025. SSR: Socratic Self-Refine for Large Language Model Reasoning. *arXiv preprint arXiv:2511.10621* (2025).
- [225] Jiawen Shi, Zenghui Yuan, Yinyao Liu, Yue Huang, Pan Zhou, Lichao Sun, and Neil Zhenqiang Gong. 2024. Optimization-based Prompt Injection Attack to LLM-as-a-Judge. [arXiv:2403.17710](#)
- [226] Jiawen Shi, Zenghui Yuan, Guiyao Tie, Pan Zhou, Neil Zhenqiang Gong, and Lichao Sun. 2025. Prompt injection attack to tool selection in llm agents. *arXiv preprint arXiv:2504.19793* (2025).
- [227] Lucy Xiaoyang Shi, Zheyuan Hu, Tony Z. Zhao, Archit Sharma, Karl Pertsch, Jianlan Luo, Sergey Levine, and Chelsea Finn. 2024. Yell At Your Robot: Improving On-the-Fly from Language Corrections. (2024). [arXiv:2403.12910](#)
- [228] Noah Shinn, Federico Cassano, Berman Labash, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. 2023. Reflexion: Language Agents with Verbal Reinforcement Learning. In *Advances in Neural Information Processing Systems*, Vol. 36.
- [229] Mohit Shridhar, Xingdi Yuan, Marc-Alexandre Côté, Yonatan Bisk, Adam Trischler, and Matthew Hausknecht. 2020. Alfworld: Aligning text and embodied environments for interactive learning. *arXiv preprint arXiv:2010.03768* (2020).
- [230] Ilya Shumailov, Zakhar Shumaylov, Yiren Zhao, Yarin Gal, Nicolas Papernot, and Ross Anderson. 2023. The curse of recursion: Training on generated data makes models forget. *arXiv preprint arXiv:2305.17493* (2023).
- [231] David Silver, Aja Huang, Chris J Maddison, Arthur Guez, Laurent Sifre, George Van Den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Veda Panneershelvam, and Marc Lanctot. 2016. Mastering the game of Go with deep neural

- networks and tree search. *nature* 529, 7587 (2016), 484–489.
- [232] Avi Singh, John D Co-Reyes, Rishabh Agarwal, Ankesh Anand, Piyush Patil, Xavier Garcia, Peter J Liu, James Harrison, Jaehoon Lee, and Kelvin Xu. 2023. Beyond human data: Scaling self-training for problem-solving with language models. *arXiv preprint arXiv:2312.06585* (2023).
 - [233] Ishika Singh, Valts Blukis, Arsalan Mousavian, Ankit Goyal, Danfei Xu, Jonathan Tremblay, Dieter Fox, Jesse Thomason, and Animesh Garg. 2022. Progprompt: Generating situated robot task plans using large language models. *arXiv preprint arXiv:2209.11302* (2022).
 - [234] Charlie Snell, Jaehoon Lee, Kelvin Xu, and Aviral Kumar. 2024. Scaling LLM Test-Time Compute Optimally Can Be More Effective than Scaling Model Parameters. *arXiv preprint arXiv:2408.03314* (2024).
 - [235] Guijin Son, Dongkeun Yoon, Juyoung Suk, Javier Aula-Blasco, Mano Aslan, Vu Trong Kim, Shayekh Bin Islam, Jaume Prats-Cristià, Lucía Tormo-Bañuelos, and Seungone Kim. 2024. MM-Eval: A Multilingual Meta-Evaluation Benchmark for LLM-as-a-Judge and Reward Models. (2024). [arXiv:2410.17578](#)
 - [236] Mingyang Song, Zhaochen Su, Xiaoye Qu, Jiawei Zhou, and Yu Cheng. 2025. PRMBench: A Fine-grained and Challenging Benchmark for Process-Level Reward Models. (2025). [arXiv:2501.03124](#)
 - [237] Saksham Sahai Srivastava and Vaneet Aggarwal. 2025. A Technical Survey of Reinforcement Learning Techniques for Large Language Models. (2025). [arXiv:2507.04136](#)
 - [238] Elias Stengel-Eskin, Peter Hase, and Mohit Bansal. 2024. Teaching Models to Balance Resisting and Accepting Persuasion. (2024). [arXiv:2410.14596](#)
 - [239] Moritz Stephan, Alexander Khazatsky, Eric Mitchell, Annie S Chen, Sheryl Hsu, Archit Sharma, and Chelsea Finn. 2024. RLVF: Learning from Verbal Feedback without Overgeneralization. (2024). [arXiv:2402.10893](#)
 - [240] Nisan Stiennon, Long Ouyang, Jeffrey Wu, Daniel Ziegler, Ryan Lowe, Chelsea Voss, Alec Radford, Dario Amodei, and Paul F Christiano. 2020. Learning to summarize with human feedback. *Advances in neural information processing systems* 33 (2020), 3008–3021. [arXiv:2009.01325](#)
 - [241] Alexander L Strehl, Lihong Li, and Michael L Littman. 2009. Reinforcement Learning in Finite MDPs: PAC Analysis. *Journal of Machine Learning Research* 10, 84 (2009), 2413–2444.
 - [242] Vighnesh Subramaniam, Yilun Du, Joshua B. Tenenbaum, Antonio Torralba, Shuang Li, and Igor Mordatch. 2025. Multiagent Finetuning: Self Improvement with Diverse Reasoning Chains. (2025). [arXiv:2501.05707](#)
 - [243] Aleksa Sukovic and Goran Radanovic. 2024. Reward Design for Justifiable Sequential Decision-Making. (2024). [arXiv:2402.15826](#)
 - [244] Theodore R. Sumers, Shunyu Yao, Karthik Narasimhan, and Thomas L. Griffiths. 2023. Cognitive Architectures for Language Agents. (2023). [arXiv:2309.02427](#)
 - [245] Shengjie Sun, Runze Liu, Jiafei Lyu, Jing-Wen Yang, Liangpeng Zhang, and Xiu Li. 2025. A large language model-driven reward design framework via dynamic feedback for reinforcement learning. *Knowledge-Based Systems* 326 (2025), 114065.
 - [246] Shengjie Sun, Jiafei Lyu, Runze Liu, Mengbei Yan, Bo Liu, Deheng Ye, and Xiu Li. 2025. PROF: An LLM-based Reward Code Preference Optimization Framework for Offline Imitation Learning. *arXiv preprint arXiv:2511.13765* (2025).
 - [247] Rohan Surana, Gagan Mundada, Xunyi Jiang, Chuhan Wang, Zhenwei Tang, Difan Jiao, Zihan Huang, Yuxin Xiong, Junda Wu, Sheldon Yu, Xintong Li, Raghav Jain, Nikki Kuang, Sizhe Zhou, Bowen Jin, Zhendong Chu, Tong Yu, Ryan Rossi, Kuan-Hao Huang, Jingbo Shang, Jiawei Han, and Julian McAuley. 2026. Generate, Filter, Control, Replay: A Comprehensive Survey of Rollout Strategies for LLM Reinforcement Learning. (2026). [arXiv:2605.02913](#)
 - [248] Richard S Sutton and Andrew G Barto. 2018. *Reinforcement Learning: An Introduction* (2 ed.). MIT Press.
 - [249] Mirac Suzgun, Mert Yuksekgonul, Federico Bianchi, Dan Jurafsky, and James Zou. 2026. Dynamic Cheatsheet: Test-Time Learning with Adaptive Memory. In *Proceedings of the 19th Conference of the European Chapter of the Association for Computational Linguistics (Volume 1: Long Papers)*, Vera Demberg, Kentaro Inui, and Lluís Marquez (Eds.). Association for Computational Linguistics, Rabat, Morocco, 7080–7106. [doi:10.18653/v1/2026.eacl-long.333](#)
 - [250] Huajie Tan, Sixiang Chen, Yijie Xu, Zixiao Wang, Yuheng Ji, Cheng Chi, Yaoxu Lyu, Zhongxia Zhao, Xiansheng Chen, Peterson Co, Shaoxuan Xie, Guocai Yao, Pengwei Wang, Zhongyuan Wang, and Shanghang Zhang. 2025. RoboDopamine: General Process Reward Modeling for High-Precision Robotic Manipulation. (2025). [arXiv:2512.23703](#)
 - [251] Haoran Tan, Zeyu Zhang, Chen Ma, Xu Chen, Quanyu Dai, and Zhenhua Dong. 2025. Membench: Towards more comprehensive evaluation on the memory of llm-based agents. In *Findings of the Association for Computational Linguistics: ACL 2025*. 19336–19352.
 - [252] Sijun Tan, Siyuan Zhuang, Kyle Montgomery, William Y. Tang, Alejandro Cuadron, Chenguang Wang, Raluca Ada Popa, and Ion Stoica. 2024. JudgeBench: A Benchmark for Evaluating LLM-based Judges. (2024). [arXiv:2410.12784](#)
 - [253] Zhengyang Tang, Ziniu Li, Zhenyang Xiao, Tian Ding, Ruoyu Sun, Benyou Wang, Dayiheng Liu, Fei Huang, Tianyu Liu, Bowen Yu, and Junyang Lin. 2025. RealCritic: Towards Effectiveness-Driven Evaluation of Language Model Critiques. (2025). [arXiv:2501.14492](#)

- [254] Mia Taylor, James Chua, Jan Betley, Johannes Treutlein, and Owain Evans. 2025. School of Reward Hacks: Hacking harmless tasks generalizes to misaligned behavior in LLMs. *arXiv:2508.17511*
- [255] Jonathan Uesato, Nate Kushman, Ramana Kumar, Francis Song, Noah Siegel, Lisa Wang, Antonia Creswell, Geoffrey Irving, and Irina Higgins. 2022. Solving math word problems with process-and outcome-based feedback. *arXiv preprint arXiv:2211.14275* (2022).
- [256] Peter Vamplew, Benjamin J. Smith, Johan Kallstrom, Gabriel Ramos, Roxana Radulescu, Diederik M. Roijers, Conor F. Hayes, Fredrik Heintz, Patrick Mannion, Pieter J. K. Libin, Richard Dazeley, and Cameron Foale. 2021. Scalar reward is not enough: A response to Silver, Singh, Precup and Sutton (2021). *arXiv:2112.15422* [cs.AI] <https://arxiv.org/abs/2112.15422>
- [257] Vijay Viswanathan, Yanchao Sun, Shuang Ma, Xiang Kong, Meng Cao, Graham Neubig, and Tongshuang Wu. 2025. Checklists Are Better Than Reward Models For Aligning Language Models. (2025). *arXiv:2507.18624*
- [258] Eric Wallace, Kai Xiao, Reimar Leike, Lilian Weng, Johannes Heidecke, and Alex Beutel. 2024. The instruction hierarchy: Training llms to prioritize privileged instructions. *arXiv preprint arXiv:2404.13208* (2024).
- [259] Ante Wang, Linfeng Song, Ye Tian, Dian Yu, Haitao Mi, Xiangyu Duan, Zhaopeng Tu, Jinsong Su, and Dong Yu. 2025. Don't Get Lost in the Trees: Streamlining LLM Reasoning by Overcoming Tree Search Exploration Pitfalls. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, Wanxiang Che, Joyce Nabende, Ekaterina Shutova, and Mohammad Taher Pilehvar (Eds.). Association for Computational Linguistics, Vienna, Austria, 23946–23959. [doi:10.18653/v1/2025.acl-long.1167](https://doi.org/10.18653/v1/2025.acl-long.1167)
- [260] Chenglong Wang, Yongyu Mu, Hang Zhou, Yifu Huo, Ziming Zhu, Jiali Zeng, Murun Yang, Bei Li, Xiaoyang Hao, Chunliang Zhang, Fandong Meng, Jingbo Zhu, and Tong Xiao. 2025. GRAM-R²: Self-Training Generative Foundation Reward Models for Reward Reasoning. (2025). *arXiv:2509.02492*
- [261] Guoqing Wang, Sunhao Dai, Guangze Ye, Zeyu Gan, Wei Yao, Yong Deng, Xiaofeng Wu, and Zhenzhe Ying. 2025. Information Gain-based Policy Optimization: A Simple and Effective Approach for Multi-Turn Search Agents. (2025). *arXiv:2510.14967*
- [262] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. 2023. Voyager: An Open-Ended Embodied Agent with Large Language Models. *arXiv preprint arXiv:2305.16291* (2023).
- [263] Hanyang Wang, Lu Wang, Chaoyun Zhang, Tianjun Mao, Si Qin, Qingwei Lin, Saravan Rajmohan, and Dongmei Zhang. 2025. Text2Grad: Reinforcement Learning from Natural Language Feedback. *arXiv preprint arXiv:2505.22338* (2025).
- [264] Jiaxuan Wang, Yulan Hu, Wenjin Yang, Zheng Pan, Xin Li, and Lan-Zhe Guo. 2026. Aligning Agents via Planning: A Benchmark for Trajectory-Level Reward Modeling. (2026). *arXiv:2604.08178*
- [265] Jianyu Wang, Zhiqiang Hu, and Lidong Bing. 2025. Evolving Prompts In-Context: An Open-ended, Self-replicating Perspective. (2025). *arXiv:2506.17930*
- [266] Peiyi Wang, Lei Li, Zhihong Shao, RX Xu, Damai Dai, Yifei Li, Deli Chen, Yu Wu, and Zhifang Sui. 2024. Math-Shepherd: Verify and Reinforce LLMs Step-by-step without Human Annotations. *arXiv preprint arXiv:2312.08935* (2024).
- [267] Pengkai Wang, Pengwei Liu, Qi Zuo, Zhijie Sang, Congkai Xie, and Hongxia Yang. 2025. InfMed-ORBIT: Aligning LLMs on Open-Ended Complex Tasks via Rubric-Based Incremental Training. (2025). *arXiv:2510.15859*
- [268] Qibin Wang, Pu Zhao, Shaohan Huang, Fangkai Yang, Lu Wang, Furu Wei, Qingwei Lin, Saravan Rajmohan, and Dongmei Zhang. 2025. Learning to refine: Self-refinement of parallel reasoning in llms. *arXiv preprint arXiv:2509.00084* (2025).
- [269] Shuhe Wang, Shengyu Zhang, Jie Zhang, Runyi Hu, Xiaoya Li, Tianwei Zhang, Jiwei Li, Fei Wu, Guoyin Wang, and Eduard Hovy. 2024. Reinforcement Learning Enhanced LLMs: A Survey. (2024). *arXiv:2412.10400*
- [270] Tianlu Wang, Ilia Kulikov, Olga Golovneva, Ping Yu, Weizhe Yuan, Jane Dwivedi-Yu, Richard Yuanzhe Pang, Maryam Fazel-Zarandi, Jason Weston, and Xian Li. 2024. Self-Taught Evaluators. (2024). *arXiv:2408.02666*
- [271] Tianlu Wang, Ping Yu, Xiaoqing Ellen Tan, Sean O'Brien, Ramakanth Pasunuru, Jane Dwivedi-Yu, Olga Golovneva, Luke Zettlemoyer, Maryam Fazel-Zarandi, and Asli Celikyilmaz. 2023. Shepherd: A Critic for Language Model Generation. *arXiv preprint arXiv:2308.04592* (2023).
- [272] Wenyi Wang, Hisham A. Alyahya, Dylan R. Ashley, Oleg Serikov, Dmitrii Khizbullin, Francesco Faccio, and Jürgen Schmidhuber. 2024. How to Correctly do Semantic Backpropagation on Language-based Agentic Systems. (2024). *arXiv:2412.03624*
- [273] Xingyao Wang, Yangyi Chen, Lifan Yuan, Yizhe Zhang, Yunzhu Li, Hao Peng, and Heng Ji. 2024. Executable code actions elicit better llm agents. In *Forty-first International Conference on Machine Learning*.
- [274] Xuekang Wang, Zhuoyuan Hao, Shuo Hou, Hao Peng, Juanzi Li, and Xiaozhi Wang. 2026. Reproducing, Analyzing, and Detecting Reward Hacking in Rubric-Based Reinforcement Learning. *arXiv:2606.04923*

- [275] Xingyao Wang, Boxuan Li, Yufan Song, Frank F Xu, Xiangru Tang, Mingchen Zhuge, Jiayi Pan, Yueqi Song, Bowen Li, and Jaskirat Singh. 2025. Openhands: An open platform for ai software developers as generalist agents. In *International Conference on Learning Representations*, Vol. 2025. 65882–65919.
- [276] Xingyao Wang, Zihan Wang, Jiateng Liu, Yangyi Chen, Lifan Yuan, Hao Peng, and Heng Ji. 2023. MINT: Evaluating LLMs in Multi-turn Interaction with Tools and Language Feedback. (2023). arXiv:2309.10691
- [277] Yufei Wang, Zhanyi Sun, Jesse Zhang, Zhou Xian, Erdem Biyik, David Held, and Zackory Erickson. 2024. RL-VLM-F: Reinforcement Learning from Vision Language Foundation Model Feedback. (2024). arXiv:2402.03681
- [278] Zongqi Wang, Rui Wang, Yuchuan Wu, Yiyao Yu, Pinyi Zhang, Shaoning Sun, Yujiu Yang, and Yongbin Li. 2026. Reward Modeling from Natural Language Human Feedback. (2026). arXiv:2601.07349
- [279] Zora Zhiruo Wang, Jiayuan Mao, Daniel Fried, and Graham Neubig. 2024. Agent Workflow Memory. (2024). arXiv:2409.07429
- [280] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, and Denny Zhou. 2022. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems* 35 (2022), 24824–24837.
- [281] Jiaqi Wei, Xiang Zhang, Yuejin Yang, Wenxuan Huang, Juntao Cao, Sheng Xu, Xiang Zhuang, Zhangyang Gao, Muhammad Abdul-Mageed, Laks V. S. Lakshmanan, Chenyu You, Wanli Ouyang, and Siqi Sun. 2025. Unifying Tree Search Algorithm and Reward Design for LLM Reasoning: A Survey. (2025). arXiv:2510.09988
- [282] Quan Wei, Siliang Zeng, Chenliang Li, William Brown, Oana Frunza, Wei Deng, Anderson Schneider, Yuriy Nevmyvaka, Yang Katie Zhao, Alfredo Garcia, and Mingyi Hong. 2025. Reinforcing Multi-Turn Reasoning in LLM Agents via Turn-Level Reward Design. (2025). arXiv:2505.11821
- [283] Tianxin Wei, Noveen Sachdeva, Benjamin Coleman, Zhankui He, Yuanchen Bei, Xuying Ning, Mengting Ai, Yunzhe Li, Jingrui He, Ed H. Chi, Chi Wang, Shuo Chen, Fernando Pereira, Wang-Cheng Kang, and Derek Zhiyuan Cheng. 2025. Evo-Memory: Benchmarking LLM Agent Test-time Learning with Self-Evolving Memory. (2025). arXiv:2511.20857
- [284] Chenxi Whitehouse, Tianlu Wang, Ping Yu, Xian Li, Jason Weston, Ilia Kulikov, and Swarnadeep Saha. 2025. J1: Incentivizing Thinking in LLM-as-a-Judge via Reinforcement Learning. (2025). arXiv:2505.10320
- [285] Fang Wu, Aaron Tu, Weihao Xuan, Heli Qi, Xu Huang, Qingcheng Zeng, Shayan Talaei, Yijia Xiao, Peng Xia, Xiangru Tang, Yuchen Zhuang, Yinxi Li, Bing Hu, Hanqun Cao, Wenqi Shi, Rui Yang, Nan Liu, Huaxiu Yao, Ge Liu, Li Erran Li, Amin Saberi, Naoto Yokoya, Jure Leskovec, and Yejin Choi. 2025. Position: The Hidden Costs and Measurement Gaps of Reinforcement Learning with Verifiable Rewards. (2025). arXiv:2509.21882
- [286] Mian Wu, Gavin Zhang, Sewon Min, Sergey Levine, and Aviral Kumar. 2025. RLAC: Reinforcement Learning with Adversarial Critic for Free-Form Generation Tasks. (2025). arXiv:2511.01758
- [287] Shengguang Wu, Hao Zhu, Yuhui Zhang, Xiaohan Wang, and Serena Yeung-Levy. 2026. AutoMem: Automated Learning of Memory as a Cognitive Skill. (2026). arXiv:2607.01224
- [288] Tianhao Wu, Weizhe Yuan, Olga Golovneva, Jing Xu, Yuandong Tian, Jiantao Jiao, Jason Weston, and Sainbayar Sukhbaatar. 2024. Meta-Rewarding Language Models: Self-Improving Alignment with LLM-as-a-Meta-Judge. (2024). arXiv:2407.19594
- [289] Xiaobao Wu. 2025. Sailing by the Stars: A Survey on Reward Models and Learning Strategies for Learning from Rewards. (2025). arXiv:2505.02686
- [290] Yanru Wu, Weiduo Yuan, Ang Qi, Vitor Guizilini, Jiageng Mao, and Yue Wang. 2026. Large Reward Models: Generalizable Online Robot Reward Generation with Vision-Language Models. (2026). arXiv:2603.16065
- [291] Evzen Wybitul, Evan Ryan Gunter, Mikhail Seleznyov, and David Lindner. 2024. ViSTa Dataset: Do vision-language models understand sequential tasks? (2024). arXiv:2411.13211
- [292] Jiajun Xi, Yinong He, Jianing Yang, Yinpei Dai, and Joyce Chai. 2024. Teaching Embodied Reinforcement Learning Agents: Informativeness and Diversity of Language Use. (2024). arXiv:2410.24218
- [293] Zhiheng Xi, Jixuan Huang, Xin Guo, Boyang Hong, Dingwen Yang, Xiaoran Fan, Shuo Li, Zehui Chen, Junjie Ye, Siyu Yuan, Zhengyin Du, Xuesong Yao, Yufei Xu, Jiecao Chen, Rui Zheng, Tao Gui, Qi Zhang, and Xuanjing Huang. 2025. Critique-RL: Training Language Models for Critiquing through Two-Stage Reinforcement Learning. (2025). arXiv:2510.24320
- [294] Zhiheng Xi, Dingwen Yang, Jixuan Huang, Jiafu Tang, Guanyu Li, Yiwen Ding, Wei He, Boyang Hong, Shihaan Do, Wenyu Zhan, Xiao Wang, Rui Zheng, Tao Ji, Xiaowei Shi, Yitao Zhai, Rongxiang Weng, Jingang Wang, Xunliang Cai, Tao Gui, Zuxuan Wu, Qi Zhang, Xipeng Qiu, Xuanjing Huang, and Yu-Gang Jiang. 2024. Enhancing LLM Reasoning via Critique Models with Test-Time and Training-Time Supervision. (2024). arXiv:2411.16579
- [295] Peng Xia, Jianwen Chen, Hanyang Wang, Jiaqi Liu, Kaide Zeng, Yu Wang, Siwei Han, Yiyang Zhou, Xujiang Zhao, Haifeng Chen, Zeyu Zheng, Cihang Xie, and Huaxiu Yao. 2026. SkillRL: Evolving Agents via Recursive Skill-Augmented Reinforcement Learning. (2026). arXiv:2602.08234
- [296] Jinyu Xiang, Jiayi Zhang, Zhaoyang Yu, Xinning Liang, Fengwei Teng, Jinhao Tu, Fashen Ren, Xiangru Tang, Sirui Hong, Chenglin Wu, and Yuyu Luo. 2025. Self-Supervised Prompt Optimization. (2025). arXiv:2502.06855

- [297] Tim Z. Xiao, Robert Bamler, Bernhard Schölkopf, and Weiyang Liu. 2024. Verbalized Machine Learning: Revisiting Machine Learning with Language Models. (2024). [arXiv:2406.04344](#)
- [298] Wenyi Xiao, Zechuan Wang, Leilei Gan, Shuai Zhao, Zongrui Li, Ruirui Lei, Wanggui He, Luu Anh Tuan, Long Chen, Hao Jiang, Zhou Zhao, and Fei Wu. 2024. A Comprehensive Survey of Direct Preference Optimization: Datasets, Theories, Variants, and Applications. (2024). [arXiv:2410.15595](#)
- [299] Guofu Xie, Yunsheng Shi, Hongtao Tian, Ting Yao, and Xiao Zhang. 2025. CAPO: Towards Enhancing LLM Reasoning through Generative Credit Assignment. (2025). [arXiv:2508.02298](#)
- [300] Tianbao Xie, Siheng Zhao, Chen Wu, Yitao Liu, Qian Luo, Victor Zhong, Yanchao Yang, and Tao Yu. 2024. Text2reward: Reward shaping with language models for reinforcement learning. In *International Conference on Learning Representations*, Vol. 2024. 35663–35699.
- [301] Yuxi Xie, Kenji Kawaguchi, Yiran Zhao, James Xu Zhao, Min-Yen Kan, Junxian He, and Michael Xie. 2023. Self-evaluation guided beam search for reasoning. *Advances in Neural Information Processing Systems* 36 (2023), 41618–41650.
- [302] Zhihui Xie, Jie Chen, Liyu Chen, Weichao Mao, Jingjing Xu, and Lingpeng Kong. 2025. Teaching Language Models to Critique via Reinforcement Learning. (2025). [arXiv:2502.03492](#)
- [303] Wei Xiong, Wenting Zhao, Weizhe Yuan, Olga Golovneva, Tong Zhang, Jason Weston, and Sainbayar Sukhbaatar. 2025. StepWiser: Stepwise Generative Judges for Wiser Reasoning. (2025). [arXiv:2508.19229](#)
- [304] Guowei Xu, Mert Yuksekgonul, Carlos Guestrin, and James Zou. 2025. metaTextGrad: Automatically Optimizing Language Model Optimizers. (2025). [arXiv:2505.18524](#)
- [305] Tianze Xu, Yanzhao Zheng, Pengrui Lu, Lyumanshan Ye, Yong Wu, Zhentao Zhang, Yuanqiang Yu, Chao Ma, Jihuai Zhu, Pengfei Liu, Baohua Dong, Hangcheng Zhu, Ruohui Huang, and Gang Yu. 2026. Rubrics to Tokens: Bridging Response-level Rubrics and Token-level Rewards in Instruction Following Tasks. (2026). [arXiv:2604.02795](#)
- [306] Wujiang Xu, Zujie Liang, Kai Mei, Hang Gao, Juntao Tan, and Yongfeng Zhang. 2025. A-MEM: Agentic Memory for LLM Agents. (2025). [arXiv:2502.12110](#)
- [307] Wanqiao Xu, Allen Nie, Ruijie Zheng, Aditya Modi, Adith Swaminathan, and Ching-An Cheng. 2025. Formalizing Learning from Language Feedback with Provable Guarantees. (2025). [arXiv:2506.10341](#)
- [308] Sikuan Yan, Ahmed Bahloul, Ercong Nie, Susanna Schwarzmann, Riccardo Trivisonno, Volker Tresp, and Yunpu Ma. 2026. Memory-R2: Fair Credit Assignment for Long-Horizon Memory-Augmented LLM Agents. (2026). [arXiv:2605.21768](#)
- [309] Sikuan Yan, Xiufeng Yang, Zuchao Huang, Ercong Nie, Zifeng Ding, Zonggen Li, Xiaowen Ma, Jinhe Bi, Kristian Kersting, Jeff Z. Pan, Hinrich Schütze, Volker Tresp, and Yunpu Ma. 2025. Memory-R1: Enhancing Large Language Model Agents to Manage and Utilize Memories via Reinforcement Learning. (2025). [arXiv:2508.19828](#)
- [310] Yuchen Yan, Jin Jiang, Zhenbang Ren, Yijun Li, Xudong Cai, Yang Liu, Xin Xu, Mengdi Zhang, Jian Shao, Yongliang Shen, Jun Xiao, and Yueting Zhuang. 2025. VerifyBench: Benchmarking Reference-based Reward Systems for Large Language Models. (2025). [arXiv:2505.15801](#)
- [311] Chengrun Yang, Xuezhi Wang, Yifeng Lu, Hanxiao Liu, Quoc V Le, Denny Zhou, and Xinyun Chen. 2024. Large Language Models as Optimizers. In *International Conference on Learning Representations Workshop*. [arXiv:2309.03409](#)
- [312] John Yang, Carlos E Jimenez, Alexander Wettig, Kilian Lieret, Shunyu Yao, Karthik Narasimhan, and Ofir Press. 2024. Swe-agent: Agent-computer interfaces enable automated software engineering. *Advances in Neural Information Processing Systems* 37 (2024), 50528–50652.
- [313] Ruihan Yang, Fanghua Ye, Jian Li, Siyu Yuan, Yikai Zhang, Zhaopeng Tu, Xiaolong Li, and Deqing Yang. 2025. The Lighthouse of Language: Enhancing LLM Agents via Critique-Guided Improvement. (2025). [arXiv:2503.16024](#)
- [314] Wenkai Yang, Jingwen Chen, Yankai Lin, and Ji-Rong Wen. 2025. DeepCritic: Deliberate Critique with Large Language Models. (2025). [arXiv:2505.00662](#)
- [315] Xianglin Yang, Bryan Hooi, Gelei Deng, Tianwei Zhang, and Jin Song Dong. 2026. Turning Bias into Bugs: Bandit-Guided Style Manipulation Attacks on LLM Judges. [arXiv:2605.26156](#)
- [316] Yutao Yang, Junsong Li, Qianjun Pan, Bihao Zhan, Yuxuan Cai, Lin Du, Jie Zhou, Kai Chen, Qin Chen, Xin Li, Bo Zhang, and Liang He. 2026. AutoSkill: Experience-Driven Lifelong Learning via Skill Self-Evolution. (2026). [arXiv:2603.01145](#)
- [317] Yongjin Yang, Euiin Yi, Jongwoo Ko, Kimin Lee, Zhijing Jin, and Se-Young Yun. 2025. Revisiting Multi-Agent Debate as Test-Time Scaling: A Systematic Study of Conditional Effectiveness. (2025). [arXiv:2505.22960](#)
- [318] Shunyu Yao, Rohan Rao, Matthew Hausknecht, and Karthik Narasimhan. 2020. Keep calm and explore: Language models for action generation in text-based games. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. 8736–8754.
- [319] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Tom Griffiths, Yuan Cao, and Karthik Narasimhan. 2023. Tree of thoughts: Deliberate problem solving with large language models. *Advances in neural information processing systems* 36 (2023), 11809–11822.

- [320] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. 2023. ReAct: Synergizing Reasoning and Acting in Language Models. In *International Conference on Learning Representations*.
- [321] Jiayi Ye, Yanbo Wang, Yue Huang, Dongping Chen, Qihui Zhang, Nuno Moniz, Tian Gao, Werner Geyer, Chao Huang, Pin-Yu Chen, Nitesh V Chawla, and Xiangliang Zhang. 2024. Justice or Prejudice? Quantifying Biases in LLM-as-a-Judge. (2024). [arXiv:2410.02736](#)
- [322] Zhiling Ye, Yun Yue, Haowen Wang, Xudong Han, Jiadi Jiang, Cheng Wei, Lei Fan, Jiaxin Liang, Shuowen Zhang, Ji Li, Chunxiao Guo, Jian Wang, Peng Wei, and Jinjie Gu. 2025. Self-Rewarding Rubric-Based Reinforcement Learning for Open-Ended Reasoning. (2025). [arXiv:2509.25534](#)
- [323] John Seon Keun Yi, Aaron Mueller, and Dokyun Lee. 2026. Latent Agents: A Post-Training Procedure for Internalized Multi-Agent Debate. (2026). [arXiv:2604.24881](#)
- [324] Li Yin and Zhangyang Wang. 2025. LLM-AutoDiff: Auto-Differentiate Any LLM Workflow. (2025). [arXiv:2501.16673](#)
- [325] Zhangyue Yin, Qiushi Sun, Zhiyuan Zeng, Qinyuan Cheng, Xipeng Qiu, and Xuanjing Huang. 2025. Dynamic and Generalizable Process Reward Modeling. (2025). [arXiv:2507.17849](#)
- [326] Wenhao Yu, Nimrod Gileadi, Chuyuan Fu, Sean Kirmani, Kuang-Huei Lee, Montse Gonzalez Arenas, Hao-Tien Lewis Chiang, Tom Erez, Leonard Hasenclever, and Jan Humplik. 2023. Language to rewards for robotic skill synthesis. *arXiv preprint arXiv:2306.08647* (2023).
- [327] Yue Yu, Zhengxing Chen, Aston Zhang, Liang Tan, Chenguang Zhu, Richard Yuanzhe Pang, Yundi Qian, Xuewei Wang, Suchin Gururangan, Chao Zhang, Melanie Kambadur, Dhruv Mahajan, and Rui Hou. 2024. Self-Generated Critiques Boost Reward Modeling for Language Models. (2024). [arXiv:2411.16646](#)
- [328] Siyu Yuan, Zehui Chen, Zhiheng Xi, Junjie Ye, Zhengyin Du, and Jiecao Chen. 2025. Agent-R: Training Language Model Agents to Reflect via Iterative Self-Training. (2025). [arXiv:2501.11425](#)
- [329] Weizhe Yuan, Richard Yuanzhe Pang, Kyunghyun Cho, Xian Li, Sainbayar Sukhbaatar, Jing Xu, and Jason Weston. 2024. Self-rewarding language models. *arXiv preprint arXiv:2401.10020* (2024).
- [330] Youliang Yuan, Qiuyang Mang, Jingbang Chen, Hong Wan, Xiaoyuan Liu, Junjielong Xu, Jen-tse Huang, Wenxuan Wang, Wenxiang Jiao, and Pinjia He. 2025. Curing Miracle Steps in LLM Mathematical Reasoning with Rubric Rewards. (2025). [arXiv:2510.07774](#)
- [331] Mert Yuksekgonul, Federico Bianchi, Joseph Boen, Sheng Liu, Zhi Huang, Carlos Guestrin, and James Zou. 2024. TextGrad: Automatic “Differentiation” via Text. *arXiv preprint arXiv:2406.07496* (2024).
- [332] Eric Zelikman, Yuhuai Wu, Jesse Mu, and Noah D Goodman. 2022. STaR: Bootstrapping Reasoning With Reasoning. In *Advances in Neural Information Processing Systems*.
- [333] Runhao Zeng, Dingjie Zhou, Qiwei Liang, Junlin Liu, Hui Li, Changxin Huang, Jianqiang Li, Xiping Hu, and Fuchun Sun. 2024. Video2reward: Generating reward function from videos for legged robot behavior learning. *arXiv preprint arXiv:2412.05515* (2024).
- [334] Zhiyuan Zeng, Jiatong Yu, Tianyu Gao, Yu Meng, Tanya Goyal, and Danqi Chen. 2023. Evaluating Large Language Models at Evaluating Instruction Following. (2023). [arXiv:2310.07641](#)
- [335] Lihan Zha, Yuchen Cui, Li-Heng Lin, Minae Kwon, Montserrat Gonzalez Arenas, Andy Zeng, Fei Xia, and Dorsa Sadigh. 2023. Distilling and Retrieving Generalizable Knowledge for Robot Manipulation via Language Corrections. (2023). [arXiv:2311.10678](#)
- [336] Qiusi Zhan, Richard Fang, Henil Shalin Panchal, and Daniel Kang. 2025. Adaptive attacks break defenses against indirect prompt injection attacks on llm agents. In *Findings of the Association for Computational Linguistics: NAACL 2025*. 7101–7117.
- [337] Qiusi Zhan, Zhixiang Liang, Zifan Ying, and Daniel Kang. 2024. Injecagent: Benchmarking indirect prompt injections in tool-integrated large language model agents. In *Findings of the Association for Computational Linguistics: ACL 2024*. 10471–10506.
- [338] Alexander Zhang, Marcus Dong, Jiaheng Liu, Wei Zhang, Yejie Wang, Jian Yang, Ge Zhang, Tianyu Liu, Zhongyuan Peng, Yingshui Tan, Yuanxing Zhang, Zhexu Wang, Weixun Wang, Yancheng He, Ken Deng, Wangchunshu Zhou, Wenhao Huang, and Zhaoxiang Zhang. 2025. CodeCriticBench: A Holistic Code Critique Benchmark for Large Language Models. (2025). [arXiv:2502.16614](#)
- [339] Chenchen Zhang. 2026. From Reasoning to Agentic: Credit Assignment in Reinforcement Learning for Large Language Models. (2026). [arXiv:2604.09459](#)
- [340] Dylan Zhang, Yanshan Lin, Zhengkun Wu, Yihang Sun, Bingxuan Li, Dianqi Li, and Hao Peng. 2026. Useful Memories Become Faulty When Continuously Updated by LLMs. (2026). [arXiv:2605.12978](#)
- [341] Guibin Zhang, Muxin Fu, Guancheng Wan, Miao Yu, Kun Wang, and Shuicheng Yan. 2025. G-Memory: Tracing Hierarchical Memory for Multi-Agent Systems. (2025). [arXiv:2506.07398](#)
- [342] Guibin Zhang, Hejia Geng, Xiaohang Yu, Zhenfei Yin, Zaibin Zhang, Zelin Tan, Heng Zhou, Zhongzhi Li, Xiangyuan Xue, Yijiang Li, Yifan Zhou, Yang Chen, Chen Zhang, Yutao Fan, Zihu Wang, Songtao Huang, Francisco Piedrahita-Velez, Yue Liao, Hongru Wang, Mengyue Yang, Heng Ji, Jun Wang, Shuicheng Yan, Philip Torr, and Lei Bai. 2025. The

- Landscape of Agentic Reinforcement Learning for LLMs: A Survey. (2025). arXiv:2509.02547
- [343] Guibin Zhang, Haotian Ren, Chong Zhan, Zhenhong Zhou, Junhao Wang, He Zhu, Wangchunshu Zhou, and Shuicheng Yan. 2025. MemEvolve: Meta-Evolution of Agent Memory Systems. (2025). arXiv:2512.18746
 - [344] Hangfan Zhang, Zhiyao Cui, Jianhao Chen, Xinrun Wang, Qiaosheng Zhang, Zhen Wang, Dinghao Wu, and Shuyue Hu. 2025. Stop Overvaluing Multi-Agent Debate – We Must Rethink Evaluation and Embrace Model Heterogeneity. (2025). arXiv:2502.08788
 - [345] Haozhen Zhang, Quanyu Long, Jianzhu Bao, Tao Feng, Weizhi Zhang, Haodong Yue, and Wenya Wang. 2026. MemSkill: Learning and Evolving Memory Skills for Self-Evolving Agents. (2026). arXiv:2602.02474
 - [346] Jiayi Zhang, Jinyu Xiang, Zhaoyang Yu, Fengwei Teng, Xionghui Chen, Jiaqi Chen, Mingchen Zhuge, Xin Cheng, Sirui Hong, Jinlin Wang, Bingnan Zheng, Bang Liu, Yuyu Luo, and Chenglin Wu. 2024. AFlow: Automating Agentic Workflow Generation. (2024). arXiv:2410.10762
 - [347] Lunjun Zhang, Ryan Chen, and Bradley C. Stadie. 2026. Evolutionary System Prompt Learning for Reinforcement Learning in LLMs. (2026). arXiv:2602.14697
 - [348] Lunjun Zhang, Arian Hosseini, Hritik Bansal, Mehran Kazemi, Aviral Kumar, and Rishabh Agarwal. 2025. Generative Verifiers: Reward Modeling as Next-Token Prediction. In *International Conference on Learning Representations*. arXiv:2408.15240
 - [349] Peiyan Zhang, Haibo Jin, Leyang Hu, Xinnuo Li, Liying Kang, Man Luo, Yangqiu Song, and Haohan Wang. 2024. REVOLVE: Optimizing AI Systems by Tracking Response Evolution in Textual Optimization. (2024). arXiv:2412.03092
 - [350] Qizheng Zhang, Changran Hu, Shubhangi Upasani, Boyuan Ma, Fenglu Hong, Vamsidhar Kamanuru, Jay Rainton, Chen Wu, Mengmeng Ji, Hanchen Li, Urmish Thakker, James Zou, and Kunle Olukotun. 2025. Agentic Context Engineering: Evolving Contexts for Self-Improving Language Models. (2025). arXiv:2510.04618
 - [351] Qiyan Zhang, Fuyuan Lyu, Zexu Sun, Lei Wang, Weixu Zhang, Wenyue Hua, Haolun Wu, Zhihan Guo, Yufei Wang, Niklas Muennighoff, Irwin King, Xue Liu, and Chen Ma. 2025. A Survey on Test-Time Scaling in Large Language Models: What, How, Where, and How Well? (2025). arXiv:2503.24235
 - [352] Xiaohan Zhang, Yan Ding, Yohei Hayamizu, Zainab Altaweel, Yifeng Zhu, Yuke Zhu, Peter Stone, Chris Paxton, and Shiqi Zhang. 2025. LLM-GROP: Visually grounded robot task and motion planning with large language models. *The International Journal of Robotics Research* (2025), 02783649251378196.
 - [353] Yaolun Zhang, Yiran Wu, Yijiong Yu, Qingyun Wu, and Huazheng Wang. 2026. Live-Evo: Online Evolution of Agentic Memory from Continuous Feedback. (2026). arXiv:2602.02369
 - [354] Yang Zhang, Shixin Yang, Chenjia Bai, Fei Wu, Xiu Li, Zhen Wang, and Xuelong Li. 2025. Towards efficient llm grounding for embodied multi-agent collaboration. In *Findings of the Association for Computational Linguistics: ACL 2025*. 1663–1699.
 - [355] Zeyu Zhang, Quanyu Dai, Xiaohe Bo, Chen Ma, Rui Li, Xu Chen, Jieming Zhu, Zhenhua Dong, and Ji-Rong Wen. 2025. A survey on the memory mechanism of large language model-based agents. *ACM Transactions on Information Systems* 43, 6 (2025), 1–47.
 - [356] Zhang Zhang, Shuqi Lu, Hongjin Qian, Di He, and Zheng Liu. 2026. AgentFactory: A Self-Evolving Framework Through Executable Subagent Accumulation and Reuse. (2026). arXiv:2603.18000
 - [357] Zhenru Zhang, Chujie Zheng, Yangzhen Wu, Beichen Zhang, Runji Lin, Bowen Yu, Dayiheng Liu, Jingren Zhou, and Junyang Lin. 2025. The Lessons of Developing Process Reward Models in Mathematical Reasoning. (2025). arXiv:2501.07301
 - [358] Andrew Zhao, Reshmi Ghosh, Vitor Carvalho, Emily Lawton, Keegan Hines, Gao Huang, and Jack W. Stokes. 2025. Are My Optimized Prompts Compromised? Exploring Vulnerabilities of LLM-based Optimizers. arXiv:2510.14381
 - [359] Andrew Zhao, Daniel Huang, Quentin Xu, Matthieu Lin, Yong-Jin Liu, and Gao Huang. 2024. ExpeL: LLM Agents Are Experiential Learners. In *AAAI Conference on Artificial Intelligence*.
 - [360] Jian Zhao, Runze Liu, Kaiyan Zhang, Zhimu Zhou, Junqi Gao, Dong Li, Jiafei Lyu, Zhouyi Qian, Biqing Qi, and Xiu Li. 2026. Genprm: Scaling test-time compute of process reward models via generative reasoning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 40. 34932–34940.
 - [361] Yulai Zhao, HaoLin Liu, Dian Yu, Sunyuan Kung, Meijia Chen, Haitao Mi, and Dong Yu. 2025. One Token to Fool LLM-as-a-Judge. arXiv:2507.08794
 - [362] Chujie Zheng, Zhenru Zhang, Beichen Zhang, Runji Lin, Keming Lu, Bowen Yu, Dayiheng Liu, Jingren Zhou, and Junyang Lin. 2024. ProcessBench: Identifying Process Errors in Mathematical Reasoning. (2024). arXiv:2412.06559
 - [363] Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, and Eric Xing. 2023. Judging llm-as-a-judge with mt-bench and chatbot arena. *Advances in neural information processing systems* 36 (2023), 46595–46623.
 - [364] Victor Zhong, Dipendra Misra, Xingdi Yuan, and Marc-Alexandre Côté. 2024. Policy Improvement using Language Feedback Models. (2024). arXiv:2402.07876

- [365] Enshen Zhou, Qi Su, Cheng Chi, Zhizheng Zhang, Zhongyuan Wang, Tiejun Huang, Lu Sheng, and He Wang. 2025. Code-as-monitor: Constraint-aware visual programming for reactive and proactive robotic failure detection. In *Proceedings of the Computer Vision and Pattern Recognition Conference*. 6919–6929.
- [366] Enyu Zhou, Guodong Zheng, Binghai Wang, Zhiheng Xi, Shihan Dou, Rong Bao, Wei Shen, Limao Xiong, Jessica Fan, Yurong Mou, Rui Zheng, Tao Gui, Qi Zhang, and Xuanjing Huang. 2024. RMB: Comprehensively Benchmarking Reward Models in LLM Alignment. (2024). [arXiv:2410.09893](#)
- [367] Huichi Zhou, Yihang Chen, Siyuan Guo, Xue Yan, Kin Hei Lee, Zihan Wang, Ka Yiu Lee, Guchun Zhang, Kun Shao, Linyi Yang, and Jun Wang. 2025. Memento: Fine-tuning LLM Agents without Fine-tuning LLMs. (2025). [arXiv:2508.16153](#)
- [368] Huichi Zhou, Siyuan Guo, Anjie Liu, Zhongwei Yu, Ziqin Gong, Bowen Zhao, Zhixun Chen, Menglong Zhang, Yihang Chen, Jinsong Li, Runyu Yang, Qiangbin Liu, Xinlei Yu, Jianmin Zhou, Na Wang, Chunyang Sun, and Jun Wang. 2026. Memento-Skills: Let Agents Design Agents. (2026). [arXiv:2603.18743](#)
- [369] Han Zhou, Xingchen Wan, Ruoxi Sun, Hamid Palangi, Shariq Iqbal, Ivan Vulić, Anna Korhonen, and Sercan Ö. Arık. 2025. Multi-Agent Design: Optimizing Agents with Better Prompts and Topologies. (2025). [arXiv:2502.02533](#)
- [370] Meng Zhou, Bei Li, Jiahao Liu, Xiaowen Shi, Yang Bai, Rongxiang Weng, Jingang Wang, and Xunliang Cai. 2025. Libra: Assessing and Improving Reward Model by Learning to Think. (2025). [arXiv:2507.21645](#)
- [371] Wangchunshu Zhou, Yixin Ou, Shengwei Ding, Long Li, Jialong Wu, Tiannan Wang, Jiamin Chen, Shuai Wang, Xiaohua Xu, Ningyu Zhang, HuaJun Chen, and Yuchen Eleanor Jiang. 2024. Symbolic Learning Enables Self-Evolving Agents. (2024). [arXiv:2406.18532](#)
- [372] Wenxuan Zhou, Shujian Zhang, Lingxiao Zhao, and Tao Meng. 2024. T-REG: Preference Optimization with Token-Level Reward Regularization. (2024). [arXiv:2412.02685](#)
- [373] Yan Zhou and Yanguang Chen. 2025. Adaptive heterogeneous multi-agent debate for enhanced educational and factual reasoning in large language models. *Journal of King Saud University Computer and Information Sciences* 37, 10 (2025), 330.
- [374] Yongchao Zhou, Andrei Ioan Muresanu, Ziwen Han, Keiran Paster, Silviu Pitis, Harris Chan, and Jimmy Ba. 2023. Large Language Models Are Human-Level Prompt Engineers. In *International Conference on Learning Representations*. [arXiv:2211.01910](#)
- [375] Yuxuan Zhou, Yubin Wang, Bin Wang, Chen Ning, Xien Liu, Ji Wu, and Jianye Hao. 2025. Enhancing the Medical Context-Awareness Ability of LLMs via Multifaceted Self-Refinement Learning. *arXiv preprint arXiv:2511.10067* (2025).
- [376] Yilun Zhou, Austin Xu, Peifeng Wang, Caiming Xiong, and Shafiq Joty. 2025. Evaluating Judges as Evaluators: The JETTS Benchmark of LLM-as-Judges as Test-Time Scaling Evaluators. (2025). [arXiv:2504.15253](#)
- [377] Yifei Zhou, Andrea Zanette, Jiayi Pan, Sergey Levine, and Aviral Kumar. 2024. ARCher: Training Language Model Agents via Hierarchical Multi-Turn RL. (2024). [arXiv:2402.19446](#)
- [378] Adam Zweiger, Jyothish Pari, Han Guo, Ekin Akyürek, Yoon Kim, and Pulkit Agrawal. 2025. Self-Adapting Language Models. (2025). [arXiv:2506.10943](#)