Machine Learning

From Intuition to Implementation



A textbook for BCA students
Course code NBCA-601

Unit I Introduction · Unit II Supervised Learning · Unit III Ensembles & SVM
Unit IV Unsupervised Learning · Unit V Neural Networks

How to Use This Book

Learning Objectives

Every chapter opens with a box like this one, telling you exactly what you will be able to do by the end.

Key Idea

The one idea to remember. If you remember nothing else, remember this box.

Definition: Term

Formal definitions you may be asked to write in exams.

Example

Worked examples with real numbers, solved step by step.

Common Mistake

Mistakes students commonly make, and how to avoid them.

Try It Yourself

Short Python experiments. Run them, change numbers, and watch what happens.

Exam Tip

Frequently asked exam questions and how to answer them.

Contents

1 Introduction to Machine Learning **1**

1.1 Why Do We Need Machine Learning? . . . 1
1.2 Artificial Intelligence, Machine Learning and Deep Learning . . . 2
1.3 Where Is Machine Learning Used? . . . 4
1.4 Basic Terminology . . . 4
1.5 Types of Machine Learning Systems . . . 5
1.5.1 Supervised Learning . . . 6
1.5.2 Unsupervised Learning . . . 6
1.5.3 Semi-supervised Learning . . . 7
1.5.4 Reinforcement Learning . . . 7
1.5.5 Batch vs. Online Learning . . . 8
1.5.6 Instance-based vs. Model-based Learning . . . 8
1.6 The Machine Learning Workflow . . . 9
1.7 Main Challenges of Machine Learning . . . 10
1.7.1 Problems with the Data . . . 10
1.7.2 Problems with the Algorithm . . . 11
1.7.3 Testing and Validating . . . 12
1.7.4 No Free Lunch Theorem . . . 12
Exam Corner . . . 13

Chapter 1

Introduction to Machine Learning

Learning Objectives

After studying this chapter you will be able to:

- explain the relationship between **AI, Machine Learning and Deep Learning**;
- state and apply Samuel's and Mitchell's definitions of Machine Learning;
- use the vocabulary of ML correctly: *instance, feature, label, training set, model, parameter, hyperparameter*;
- classify ML systems as **supervised, unsupervised, semi-supervised** or **reinforcement**;
- distinguish **batch vs. online** and **instance-based vs. model-based** learning;
- fit a straight-line model by hand using the least-squares formula;
- describe the main **challenges** of ML (data problems, *overfitting*, *underfitting*) and the remedies for each;
- answer 2-, 5- and 10-mark university questions on this unit.

> *Machine learning is the field of study that gives computers the ability to learn without being explicitly programmed.*
>
> — Arthur Samuel, 1959

1.1 Why Do We Need Machine Learning?

Suppose you must write a program that detects *spam e-mail*. The traditional approach is to write rules by hand:

- If the subject contains "FREE" ⇒ spam.
- If the sender is unknown and the body contains "winner" ⇒ spam.
- . . . and hundreds more rules.

This approach has three serious weaknesses.

1. **Long, hard-to-maintain rule lists.** Every new spam trick needs a new rule, and rules start to contradict each other.
2. **No adaptation.** Spammers change "FREE" to "FR33" or "fr.ee" and the rules stop working.

3. **Problems too complex for rules.** No one can write explicit rules to recognise a spoken word or a face in a photo.

A machine-learning program instead studies thousands of e-mails already labelled *spam* or *not spam* and discovers the pattern by itself. When spammers change tactics, we simply retrain it on fresh data.

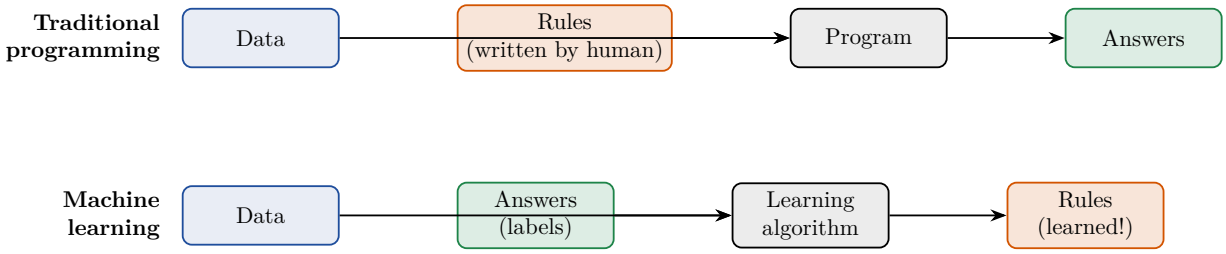


Figure 1.1. Traditional programming versus machine learning.

Reading the Figure

Top row (traditional programming). A programmer writes the *rules*. The program applies those rules to the *data* and produces *answers*.
Bottom row (machine learning). The inputs are swapped. We give the algorithm the *data* together with the correct *answers*, and what comes out is the *rules*. These learned rules can then be applied to new data.
Note the colours: orange marks the *rules*. In the top row a human produces them; in the bottom row the algorithm does. This swap of inputs and outputs is the whole idea of ML.

Key Idea

Traditional programming: *data* + *rules* → *answers*. Machine learning: *data* + *answers* → *rules*.

1.2 Artificial Intelligence, Machine Learning and Deep Learning

Definition: Artificial Intelligence

Artificial Intelligence (AI) is the branch of computer science concerned with building machines that perform tasks that normally require human intelligence, such as reasoning, understanding language, recognising images and making decisions.

Early AI (1950s–1980s) was dominated by **symbolic AI** or *expert systems*, in which experts typed in thousands of "if–then" rules. These systems were useful in narrow areas such as medical diagnosis but broke down on messy real-world data. Since the 1990s the focus has shifted to systems that *learn* from data.

Definition: Machine Learning (Samuel, 1959)

Machine Learning is the field of study that gives computers the ability to learn without being explicitly programmed.

Definition: Machine Learning (Mitchell, 1997)

A computer program is said to **learn** from experience E with respect to some class of tasks T and performance measure P, if its performance at tasks in T, as measured by P, improves with experience E.

Samuel's definition is informal and historical (he wrote a checkers program that improved by playing against itself). Mitchell's definition is more engineering-oriented because it tells us *what to measure*: to claim that a program is learning we must name the task, the metric and the experience.

Definition: Deep Learning

Deep Learning is a subfield of ML that uses *artificial neural networks with many layers* to learn increasingly abstract representations of data (e.g. pixels → edges → shapes → faces). It is the subject of Unit V.

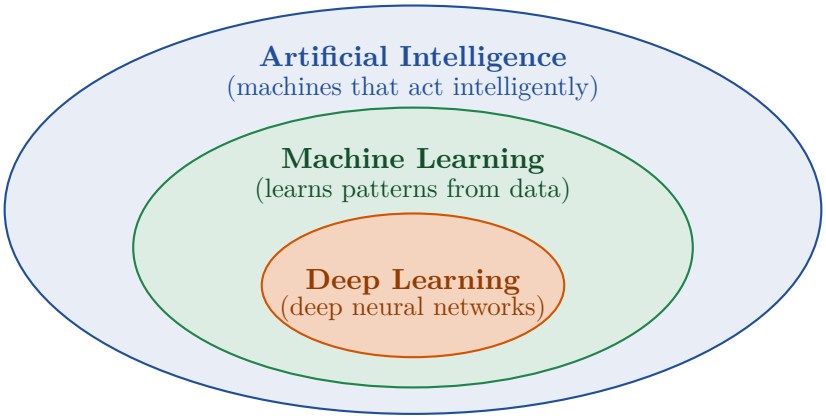


Figure 1.2. AI, ML and Deep Learning as nested sets.

Reading the Figure

The figure is a **set diagram**: each ellipse lies completely inside the one before it.

- *Outer ellipse (AI):* the biggest set. It includes ML but also non-learning AI such as hand-coded chess engines and rule-based expert systems.
- *Middle ellipse (ML):* every ML system is AI, but not every AI system learns.
- *Inner ellipse (DL):* deep learning is one family of ML methods. Decision trees, k-NN and SVMs are ML but *not* deep learning.

Remember the order DL ⊂ ML ⊂ AI.

Example: Spam filter in (T, P, E) form

Task T	Flag new e-mails as spam or not spam
Performance P	Percentage of e-mails classified correctly (accuracy)
Experience E	A collection of e-mails labelled by users

Check: if accuracy rises from 90% to 96% as we add more labelled mail, the program is learning. If accuracy does not change however much data we add, it is *not* learning,

whatever its marketing says.

Example: Which of these is ML?

(a) A program that fixes a date's format using a fixed rule. **Not ML:** no experience is used.

(b) A music app that suggests songs based on what you skipped. **ML:** behaviour (experience) improves recommendations.

(c) A calculator. **Not ML:** its performance never improves with experience.

Exam Tip

"Define Machine Learning" appears almost every year. For full marks write *both* Samuel's and Mitchell's definitions, then give the spam-filter example in (T, P, E) form.

1.3 Where Is Machine Learning Used?

ML is the right tool when (i) rules are too many or too complex, (ii) the environment keeps changing, (iii) the problem has no known algorithmic solution, or (iv) large amounts of data are available to learn from.

Area	Application	ML task
E-mail	Spam filtering	Classification
E-commerce	"Customers also bought"	Recommendation
Health	Detecting disease from X-rays	Image classification
Transport	Self-driving cars	Perception and control
Language	Translation, chatbots	Sequence modelling
Finance	Credit-card fraud detection	Anomaly detection
Real estate	Predicting house prices	Regression
Marketing	Grouping similar customers	Clustering

1.4 Basic Terminology

Before going further, learn this vocabulary. It is used in every chapter.

Term	Meaning
Instance (sample)	One data point, e.g. one e-mail or one house.
Feature (attribute)	An input measurement describing an instance, e.g. area, number of rooms.
Label (target)	The correct output for an instance, e.g. price or "spam".
Training set	Data used to *fit* the model.
Test set	Data held back to *evaluate* the final model on unseen instances.
Model	The function f learned from data, $\hat{y} = f(\boldsymbol{x})$.
Parameters	Numbers learned *by the algorithm* during training (e.g. θ_0, θ_1).
Hyperparameters	Settings chosen *by the human* before training (e.g. k in k-NN, learning rate).

Example: A small dataset

	Area (m^2)	Rooms	Age (yr)	Price (lakh Rs.)
Instance 1	80	2	10	45
Instance 2	120	3	5	78
Instance 3	60	1	20	28

Here *Area, Rooms, Age* are the three **features**; the feature vector of instance 1 is $\boldsymbol{x}_1 = (80, 2, 10)$, and its **label** is $y_1 = 45$. The first three columns together form the input X, and the last column is the target y.

Common Mistake

Do not mix up **parameters** and **hyperparameters**. Parameters are *learned from data*; hyperparameters are *set by you* and are tuned by trying several values and comparing performance on held-out data.

1.5 Types of Machine Learning Systems

ML systems are classified in three independent ways. The same system gets one label from each way, e.g. "a supervised, batch, model-based system".

Q1. How much supervision does it get during training? (supervised, unsupervised, semi-supervised, reinforcement)

Q2. Can it learn incrementally on the fly? (batch vs. online)

Q3. Does it compare new data to stored examples or build a model? (instance-based vs. model-based)

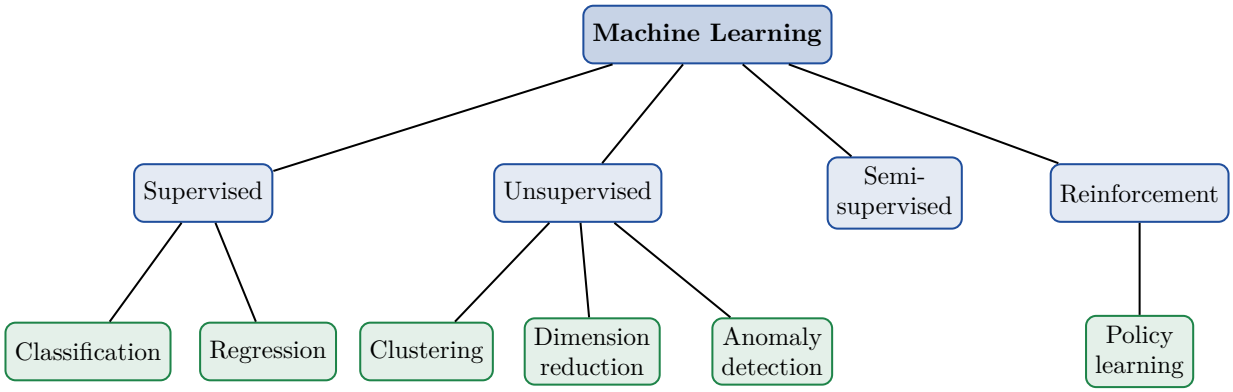


Figure 1.3. Taxonomy of ML systems by the type of supervision. Blue = learning paradigm, green = typical task.

Reading the Figure

Read this **tree from top to bottom**. The root is Machine Learning. The second level (blue) shows the four paradigms; the third level (green) shows the typical *tasks* that each paradigm solves. For example, *classification* and *regression* both need labelled data and therefore sit under *supervised*; *clustering* needs no labels and so sits under *unsupervised*. Semi-supervised learning is a mix of the first two and is usually applied to the same tasks.

1.5.1 Supervised Learning

In supervised learning the training data includes the **correct answer** (the label). The learner is like a student who checks each practice answer against an answer key.

Definition: Supervised Learning

Given a training set $\{(\boldsymbol{x}_i, y_i)\}_{i=1}^{n}$ where $\boldsymbol{x}_i \in \mathbb{R}^d$ is the feature vector and y_i is the label, learn a function f such that $f(\boldsymbol{x}) \approx y$ *for new, unseen inputs.*

Types of supervised problems.

- **Classification:** y is a *category.*
  - *Binary:* two classes (spam / not spam).
  - *Multiclass:* one of many classes (digit 0–9).
  - *Multilabel:* several labels at once (a photo tagged "beach" and "sunset").
- **Regression:** y is a *real number* (house price, temperature). If there is one feature it is *simple* regression; if more, *multiple* regression.



Figure 1.4. (a) Classification separates two classes with a decision boundary. (b) Regression fits a line that predicts a number.

Reading the Figure

Panel (a): each point is one instance, plotted by two features x_1, x_2. Blue circles belong to class A and orange triangles to class B. The dashed green line is the *decision boundary* the classifier has learned: points on one side are predicted A, points on the other side B. The *output is a category.*
Panel (b): each dot is a house. The horizontal axis is the feature (size) and the vertical axis is the target (price). The green line is the fitted model; to predict the price of a new house, find its size on the horizontal axis and read the height of the line. The *output is a number.*

1.5.2 Unsupervised Learning

The training data is **unlabelled**. The system must discover structure on its own, like sorting a heap of unfamiliar coins into groups by size and colour without anyone naming them.

Definition: Unsupervised Learning

Given only inputs $\{\boldsymbol{x}_i\}_{i=1}^n$ with no labels, discover hidden structure, such as groups, directions of variation or unusual points, in the data.

- **Clustering:** group similar instances, e.g. segment customers by buying behaviour (K-Means, DBSCAN; Chapter 7).
- **Dimensionality reduction:** compress many features into a few while keeping the information (PCA; Chapter 8). Useful for visualisation and for speeding up learning.
- **Anomaly (outlier) detection:** flag unusual instances, e.g. a suspicious credit-card transaction.
- **Association rule learning:** find relations such as "people who buy bread also buy butter".

1.5.3 Semi-supervised Learning

Labelling is slow and costly (a doctor must label every X-ray), but unlabelled data is cheap. **Semi-supervised** algorithms use a *small labelled* set and a *large unlabelled* set. A typical method is **self-training**: train on the labelled data, predict labels for the unlabelled data, keep the most confident predictions as new labels, and retrain.

Example. Photo apps first cluster faces automatically (unsupervised), then ask you to name each person once (supervised); the name then spreads to every photo in the cluster.

1.5.4 Reinforcement Learning

There are no labelled examples. An **agent** observes the **state** of an **environment**, chooses an **action**, and receives a **reward** (positive) or **penalty** (negative). It learns a **policy**, a rule that says which action to take in each state, that maximises the total reward over time.

Term	Example: robot learning to walk
Agent	The robot's control program
Environment	The floor, gravity, the robot's body
State s	Joint angles, speed, whether upright
Action a	Move a joint motor
Reward r	$+1$ for moving forward, -10 for falling
Policy π	The learned rule: state $\mapsto$ action

Because rewards may arrive late (a chess move is only rewarded when the game ends), the agent maximises the **discounted return**

$$G_t = r_{t+1} + \gamma\, r_{t+2} + \gamma^2 r_{t+3} + \cdots = \sum_{k=0}^{\infty} \gamma^k\, r_{t+k+1}, \qquad 0 \le \gamma \le 1,$$

where the *discount factor* γ says how much we value future rewards. With $\gamma = 0$ the agent is short-sighted (only the next reward matters); with γ close to 1 it is far-sighted. Famous examples are DeepMind's AlphaGo, which beat the world Go champion, and robots that learn to walk.

Reading the Figure

The picture shows a **closed loop** that repeats at every time step t. (1) The agent looks at the current state and uses its policy to pick an action a_t (top arrow). (2) The environment reacts and sends back the next state s_{t+1} and a reward r_{t+1} (bottom arrow). (3) The agent

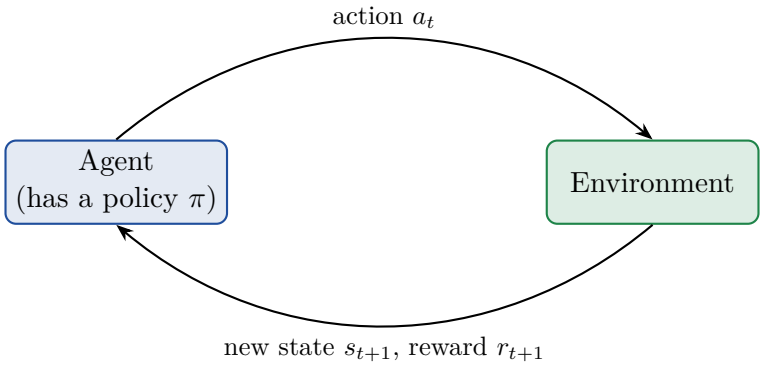


Figure 1.5. The reinforcement-learning loop.

uses that feedback to improve its policy, and the loop repeats. Learning happens by *trial and error*: actions that lead to high reward become more likely.

Type	Labels?	Feedback	Typical task	Example
Supervised	Yes	Correct answer	Classification, regression	Spam, prices
Unsupervised	No	None	Clustering, PCA	Customer groups
Semi-supervised	Few	Partial	Mixed	Photo tagging
Reinforcement	No	Reward/penalty	Sequential decisions	Games, robots

1.5.5 Batch vs. Online Learning

Batch (offline) learning. The system is trained once on *all* available data, then deployed and no longer learns. To include new data it must be retrained from scratch on old + new data. This is simple but can take hours and a lot of memory.

Online (incremental) learning. The system is trained continuously on single instances or small *mini-batches* as they arrive. Each step is cheap, so it suits streaming data (stock prices) and limited memory; it can even handle datasets too large for memory (*out-of-core learning*).

The key hyperparameter of online learning is the **learning rate**: a *high* rate adapts quickly but forgets old data fast and is sensitive to noise; a *low* rate is stable but slow to adapt. A risk is that *bad data* (a faulty sensor) can quickly degrade a live system, so its performance must be monitored.

1.5.6 Instance-based vs. Model-based Learning

Instance-based learning. The system *memorises* the training examples and, for a new point, finds the most *similar* stored ones and copies their answer. *Example:* k-Nearest Neighbours (Chapter 3). No explicit model is built.

Model-based learning. The system builds a *mathematical model* from the examples, then uses only the model (the training data may be thrown away) to predict. *Example:* linear regression.

	Instance-based	**Model-based**
Stores	All training data	Only parameters
Prediction by	Similarity to stored data	Evaluating the learned formula
Training cost	Low (just store)	Higher (fit parameters)
Prediction cost	High (compare to many points)	Low
Example	k-NN	Linear regression

Worked example: a model-based learner by hand

Suppose we believe that house price y depends linearly on size x:

$$\hat{y} = \theta_0 + \theta_1 x.$$

Learning means choosing θ_0, θ_1 so that predictions are close to the data. For simple linear regression the least-squares solution is

$$\theta_1 = \frac{\sum_i (x_i - \bar{x})(y_i - \bar{y})}{\sum_i (x_i - \bar{x})^2}, \qquad \theta_0 = \bar{y} - \theta_1 \bar{x}.$$

Example: Fit a line by hand

Data: size x (100 m^2) and price y (lakh Rs.).

x	1	2	3	4	5	$\bar{x} = 3$
y	15	26	29	44	46	$\bar{y} = 32$
$x - \bar{x}$	-2	-1	0	1	2	
$y - \bar{y}$	-17	-6	-3	12	14	
$(x - \bar{x})(y - \bar{y})$	34	6	0	12	28	$\Sigma = 80$
$(x - \bar{x})^2$	4	1	0	1	4	$\Sigma = 10$

Step 1: $\theta_1 = 80/10 = 8$. **Step 2:** $\theta_0 = 32 - 8 \times 3 = 8$.
Model: $\hat{y} = 8 + 8x$. For a new house of size $x = 6$: $\hat{y} = 8 + 8 \times 6 = 56$ lakh Rs..

Try It Yourself

Check the hand calculation with `scikit-learn`. The output should be intercept 8, coefficient 8 and prediction 56.

```
from sklearn.linear_model import LinearRegression

X = [[1], [2], [3], [4], [5]]       # feature: size (100 m^2)
y = [15, 26, 29, 44, 46]            # label: price (lakh Rs)

model = LinearRegression()          # 1. choose the model
model.fit(X, y)                     # 2. learn theta_0 and theta_1
print(model.intercept_, model.coef_[0])   # -> 8.0  8.0
print(model.predict([[6]]))               # -> [56.]
```

Challenge: add the point (6, 58) to the data. Do the parameters change? Why?

1.6 The Machine Learning Workflow

A real ML project is more than choosing an algorithm. It follows a cycle of steps.

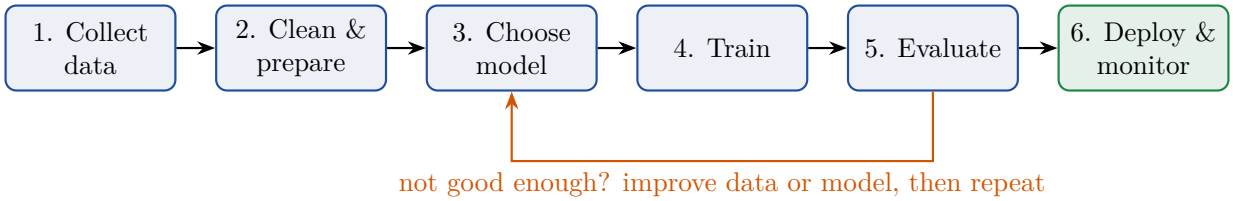


Figure 1.6. The machine-learning workflow.

Reading the Figure

Follow the **blue boxes left to right**; they are the steps in order. The **orange arrow** is the most important part: it shows that evaluation usually sends you *back* to try a different model or better data. ML is therefore iterative.

1. **Collect data:** from databases, sensors, web, surveys.
2. **Clean and prepare:** handle missing values, remove duplicates and outliers, encode text categories as numbers, and *scale* features to comparable ranges. This step often takes most of the project time.
3. **Choose a model** that suits the task (classifier, regressor, clusterer).
4. **Train:** the algorithm finds the parameters that fit the training set.
5. **Evaluate** on data *not* used for training, using the performance measure P.
6. **Deploy and monitor:** use the model on real inputs and watch for performance decay.

1.7 Main Challenges of Machine Learning

Two things can go wrong: *bad data* and *bad algorithm*.

1.7.1 Problems with the Data

1. **Insufficient training data.** A toddler needs to be shown a ball once or twice; ML systems need thousands or millions of examples. Banko and Brill (2001) showed that, given enough data, even simple algorithms perform almost as well as sophisticated ones: *data matters more than the algorithm.*
2. **Non-representative training data.** The training data must represent the cases the model will meet. If you build a "happiness vs. income" model using only rich countries, it will predict poorly for poor countries. This is **sampling bias**. A famous case is the 1936 *Literary Digest* poll: it surveyed 2.4 million people drawn from telephone and car owners, who were mostly wealthy, and wrongly predicted that Landon would beat Roosevelt. A small *sampling noise* (by chance) arises when the sample is too small; *sampling bias* arises when the method of sampling is flawed, even if the sample is large.
3. **Poor-quality data.** Errors, outliers, noise and missing values hide the patterns. Cleaning (discard outliers, fill or drop missing values) is essential.
4. **Irrelevant features.** "Garbage in, garbage out." **Feature engineering** has three parts: *feature selection* (choose the most useful features), *feature extraction* (combine features, e.g. dimensionality reduction) and *creating new features* by collecting new data.

1.7.2 Problems with the Algorithm

Overfitting. The model performs very well on the training data but badly on new data, because it has *memorised the noise* instead of learning the pattern. It is like a student who memorises last year's paper word for word and then cannot answer a new question. Overfitting happens when the model is *too complex* relative to the amount and noisiness of the data.

Underfitting. The model is too simple to capture the structure of the data, so it does badly even on the training set (like a student who read only the chapter titles).

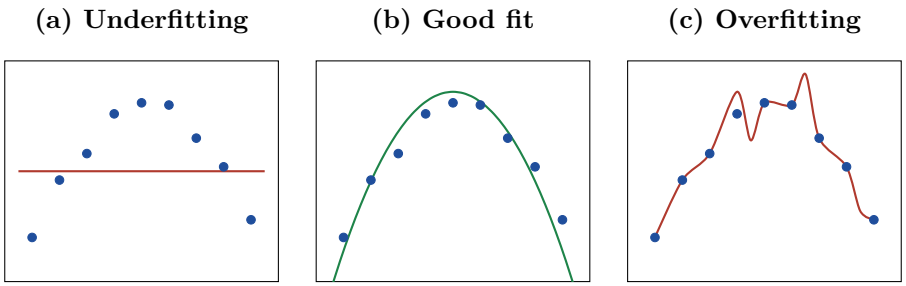


Figure 1.7. The same nine data points fitted by three models of different complexity.

Reading the Figure

All three panels show the *same* blue data points; only the fitted curve (red or green) changes. **(a)** The model is a flat horizontal line. It ignores the rise-and-fall pattern, so errors are large for *every* point: **high training error** ⇒ underfitting. **(b)** A smooth curve passes close to all points without chasing each one: this is the **right complexity** and will generalise well. **(c)** The wiggly curve passes *exactly* through every point, including the random noise. Training error is almost zero, but the zig-zags will mispredict new points: **low training error, high test error** ⇒ overfitting.

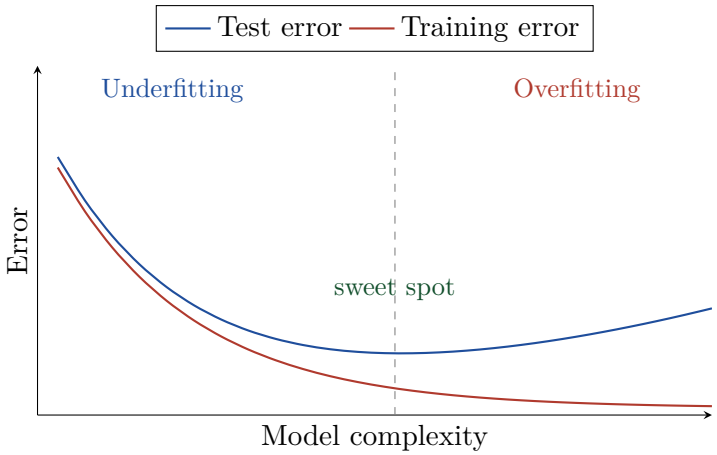


Figure 1.8. Training and test error as model complexity increases.

Reading the Figure

The horizontal axis is how *flexible* the model is (e.g. the degree of a polynomial). The vertical axis is the error.

- **Red curve (training error)** always *falls*: a more flexible model can always fit the training data better.
- **Blue curve (test error)** falls at first and then *rises again*. Beyond the dashed line the model starts fitting noise, so it gets worse on unseen data.
- **Left of the dashed line:** both errors are high ⇒ underfitting. **Right of it:** a growing gap between training and test error ⇒ overfitting.
- **The dashed line** marks the minimum of the test error, the best complexity.

Rule of thumb: judge a model by the *test* curve, never by the training curve.

Common Mistake

Very high accuracy on training data does **not** mean the model is good. Always evaluate on data the model has never seen (Chapter 2).

	Overfitting	**Underfitting**
Model is	too complex	too simple
Training error	very low	high
Test error	high	high
Also called	high variance	high bias
Remedies	more training data; simpler model or fewer features; **regularisation**; remove noise/outliers; early stopping	more complex model; better or more features; reduce regularisation; train longer

Definition: Regularisation

Regularisation means deliberately *constraining* a model to make it simpler and so reduce overfitting, for example by adding a penalty on large parameter values to the loss (Chapter 4). The amount of regularisation is a hyperparameter.

1.7.3 Testing and Validating

The only reliable way to know how well a model generalises is to try it on new cases. So we split the data:

- **Training set** (e.g. 60–80%): used to fit the parameters.
- **Validation set** (e.g. 10–20%): used to compare models and tune *hyperparameters*.
- **Test set** (e.g. 10–20%): used *once*, at the very end, to estimate the **generalisation error**.

Common Mistake

If you tune hyperparameters on the *test* set, the test set is no longer "unseen": your reported error will be optimistic. Use the validation set (or cross-validation) for tuning and keep the test set locked away.

1.7.4 No Free Lunch Theorem

Wolpert (1996) proved that, averaged over *all possible problems*, no learning algorithm is better than any other. If we make *no assumption* about the data, there is no reason to prefer a linear

model over a neural network. In practice we must therefore (i) make reasonable **assumptions** about the data and (ii) *try several models* and compare them on a validation set.

Key Idea

The goal of ML is **generalisation**: performing well on *new* data, not on the data used for training.

Chapter Summary

- DL $\subset$ ML $\subset$ AI. ML learns *rules from data*; Mitchell's definition uses (T, P, E).
- Vocabulary: instance, feature, label, training/test set, model, parameters (learned) vs. hyperparameters (set by us).
- By supervision: supervised (labels), unsupervised (no labels), semi-supervised (few labels), reinforcement (rewards).
- Supervised tasks: classification (category) and regression (number). Unsupervised tasks: clustering, dimensionality reduction, anomaly detection.
- Batch learns offline from all data; online learns incrementally (learning rate matters). Instance-based memorises; model-based fits parameters.
- Challenges: insufficient data, non-representative data (sampling bias), poor quality, irrelevant features, overfitting, underfitting.
- Fix overfitting by more data, simpler models and regularisation; fix underfitting by richer models and better features.
- Split data into training, validation and test sets; never tune on the test set.

Exam Corner

A. Very Short Answer Questions (2 marks each)

1. Define machine learning. **[2 marks]**
2. What is meant by (T, P, E) in Mitchell's definition? **[2 marks]**
3. Differentiate between a feature and a label. **[2 marks]**
4. Differentiate a parameter from a hyperparameter. **[2 marks]**
5. Name two applications each of classification and regression. **[2 marks]**
6. What is semi-supervised learning? Give one example. **[2 marks]**
7. Define overfitting. **[2 marks]**
8. What is the purpose of the test set? **[2 marks]**

Model Answer: Q2 and Q4

Q2. T is the *task* the program must perform, P is the *performance measure* used to judge it, and E is the *experience* (data) it learns from. A program learns if its P on T improves with E.

Q4. A *parameter* (e.g. θ_1 in linear regression) is learned automatically from the training data. A *hyperparameter* (e.g. k in k-NN or the learning rate) is set by the user before

training and tuned using a validation set.

B. Short Answer Questions (5 marks each)

1. Differentiate between AI, machine learning and deep learning with a suitable diagram. **[5 marks]**
2. Compare supervised and unsupervised learning with examples. **[5 marks]**
3. Explain batch and online learning. What is the role of the learning rate? **[5 marks]**
4. Differentiate between instance-based and model-based learning with examples. **[5 marks]**
5. Explain reinforcement learning with a diagram. Define agent, state, action, reward and policy. **[5 marks]**
6. Explain the bias in training data (sampling bias) with an example. **[5 marks]**

Model Answer: B2 (outline for 5 marks)

Supervised learning uses *labelled* data $(\boldsymbol{x}, y)$ and learns a mapping $f(\boldsymbol{x}) \approx y$; tasks are classification and regression (e.g. spam detection, house-price prediction); feedback is the correct answer. **Unsupervised learning** uses *unlabelled* data $\boldsymbol{x}$ and finds hidden structure; tasks are clustering, dimensionality reduction, anomaly detection (e.g. customer segmentation); there is no feedback.

Basis	**Supervised**	**Unsupervised**
Data	Labelled	Unlabelled
Goal	Predict output	Discover structure
Algorithms	k-NN, SVM, linear regression	K-Means, PCA, DBSCAN
Evaluation	Direct (compare with labels)	Indirect

C. Long Answer Questions (10 marks each)

1. Explain the different types of machine-learning systems based on the amount of supervision, with diagrams and examples. **[10 marks]**
2. Describe the main challenges of machine learning. **[10 marks]**
3. What are overfitting and underfitting? Explain with diagrams, state the causes and the remedies for each. **[10 marks]**
4. Using the data $(1, 15), (2, 26), (3, 29), (4, 44), (5, 46)$, fit a straight line $\hat{y} = \theta_0 + \theta_1 x$ by least squares and predict y for $x = 7$. **[10 marks]**

Model Answer: C4 (numerical)

$\bar{x} = 3,\ \bar{y} = 32.\ \sum(x-\bar{x})(y-\bar{y}) = 34+6+0+12+28 = 80;\ \sum(x-\bar{x})^2 = 4+1+0+1+4 = 10.$
$\theta_1 = 80/10 = 8,\ \ \theta_0 = 32 - 8(3) = 8.$ Model: $\hat{y} = 8 + 8x.$
For $x = 7$: $\hat{y} = 8 + 8(7) = \mathbf{64}$.

D. Multiple-Choice Questions

1. Which of the following is *not* a type of ML system by supervision?
   (a) Supervised (b) Unsupervised (c) Reinforcement (d) **Compiled**

2. Grouping customers by buying behaviour without predefined labels is:
   (a) classification (b) regression (c) clustering (d) reinforcement
3. A model with very low training error but high test error is:
   (a) underfitting (b) overfitting (c) well fitted (d) unbiased
4. In Mitchell's definition, accuracy of a spam filter is an example of:
   (a) task (b) experience (c) performance measure (d) model
5. k-Nearest Neighbours is an example of:
   (a) model-based learning (b) instance-based learning (c) online learning (d) RL
6. The discount factor γ is used in:
   (a) clustering (b) regression (c) reinforcement learning (d) PCA
7. Hyperparameters are tuned using the:
   (a) training set (b) validation set (c) test set (d) none

Answers: 1-d, 2-c, 3-b, 4-c, 5-b, 6-c, 7-b.

E. Practice Problems

1. Label each as classification, regression or clustering: (a) predicting tomorrow's temperature, (b) deciding whether a tumour is benign, (c) grouping news articles by topic.
2. Write the (T, P, E) description for a handwriting-recognition program.
3. A robot has $\gamma = 0.9$ and receives rewards 1, 0, 5 at the next three steps (and none afterwards). Compute G_t. *(Answer:* $1 + 0.9 \cdot 0 + 0.81 \cdot 5 = 5.05$*.)*
4. **Coding:** extend the `LinearRegression` program to print predictions for sizes 6, 7 and 8. Plot the data and the fitted line with `matplotlib`.

Quick Revision

Topic	One-line recall
Samuel (1959)	Learning without being explicitly programmed.
Mitchell (1997)	Performance P at task T improves with experience E.
Supervised	Labelled data; classification (category) / regression (number).
Unsupervised	No labels; clustering, PCA, anomaly detection.
Semi-supervised	Few labels + many unlabelled (self-training).
Reinforcement	Agent–environment loop; maximise $G_t = \sum \gamma^k r_{t+k+1}$.
Batch / Online	All data once / incremental; learning rate.
Instance / Model-based	Memorise and compare / fit parameters.
Overfitting	Low train error, high test error $\rightarrow$ more data, regularise, simplify.
Underfitting	High train and test error $\rightarrow$ richer model, better features.
Data splits	Train: fit. Validation: tune. Test: final estimate.
No Free Lunch	No best algorithm for all problems; make assumptions and compare.