


Login Details

Username: **atul.lal@abb.com**


Password: **123456**

Copy the two folders from Arvind_Kumar_BIT_Mobile_project\Server_side\webserver “webservice” and “bitWS_localhost” to htdocs in XAMPP

Change the database password in config file.

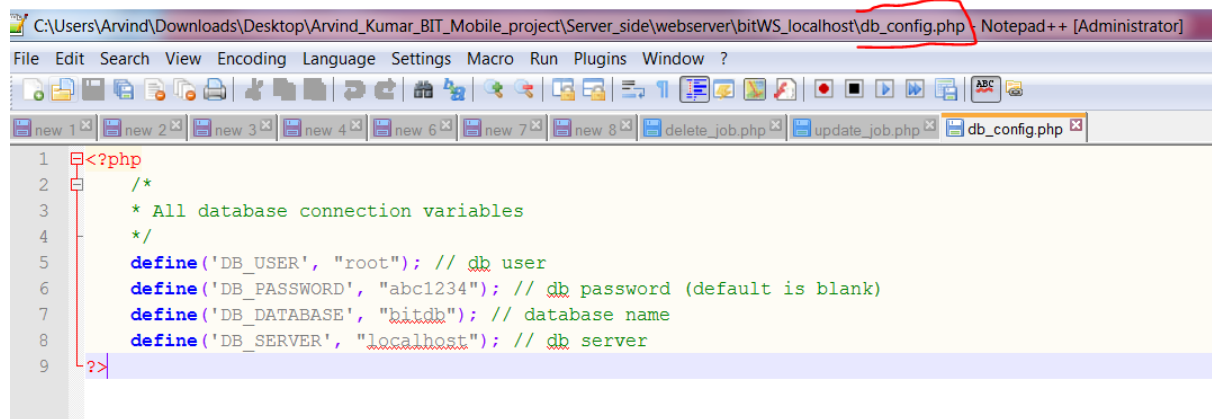


```
1 <?php
2 /*
3  * All database connection variables
4  */
5 define('DB_USER', "root"); // db user
6 define('DB_PASSWORD', "abc1234"); // db password (default is blank)
7 define('DB_DATABASE', "bitdb"); // database name
8 define('DB_SERVER', "localhost"); // db server
9 >?
```

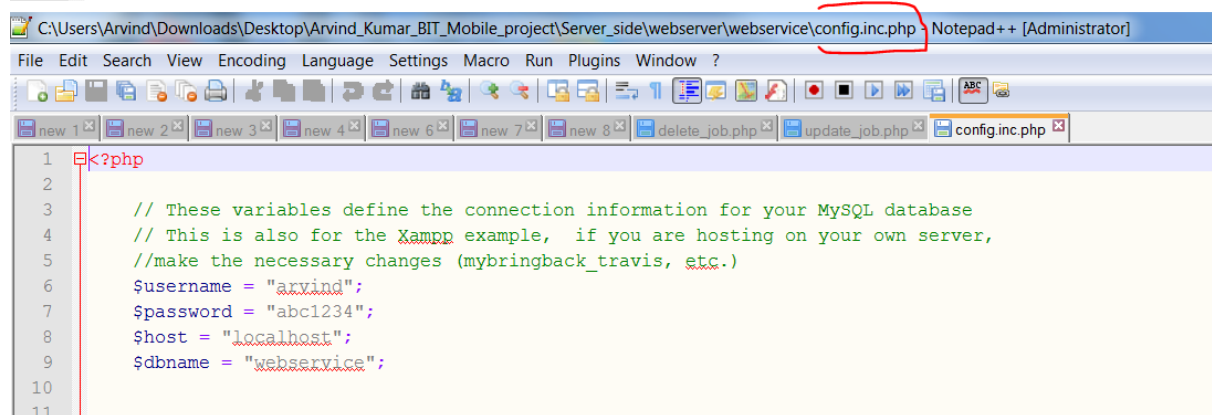

```
1 <?php
2
3 // These variables define the connection information for your MySQL database
4 // This is also for the Xampp example, if you are hosting on your own server,
5 //make the necessary changes (mybringback_travis, etc.)
6 $username = "arvind";
7 $password = "abc1234";
8 $host = "localhost";
9 $dbname = "webservice";
10
11
```

From Arvind_Kumar_BIT_Mobile_project\Server_side\databases run the database scripts “bitdb.sql” and “webservice.sql”

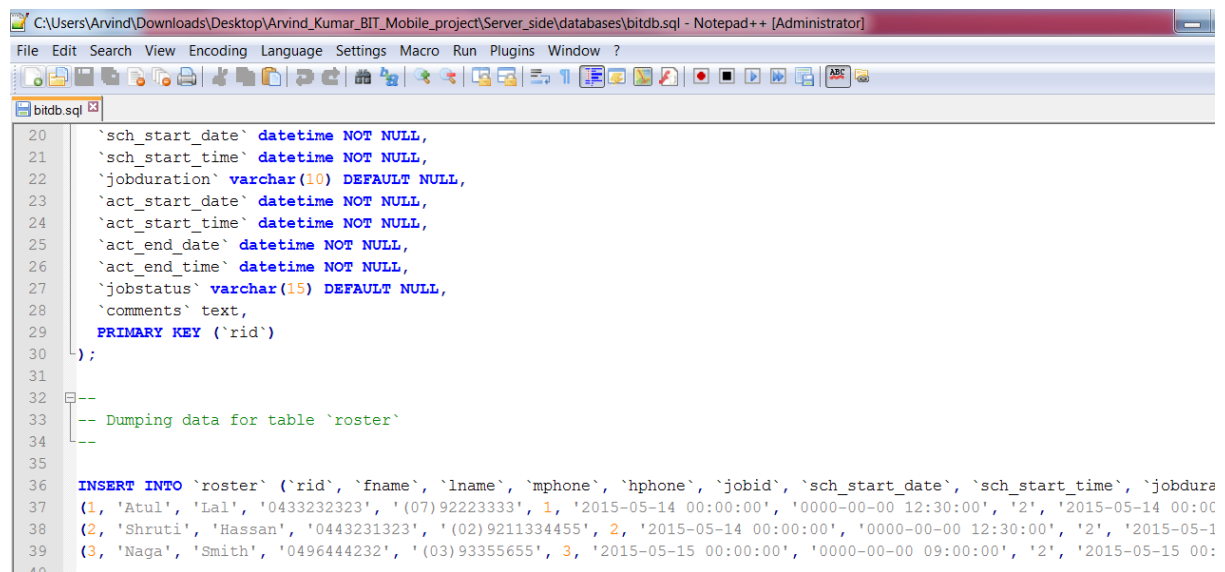

```
20 `sch_start_date` datetime NOT NULL,
21 `sch_start_time` datetime NOT NULL,
22 `jobduration` varchar(10) DEFAULT NULL,
23 `act_start_date` datetime NOT NULL,
24 `act_start_time` datetime NOT NULL,
25 `act_end_date` datetime NOT NULL,
26 `act_end_time` datetime NOT NULL,
27 `jobstatus` varchar(15) DEFAULT NULL,
28 `comments` text,
29 PRIMARY KEY (`rid`)
30 );
31
32 --
33 -- Dumping data for table `roster`
34 --
35
36 INSERT INTO `roster` (`rid`, `fname`, `lname`, `mphone`, `hphone`, `jobid`, `sch_start_date`, `sch_start_time`, `jobdura
37 (1, 'Atul', 'Lal', '0433232323', '(07) 92223333', 1, '2015-05-14 00:00:00', '0000-00-00 12:30:00', '2', '2015-05-14 00:00
38 (2, 'Shruti', 'Hassan', '0443231323', '(02) 9211334455', 2, '2015-05-14 00:00:00', '0000-00-00 12:30:00', '2', '2015-05-1
39 (3, 'Naga', 'Smith', '0496444232', '(03) 93355655', 3, '2015-05-15 00:00:00', '0000-00-00 09:00:00', '2', '2015-05-15 00:
40
```

C:\Users\Arvind\Downloads\Desktop\Arvind_Kumar_BIT_Mobile_project\Server_side\databases\webservice.sql - Notepad++ [Administrator]

File Edit Search View Encoding Language Settings Macro Run Plugins Window ?

webservice.sql

```
1  --
2  -- Database: `webservice`
3  --
4  CREATE DATABASE IF NOT EXISTS `webservice`;
5  USE `webservice`;
6
7  -----
8
9  --
10 -- Table structure for table `comments`
11 --
12
13 DROP TABLE IF EXISTS `comments`;
14 CREATE TABLE IF NOT EXISTS `comments` (
15   `post_id` int(11) NOT NULL AUTO_INCREMENT,
16   `username` varchar(64) NOT NULL,
17   `title` varchar(120) NOT NULL,
18   `message` varchar(255) NOT NULL,
19   PRIMARY KEY (`post_id`),
20   UNIQUE KEY `post_id` (`post_id`)
21 ) ENGINE=InnoDB DEFAULT CHARSET=latin1 AUTO_INCREMENT=4 ;
22
23 --
```

localhost:8080 / 127.0.0.1 / ...

localhost:8080/phpmyadmin/#PMAURL-1:db_structure.php?db=webservice&table=

Most Visited Getting Started Java Hardware Parts AS400 TAFE

Disable Cookies CSS Forms Images Information Miscellaneous Outline Resize Tools View Source

phpMyAdmin

(Recent tables) ...

- New
- android
- android_api
- authapp
- bitdb
- cdcol
- efarming
- information_schema
- mysql
- performance_schema
- phpmyadmin
- suzumapp
- test
- webauth
- webservice**
 - New
 - comments
 - users

Structure SQL Search Query Export Import Operations Privileges Routines Events Tr


Table	Action	Rows	Type	Collation	Size	Overhead
comments	Browse Structure Search Insert Empty Drop	-2	InnoDB	latin1_swedish_ci	32 K.B	-
users	Browse Structure Search Insert Empty Drop	-11	InnoDB	latin1_swedish_ci	32 K.B	-
2 tables	Sum					
		13	InnoDB	latin1_swedish_ci	64 K.B	0 B

Check All With selected:


Print view Data Dictionary

Create table


Name: Number of columns:

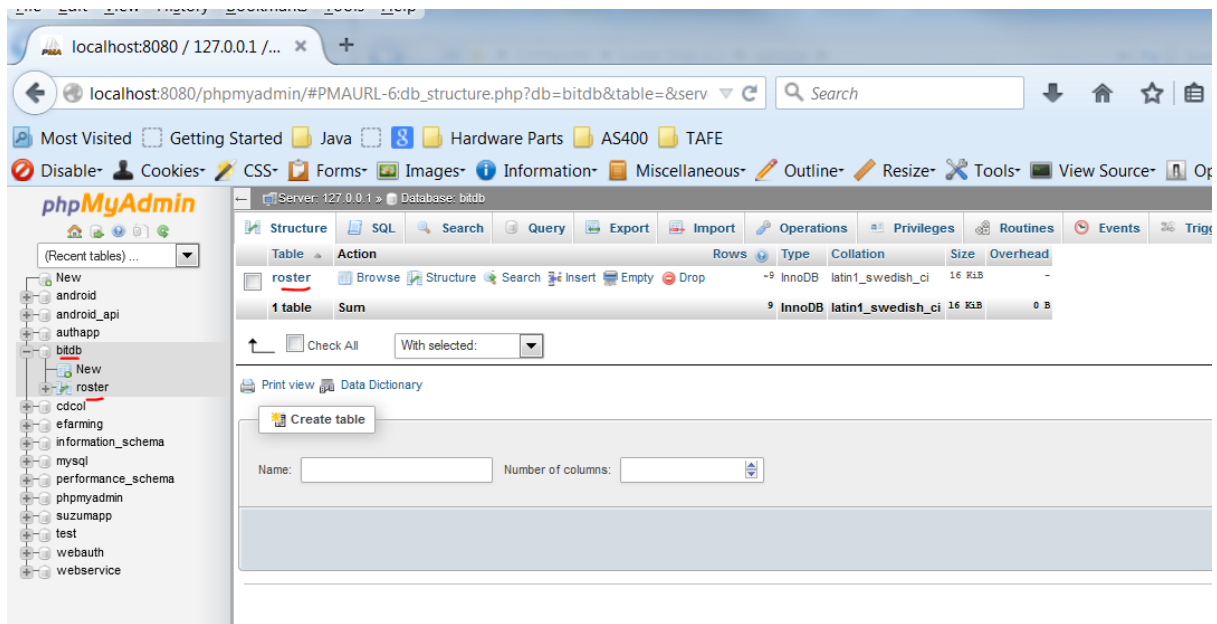

Start the XAMPP.

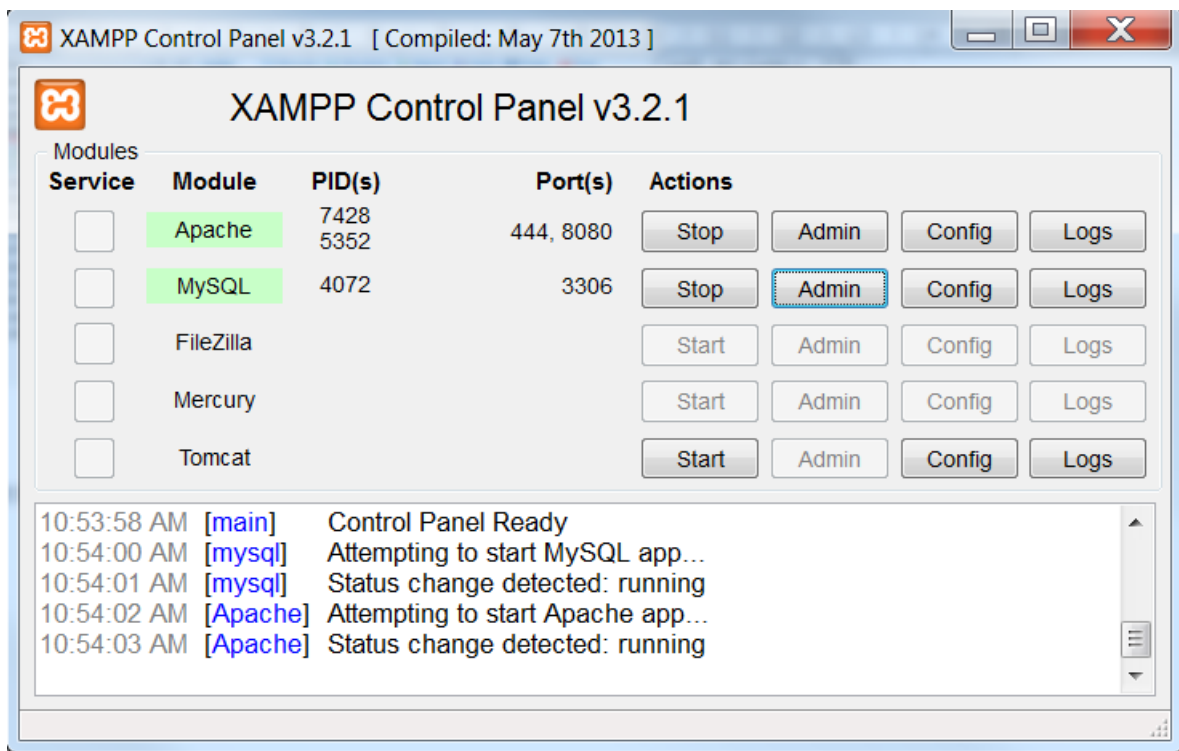

Find the ipaddress of the local machine.

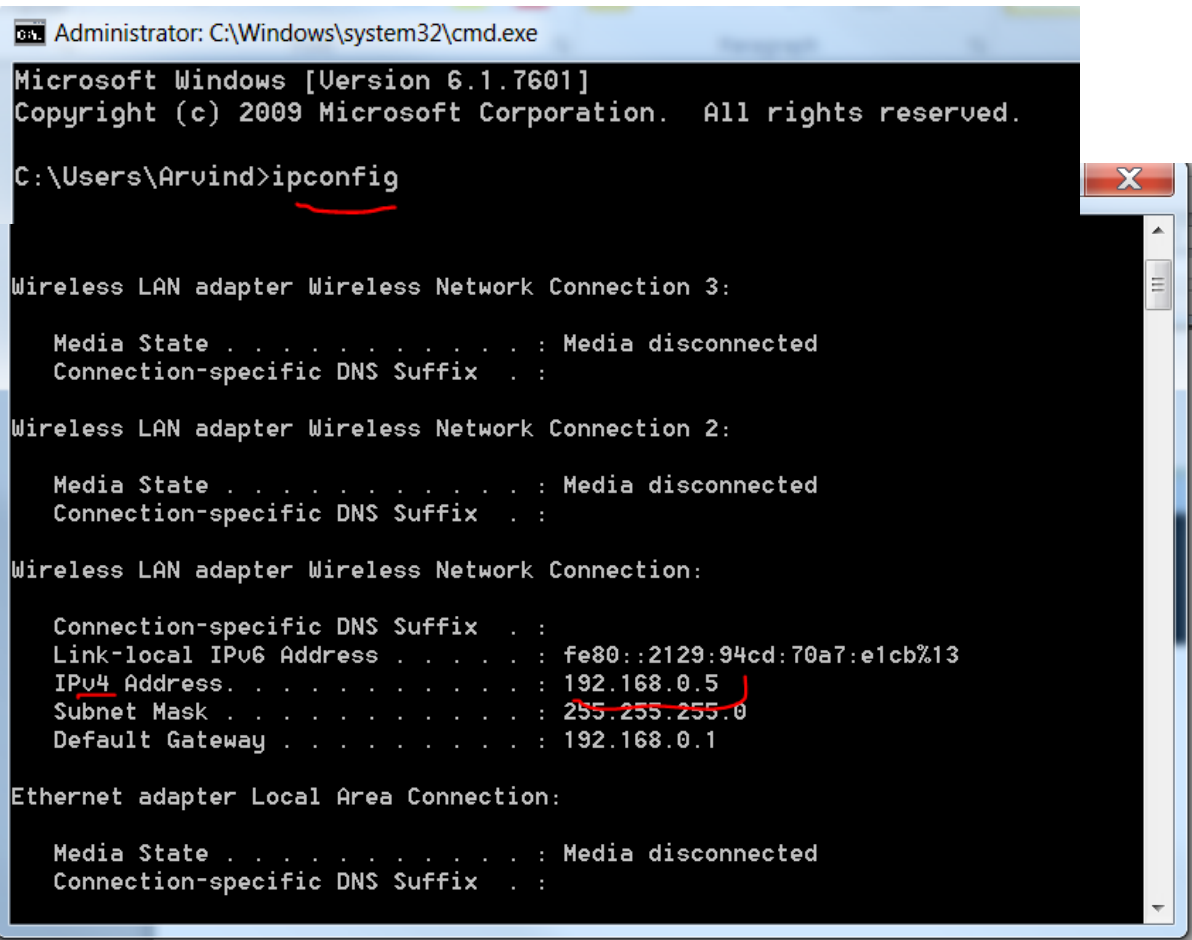

```
Administrator: C:\Windows\system32\cmd.exe
Microsoft Windows [Version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Users\Arvind>ipconfig

Wireless LAN adapter Wireless Network Connection 3:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Wireless LAN adapter Wireless Network Connection 2:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :


Wireless LAN adapter Wireless Network Connection:

    Connection-specific DNS Suffix  . :
    Link-local IPv6 Address . . . . . : fe80::2129:94cd:70a7:e1cb%13
    IPv4 Address. . . . . : 192.168.0.5
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.1

Ethernet adapter Local Area Connection:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :
```


Change the ipaddress in AppConfig.java file.

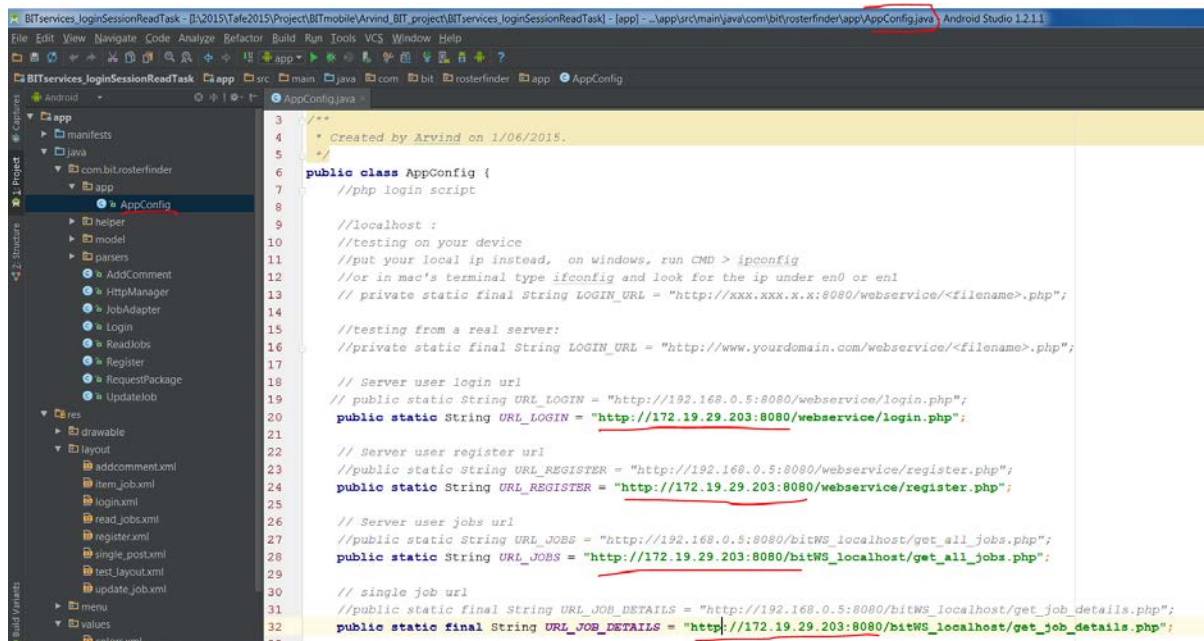



```
BITServices_loginSessionReadTask - [D:\2015\Tafe2015\Project\BITmobile\Arvind_BIT_project\BITServices_loginSessionReadTask] - [app] - ...\app\src\main\java\com\bit\rosterfinder\app\AppConfig.java Android Studio 1.2.1.1
File Edit View Navigate Code Analyzer Refactor Build Run Tools VCS Window Help
BITServices_loginSessionReadTask app src main java com bit rosterfinder app AppConfig
Android
  app
    manifests
    java
      com.bit.rosterfinder
        app
          AppConfig
            helper
            model
            parsers
            AddComment
            HttpManager
            JobAdapter
            Login
            ReadJobs
            Register
            RequestPackage
            UpdateJob
    res
      drawable
      layout
        addcomment.xml
        item_job.xml
        login.xml
        read_jobs.xml
        register.xml
        single_post.xml
        test_layout.xml
        update_job.xml
      values
        colors.xml


3
4  * Created by Arvind on 1/06/2015.
5
6 public class AppConfig {
7     //php login script
8
9     //localhost :
10    //testing on your device
11    //put your local ip instead, on windows, run CMD > ipconfig
12    //or in mac's terminal type ifconfig and look for the ip under en0 or en1
13    // private static final String LOGIN_URL = "http://xxx.xxx.x.x:8080/webService/<filename>.php";
14
15    //testing from a real server:
16    //private static final String LOGIN_URL = "http://www.yourdomain.com/webService/<filename>.php";
17
18    // Server user login url
19    // public static final String URL_LOGIN = "http://192.168.0.5:8080/webService/login.php";
20    public static final String URL_LOGIN = "http://172.19.29.203:8080/webService/login.php";
21
22    // Server user register url
23    //public static final String URL_REGISTER = "http://192.168.0.5:8080/webService/register.php";
24    public static final String URL_REGISTER = "http://172.19.29.203:8080/webService/register.php";
25
26    // Server user jobs url
27    //public static final String URL_JOBS = "http://192.168.0.5:8080/bitWS_localhost/get_all_jobs.php";
28    public static final String URL_JOBS = "http://172.19.29.203:8080/bitWS_localhost/get_all_jobs.php";
29
30    // single job url
31    //public static final String URL_JOB_DETAILS = "http://192.168.0.5:8080/bitWS_localhost/get_job_details.php";
32    public static final String URL_JOB_DETAILS = "http://172.19.29.203:8080/bitWS_localhost/get_job_details.php";
33}
```


Run the Android app

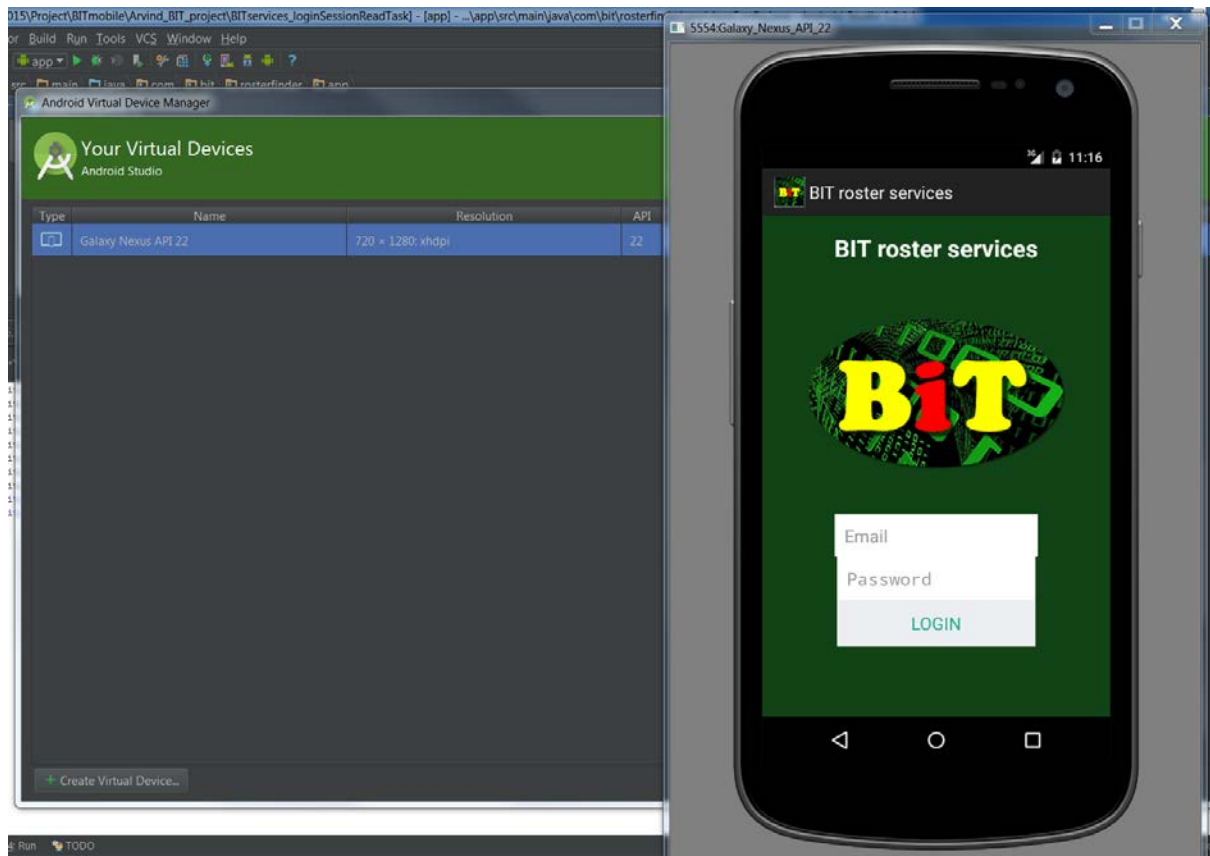


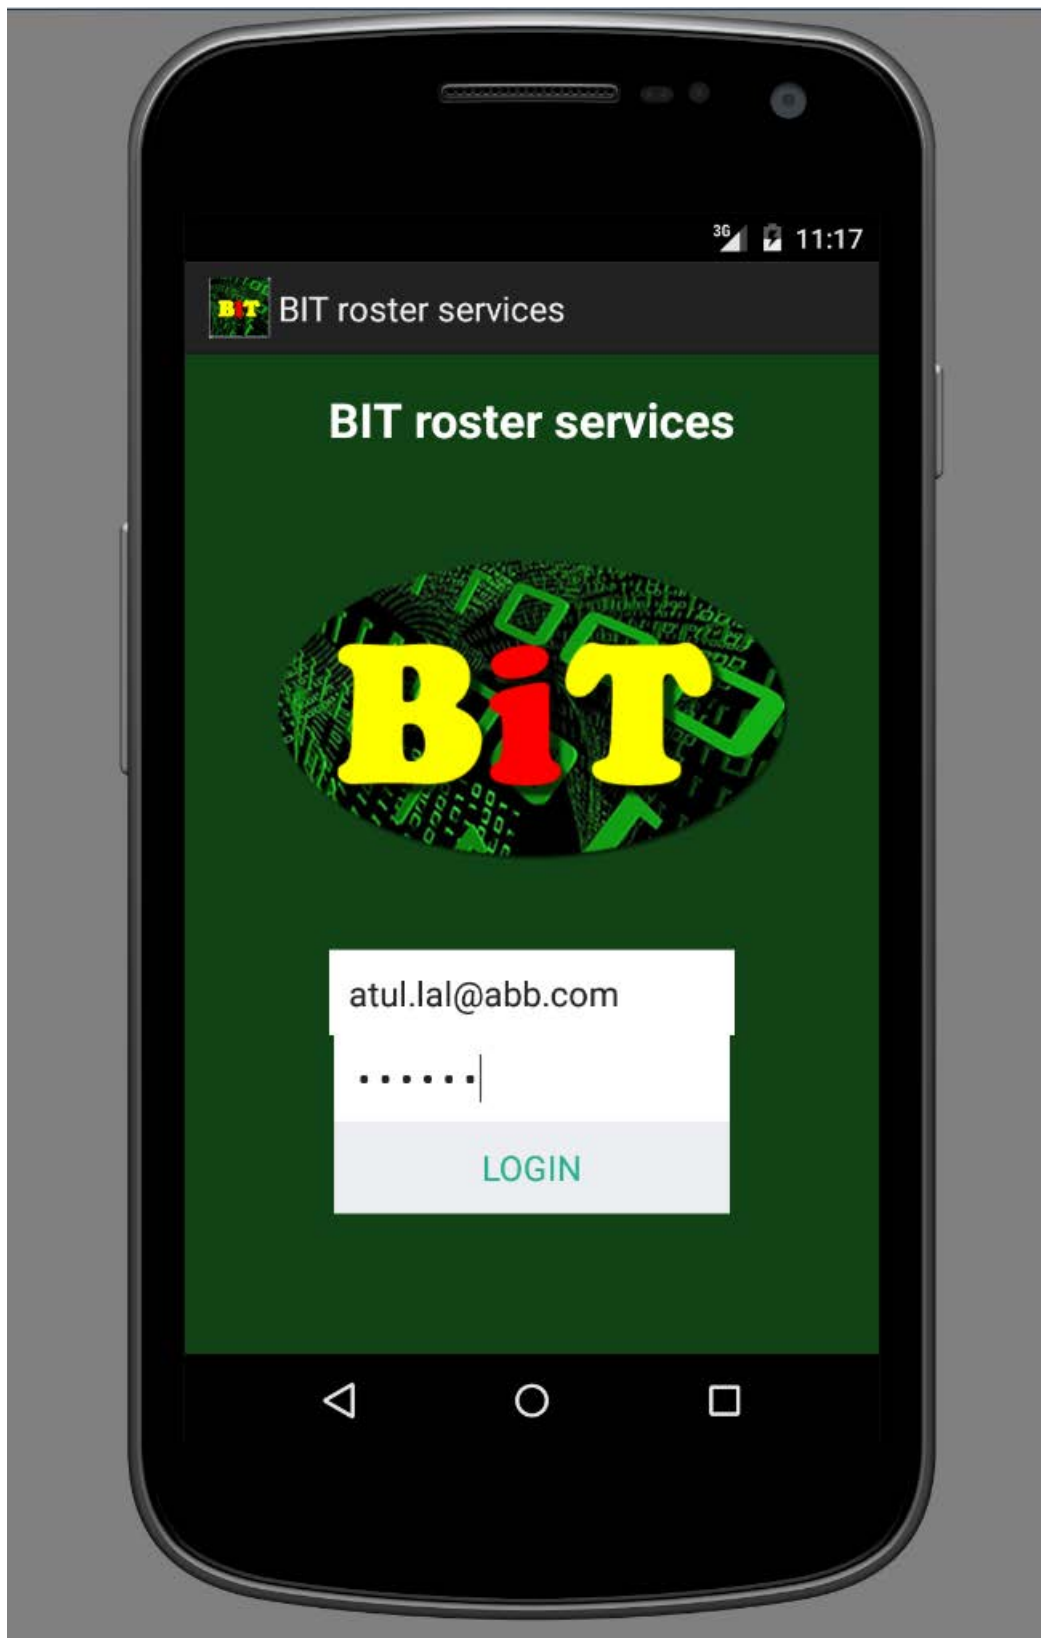


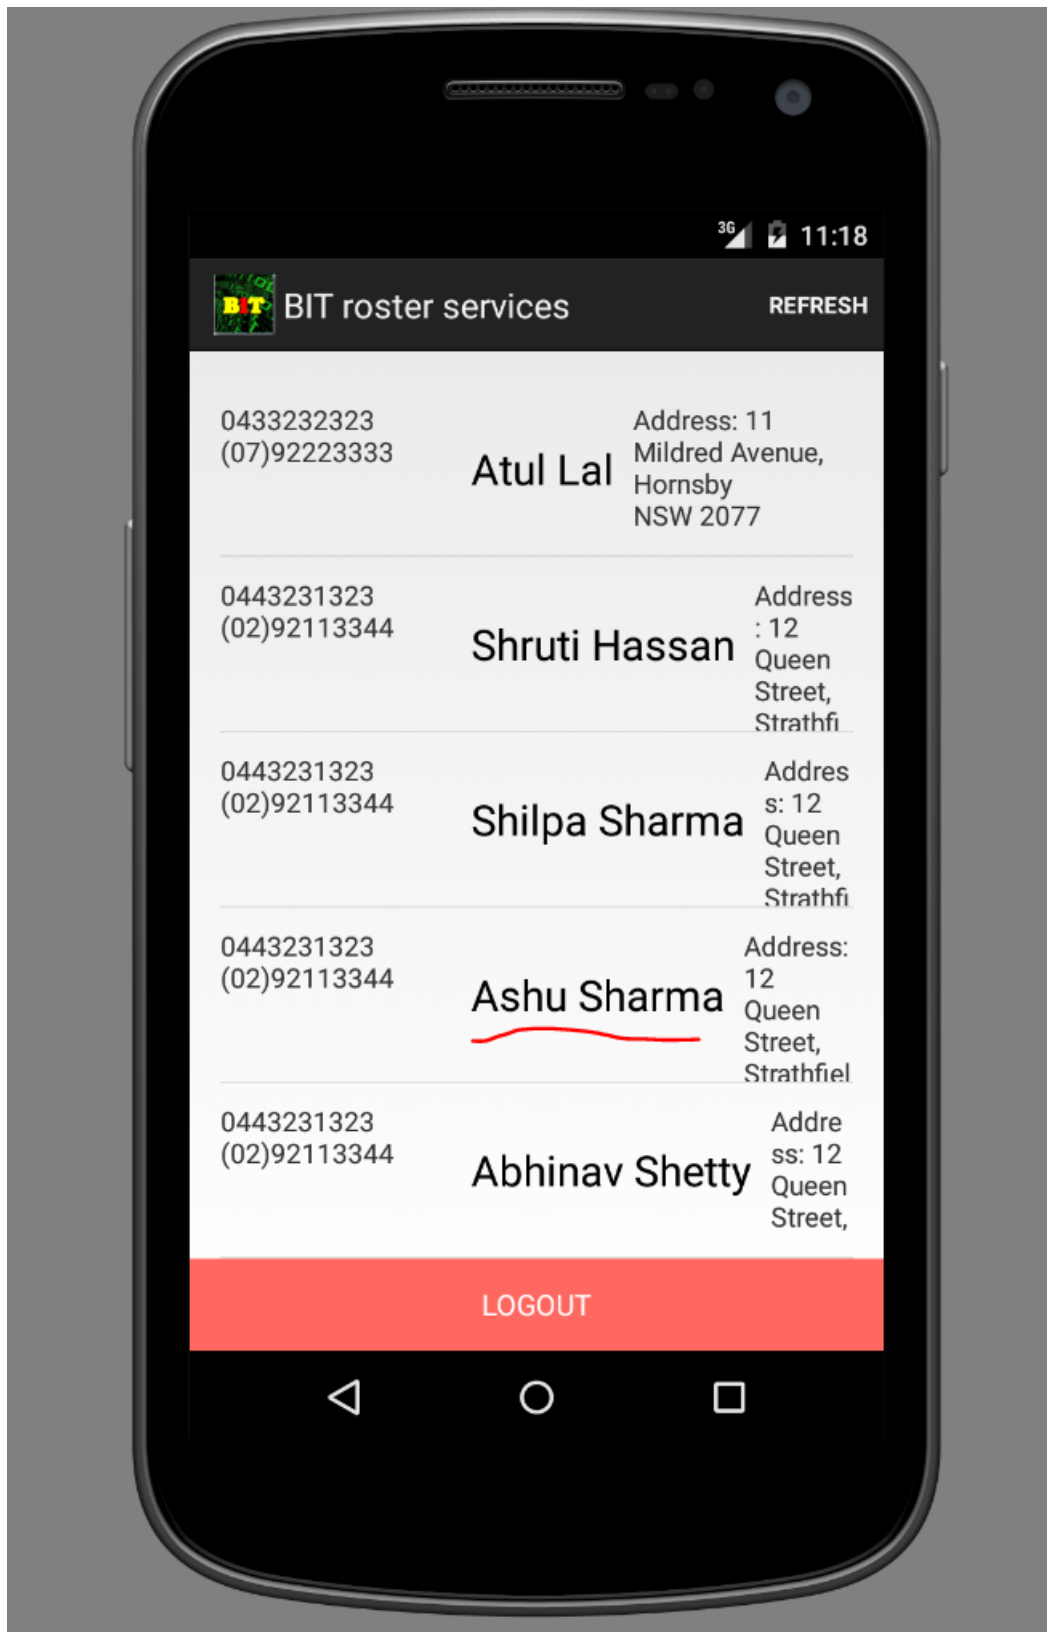


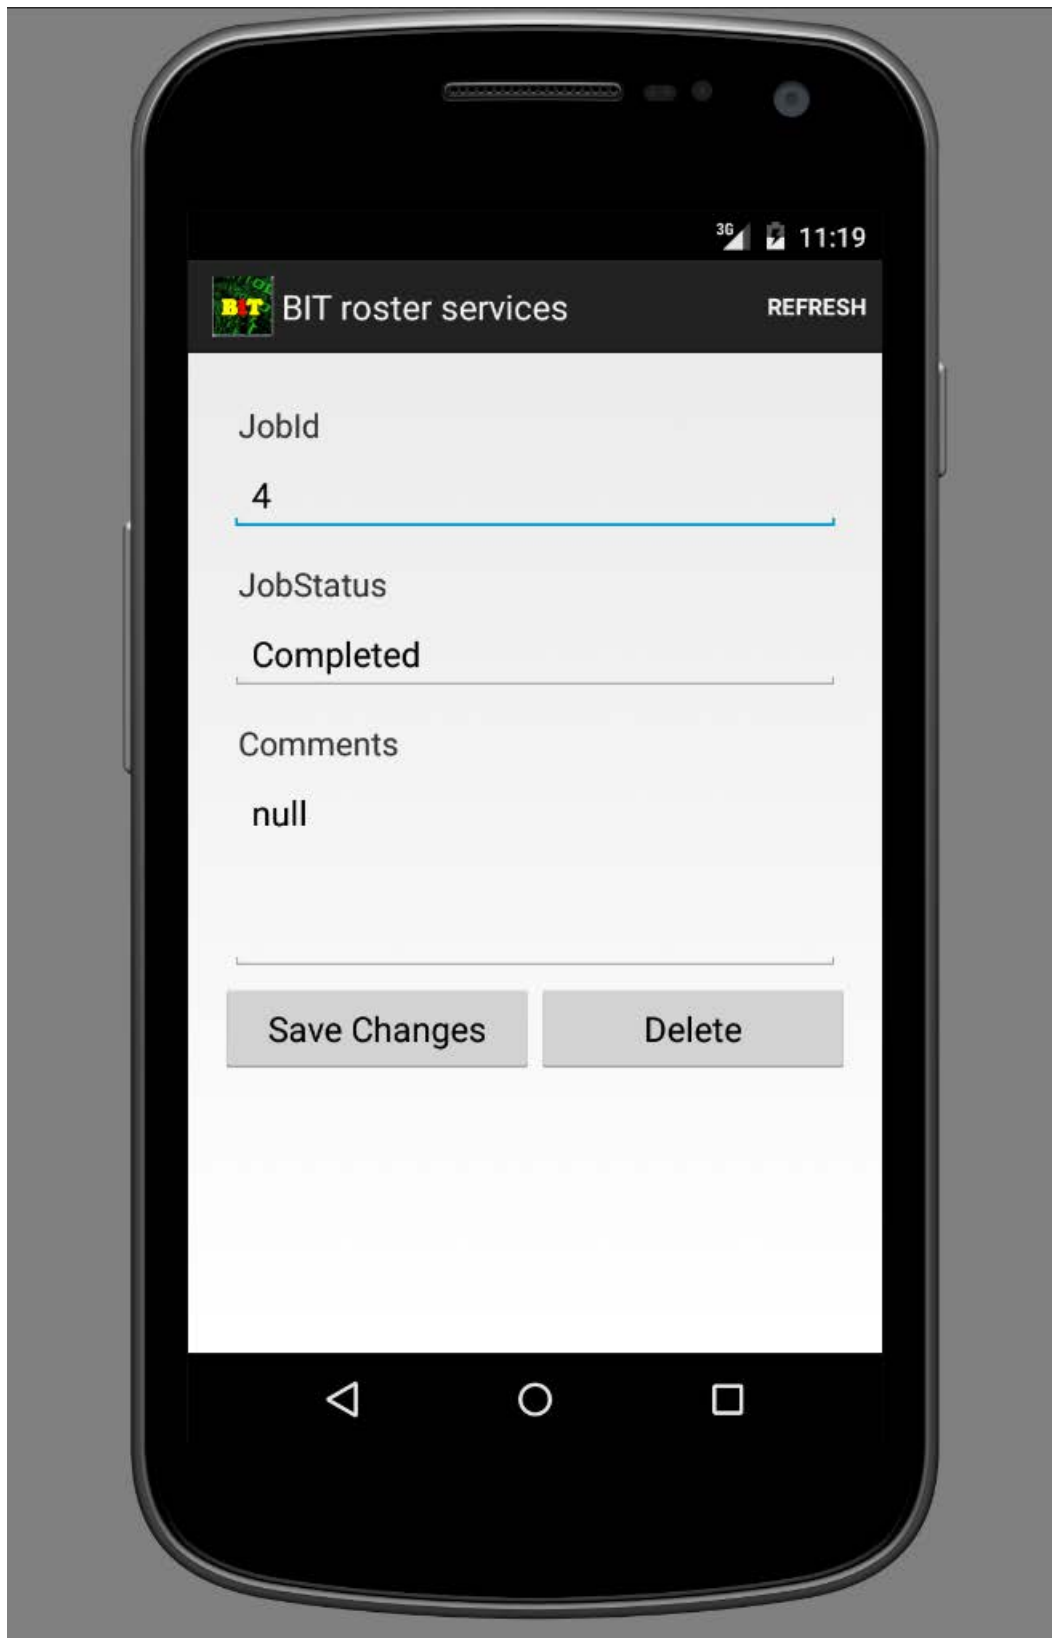

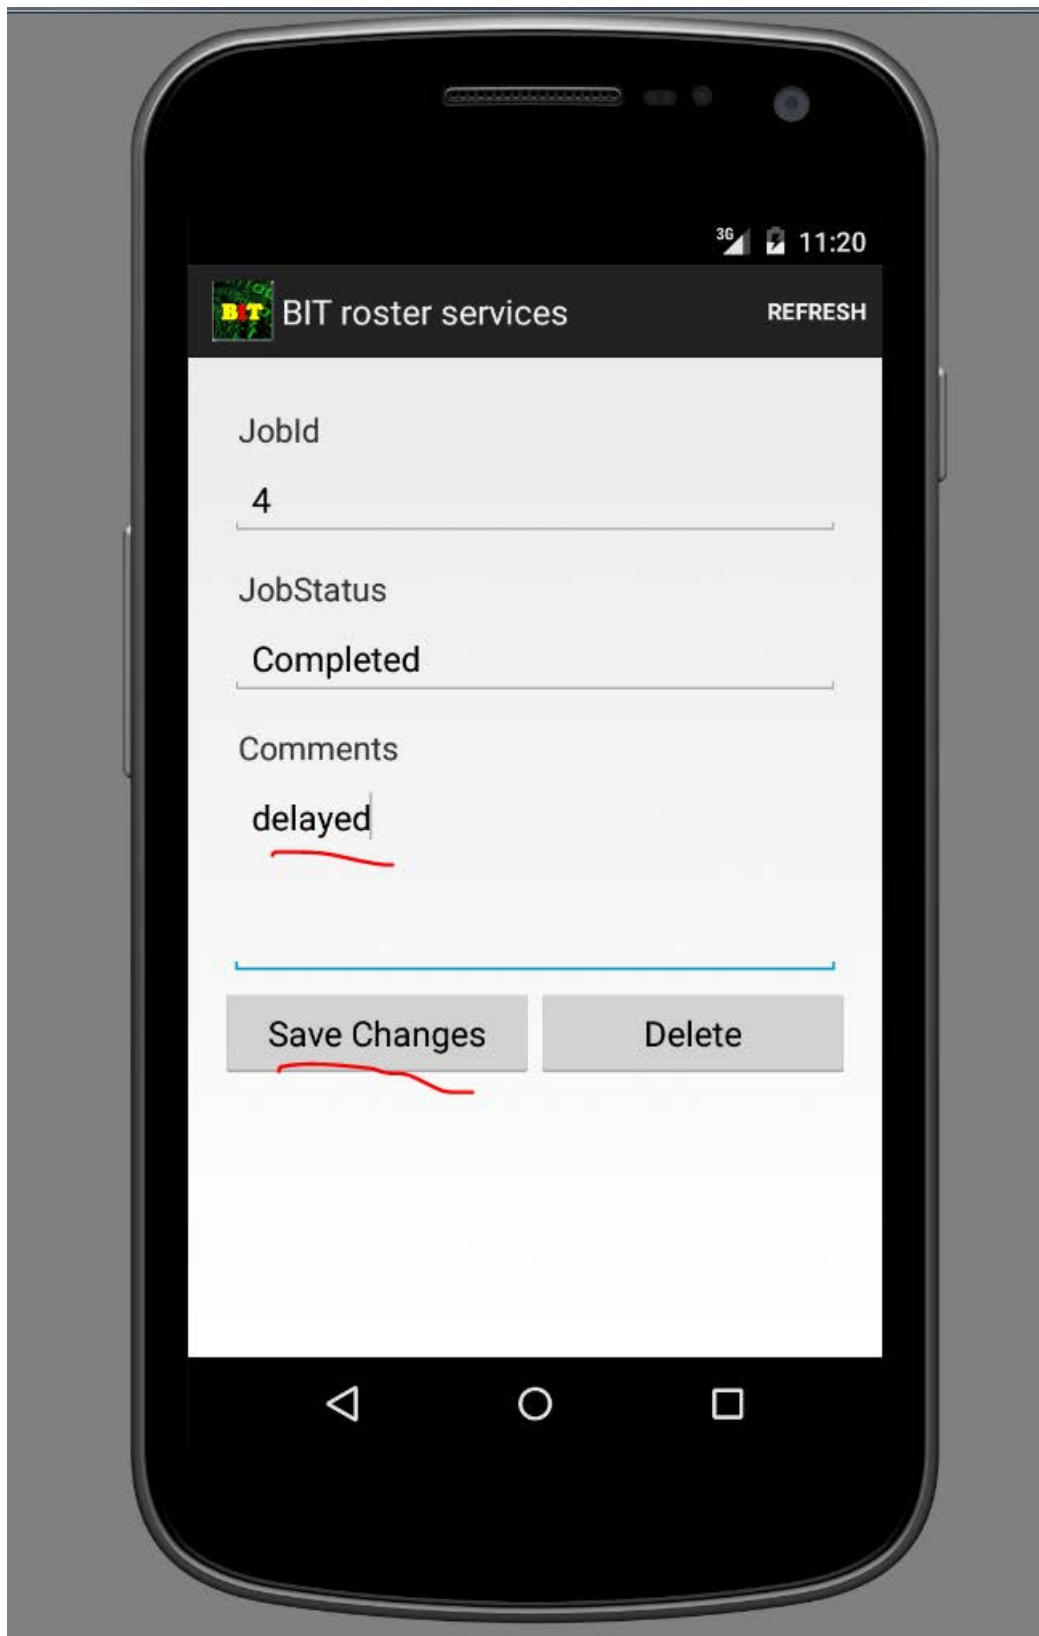


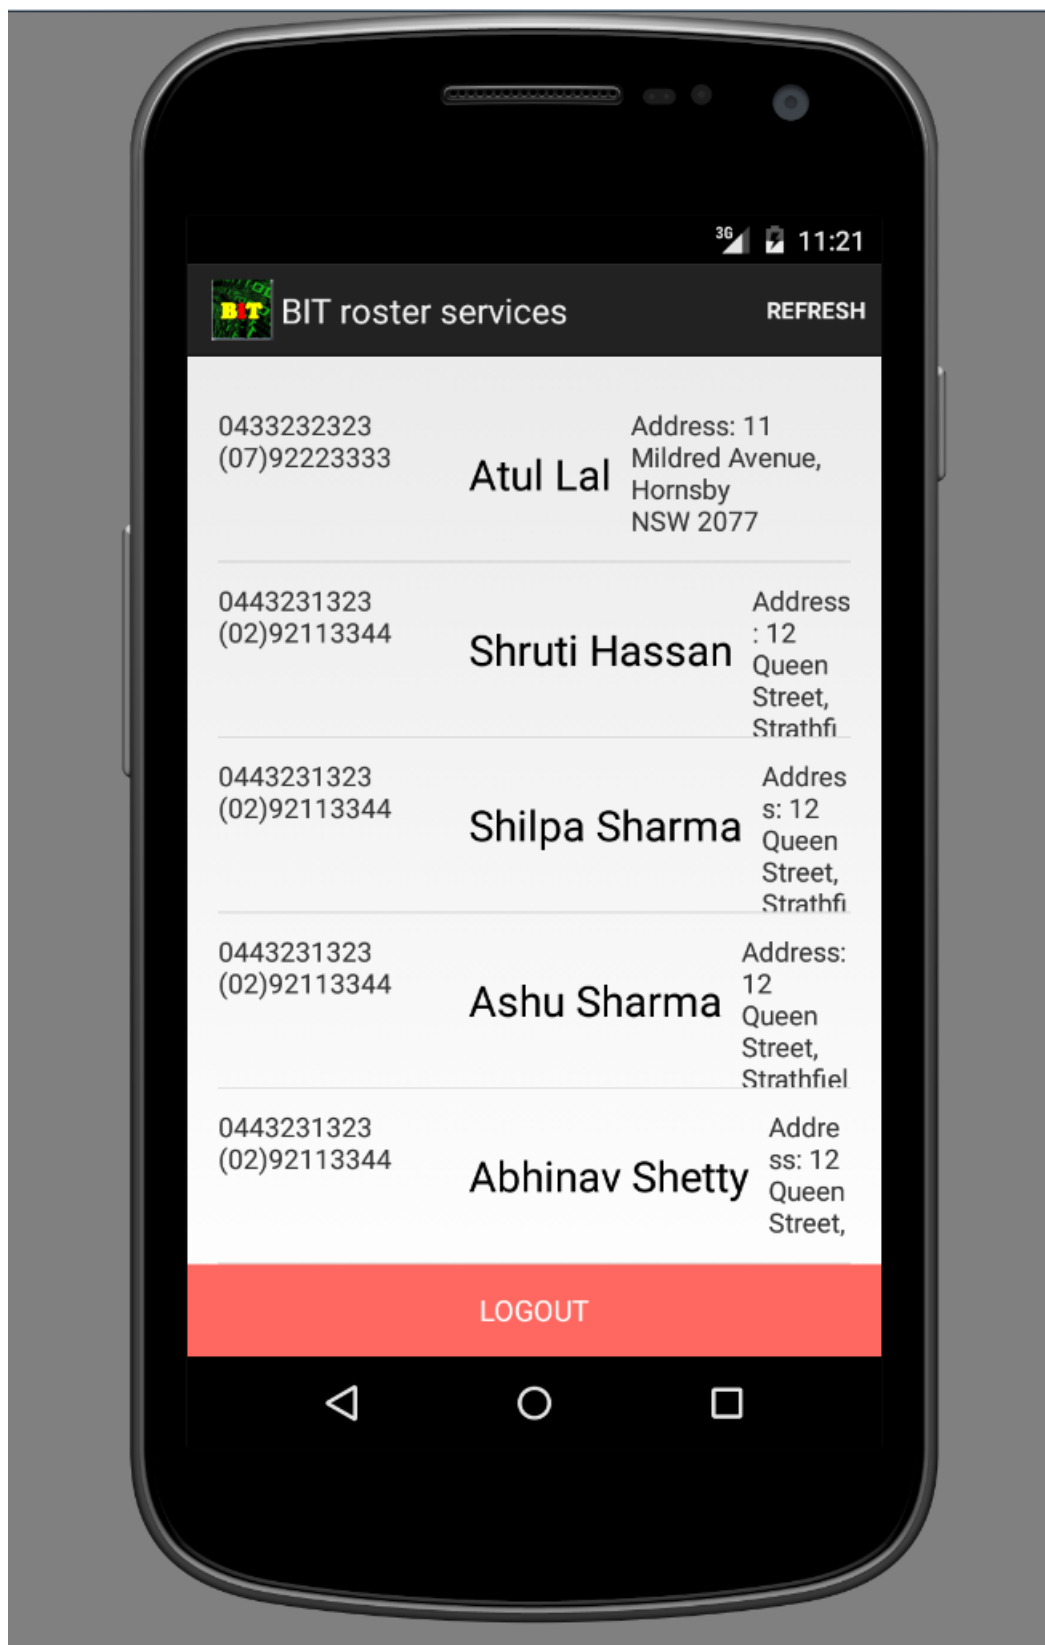

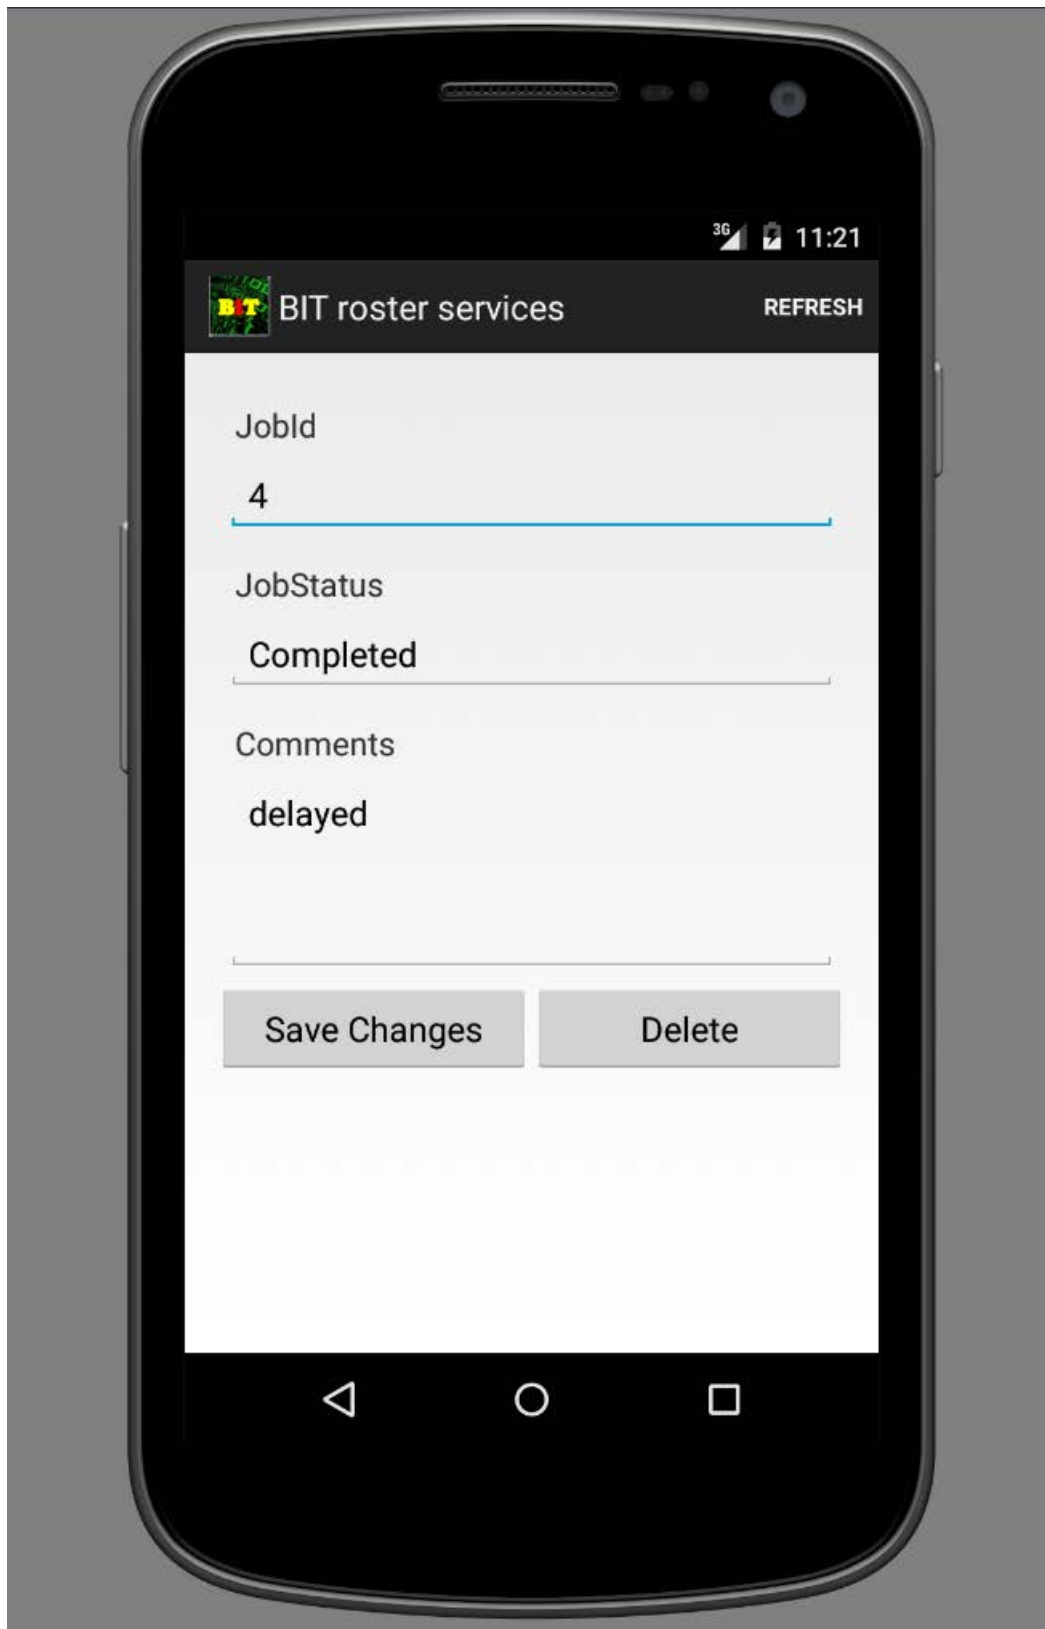

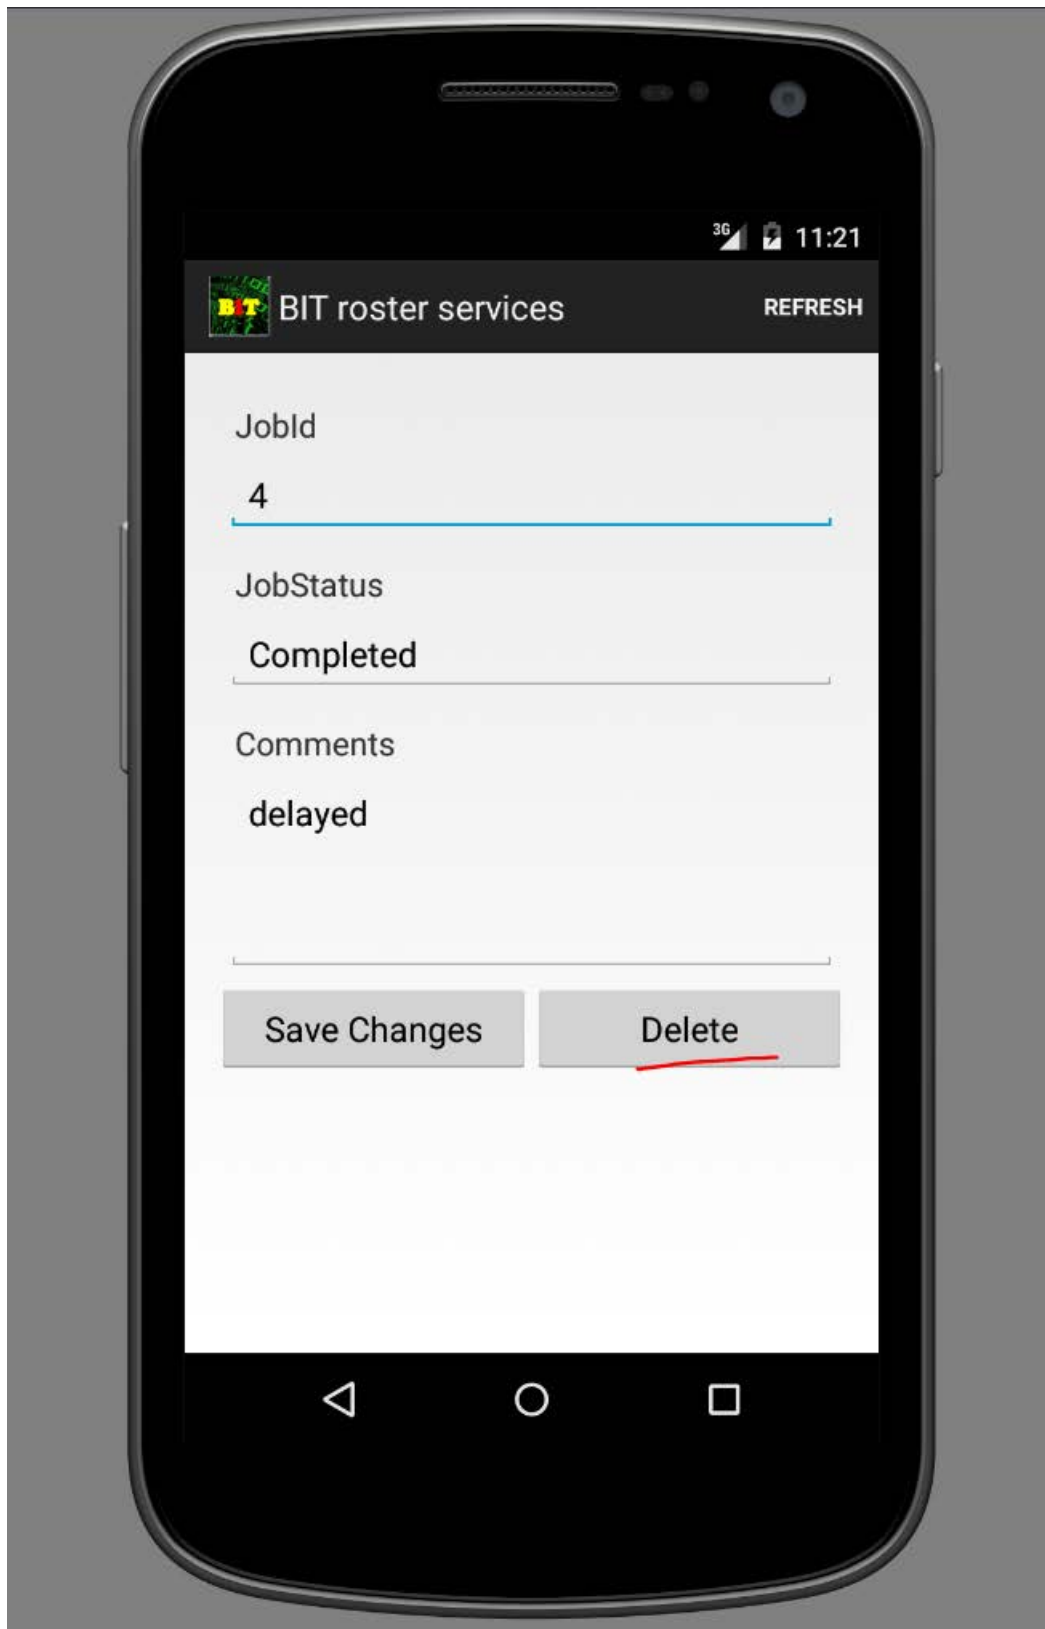

Note: Job for client "Ashu Sharma" removed from the list.

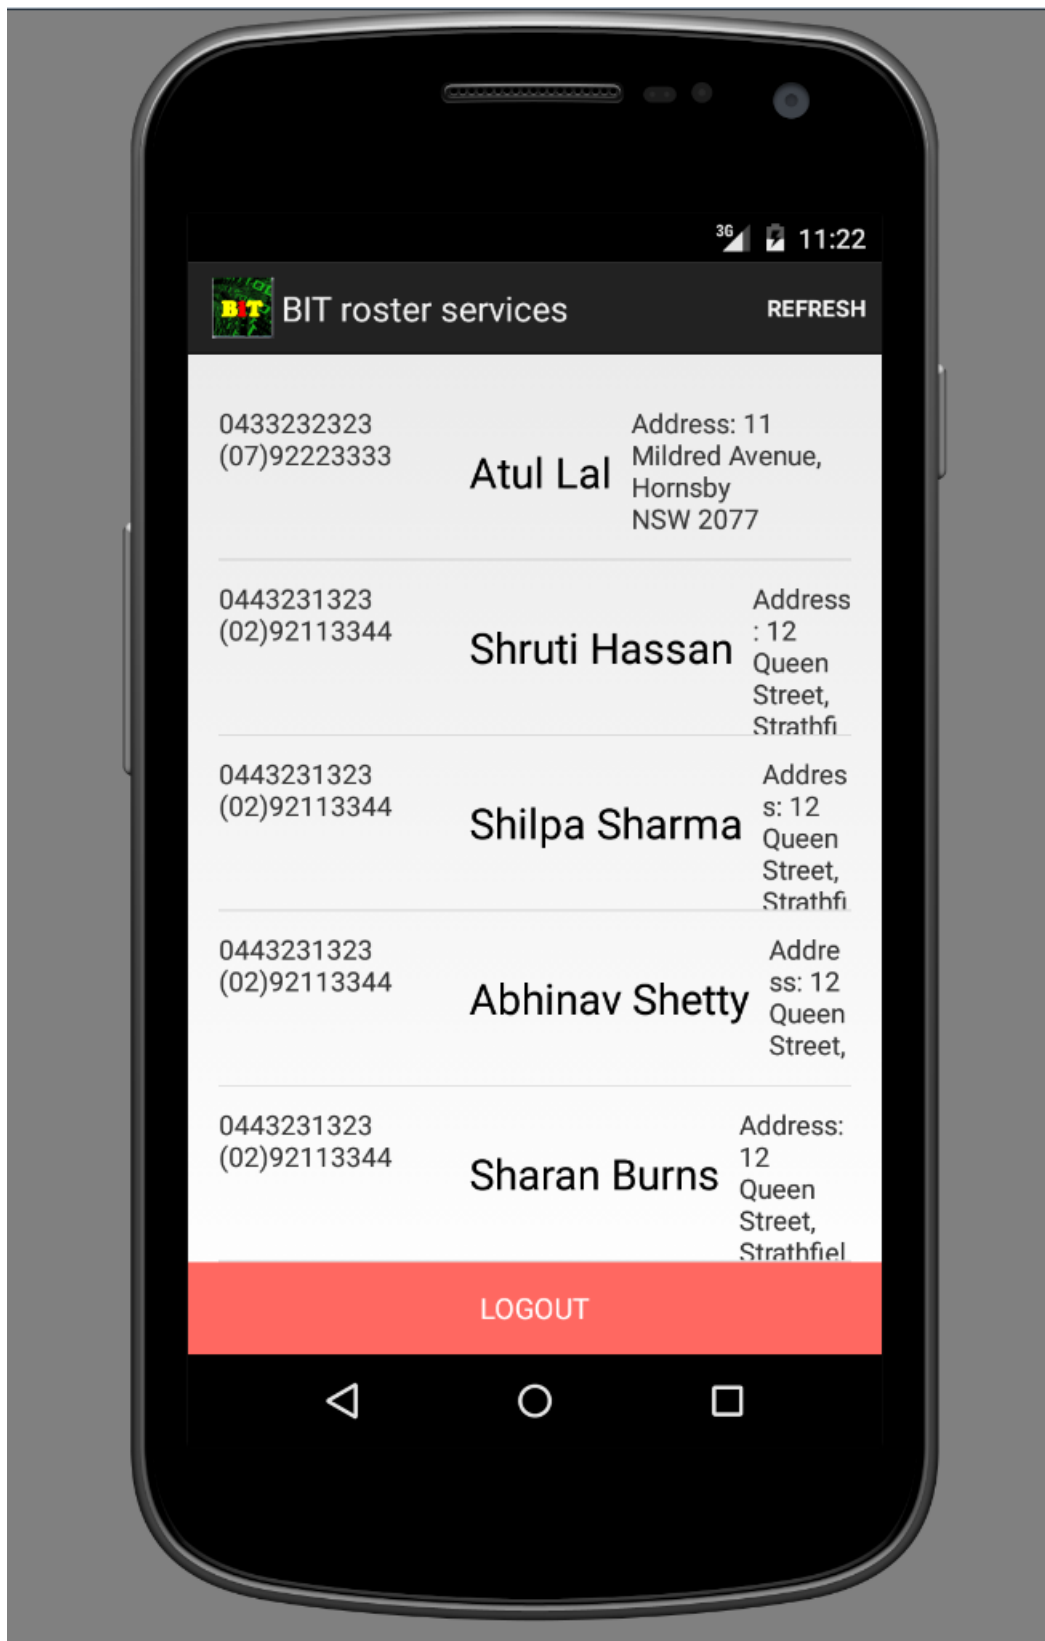

Wrong password !

