



CompliantBean.java ×

```
1 package com.accnture.lkm.business.bean;
2
3 import java.util.Date;
4
10
11 public class CompliantBean {
12
13     private Integer compliantId;
14     @NotBlank(message = "Please Enter Customer Name")
15     private String customerName;
16     private String description;
17     @NotNull(message = "Please Enter Date of Incidence")
18     @Past(message = "Date of Incidence must be past date")
19     @DateTimeFormat(pattern = "dd-MMM-yyyy")
20     private Date dateOfIncidence;
21     @NotNull(message = "Please mention total amount of loss you have suffered through this incident")
22     private Double amount;
23     @NotNull(message = "Please Enter Customer Type")
24     private Integer compliantTypeId;
25     public Integer getCompliantId() {
26         return compliantId;
27     }
28     public void setCompliantId(Integer compliantId) {
29         this.compliantId = compliantId;
30     }
31     public String getCustomerName() {
32         return customerName;
33     }
34     public void setCustomerName(String customerName) {
35         this.customerName = customerName;
36     }
37     public String getDescription() {
38         return description;
39     }
40     public void setDescription(String description) {
41         this.description = description;
42     }
43     public Date getDateOfIncidence() {
44         return dateOfIncidence;
45     }
46 }
```

Writable

Smart Insert

1 : 1 : 0

Validating PT-JagoGrahak-...ar.more: (11%)

```
1 package com.accenture.lkm.business.bean;
2
3
4 public class CompliantTypeBean {
5     private Integer compliantTypeId;
6     private String compliantTypeName;
7     public Integer getCompliantTypeId() {
8         return compliantTypeId;
9     }
10    public void setCompliantTypeId(Integer compliantTypeId) {
11        this.compliantTypeId = compliantTypeId;
12    }
13    public String getCompliantTypeName() {
14        return compliantTypeName;
15    }
16    public void setCompliantTypeName(String compliantTypeName) {
17        this.compliantTypeName = compliantTypeName;
18    }
19
20 }
21
```


Writable

Smart Insert

1 : 1 : 0

Validating PT-JagoGrahak-...ar.more: (12%)

```
1 package com.accnture.lkm.business.bean;
2
3 import java.util.Date;
4
5 public class DateRangeBean {
6
7     private Date fromDate;
8     private Date toDate;
9     public Date getFromDate() {
10         return fromDate;
11     }
12     public void setFromDate(Date fromDate) {
13         this.fromDate = fromDate;
14     }
15     public Date getToDate() {
16         return toDate;
17     }
18     public void setToDate(Date toDate) {
19         this.toDate = toDate;
20     }
21 }
22
23
```

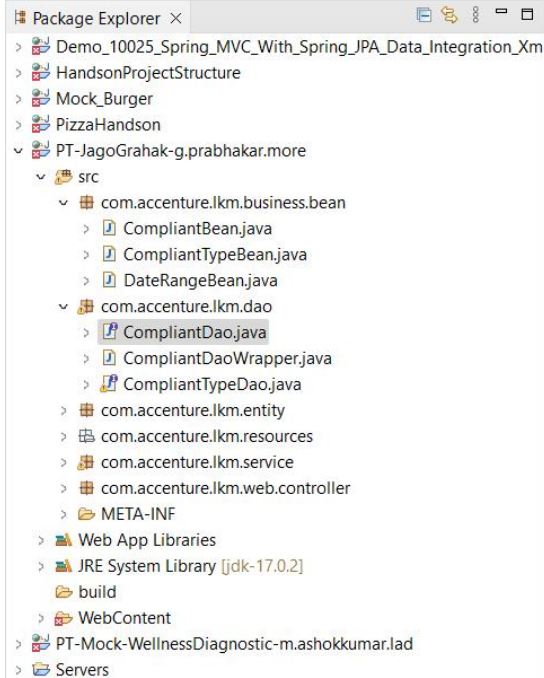

```
1 package com.accenture.lkm.dao;
2
3 import java.util.Date;
4
5
6
7
8
9
10
11
12 @RepositoryDefinition(idClass = Integer.class, domainClass = CompliantEntity.class)
13 @Transactional(value = "txManager")
14 public interface CompliantDao {
15     @Query(name = "getCustomerByCompliantType")
16     CompliantEntity getCustomerByCompliantType(String customerName, int compliantTypeId);
17     CompliantEntity save(CompliantEntity compliantEntity);
18     @Query(name="getCompliantDetailsByDate")
19     List<CompliantEntity> getCompliantDetailsByDate(Date fromDate, Date toDate);
20 }
21
```

Problems Javadoc Declaration Console × SonarLint On-The-Fly Servers

No consoles to display at this time.

```
CompliantDaoWrapper.java CompliantTypeDao.java ×
1 package com.accenture.lkm.dao;
2
3 import java.util.Date;
4
5
6
7
8
9
10
11
12 @RepositoryDefinition(idClass = Integer.class, domainClass = CompliantTypeEntity.class)
13 @Transactional(value = "txManager")
14 // name of TransactionManger can be any thing
15 public interface CompliantTypeDao {
16     List<CompliantTypeEntity> findAll();
17 }
18
```



```
1 package com.accenture.lkm.dao;
2
3 import java.util.ArrayList;
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20 @Repository
21 @Transactional(value = "txManager")
22 public class CompliantDaoWrapper {
23
24     @Autowired
25     private CompliantDao compliantDao;
26
27     @Autowired
28     private CompliantTypeDao compliantTypeDao;
29
30     @PersistenceContext
31     private EntityManager manager;
32
33     public void registerCompliantDetails(CompliantBean compliantBean) {
34         CompliantEntity compliantEntity=convertCompliantBeanToEntity(compliantBean);
35         compliantDao.save(compliantEntity);
36     }
37
38
39     public List<CompliantBean> getCompliantDetailsByDate(Date fromDate,Date toDate){
40         List<CompliantEntity> compliantEntities=compliantDao.getCompliantDetailsByDate(fromDate, toDate);
41         List<CompliantBean> compliantBeans=new ArrayList<CompliantBean>();
42         for(CompliantEntity entity:compliantEntities) {
43             CompliantBean bean=convertCompliantEntityToBean(entity);
44             compliantBeans.add(bean);
45         }
46         return compliantBeans;
47     }
48
49     public List<CompliantTypeBean> getAllCompliantTypes(){
50         List<CompliantTypeEntity> typeEntities=compliantTypeDao.findAll();
51         List<CompliantTypeBean> typeBeans=new ArrayList<CompliantTypeBean>();
52         for(CompliantTypeEntity entity:typeEntities) {
53             CompliantTypeBean bean=convertCompliantTypeEntityToBean(entity);
54         }
55     }
56 }
```

Writable

Smart Insert

1 : 1 : 0

```
CompliantDaoWrapper.java x CompliantTypeDao.java
52  public CompliantTypeBean convertTypeEntityToBean(CompliantTypeEntity entity) {
53      CompliantTypeBean bean=convertTypeEntityToBean(entity);
54      typeBeans.add(bean);
55  }
56  return typeBeans;
57  }
58
59  public int getCustomerByCompliantType(String customerName,int compliantTypeId) {
60      CompliantEntity compliantEntity=compliantDao.getCustomerByCompliantType(customerName, compliantTypeId);
61      if(compliantEntity!=null)
62          return 1;
63      else
64          return 0;
65  }
66
67  // Utility Methods.....
68  public static CompliantTypeBean convertTypeEntityToBean(CompliantTypeEntity entity) {
69      CompliantTypeBean bean = new CompliantTypeBean();
70      BeanUtils.copyProperties(entity, bean);
71      return bean;
72  }
73  public static CompliantTypeEntity convertTypeBeanToEntity(CompliantTypeBean bean) {
74      CompliantTypeEntity entity = new CompliantTypeEntity();
75      BeanUtils.copyProperties(bean, entity);
76      return entity;
77  }
78  public static CompliantBean convertCompliantEntityToBean(CompliantEntity entity) {
79      CompliantBean bean = new CompliantBean();
80      BeanUtils.copyProperties(entity, bean);
81      return bean;
82  }
83  public static CompliantEntity convertCompliantBeanToEntity(CompliantBean bean) {
84      CompliantEntity entity = new CompliantEntity();
85      BeanUtils.copyProperties(bean, entity);
86      return entity;
87  }
88  }
89  }
```



CompliantEntity.java ×

```
1 package com.accenture.lkm.entity;
2
3 import java.util.Date;
4
12
13 @Entity
14 @Table(name = "Compliant")
15 public class CompliantEntity {
16
17     @Id
18     @GeneratedValue(strategy = GenerationType.IDENTITY)
19     private Integer compliantId;
20     private String customerName;
21     private String description;
22     @Temporal(TemporalType.DATE)
23     private Date dateOfIncidence;
24     private Double amount;
25     private Integer compliantTypeId;
26     public Integer getCompliantId() {
27         return compliantId;
28     }
29     public void setCompliantId(Integer compliantId) {
30         this.compliantId = compliantId;
31     }
32     public String getCustomerName() {
33         return customerName;
34     }
35     public void setCustomerName(String customerName) {
36         this.customerName = customerName;
37     }
38     public String getDescription() {
39         return description;
40     }
41     public void setDescription(String description) {
42         this.description = description;
43     }
44     public Date getDateOfIncidence() {
45         return dateOfIncidence;
46     }
47 }
```

Writable

Smart Insert

1 : 1 : 0


```
CompliantEntity.java x
28     }
29     public void setCompliantId(Integer compliantId) {
30         this.compliantId = compliantId;
31     }
32     public String getCustomerName() {
33         return customerName;
34     }
35     public void setCustomerName(String customerName) {
36         this.customerName = customerName;
37     }
38     public String getDescription() {
39         return description;
40     }
41     public void setDescription(String description) {
42         this.description = description;
43     }
44     public Date getDateOfIncidence() {
45         return dateOfIncidence;
46     }
47     public void setDateOfIncidence(Date dateOfIncidence) {
48         this.dateOfIncidence = dateOfIncidence;
49     }
50     public Double getAmount() {
51         return amount;
52     }
53     public void setAmount(Double amount) {
54         this.amount = amount;
55     }
56     public Integer getCompliantTypeId() {
57         return compliantTypeId;
58     }
59     public void setCompliantTypeId(Integer compliantTypeId) {
60         this.compliantTypeId = compliantTypeId;
61     }
62
63 }
64
```

Writable

Smart Insert

30 : 40 : 816

```
1 package com.accnture.lkm.entity;
2
3 import javax.persistence.Entity;
4
5
6 @Entity
7 @Table(name = "CompliantType")
8 public class CompliantTypeEntity {
9
10
11     @Id
12     private Integer compliantTypeId;
13     private String compliantTypeName;
14     public Integer getCompliantTypeId() {
15         return compliantTypeId;
16     }
17     public void setCompliantTypeId(Integer compliantTypeId) {
18         this.compliantTypeId = compliantTypeId;
19     }
20     public String getCompliantTypeName() {
21         return compliantTypeName;
22     }
23     public void setCompliantTypeName(String compliantTypeName) {
24         this.compliantTypeName = compliantTypeName;
25     }
26
27
28 }
29
```

Writable

Smart Insert

1 : 1 : 0

```
CompliantService.java ×
1 package com.accenture.lkm.service;
2
3 import java.util.Date;
4
5
6
7
8
9 public interface CompliantService {
10     void registerCompliantDetails(CompliantBean compliantBean) throws Exception;
11     List<CompliantBean> getCompliantDetailsByDate(Date fromDate, Date toDate);
12     Map<Integer, String> getAllCompliantTypes();
13 }
```

```
1 package com.accenture.lkm.service;
2
3 import java.util.Date;
4
15
16 @Service
17 public class CompliantServiceImpl implements CompliantService{
18
19     @Autowired
20     CompliantDaoWrapper compliantDaoWrapper;
21
22     @Override
23     public void registerCompliantDetails(CompliantBean compliantBean) throws Exception {
24         // TODO Auto-generated method stub
25         int status=compliantDaoWrapper.getCustomerByCompliantType(compliantBean.getCustomerName(), compliantBean.getCompliantTypeId());
26         if(status==1) {
27             throw new Exception("Hi "+compliantBean.getCustomerName()+" , you already submitted a compliant with same compliant type");
28         }
29         else {
30             compliantDaoWrapper.registerCompliantDetails(compliantBean);
31         }
32     }
33
34     @Override
35     public List<CompliantBean> getCompliantDetailsByDate(Date fromDate, Date toDate) {
36         // TODO Auto-generated method stub
37         List<CompliantBean> compliantBeans=compliantDaoWrapper.getCompliantDetailsByDate(fromDate, toDate);
38         return compliantBeans;
39     }
40
41     @Override
42     public Map<Integer, String> getAllCompliantTypes() {
43         // TODO Auto-generated method stub
44         Map<Integer,String> typeMap=new HashMap<Integer, String>();
45         List<CompliantTypeBean> typeList=compliantDaoWrapper.getAllCompliantTypes();
46         for(CompliantTypeBean bean:typeList) {
47             typeMap.put(bean.getCompliantTypeId(),bean.getCompliantTypeName());
48         }
49         return typeMap;
50     }
51 }
```

Writable

Smart Insert

1:1:0

CompliantService.java × CompliantServiceImpl.java ×

```
17 public class CompliantServiceImpl implements CompliantService{
18
19     @Autowired
20     CompliantDaoWrapper compliantDaoWrapper;
21
22     @Override
23     public void registerCompliantDetails(CompliantBean compliantBean) throws Exception {
24         // TODO Auto-generated method stub
25         int status=compliantDaoWrapper.getCustomerByCompliantType(compliantBean.getCustomerName(), compliantBean.getCompliantTypeId());
26         if(status==1) {
27             throw new Exception("Hi "+compliantBean.getCustomerName()+" , you already submitted a compliant with same compliant type");
28         }
29         else {
30             compliantDaoWrapper.registerCompliantDetails(compliantBean);
31         }
32     }
33
34     @Override
35     public List<CompliantBean> getCompliantDetailsByDate(Date fromDate, Date toDate) {
36         // TODO Auto-generated method stub
37         List<CompliantBean> compliantBeans=compliantDaoWrapper.getCompliantDetailsByDate(fromDate, toDate);
38         return compliantBeans;
39     }
40
41     @Override
42     public Map<Integer, String> getAllCompliantTypes() {
43         // TODO Auto-generated method stub
44         Map<Integer,String> typeMap=new HashMap<Integer, String>();
45         List<CompliantTypeBean> typeList=compliantDaoWrapper.getAllCompliantTypes();
46         for(CompliantTypeBean bean:typeList) {
47             typeMap.put(bean.getCompliantTypeId(),bean.getCompliantTypeName());
48         }
49         return typeMap;
50     }
51
52 }
53
```

Writable

Smart Insert

1:1:0

```
CompliantRegisterController.java x
1 package com.accnture.lkm.web.controller;
2
3 import java.*
18
19 @Controller
20 public class CompliantRegisterController {
21
22     @Autowired
23     private CompliantService compliantService;
24
25     @RequestMapping(value = "/loadCompliantForm.html")
26     public ModelAndView loadCompliantForm() {
27         return new ModelAndView("CompliantPage", "compliantBean", new CompliantBean());
28     }
29
30     @RequestMapping(value = "/processCompliantForm.html", method = RequestMethod.POST)
31     public ModelAndView processCompliantForm(@ModelAttribute("compliantBean") @Valid CompliantBean bean, BindingResult result) throws Exception {
32         ModelAndView mv = new ModelAndView();
33         if (result.hasErrors()) {
34             mv.setViewName("CompliantPage");
35         }
36         else {
37             compliantService.registerCompliantDetails(bean);
38             mv.setViewName("Success");
39             mv.addObject("message", "Hi " + bean.getCustomerName() + " your compliant is successful registered.");
40         }
41         return mv;
42     }
43
44     @ModelAttribute("types")
45     public Map<Integer, String> getAllCompliantTypes() {
46         return compliantService.getAllCompliantTypes();
47     }
48
49     //Error Handler:
50     @ExceptionHandler(value = Exception.class)
51     public ModelAndView handleAllExceptions(Exception exception) {
52         ModelAndView mv = new ModelAndView();
53         mv.setViewName("Error");
54         mv.addObject("message", "An error occurred: " + exception.getMessage());
55         return mv;
56     }
57 }
```

Writable

Smart Insert

1 : 1 : 0

```
CompliantRegisterController.java X
24
25 @RequestMapping(value = "/loadCompliantForm.html")
26 public ModelAndView loadCompliantForm() {
27     return new ModelAndView("CompliantPage","compliantBean",new CompliantBean());
28 }
29
30 @RequestMapping(value = "/processCompliantForm.html", method = RequestMethod.POST)
31 public ModelAndView processCompliantForm(@ModelAttribute("compliantBean")@Valid CompliantBean bean, BindingResult result) throws Exception {
32     ModelAndView mv=new ModelAndView();
33     if(result.hasErrors()) {
34         mv.setViewName("CompliantPage");
35     }
36     else {
37         compliantService.registerCompliantDetails(bean);
38         mv.setViewName("Success");
39         mv.addObject("message", "Hi "+bean.getCustomerName()+" your compliant is successful registered.");
40     }
41     return mv;
42 }
43
44 @ModelAttribute("types")
45 public Map<Integer,String> getAllCompliantTypes() {
46     return compliantService.getAllCompliantTypes();
47 }
48
49 //Error Handler:
50 @ExceptionHandler(value=Exception.class)
51 public ModelAndView handleAllExceptions(Exception exception){
52     ModelAndView modelAndView = new ModelAndView();
53     modelAndView.setViewName("GeneralizedExceptionHandlerPage");
54     modelAndView.addObject("message", exception.getMessage());
55     modelAndView.addObject("exception", exception);
56     return modelAndView;
57 }
58
59 }
60
```

Writable

Smart Insert

1:1:0


```
1 package com.accnture.lkm.web.controller;
2
3 import java.util.List;
4
5
6
7
8
9
10
11
12
13
14
15
16
17 @Controller
18 public class CompliantReportController {
19
20     @Autowired
21     private CompliantService compliantService;
22
23     @RequestMapping(value = "/loadCompliantReport.html")
24     public ModelAndView loadCompliantReport() {
25         return new ModelAndView("CompliantReport", "dateRangeBean", new DateRangeBean());
26     }
27
28     @RequestMapping(value = "/getDetails.html", method = RequestMethod.POST)
29     public ModelAndView getCompliantDetailsByDate(@ModelAttribute("dateRangeBean") DateRangeBean dateRange) {
30         ModelAndView mv = new ModelAndView();
31         List<CompliantBean> compliants = compliantService.getCompliantDetailsByDate(dateRange.getFromDate(), dateRange.getToDate());
32         mv.setViewName("ShowCompliantDetails");
33         mv.addObject("compliants", compliants);
34         return mv;
35     }
36
37     //Error Handler:
38     @ExceptionHandler(value = Exception.class)
39     public ModelAndView handleAllExceptions(Exception exception) {
40         ModelAndView modelAndView = new ModelAndView();
41         modelAndView.setViewName("GeneralizedExceptionHandlerPage");
42         modelAndView.addObject("message", exception.getMessage());
43         modelAndView.addObject("exception", exception);
44         return modelAndView;
45     }
46 }
47
```

Writable

Smart Insert

1 : 1 : 0


```
1 <%@ page language="java" contentType="text/html; charset=ISO-8859-1"
2   pageEncoding="ISO-8859-1"%>
3 <%@ taglib uri="http://www.springframework.org/tags/form" prefix="form"%>
4 <%@ taglib prefix="c" uri="http://java.sun.com/jsp/jstl/core"%>
5 <!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN" "http://www.w3.org/TR/html4/loose.dtd">
6 <html>
7 <head>
8 <style type="text/css">
9   body {
10     background: lavender;
11   }
12 </style>
13 <meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
14 <title>Dummy Page</title>
15 <style>
16 .error {
17   color: #ff0000;
18   font-style: italic;
19 }
20 </style>
21 </head>
22 <body>
23   <center>
24     <h2><u>File Complaint</u></h2>
25     <form:form action="processCompliantForm.html" method="POST" modelAttribute="compliantBean">
26       <table>
27       <tr>
28         <td>Customer Name</td>
29         <td><form:input path="customerName"/></td>
30         <td><form:errors cssClass="error" path="customerName" /></td>
31       </tr>
32       <tr>
33         <td>Customer Type</td>
34         <td><form:select path="compliantTypeId">
35           <form:option label="--Select--" value="" />
36           <form:options items="${types}" />
37         </form:select></td>
38       </tr>
39     </form>
40   </center>
```

Writable

Smart Insert

1 : 1 : 0

CompliantRegisterController.java CompliantReportController.java CompliantPage.jsp x

```
25 <form:form action="processCompliantForm.html" method="POST" modelAttribute="compliantBean">
26 <table>
27 <tr>
28 <td>Customer Name</td>
29 <td><form:input path="customerName"/></td>
30 <td><form:errors cssClass="error" path="customerName" /></td>
31 </tr>
32 <tr>
33 <td>Customer Type</td>
34 <td><form:select path="compliantTypeId">
35 <form:option label="--Select--" value="" />
36 <form:options items="${types}" />
37 </form:select></td>
38 <td><form:errors cssClass="error" path="compliantTypeId" /></td>
39 </tr>
40 <tr>
41 <td>Description</td>
42 <td><form:input path="description"/></td>
43 </tr>
44 <tr>
45 <td>Date of Incidence<br>[dd-MMM-yyyy]</td>
46 <td><form:input path="dateOfIncidence"/></td>
47 <td><form:errors cssClass="error" path="dateOfIncidence" /></td>
48 </tr>
49 <tr>
50 <td>Total loss of amount<br>from this incident</td>
51 <td><form:input path="amount"/></td>
52 <td><form:errors cssClass="error" path="amount" /></td>
53 </tr>
54 </table>
55 <br>
56 <input type="submit" value="Submit Compliant" />
57 </form:form>
58 <br><a href="${pageContext.request.contextPath}/index.jsp">HOME</a>
59 </center>
60 </body>
61 </html>
```

<> jsp:directive.page

Writable

Smart Insert

1 : 1 : 0

```
1 <%@ page language="java" contentType="text/html; charset=ISO-8859-1"
2   pageEncoding="ISO-8859-1"%>
3 <%@ taglib uri="http://www.springframework.org/tags/form" prefix="form"%>
4 <%@ taglib prefix="c" uri="http://java.sun.com/jsp/jstl/core"%>
5 <!DOCTYPE html>
6 <html>
7 <head>
8 <style type="text/css">
9   body {
10     background: lavender;
11   }
12 </style>
13 <meta charset="ISO-8859-1">
14 <title>Insert title here</title>
15 </head>
16 <body>
17 <center>
18 <h2><u>Compliant Report Details</u></h2>
19 <form:form action="getDetails.html" method="POST" modelAttribute="dateRangeBean">
20 <table>
21 <tr>
22 <td>From Date <div style="color: blue">[dd-MMM-yyyy]</div></td>
23 <td><form:input path="fromDate"/>
24 </tr>
25 <tr>
26 <td>To Date <div style="color: blue">[dd-MMM-yyyy]</div></td>
27 <td><form:input path="toDate"/>
28 </tr>
29 </table><br>
30 <input type="submit" value="Fetch" >
31 </form:form>
32 <br><br><a href="${pageContext.request.contextPath}/index.jsp">HOME</a>
33 </center>
34 </body>
35 </html>
```

Writable

Smart Insert

1 : 1 : 0

```
CompliantReport.jsp  GeneralizedExceptionHandlerPage.jsp x
1 <%@ page language="java" contentType="text/html; charset=ISO-8859-1"
2   pageEncoding="ISO-8859-1"%>
3 <!DOCTYPE html>
4 <html>
5 <head>
6 <style type="text/css">
7   body {
8     background: lavender;
9   }
10 </style>
11 <meta charset="ISO-8859-1">
12 <title>Insert title here</title>
13 </head>
14 <body>
15 <center>
16   <h2 style="color: red">Generalized Exception Handler Page</h2>
17   <hr>
18   Exception Occurred is: ${message}
19   <hr>
20
21   <br><a href="${pageContext.request.contextPath}/index.jsp">HOME</a>
22 </center>
23 </body>
24 </html>
```



```
ShowCompliantDetails.jsp ×
1 <%@ page language="java" contentType="text/html; charset=ISO-8859-1"
2   pageEncoding="ISO-8859-1"%>
3   <%@ taglib uri="http://www.springframework.org/tags/form" prefix="form"%>
4   <%@ taglib prefix="c" uri="http://java.sun.com/jsp/jstl/core"%>
5   <%@ taglib prefix="fmt" uri="http://java.sun.com/jsp/jstl/fmt" %>
6   <!DOCTYPE html>
7   <html>
8   <head>
9     <style type="text/css">
10  body {
11    background: lavender;
12  }
13  </style>
14  <meta charset="ISO-8859-1">
15  <title>Insert title here</title>
16  </head>
17  <body>
18  <center>
19    <h2>Show Complaint Details</h2>
20    <c:choose>
21    <c:when test="${not empty compliants}">
22      <table border="1" >
23        <tr>
24          <th>Compliant Id</th><th>Customer Name</th><th>Compliant Type</th><th>Description</th><th>Date of Incidence</th><th>Loss of Amount</th>
25        </tr>
26        <c:forEach var="compliant" items="${compliants}">
27          <tr>
28            <td align="right">${compliant.compliantId+10000}</td>
29            <td align="center">${compliant.customerName}</td>
30            <td align="center">${compliant.compliantTypeId}</td>
31            <td align="center">${compliant.description}</td>
32            <td align="center"><fmt:formatDate pattern="dd-MMM-yyyy" value="${compliant.dateOfIncidence}" /></td>
33            <td align="right">${compliant.amount}</td>
34          </tr>
35        </c:forEach>
36      </table>
37    </c:when>
38  </center>
```

```
ShowCompliantDetails.jsp x
<!-- JSP Directive: contentType -->
10 body {
11     background: lavender;
12 }
13 </style>
14 <meta charset="ISO-8859-1">
15 <title>Insert title here</title>
16 </head>
17 <body>
18 <center>
19 <h2>Show Complaint Details</h2>
20 <c:choose>
21 <c:when test="${not empty compliants}">
22 <table border="1" >
23 <tr>
24 <th>Compliant Id</th><th>Customer Name</th><th>Compliant Type</th><th>Description</th><th>Date of Incidence</th><th>Loss of Amount</th>
25 </tr>
26 <c:forEach var="compliant" items="${compliants}">
27 <tr>
28 <td align="right">${compliant.compliantId+10000}</td>
29 <td align="center">${compliant.customerName}</td>
30 <td align="center">${compliant.compliantTypeId}</td>
31 <td align="center">${compliant.description}</td>
32 <td align="center"><fmt:formatDate pattern="dd-MMM-yyyy" value="${compliant.dateOfIncidence}" /></td>
33 <td align="right">${compliant.amount}</td>
34 </tr>
35 </c:forEach>
36 </table>
37 </c:when>
38 <c:otherwise>
39 <h3 style="color: blue">No records Found...</h3>
40 </c:otherwise>
41 </c:choose>
42
43 <br><br><a href="${pageContext.request.contextPath}/index.jsp">HOME</a>
44 </center>
45 </body>
46 </html>
```

```
1 <%@ page language="java" contentType="text/html; charset=ISO-8859-1"
2   pageEncoding="ISO-8859-1"%>
3   <%@ taglib uri="http://www.springframework.org/tags/form" prefix="form"%>
4   <%@ taglib prefix="c" uri="http://java.sun.com/jsp/jstl/core"%>
5   <!DOCTYPE html>
6   <html>
7   <head>
8   <style type="text/css">
9   body {
10    background: lavender;
11  }
12  </style>
13  <meta charset="ISO-8859-1">
14  <title>Insert title here</title>
15  </head>
16  <body>
17  <center>
18  <h2>${message}</h2>
19  <br><a href="${pageContext.request.contextPath}/index.jsp">HOME</a>
20  </center>
21  </body>
22  </html>
```

```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <entity-mappings version="1.0" xmlns="http://java.sun.com/xml/ns/persistence/orm"
3   xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
4   xsi:schemaLocation="http://java.sun.com/xml/ns/persistence/orm http://java.sun.com/xml/ns/persistence/orm_1_0.xsd">
5   <named-query name="getCustomerByCompliantType">
6     <query>select c from CompliantEntity c where c.customerName = ?1 and c.compliantTypeId = ?2</query>
7   </named-query>
8   <named-query name="getCompliantDetailsByDate">
9     <query>select c from CompliantEntity c where c.dateOfIncidence between ?1 and ?2 </query>
10  </named-query>
11 </entity-mappings>
```




cst_jpa_spring_config.xml x

```
1 <beans xmlns="http://www.springframework.org/schema/beans"
2     xmlns:context="http://www.springframework.org/schema/context"
3     xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
4     xmlns:aop="http://www.springframework.org/schema/aop"
5     xmlns:tx="http://www.springframework.org/schema/tx"
6     xmlns:jpa="http://www.springframework.org/schema/data/jpa"
7     xsi:schemaLocation="
8         http://www.springframework.org/schema/beans
9         http://www.springframework.org/schema/beans/spring-beans.xsd
10        http://www.springframework.org/schema/context
11        http://www.springframework.org/schema/context/spring-context.xsd
12        http://www.springframework.org/schema/aop http://www.springframework.org/schema/aop/spring-aop.xsd
13        http://www.springframework.org/schema/tx
14        http://www.springframework.org/schema/tx/spring-tx.xsd
15        http://www.springframework.org/schema/data/jpa
16        http://www.springframework.org/schema/data/jpa/spring-jpa.xsd">
17
18    <bean
19        class="org.springframework.beans.factory.config.PropertyPlaceholderConfigurer">
20
21        <property name="location">
22            <value>classpath:com/accnture/lkm/resources/cst_conn.properties</value> <!-- class path is requiried when runing from web app -->
23        </property>
24    </bean>
25
26    <tx:annotation-driven transaction-manager="txManager"/>
27    <!-- To Enable JPA Repository and to refer to the custom transaction Manager name-->
28    <jpa:repositories base-package="com.accnture.lkm.dao" transaction-manager-ref="txManager"> </jpa:repositories>
29
30    <bean id="dataSource" class="org.springframework.jdbc.datasource.DriverManagerDataSource" >
31        <property name="driverClassName" value="${cst_db_driver}" />
32        <property name="url" value="${cst_db_url}" />
33        <property name="username" value="${cst_user}" />
34        <property name="password" value="${cst_password}" />
35    </bean>
36
37
```

Design Source

Writable

Smart Insert

1 : 1 : 0

loading http://www.spr...p/spring-aop.xsd

```
20
21     <property name="location">
22         <value>classpath:com/accenture/lkm/resources/cst_conn.properties</value> <!-- class path is requiried when runing from web app -->
23     </property>
24 </bean>
25
26 <tx:annotation-driven transaction-manager="txManager"/>
27 <!-- To Enable JPA Repository and to refer to the custom transaction Manager name-->
28 <jpa:repositories base-package="com.accenture.lkm.dao" transaction-manager-ref="txManager"> </jpa:repositories>
29
30 <bean id="dataSource" class="org.springframework.jdbc.datasource.DriverManagerDataSource" >
31     <property name="driverClassName" value="${cst_db_driver}" />
32     <property name="url" value="${cst_db_url}" />
33     <property name="username" value="${cst_user}" />
34     <property name="password" value="${cst_password}" />
35 </bean>
36
37
38 <!-- Name of the bean should be entityManagerFactory only in Spring JPADaata-->
39 <bean id="entityManagerFactory" class="org.springframework.orm.jpa.LocalContainerEntityManagerFactoryBean">
40     <property name="dataSource" ref="dataSource" />
41     <property name="jpaVendorAdapter">
42         <bean class="org.springframework.orm.jpa.vendor.HibernateJpaVendorAdapter">
43             <property name="showSql" value="true" />
44             <property name="generateDdl" value="true" />
45             <property name="databasePlatform" value="org.hibernate.dialect.MySQLDialect" />
46         </bean>
47     </property>
48     <property name="packagesToScan" value="com.accenture.lkm.entity"></property>
49 </bean>
50
51 <bean id="txManager" class="org.springframework.orm.jpa.JpaTransactionManager"> <!-- custom transaction Manager -->
52     <property name="entityManagerFactory" ref="entityManagerFactory" />
53 </bean>
54
55 </beans>
```

Design Source

beans

Writable

Smart Insert

1 : 1 : 0

loading http://www.spr...p/spring-aop.xsd

cst-root-ctx.xml ×

```
1 <beans xmlns="http://www.springframework.org/schema/beans"
2     xmlns:context="http://www.springframework.org/schema/context"
3     xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
4     xmlns:mvc="http://www.springframework.org/schema/mvc"
5     xsi:schemaLocation="
6         http://www.springframework.org/schema/beans
7         http://www.springframework.org/schema/beans/spring-beans.xsd
8         http://www.springframework.org/schema/context
9         http://www.springframework.org/schema/context/spring-context.xsd
10        http://www.springframework.org/schema/mvc
11        http://www.springframework.org/schema/mvc/spring-mvc.xsd">
12
13     <!-- scanning service and DAO -->
14     <context:component-scan base-package="com.accenture.lkm.service, com.accenture.lkm.dao" />
15     <import resource="cst_jpa_spring_config.xml"/>
16 </beans>
```

Design Source

Writable

Smart Insert

1 : 1 : 0

loading http://www.spr...p/spring-aop.xsd


```
<?xml version="1.0" encoding="UTF-8" ?>
<beans xmlns="http://www.springframework.org/schema/beans"
       xmlns:context="http://www.springframework.org/schema/context"
       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
       xmlns:mvc="http://www.springframework.org/schema/mvc"
       xsi:schemaLocation="
           http://www.springframework.org/schema/beans
           http://www.springframework.org/schema/beans/spring-beans.xsd
           http://www.springframework.org/schema/context
           http://www.springframework.org/schema/context/spring-context.xsd
           http://www.springframework.org/schema/mvc
           http://www.springframework.org/schema/mvc/spring-mvc.xsd">

    <!-- scanning just web related dependencies -->
    <context:component-scan base-package="com.accenture.lkm.web" />

    <!--adds support for MVC annotations:
    1. @Valid annotation for validation
    2. @RequestMapping
    3. http message convertors or message body marshalling with @RequestBody/ResponseBody -->
    <mvc:annotation-driven />

    <!-- View Resolver to resolve the views from a custom location -->
    <bean class="org.springframework.web.servlet.view.InternalResourceViewResolver">
        <property name="prefix">
            <value>/WEB-INF/jspViews/</value>
        </property>
        <property name="suffix">
            <value>.jsp</value>
        </property>
    </bean>
</beans>
```

Design Source

Writable

Smart Insert

1 : 1 : 0


```
1 <?xml version="1.0" encoding="UTF-8"?>
2 <web-app xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns="http://java.sun.com/xml/ns/javaee" xsi:schemaLocation="http://java.sun.com/xml/
3 <welcome-file-list>
4     <welcome-file>index.jsp</welcome-file>
5 </welcome-file-list>
6 <listener>
7     <listener-class>
8         org.springframework.web.context.ContextLoaderListener
9     </listener-class>
10 </listener>
11 <context-param>
12     <param-name>contextConfigLocation</param-name>
13     <param-value>
14         /WEB-INF/cst-root-ctx.xml
15     </param-value>
16 </context-param>
17 <servlet>
18     <servlet-name>cstspconf-web</servlet-name>
19     <servlet-class>org.springframework.web.servlet.DispatcherServlet</servlet-class>
20     <load-on-startup>1</load-on-startup>
21 </servlet>
22 <servlet-mapping>
23     <servlet-name>cstspconf-web</servlet-name>
24     <url-pattern>*.html</url-pattern>
25 </servlet-mapping>
26 </web-app>
```

Design Source

Writable

Smart Insert

1 : 1 : 0

```
1 <%@ page language="java" contentType="text/html; charset=ISO-8859-1"
2   pageEncoding="ISO-8859-1"%>
3 <!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN" "http://www.w3.org/TR/html4/loose.dtd">
4 <html>
5 <head>
6
7 <style type="text/css">
8   body {
9     background: lavender;
10  }
11 </style>
12 <meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
13 <title>Insert title here</title>
14 </head>
15 <body>
16 <center>
17   <h2>Welcome to Jago Grahak Complaint Services</h2>
18   <a href="{pageContext.request.contextPath}/loadCompliantForm.html">File a Compliant</a>
19   <br><br>
20   <a href="{pageContext.request.contextPath}/loadCompliantReport.html">Display Compliant Report</a>
21 </center>
22 </body>
23 </html>
```