

Maven & Git Fundamentals

Mastering Git

Contents


Activity 1: Git Installation on AWS	4
1.1 Prerequisite	4
1.2 Scenario	4
1.3 Steps	4
Activity 2: Create Local Repository	12
2.1 Prerequisite	12
2.2 Scenario	12
2.3 Steps	12
Activity 3: Create Feature Branch	13
3.1 Prerequisite	13
3.2 Scenario	13
3.3 Steps	13
Activity 4: Activity on Merge Conflict	15
4.1 Prerequisite	15
4.2 Scenario	15
4.3 Steps	15
Activity 5: Setting up GitLab Account	16
5.1 Prerequisite	16
5.2 Scenario	16
5.3 Steps	16
Activity 6: Pushing Local Repository into Remote Repository using GitLab	18
6.1 Prerequisite	18
6.2 Scenario	19
6.3 Steps	19
Activity 7: Create gitlab Repository	23
7.1 Prerequisite	23
7.2 Scenario	23
7.3 Steps	23
Activity 8: Make Changes into Remote Repository	27
8.1 Prerequisite	27



8.2	Scenario	27
8.3	Steps	28
Activity 9: Pull Request		31
9.1	Prerequisite	31
9.2	Scenario	32
9.3	Steps	32
Activity 10: Git Tags		36
10.1	Prerequisite	36
10.2	Scenario	36
10.3	Steps	36

1.1 Prerequisite

1.2 Scenario

1.3 Steps

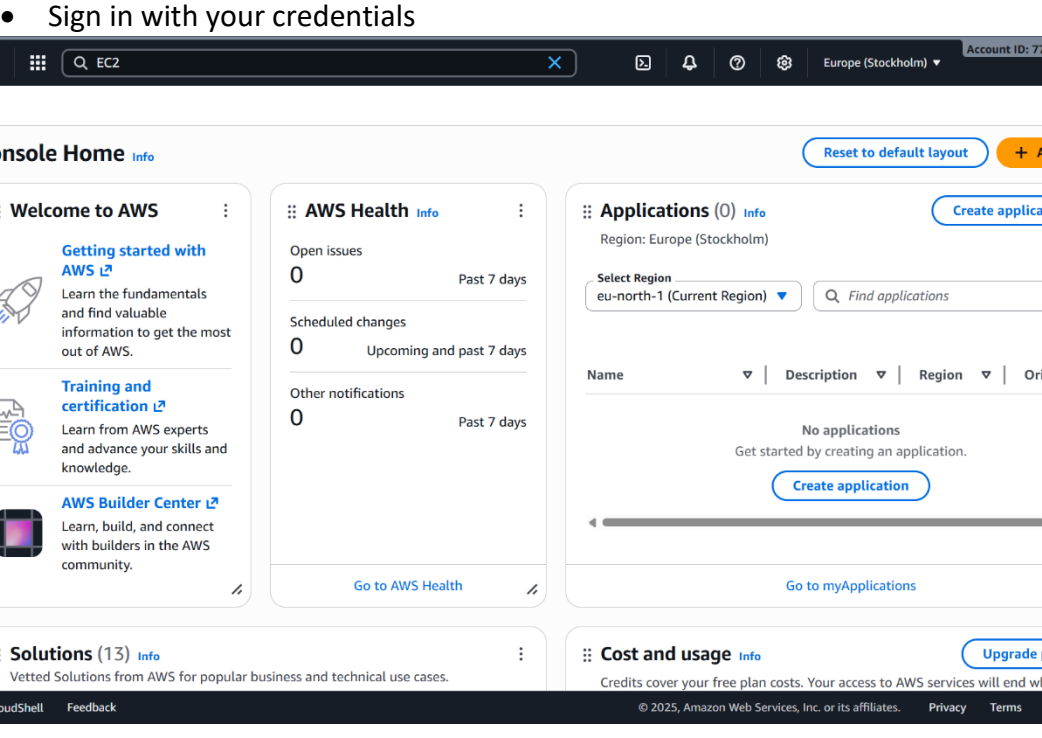1. Log in to AWS Console
 - Visit <https://aws.amazon.com/console>
 - Sign in with your credentials
2. Navigate to EC2 Dashboard
 - In the AWS Console, search for **EC2**

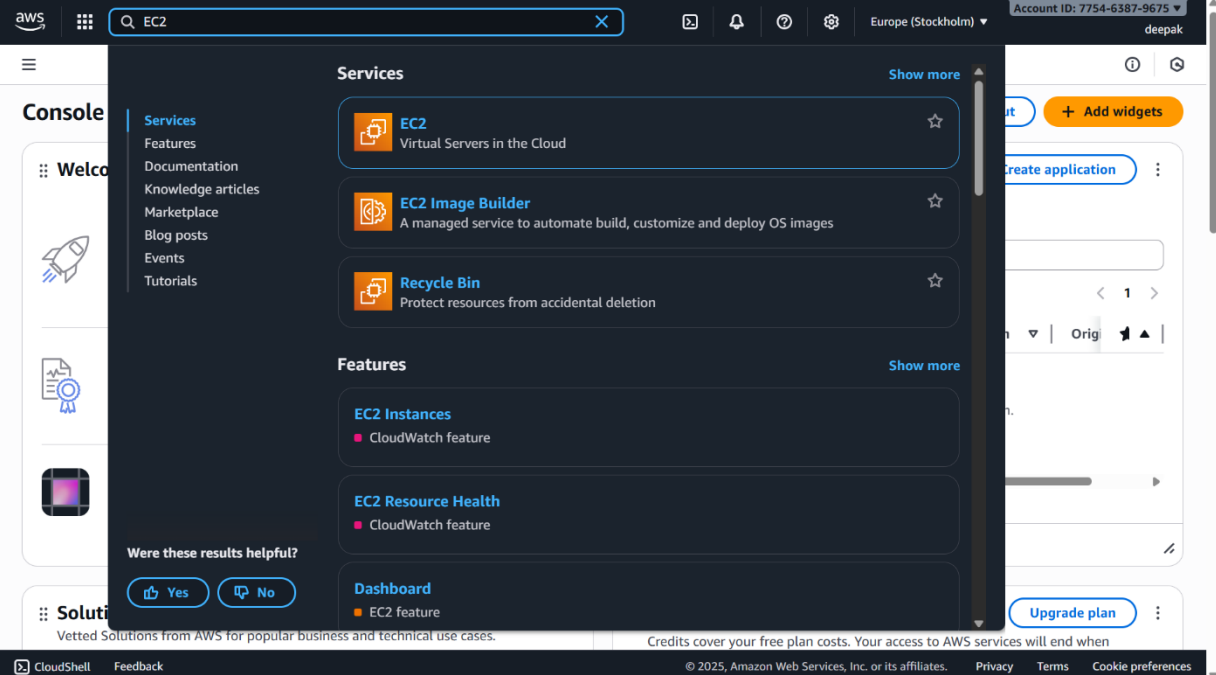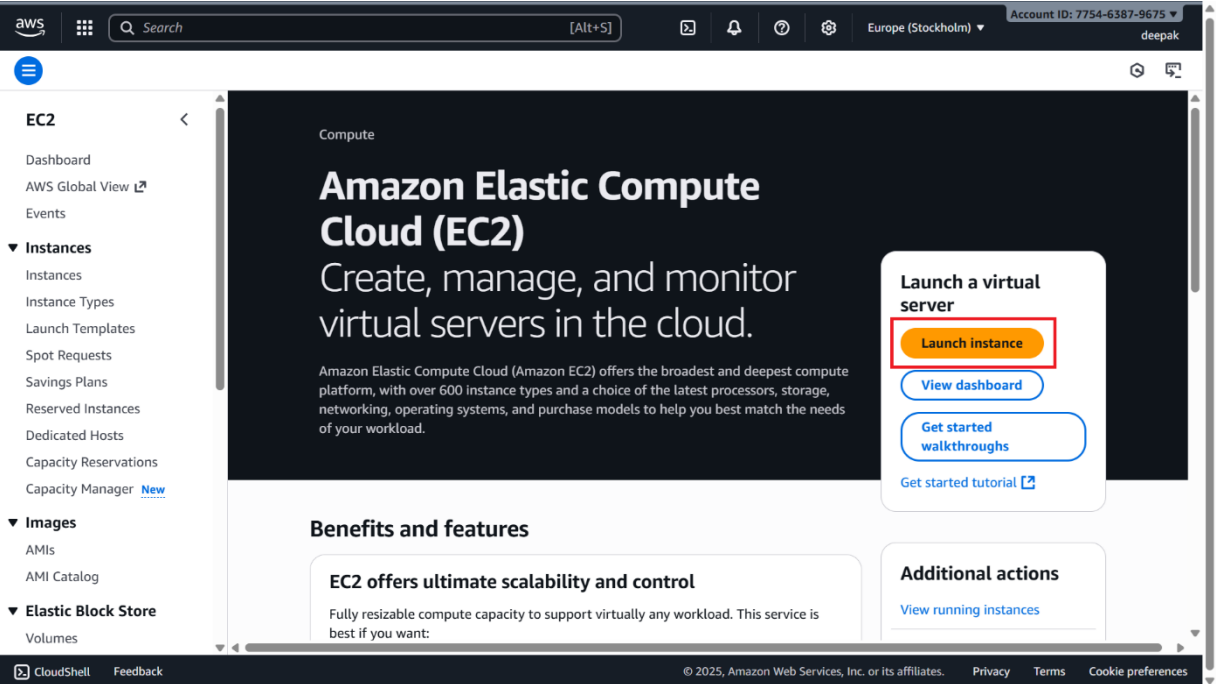	
3	3. Click Launch Instance to begin setup 
4	3. Choose an Amazon Machine Image (AMI) • Select Ubuntu Server 22.04 LTS or Ubuntu 24.04 LTS (recommended for longer support) • Ensure it is marked Free Tier eligible

aws

Search

[Alt+S]

Europe (Stockholm)

Account ID: 7754-6387-9675

deepak

EC2 > Instances > Launch an instance

name and tags Info

Name

DevOps

Add additional tags

▼ Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

Search our full catalog including 1000s of application and OS images

Recents

Quick Start

Amazon Linux

macOS

Ubuntu

Windows

Red Hat

SUSE Linux

Browse more AMIs

Amazon Machine Image (AMI)

Ubuntu Server 24.04 LTS (HVM), SSD Volume Type

ami-0a716d3f3b16d290c (64-bit (x86)) / ami-0cab1941a8a08b817 (64-bit (Arm))

Free tier eligible

▼ Summary

Number of instances Info

1

Software Image (AMI)

Canonical, Ubuntu, 24.04, amd64...[read more](#)

ami-0a716d3f3b16d290c

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

Launch instance

Preview code

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

- 5
- #### 4. Select Instance Type
- Choose **t2.micro** (1 vCPU, 1 GB RAM) – Free Tier eligible

aws

Search

[Alt+S]

Europe (Stockholm)

Account ID: 7754-6387-9675

deepak

EC2 > Instances > Launch an instance

Instance type Info | Get advice

Instance type

t3.micro

Family: t3 2 vCPU 1 GiB Memory Current generation: true

On-Demand Ubuntu Pro base pricing: 0.0143 USD per Hour

On-Demand RHEL base pricing: 0.0396 USD per Hour

On-Demand SUSE base pricing: 0.0108 USD per Hour

On-Demand Linux base pricing: 0.0108 USD per Hour

On-Demand Windows base pricing: 0.02 USD per Hour

Free tier eligible

All generations

Compare instance types

▼ Key pair (login) Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

Select

Create new key pair

▼ Network settings Info

Edit

▼ Summary

Number of instances Info

1

Software Image (AMI)

Canonical, Ubuntu, 24.04, amd64...[read more](#)

ami-0a716d3f3b16d290c

Virtual server type (instance type)

t3.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Cancel

Launch instance


Preview code

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences


- 6
- #### Configure Key Pair
- Create a new key pair or use an existing one
 - Choose .pem format for Linux/macOS or .ppk for Windows
 - Download and store securely (you won't be able to download it again)


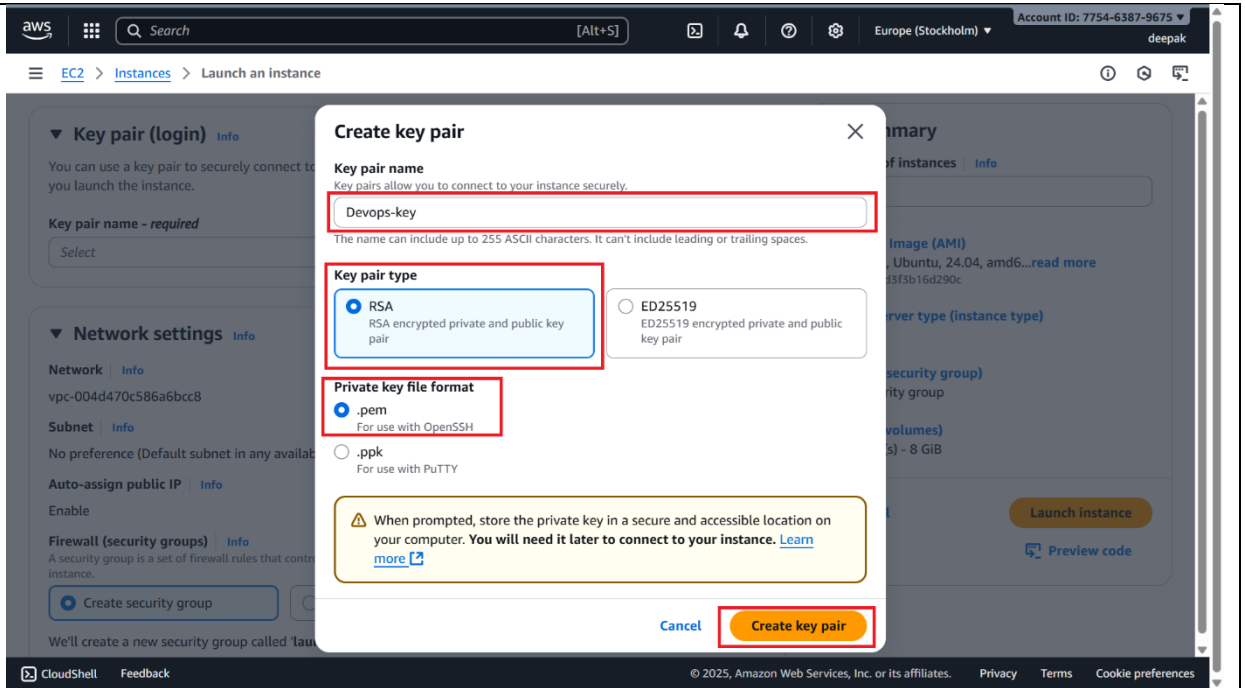


7

Configure Network Settings

- Use default VPC and subnet
- Create or select a **Security Group**
 - Allow **SSH (port 22)** from your IP
 - Optionally allow **HTTP (port 80)** and **HTTPS (port 443)** if hosting a web server

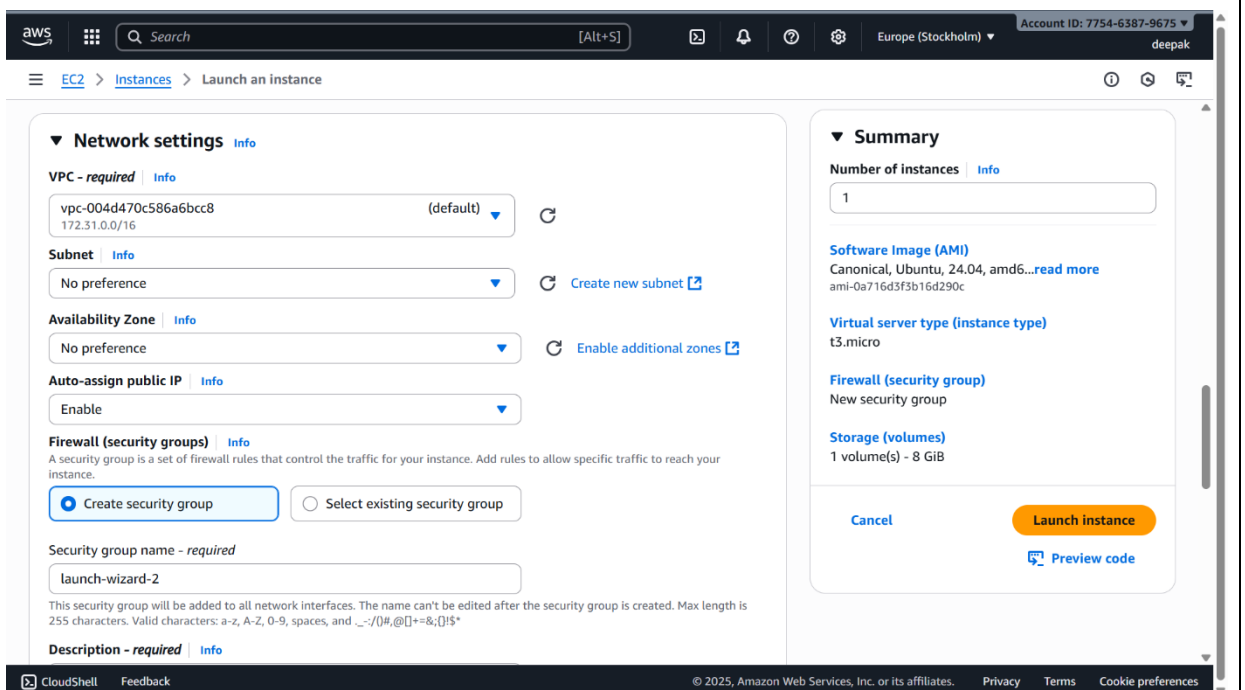

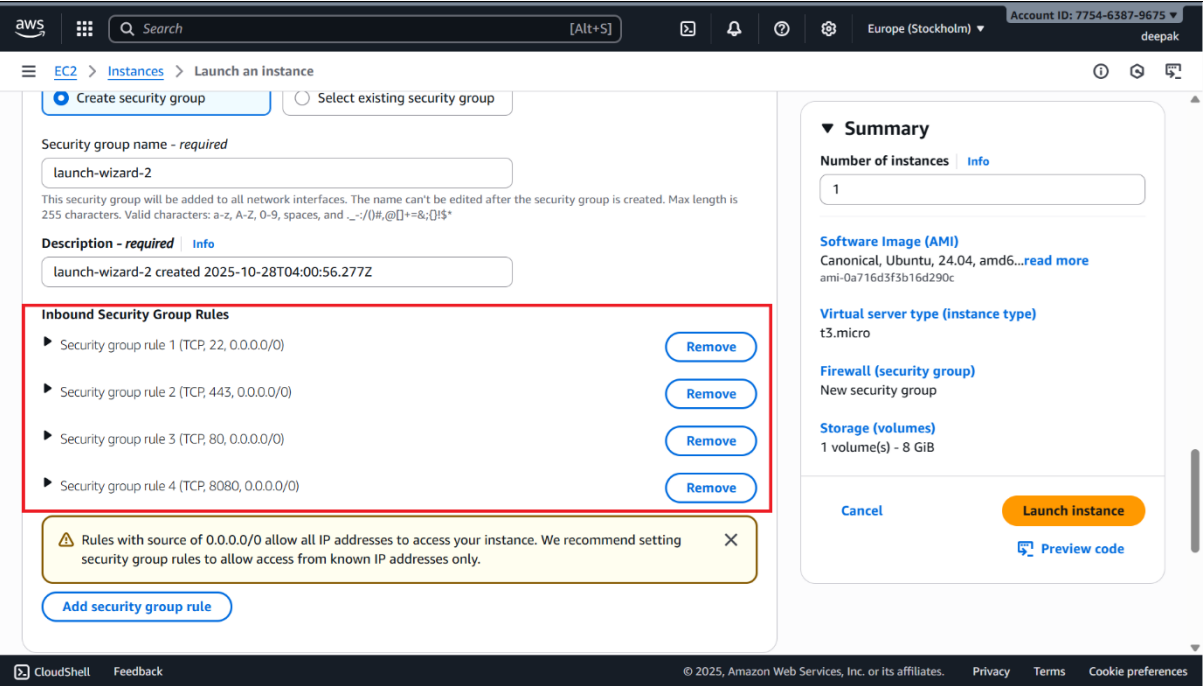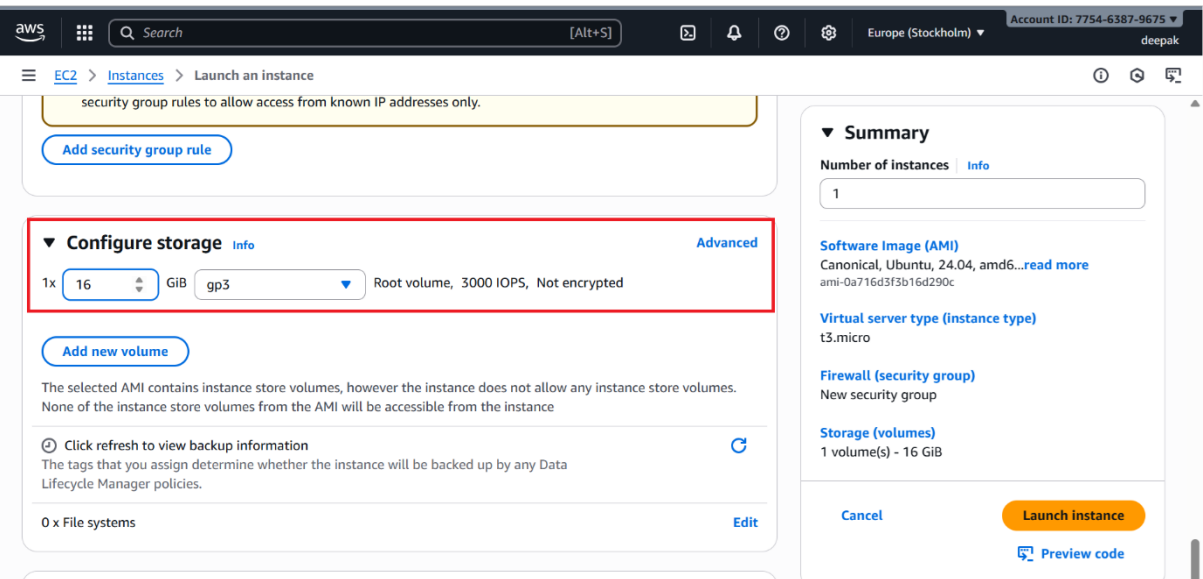	
8	7. Configure Storage • Default is 8 GB SSD (gp3) • Free Tier allows up to 30 GB of gp3 storage 
9	Review and Launch • Review all settings • Click Launch Instance

aws Search [Alt+S] Europe (Stockholm) Account ID: 7754-6387-9675 deepak

EC2 > Instances > Launch an instance

security group rules to allow access from known IP addresses only.

Add security group rule

▼ Configure storage Info Advanced

1x 16 GiB gp3 Root volume, 3000 IOPS, Not encrypted

Add new volume

The selected AMI contains instance store volumes, however the instance does not allow any instance store volumes. None of the instance store volumes from the AMI will be accessible from the instance

Click refresh to view backup information

The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

0 x File systems Edit

► Advanced details Info

▼ Summary

Number of instances Info 1

Software Image (AMI) Canonical, Ubuntu, 24.04, amd64...read more ami-0a716d3f3b16d290c

Virtual server type (instance type) t3.micro

Firewall (security group) New security group

Storage (volumes) 1 volume(s) - 16 GiB

Cancel Launch instance Preview code

10 EC2 instance is created: Devops

aws Search [Alt+S] Europe (Stockholm) Account ID: 7754-6387-9675 deepak

EC2 > Instances

EC2

Dashboard

AWS Global View

Events

▼ Instances

Instances

Instance Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances

Dedicated Hosts

Capacity Reservations

Capacity Manager New

▼ Images

AMIs

AMI Catalog

▼ Elastic Block Store

Volumes

Instances (1) Info Last updated less than a minute ago Connect Instance state Actions Launch instances

Find Instance by attribute or tag (case-sensitive)

Name = DevOps X Clear filters

All states

☐	Name	Instance ID	Instance state	Instance type	Status check	Alarm status
☐	DevOps	i-0bdba72360decb957	Running	t3.micro	Initializing	View alarms +

Select an instance

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

11

Connect to Your Instance

The screenshot shows the AWS Management Console 'Instances' page. The 'Connect' button is highlighted with a red box. Below the table, the details for instance 'i-0bdba72360decb957' are shown, including its public IPv4 address and state.

Name	Instance ID	Instance state	Instance type	Status check	Alarm status
DevOps	i-0bdba72360decb957	Running	t3.micro	Initializing	View alarms +

i-0bdba72360decb957 (DevOps)

Details | Status and alarms | Monitoring | Security | Networking | Storage | Tags

Instance summary Info

Instance ID i-0bdba72360decb957	Public IPv4 address 16.171.177.177 open address	Private IPv4 addresses 172.31.42.74
IPv6 address -	Instance state Running	Public DNS ec2-16-171-177-177.eu-north-1.compute.amazonaws.com open address

Connect to Your Instance

The screenshot shows the 'Connect to instance' page in the AWS Management Console. The 'EC2 Instance Connect' tab is selected. The 'Connection type' section shows 'Connect using a Public IP' selected. The 'Public IPv4 address' is displayed as 16.171.177.177. The 'Username' field is set to 'ubuntu'. The 'Connect' button is highlighted with a red box.

EC2 Instance Connect | Session Manager | SSH client | EC2 serial console

Instance ID
i-0bdba72360decb957 (DevOps)

Connection type

☒ Connect using a Public IP
Connect using a public IPv4 or IPv6 address

☐ Connect using a Private IP
Connect using a private IP address and a VPC endpoint

☒ Public IPv4 address
16.171.177.177

☐ IPv6 address
-

Username
Enter the username defined in the AMI used to launch the instance. If you didn't define a custom username, use the default username, ubuntu.

ubuntu

Note: In most cases, the default username, ubuntu, is correct. However, read your AMI usage instructions to check if the AMI owner has changed the default AMI username.

Cancel **Connect**

12

Update System and Install Java

- `sudo apt update`

```
aws Search [Alt+S] Europe (Stockholm) Account ID: 7754-6387-9675 deepak

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

ubuntu@ip-172-31-42-74:~$ sudo apt update
Hit:1 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble InRelease
Get:2 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble-updates InRelease [126 kB]
Get:3 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble-backports InRelease [126 kB]
Get:4 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble/universe amd64 Packages [15.0 MB]
Get:5 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble/universe Translation-en [5982 kB]
Get:6 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble/universe amd64 Components [3871 kB]
Get:7 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble/universe amd64 c-n-f Metadata [301 kB]
Get:8 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble/multiverse amd64 Packages [269 kB]
Get:9 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble/multiverse Translation-en [118 kB]
Get:10 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble/multiverse amd64 Components [35.0 kB]
Get:11 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble/multiverse amd64 c-n-f Metadata [8328 B]
Get:12 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 Packages [1545 kB]
Get:13 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main Translation-en [294 kB]
Get:14 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 Components [175 kB]
Get:15 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 c-n-f Metadata [15.4 kB]
Get:16 http://eu-north-1.ec2.archive.ubuntu.com/ubuntu noble-updates/universe amd64 Packages [1498 kB]
```

i-0bdba72360decb957 (DevOps)

- sudo apt install openjdk-17-jdk -y

```
aws Search [Alt+S] Europe (Stockholm) Account ID: 7754-6387-9675 deepak

Reading state information... Done
55 packages can be upgraded. Run 'apt list --upgradable' to see them.
ubuntu@ip-172-31-42-74:~$ sudo apt install openjdk-17-jdk -y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  adwaita-icon-theme alsa-topology-conf alsa-ucm-conf at-spi2-common at-spi2-core ca-certificates-java dconf-gsettings-backend
  dconf-service fontconfig fontconfig-config fonts-dejavu-core fonts-dejavu-extra fonts-dejavu-mono gsettings-desktop-schemas
  gtk-update-icon-cache hicolor-icon-theme humanity-icon-theme java-common libasound2-data libasound2t64 libatk-bridge2.0-0t64
  libatk-wrapper-java libatk-wrapper-java-jni libatk1.0-0t64 libatspi2.0-0t64 libavahi-client3 libavahi-common-data libavahi-common3
  libcairo-gobject2 libcairo2 libcups2t64 libdatatriel libdconf1 libdeflate0 libdrm-amdgpu libdrm-intel libfontconfig libgail-common
  libgail18t64 libgbml libgdk-pixbuf-2.0-0 libgdk-pixbuf2.0-bin libgdk-pixbuf2.0-common libgif7 libgl1 libgl1-mesa-dri libglvnd0
  libglx-mesa0 libglx0 libgraphite2-3 libgtk2.0-0t64 libgtk2.0-bin libgtk2.0-common libharfbuzz0b libice-dev libice6 libjbig0
  libjpeg-turbo8 libjpeg8 liblcms2-2 liblerc4 libllvm20 libpango-1.0-0 libpangocairo-1.0-0 libpangoft2-1.0-0 libpciaccess0 libpcsc-lite
  libpixman-1-0 libpthread-stubs0-dev librsvg2-2 librsvg2-common libsharpyuv0 libsm-dev libsm6 libthai-data libthai0 libtiff6 libvulkan1
  libwayland-client0 libwayland-server0 libwebp7 libx11-dev libx11-xcb1 libxau-dev libxaw7 libxcb-dri3-0 libxcb-glx0 libxcb-present0
  libxcb-randr0 libxcb-render0 libxcb-shape0 libxcb-shm0 libxcb-sync1 libxcb-xfixes0 libxcb1-dev libxcomposite1 libxcursor1 libxdamage1
  libxdmcp-dev libxfixes3 libxft2 libxi6 libxinerama libxkbfile1 libxmu6 libxpm4 libxrandr2 libxrender1 libxshmfence libxt6t64
  libxtst6 libxv1 libxxf86dgal libxxf86vm1 mesa-libgallium mesa-vulkan-drivers openjdk-17-jdk-headless openjdk-17-jre
  openjdk-17-jre-headless session-migration ubuntu-mono x11-common x11-utils x11proto-dev xorg-sgml-doctools xtrans-dev
Suggested packages:
  default-jre alsa-utils libasound2-plugins cups-common gvfs libice-doc liblcms2-utils pcsd librsvg2-bin libsm-doc libx11-doc libxcb-doc
  libxt-doc openjdk-17-demo openjdk-17-source visualvm libnss-mdns fonts-ipafont-gothic fonts-ipafont-mincho fonts-wqy-microhei
  fonts-wqy-zenhei fonts-indic mesa-utils
Recommended packages:
  luit
The following NEW packages will be installed:
```


i-0bdba72360decb957 (DevOps)

Install Git

sudo apt install git -y

Verify Installation

git --version

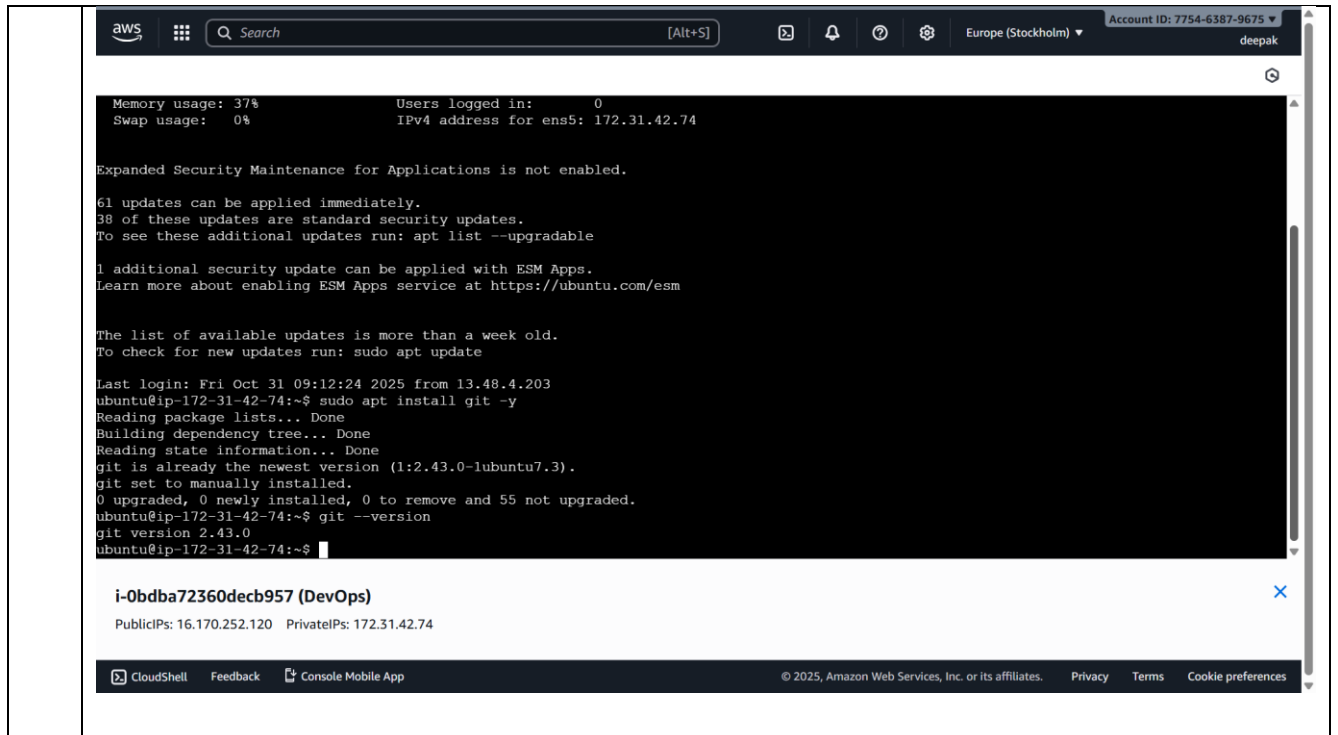

Activity 2: Create Local Repository

2.1 Prerequisite

Git is installed on GCP Cloud Shell Editor.

2.2 Scenario

Create local repository, add files and commit them.

2.3 Steps

- 1 Make new Directory using command *mkdir My_Project*
- 2 Locate the Directory using command *cd My_Project*
- 3 creates a new subdirectory named *.git* that contains all of your necessary repository files — a Git repository skeleton using *commnd git init*
- 4 Create new empty file using commnd: *touch My_File*
- 5 Add file in Git Repository using command: *git add My_File*
- 6 commit new files/changes to the local using command: *git commit -m '<commit_message>*
- 7 To see the changes to be committed use command: *git status*


```
Cloud Shell Editor
cloudshell x +
deepakmouddevops@cloudshell:~$ cd my_project
deepakmouddevops@cloudshell:~/my_project$ git init
hint: Using 'master' as the name for the initial branch. This default branch name
hint: is subject to change. To configure the initial branch name to use in all
hint: of your new repositories, which will suppress this warning, call:
hint:
hint:   git config --global init.defaultBranch <name>
hint:
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:
hint:   git branch -m <name>
Initialized empty Git repository in /home/deepakmouddevops/my_project/.git/
deepakmouddevops@cloudshell:~/my_project$ ls
deepakmouddevops@cloudshell:~/my_project$ git --global init.defaultBranch <master>
-bash: syntax error near unexpected token `newline'
deepakmouddevops@cloudshell:~/my_project$ git config --global init.defaultBranch <master>
-bash: syntax error near unexpected token `newline'
deepakmouddevops@cloudshell:~/my_project$ git config --global init.defaultBranch master
deepakmouddevops@cloudshell:~/my_project$ clear
deepakmouddevops@cloudshell:~/my_project$ mkdir My_Project
deepakmouddevops@cloudshell:~/my_project$ cd My_Project
deepakmouddevops@cloudshell:~/my_project/My_Project$ git init
Initialized empty Git repository in /home/deepakmouddevops/my_project/My_Project/.git/
deepakmouddevops@cloudshell:~/my_project/My_Project$ touch My_File
deepakmouddevops@cloudshell:~/my_project/My_Project$ ls
My_File
deepakmouddevops@cloudshell:~/my_project/My_Project$ git add My_File
deepakmouddevops@cloudshell:~/my_project/My_Project$ git commit -m "File Added"
[master (root-commit) 999adaf] File Added
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 My_File
deepakmouddevops@cloudshell:~/my_project/My_Project$ ls
My_File
deepakmouddevops@cloudshell:~/my_project/My_Project$ git status
On branch master
nothing to commit, working tree clean
deepakmouddevops@cloudshell:~/my_project/My_Project$
```

Activity 3: Create Feature Branch

3.1 Prerequisite

Google cloud account is ready. Google cloud shell editor is used on Google cloud Platform

3.2 Scenario

Create feature branch

3.3 Steps

1	Make new Directory using command: <i>mkdir myproject</i>
2	Locate the Directory using command: <i>cd myproject</i>
3	Create new empty file using commnd: <i>touch My_File</i>
4	creates a new subdirectory named .git that contains all of your necessary repository files — a Git repository skeleton using <i>commnd: git init</i>
5	Switch to the master branch (this is the default branch after initialization) using command: <i>git checkout -b master</i>
6	Create a new file in the master branch using command: <i>echo "This is a file in the master branch" > masterfile</i>
7	Stage the file for commit git add masterfile

8	Commit the changes to the master branch using command: <code>git commit -m "Add file in master branch"</code>
9	Create and switch to the develop branch using command: <code>git checkout -b develop</code>
10	Create a new file in the develop branch using command: <code>echo "This is a file in the develop branch" > developfile</code>
11	Stage the file for commit using command: <code>git add developfile</code>
12	Commit the changes in the develop branch using command: <code>git commit -m "Add file in develop branch"</code>
13	Switch back to the master branch using command: <code>git checkout master</code>
14	Merge the changes from develop branch into master using command: <code>git merge develop</code>
15	Commit the merge <code>git commit -m "Merge develop branch into master"</code>
16	To see the changes to be committed use command: <code>git status</code>

```

Cloud Shell Editor

(bold-flash-443906-f4) X + v X

rmkdir: failed to remove 'my_project': Directory not empty
deepakmouddevops@cloudshell:~ (bold-flash-443906-f4)$ clear
deepakmouddevops@cloudshell:~ (bold-flash-443906-f4)$ mkdir myproject
deepakmouddevops@cloudshell:~ (bold-flash-443906-f4)$ cd myproject
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ touch masterfile
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ git init
Initialized empty Git repository in /home/deepakmouddevops/myproject/.git/
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ git checkout -b master
Switched to a new branch 'master'
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ echo "This is a file in the master branch" > masterfile
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ git add masterfile
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ git commit -m "Add file in master branch"
[master (root-commit) 5334a31] Add file in master branch
1 file changed, 1 insertion(+)
create mode 100644 masterfile
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ git checkout -b develop
Switched to a new branch 'develop'
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ echo "This is a file in the develop branch" > developfile
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ git add developfile
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ git commit -m "Add file in develop branch"
[develop 24b958a] Add file in develop branch
1 file changed, 1 insertion(+)
create mode 100644 developfile
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ git checkout master
Switched to branch 'master'
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ git merge develop
Updating 5334a31..24b958a
Fast-forward
 developfile | 1 +
1 file changed, 1 insertion(+)
create mode 100644 developfile
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ git commit -m "Merge develop branch into master"
On branch master
nothing to commit, working tree clean
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ git status
On branch master
nothing to commit, working tree clean
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$ ls
developfile  masterfile
deepakmouddevops@cloudshell:~/myproject (bold-flash-443906-f4)$

```

Activity 4: Activity on Merge Conflict

4.1 Prerequisite


Google cloud account is ready. Google cloud shell is used on Google cloud Platform

4.2 Scenario

- Create merge conflict and resolve it

4.3 Steps

- 1 Create a directory and initialize a Git repository using following commands:
mkdir my_project
cd my_project
git init
- 2 Create the master branch and add a file using following commands.
git checkout -b master
echo "This is a line in the master branch." > file.txt
git add file.txt
git commit -m "Added file.txt in master branch"
3. Create the develop branch using following commands:
git checkout -b develop
- 4 Make conflicting changes in both branches. In develop branch using following commands:
echo "This is a line in the develop branch." > file.txt
git add file.txt
git commit -m "Modify file.txt in develop branch"
- 5 In master branch make changes using commands:
git checkout master
echo "This is a line in the master branch, changed again." > file.txt
git add file.txt
git commit -m "Modify file.txt in master branch"
- 6 Attempt to merge develop into master (this will cause a conflict) using command:
git merge develop
- 7 Resolve the conflict manually by editing file.txt
- 8 Stage the resolved file and commit the merge using commands:
git add file.txt
git commit -m "Resolve merge conflict between master and develop branches"

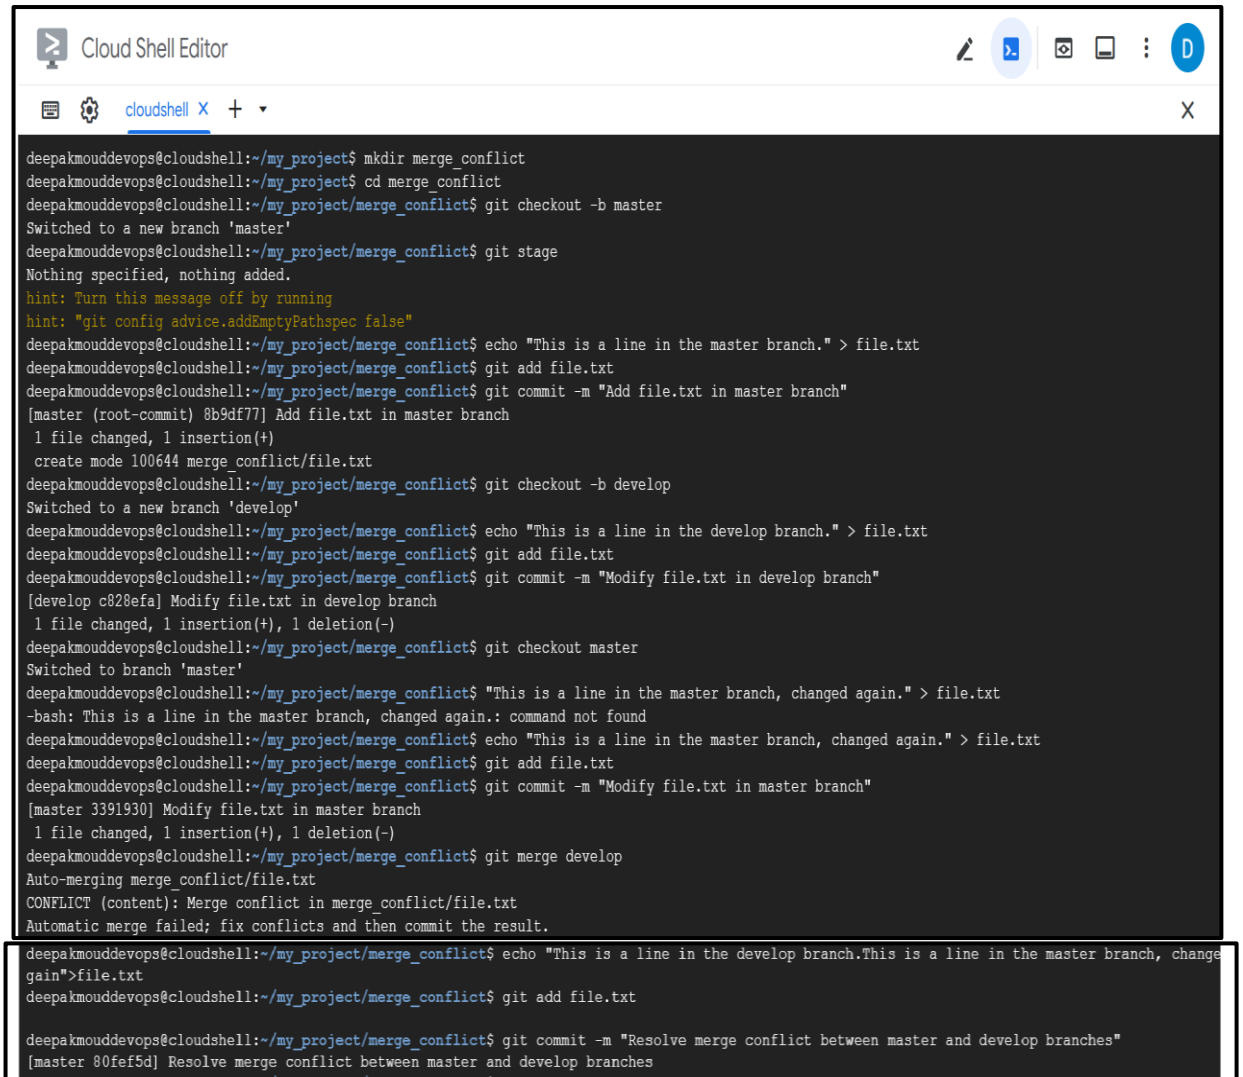

```

deepakmouddevops@cloudshell:~/my_project$ mkdir merge_conflict
deepakmouddevops@cloudshell:~/my_project$ cd merge_conflict
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git checkout -b master
Switched to a new branch 'master'
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git stage
Nothing specified, nothing added.
hint: Turn this message off by running
hint: "git config advice.addEmptyPathsSpec false"
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ echo "This is a line in the master branch." > file.txt
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git add file.txt
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git commit -m "Add file.txt in master branch"
[master (root-commit) 8b9df77] Add file.txt in master branch
1 file changed, 1 insertion(+)
create mode 100644 merge_conflict/file.txt
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git checkout -b develop
Switched to a new branch 'develop'
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ echo "This is a line in the develop branch." > file.txt
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git add file.txt
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git commit -m "Modify file.txt in develop branch"
[develop c828efa] Modify file.txt in develop branch
1 file changed, 1 insertion(+), 1 deletion(-)
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git checkout master
Switched to branch 'master'
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ "This is a line in the master branch, changed again." > file.txt
-bash: This is a line in the master branch, changed again.: command not found
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ echo "This is a line in the master branch, changed again." > file.txt
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git add file.txt
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git commit -m "Modify file.txt in master branch"
[master 3391930] Modify file.txt in master branch
1 file changed, 1 insertion(+), 1 deletion(-)
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git merge develop
Auto-merging merge_conflict/file.txt
CONFLICT (content): Merge conflict in merge_conflict/file.txt
Automatic merge failed; fix conflicts and then commit the result.

deepakmouddevops@cloudshell:~/my_project/merge_conflict$ echo "This is a line in the develop branch.This is a line in the master branch, change
gain">file.txt
deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git add file.txt

deepakmouddevops@cloudshell:~/my_project/merge_conflict$ git commit -m "Resolve merge conflict between master and develop branches"
[master 80fef5d] Resolve merge conflict between master and develop branches

```

Activity 5: Setting up GitLab Account

5.1 Prerequisite


GitLab Account to open

5.2 Scenario


Create GitLab account and create new project.

5.3 Steps


- 1 Go to https://gitlab.com/users/sign_in
Choose Google Login

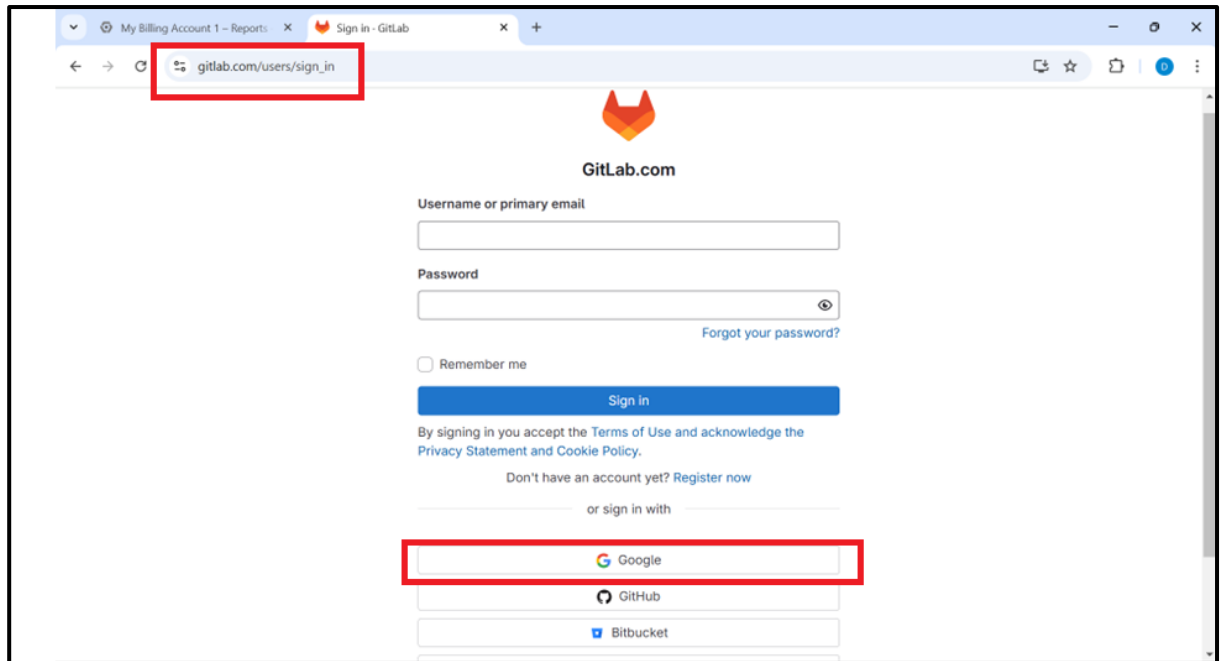


2 Choose Existing Google account:

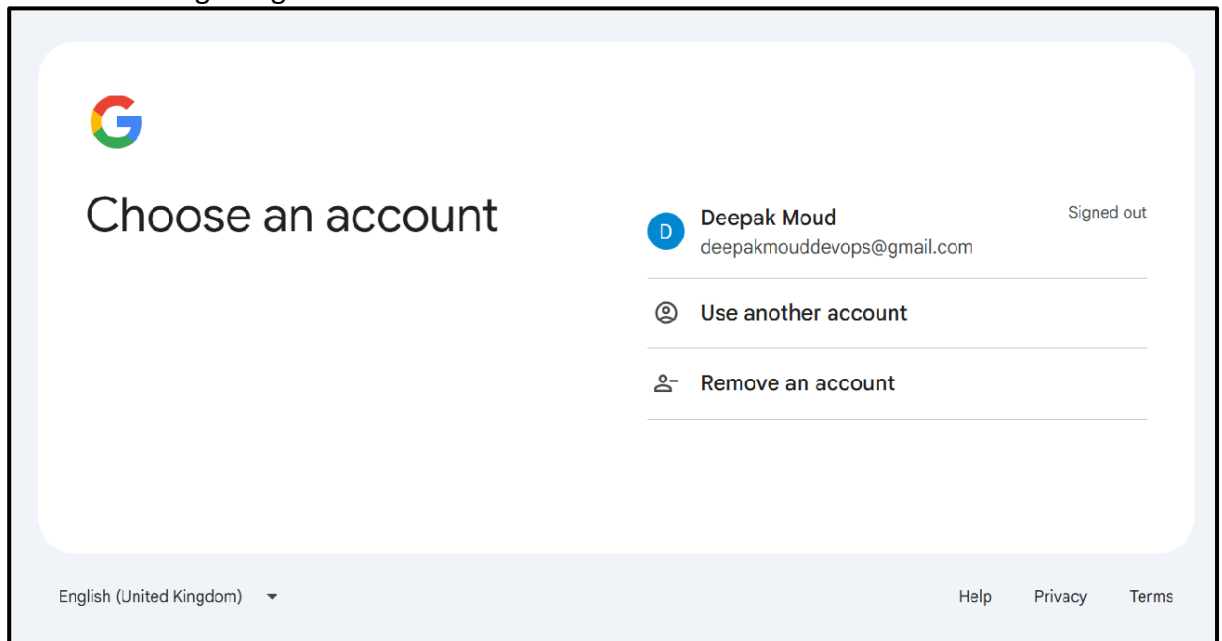

3 Sign in with Google:

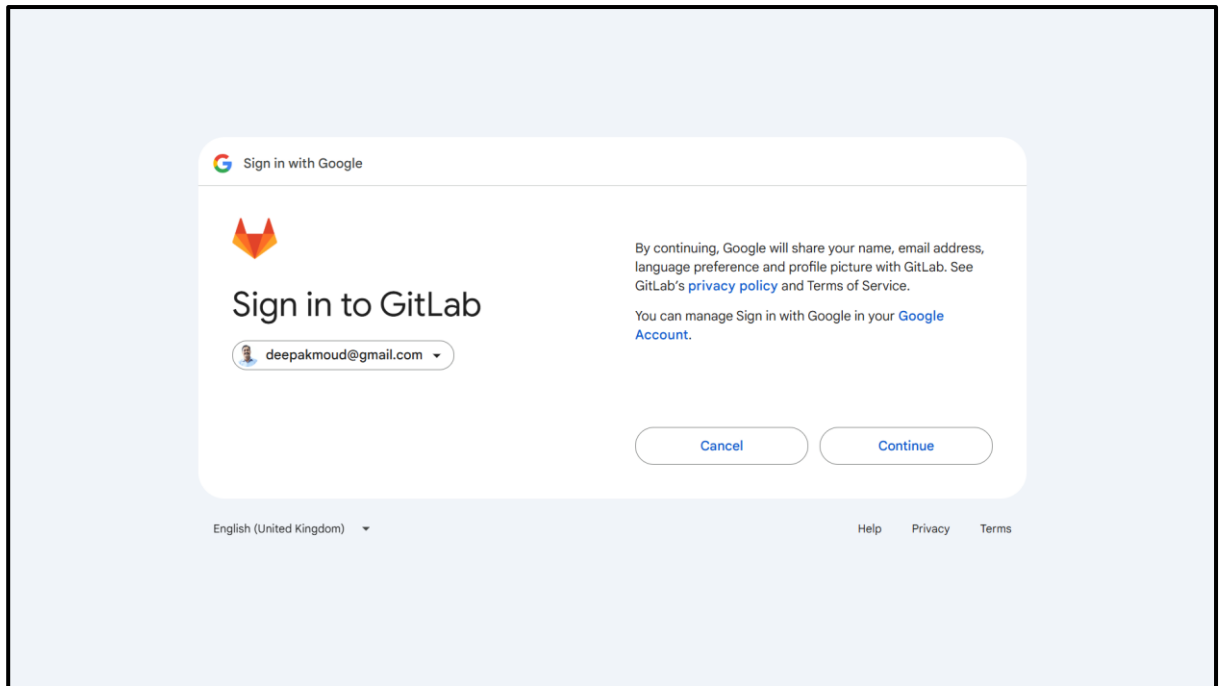

- 4 Continue and verify Google account:
After successful verification you will be redirected to home page of GitLab

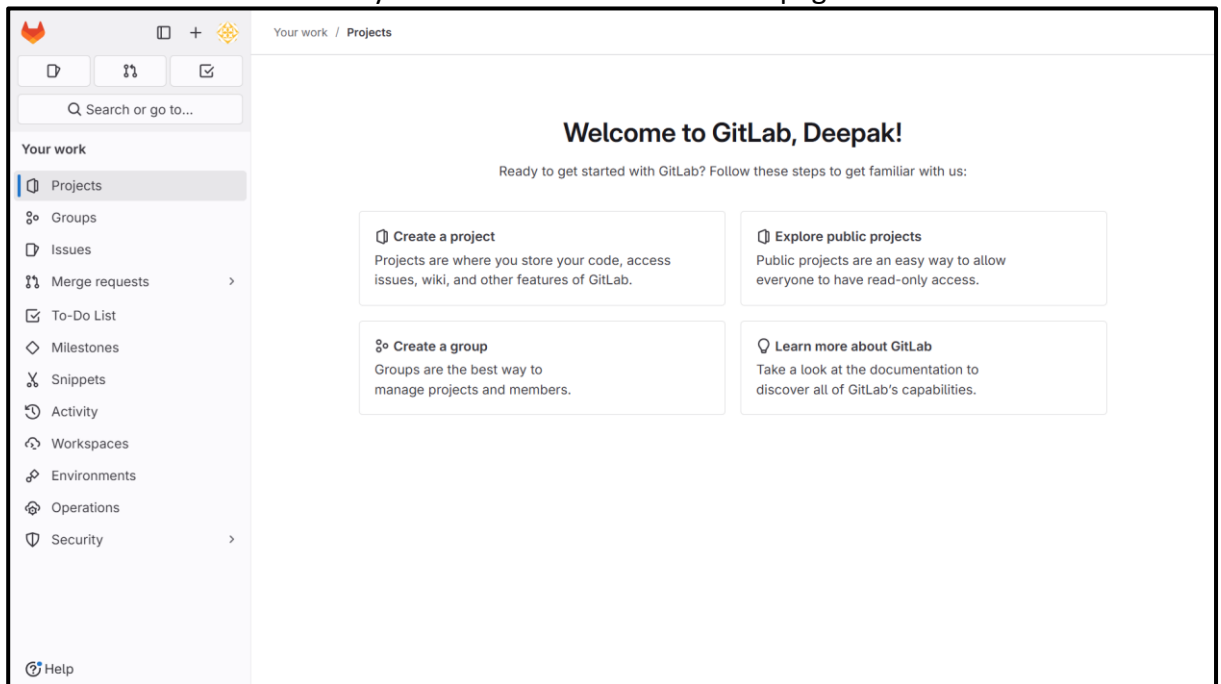

Activity 6: Pushing Local Repository into Remote Repository using GitLab

6.1 Prerequisite


Git lab account is created, Google Cloud Shell Editor is used on GCP

6.2 Scenario


To push a local Git repository into a remote repository on GitLab

6.3 Steps

- 1 Log in to your account.
click the New Project button.

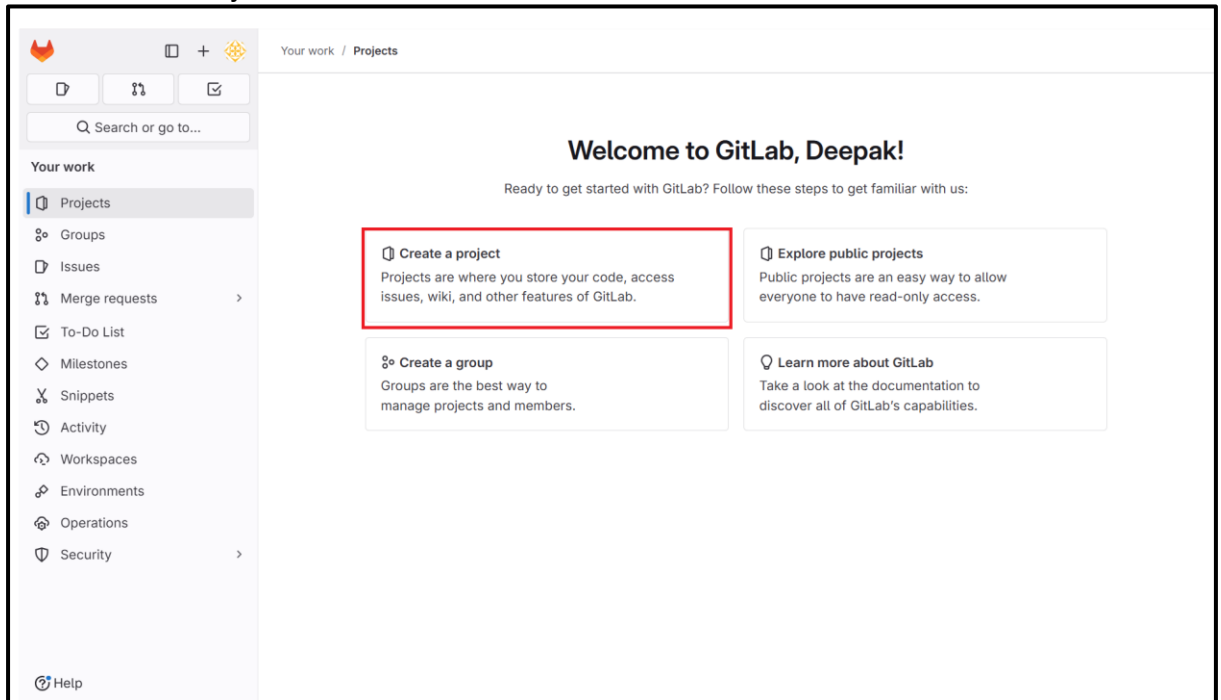

- 2 Click on Create New Project

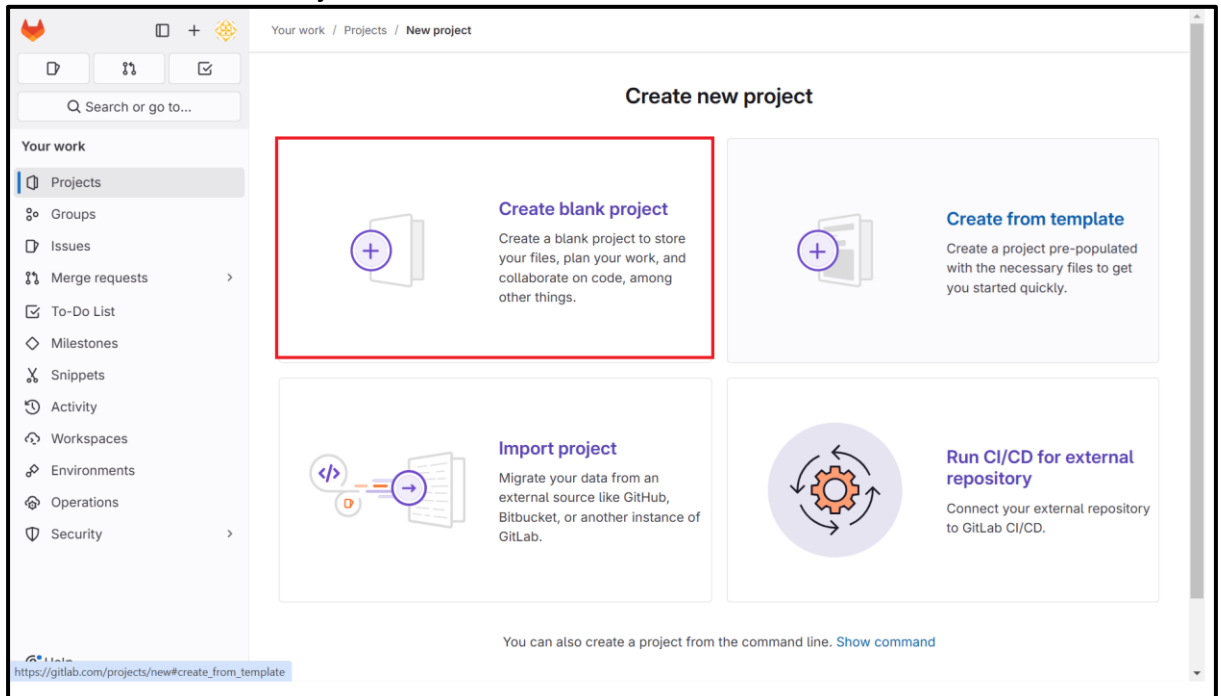

- 3 Choose the project visibility (Public, Private, or Internal). Will choose public now but in project keep it private.

Name your repository (My_GitLab_Project), and click Create project

gitlab.com/projects/new#blank_project

Your work / Projects / New project / Create blank project

Create blank project

Create a blank project to store your files, plan your work, and collaborate on code, among other things.

Project name
My_GitLab_Project
Must start with a lowercase letter, digit, emoji, or underscore. Can also contain dots, pluses, dashes, or spaces.

Project URL
https://gitlab.com/deepakmouddevops/ / **Project slug**
my-gitlab-project

Project deployment target (optional)
Select the deployment target

Visibility Level
☐ Private
Project access must be granted explicitly to each user. If this project is part of a group, access is granted to members of the group.
☐ Internal
The project can be accessed by any logged in user except external users.
☒ Public
The project can be accessed without any authentication.

Project Configuration
☒ Initialize repository with a README
Allows you to immediately clone this project's repository. Skip this if you plan to push up an existing repository.
☐ Enable Static Application Security Testing (SAST)
Analyze your source code for known security vulnerabilities. [Learn more.](#)
[Experimental settings](#)

[Help](#) [Create project](#) [Cancel](#)

4 Create or Import your first Project

Create or import your first project

Projects help you organize your work. They contain your file repository, issues, merge requests, and so much more.

Create **Import**

Project 'My_GitLab_Project' was successfully created.

Group name
DevOps

Project name
My_GitLab_Project


Select a template (optional)
Get started with one of our popular project templates.
Select

Your project will be created at:
https://gitlab.com/devops1150250/my_gitlab_project
You can always change your URL later


☒ Include a Getting Started README
Recommended if you're new to GitLab

[Create project](#)

5 My_GitLab_Project created

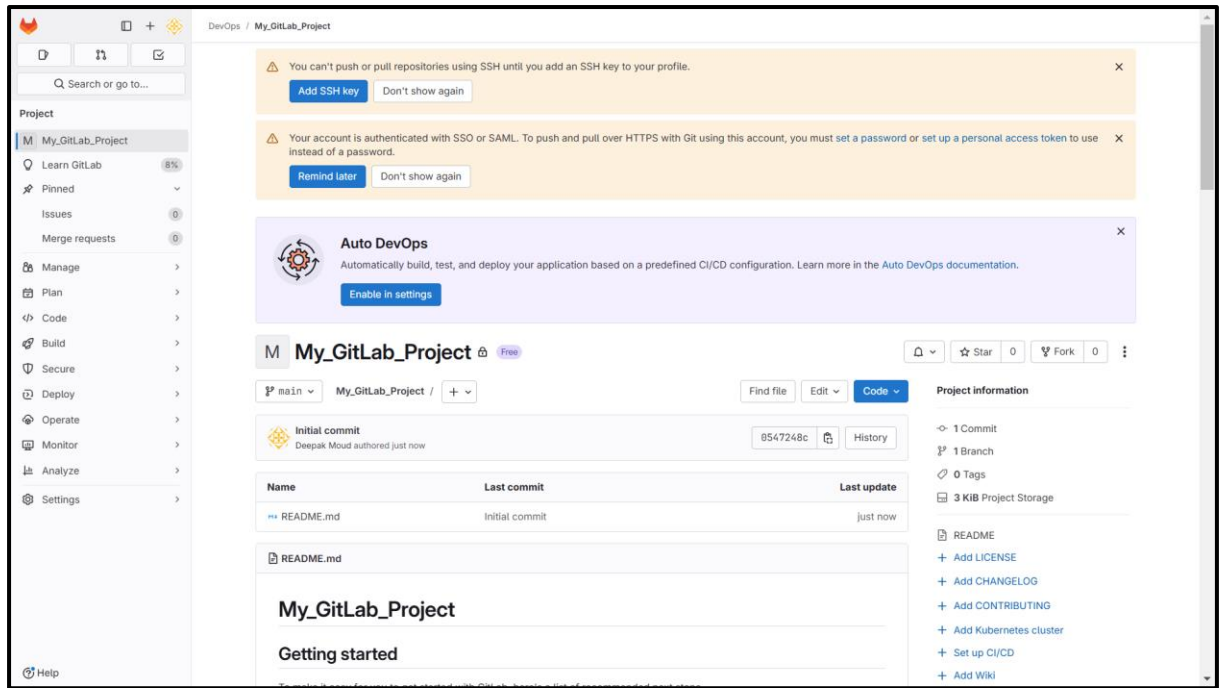

- GitLab repository's URL to push your local repository to GitLab is required.
- Go to your project page on GitLab.
- Copy the HTTPS URL of your GitLab repository.
- Now, run the command in Cloud Shell to add GitLab repository as a remote:

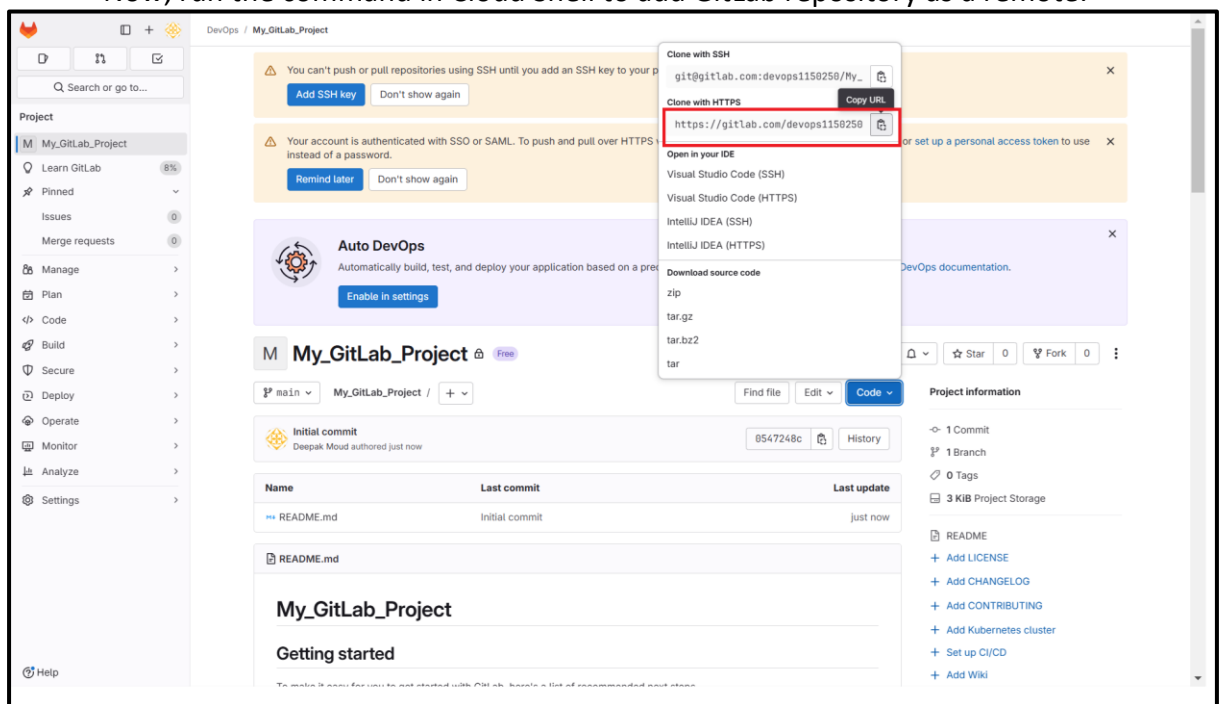


- 7 Create a directory and initialize a Git repository using following commands:

```
mkdir my_project
cd my_project
git init
```
- 8 Create the master branch and add a file using following commands.

```
git checkout -b master
```

```
touch file.txt
echo "This is a file in the master branch." > file.txt
git add file.txt
git commit -m "Add file.txt in master branch"
```

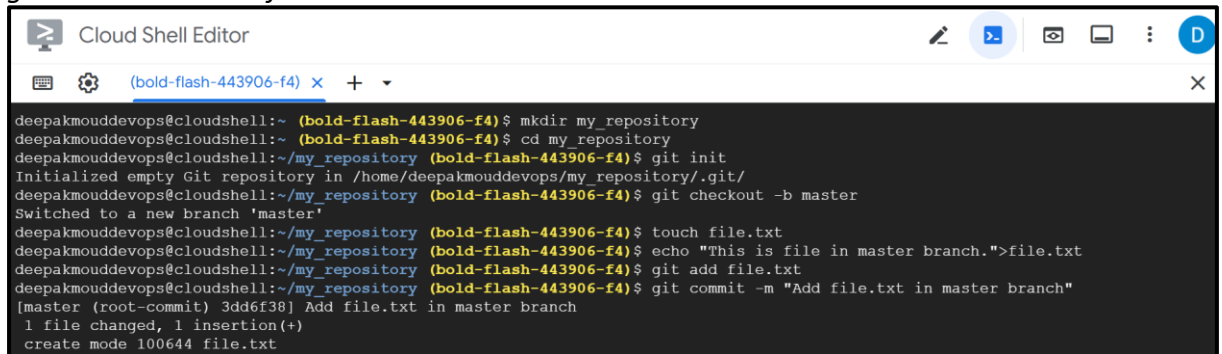

```
Cloud Shell Editor
(bold-flash-443906-f4) x + v
deepakmouddevops@cloudshell:~ (bold-flash-443906-f4)$ mkdir my_repository
deepakmouddevops@cloudshell:~ (bold-flash-443906-f4)$ cd my_repository
deepakmouddevops@cloudshell:~/my_repository (bold-flash-443906-f4)$ git init
Initialized empty Git repository in /home/deepakmouddevops/my_repository/.git/
deepakmouddevops@cloudshell:~/my_repository (bold-flash-443906-f4)$ git checkout -b master
Switched to a new branch 'master'
deepakmouddevops@cloudshell:~/my_repository (bold-flash-443906-f4)$ touch file.txt
deepakmouddevops@cloudshell:~/my_repository (bold-flash-443906-f4)$ echo "This is file in master branch.">file.txt
deepakmouddevops@cloudshell:~/my_repository (bold-flash-443906-f4)$ git add file.txt
deepakmouddevops@cloudshell:~/my_repository (bold-flash-443906-f4)$ git commit -m "Add file.txt in master branch"
[master (root-commit) 3dd6f38] Add file.txt in master branch
1 file changed, 1 insertion(+)
create mode 100644 file.txt
```

Link Your Local Repository to GitLab Remote using command:

`git remote add origin https://gitlab.com/devops1150250/My_GitLab_Project.git`



```
Cloud Shell Editor
(bold-flash-443906-f4) x + v
deepakmouddevops@cloudshell:~/my_repository (bold-flash-443906-f4)$ git remote add origin https://gitlab.com/devops1150250/My_GitLab_Project.git
```


Push Your Local Repository to GitLab

Now that the remote is linked, you can push your local repository to GitLab.

Push the contents to GitLab with the following command:

```
git push -u origin master
```


If prompted, enter your GitLab username and password (or use a Personal Access Token if 2FA is enabled)

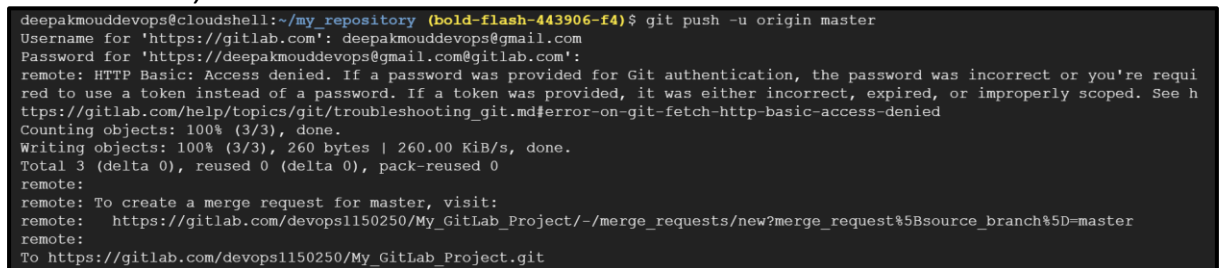

```
deepakmouddevops@cloudshell:~/my_repository (bold-flash-443906-f4)$ git push -u origin master
Username for 'https://gitlab.com': deepakmouddevops@gmail.com
Password for 'https://deepakmouddevops@gmail.com@gitlab.com':
remote: HTTP Basic: Access denied. If a password was provided for Git authentication, the password was incorrect or you're required to use a token instead of a password. If a token was provided, it was either incorrect, expired, or improperly scoped. See https://gitlab.com/help/topics/git/troubleshooting_git.md#error-on-git-fetch-http-basic-access-denied
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 260 bytes | 260.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: To create a merge request for master, visit:
remote: https://gitlab.com/devops1150250/My_GitLab_Project/-/merge_requests/new?merge_request%5Bsource_branch%5D=master
remote:
To https://gitlab.com/devops1150250/My_GitLab_Project.git
```

Go back to your GitLab project page in your browser.

Refresh the page, and you should see your files in the repository.

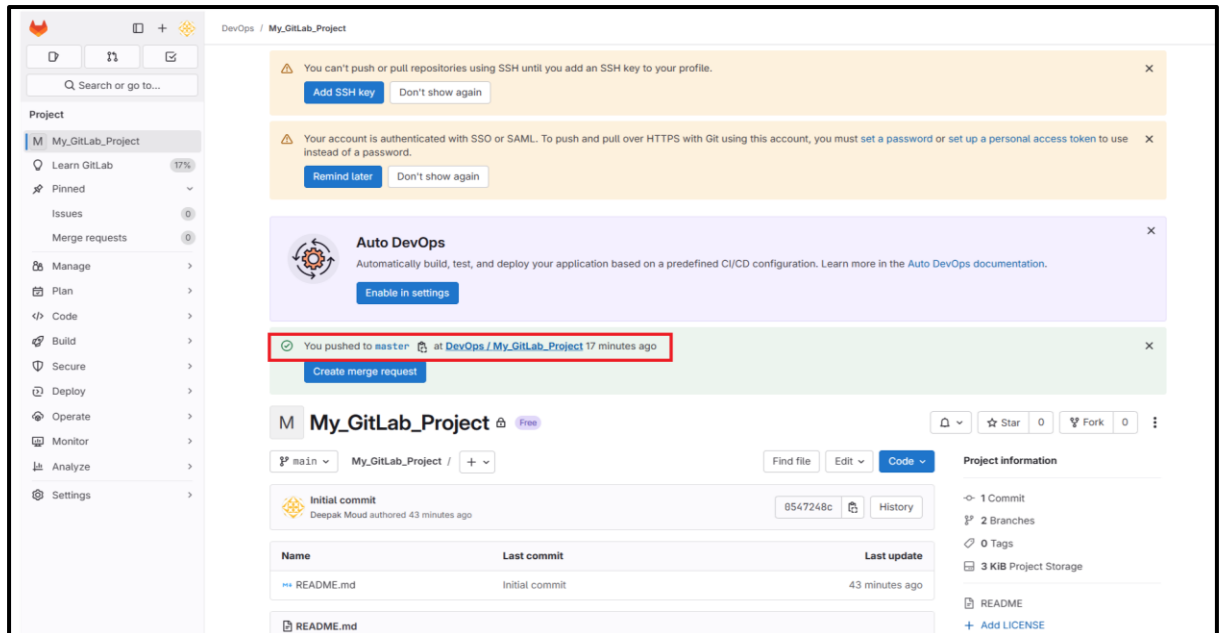

Activity 7: Create gitlab Repository

7.1 Prerequisite


Git lab account is created, Google Cloud Shell Editor is used on GCP

7.2 Scenario


steps to create an empty Git repository, clone it, work on it, and then push the changes back to GitLab:

7.3 Steps

1	- Log in to your GitLab account. - Go to your dashboard and click on the "New project" button.
---	--

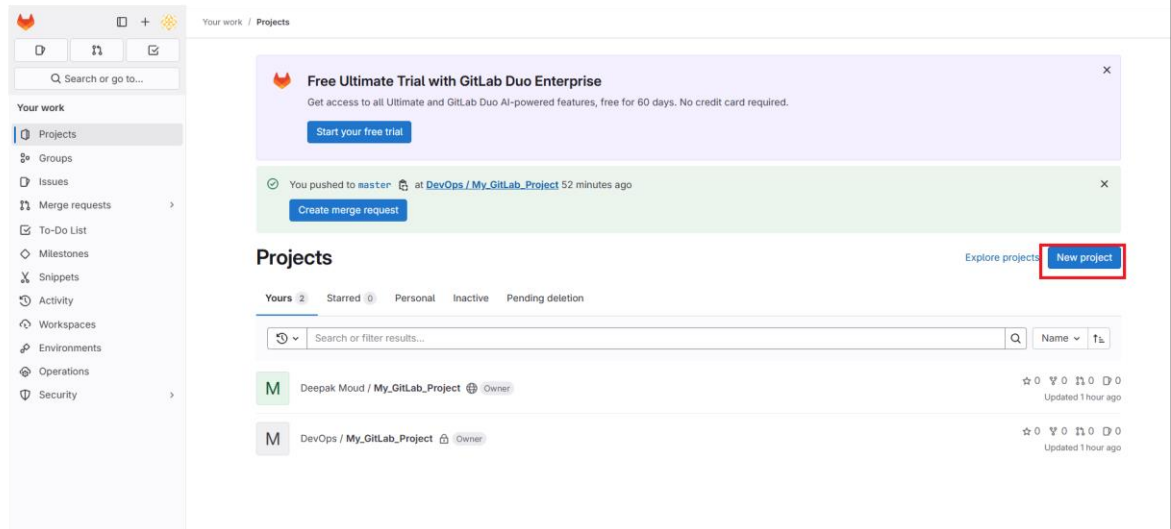

2 Click on Create New Project

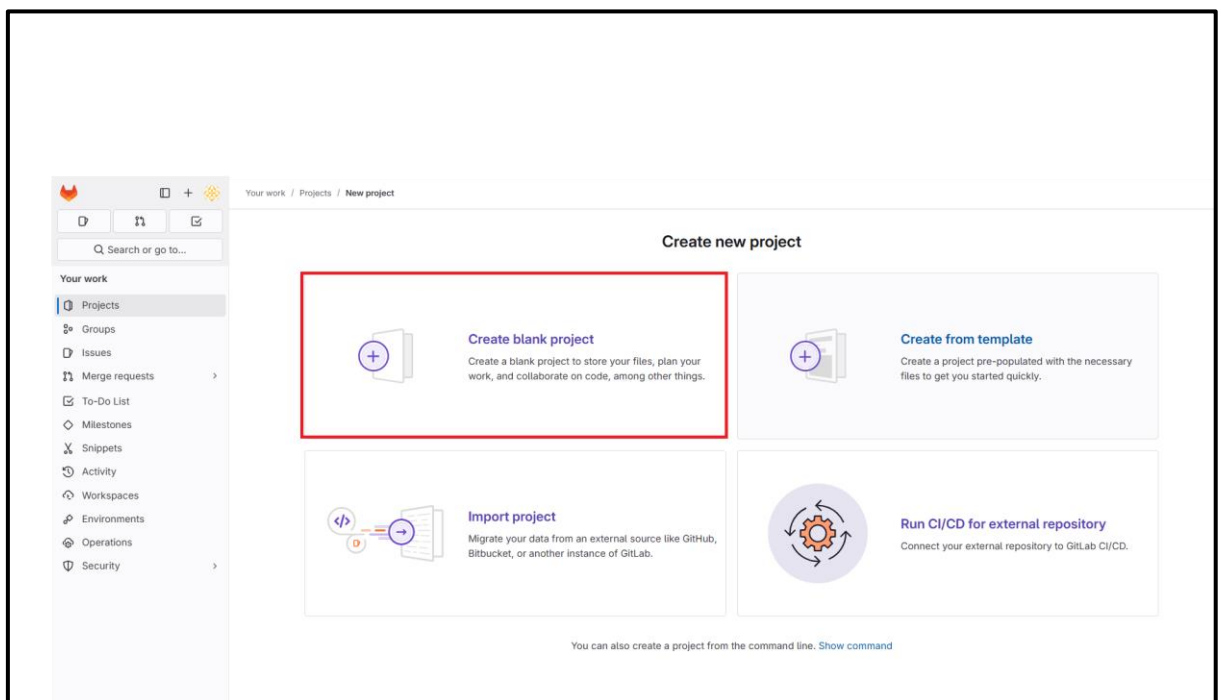

3 Choose the project visibility (Public, Private, or Internal).

Name your project (MyProject_ToClone), and click Create project

Your work / Projects / New project / Create blank project

Create blank project

Create a blank project to store your files, plan your work, and collaborate on code, among other things.

Project name
MyProject_ToClone
Must start with a lowercase or uppercase letter, digit, emoji, or underscore. Can also contain dots, pluses, dashes, or spaces.

Project URL
https://gitlab.com/devops1150250 / **Project slug**
myproject_toclone

Project deployment target (optional)
Select the deployment target

Visibility Level
☐ Private
Project access must be granted explicitly to each user. If this project is part of a group, access is granted to members of the group.
☐ Internal
The project can be accessed by any logged in user except external users.
☒ Public
The project can be accessed without any authentication.

Project Configuration
☒ Initialize repository with a README
Allows you to immediately clone this project's repository. Skip this if you plan to push up an existing repository.
☐ Enable Static Application Security Testing (SAST)
Analyze your source code for known security vulnerabilities. [Learn more.](#)

[Experimental settings](#)

Create project Cancel

5 My_GitLab_Project created

DevOps / MyProject_ToClone

Project "MyProject_ToClone" was successfully created.

MyProject_ToClone

main myproject_toclone / +

Find file Edit Code

Initial commit
Deepak Moud authored just now
72c87ef8 History

Name	Last commit	Last update
README.md	Initial commit	just now

README.md

MyProject_ToClone

Getting started

To make it easy for you to get started with GitLab, here's a list of recommended next steps.

Already a pro? Just edit this README.md and make it your own. Want to make it easy? [Use the template at the bottom!](#)

Add your files

☐ Create or upload files
☐ Add files using the command line or push an existing Git repository with the following command:

```
cd existing_repo
git remote add origin https://gitlab.com/devops1150250/myproject_toclone.git
git branch -M main
git push -uf origin main
```

Project information


- 1 Commit
- 1 Branch
- 0 Tags
- 3 KiB Project Storage

README

- [Add LICENSE](#)
- [Add CHANGELOG](#)
- [Add CONTRIBUTING](#)
- [Add Kubernetes cluster](#)
- [Set up CI/CD](#)
- [Add Wiki](#)
- [Configure Integrations](#)

Created on
December 13, 2024

6 Go to your project page on GitLab.
Copy the HTTPS URL of your GitLab repository

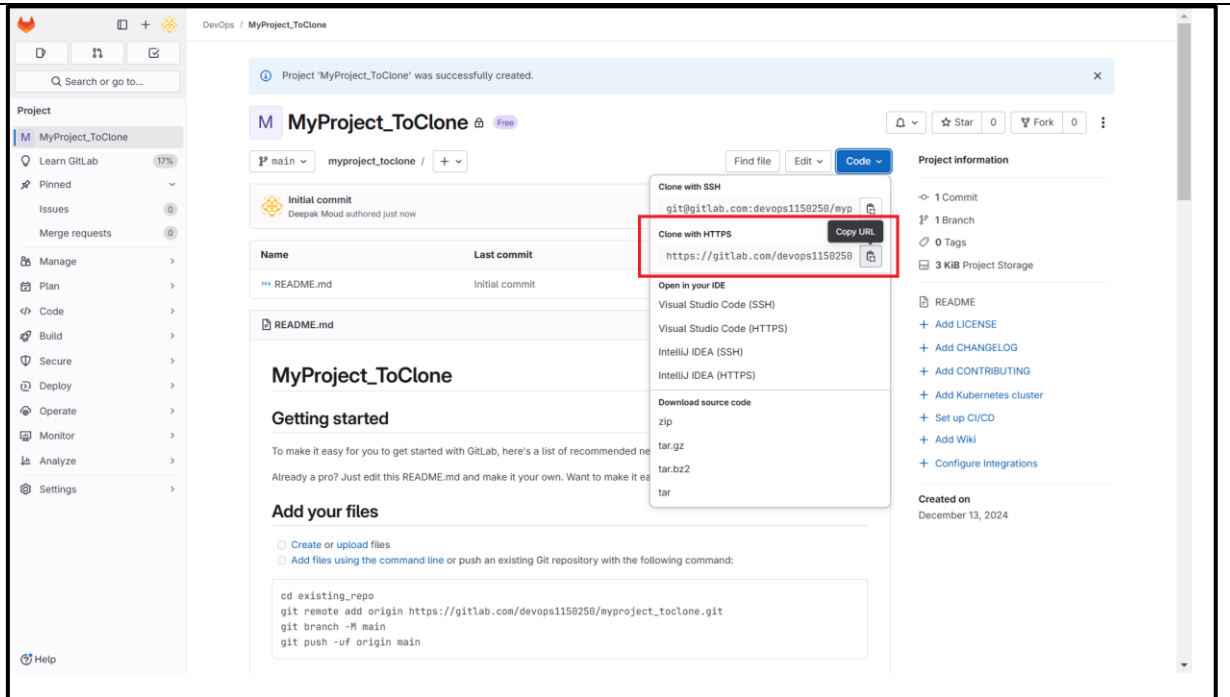

Open your terminal (or Git Bash) and run the following command to clone the repository:
 git clone https://gitlab.com/username/repository.git

```
deepakmouddevops@cloudshell:~$ git clone https://gitlab.com/devops1150250/myproject_toclone.git
Cloning into 'myproject_toclone'...
Username for 'https://gitlab.com': deepakdevops@gmail.com
Password for 'https://deepakdevops@gmail.com@gitlab.com':
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.
```

7


- Change into the project directory using command:
cd myproject_toclone
- Make Changes and Commit Locally Create or modify files as needed. Using commands:
touch file.txt
echo "Hello, GitLab!" > file.txt
- Add the file to the staging using command:
git add file.txt
- Commit the changes with a message:
git commit -m "file is added in repo"
- Push Changes Back to GitLab
- Push the changes to the GitLab repository using command:
git push origin main

```

deepakmouddevops@cloudshell:~$ cd myproject_toclone
deepakmouddevops@cloudshell:~/myproject_toclone$ touch file.txt
deepakmouddevops@cloudshell:~/myproject_toclone$ echo "it is file saved in directory" <file.txt
it is file saved in directory
deepakmouddevops@cloudshell:~/myproject_toclone$ git add file.txt
deepakmouddevops@cloudshell:~/myproject_toclone$ git commit -m "file is added in repo."
[main de3be57] file is added in repo.
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 file.txt
deepakmouddevops@cloudshell:~/myproject_toclone$ git push origin main
Username for 'https://gitlab.com': deepakmouddevops@gmail.com
Password for 'https://deepakmouddevops@gmail.com@gitlab.com':
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 4 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 288 bytes | 288.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://gitlab.com/devops1150250/myproject_toclone.git
 72c07ef..de3be57  main -> main
deepakmouddevops@cloudshell:~/myproject_toclone$

```

- Go back to your GitLab project page in your browser.
- Refresh the page, and you should see your files in the repository.

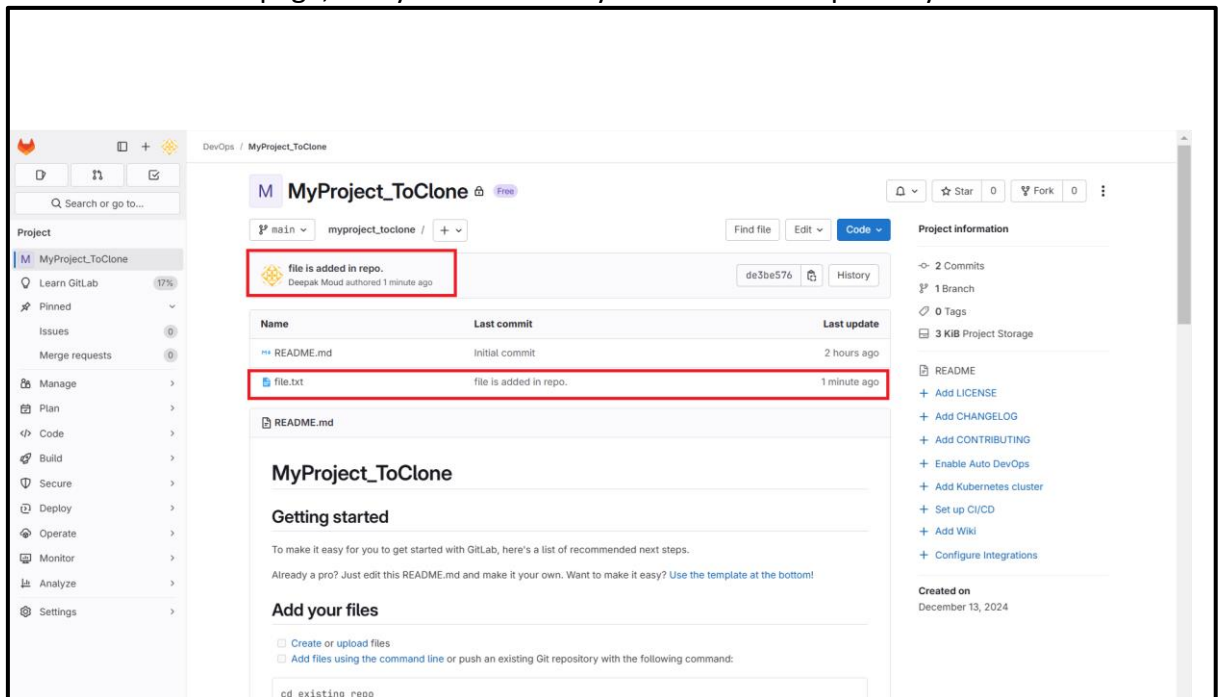

Activity 8: Make Changes into Remote Repository

8.1 Prerequisite

Git lab account is created, Google Cloud Shell Editor is used on GCP


8.2 Scenario

Make changes into remote repository, getting changes into local

8.3 Steps


1

- Log in to your GitLab account.
- Go to your dashboard and click on the MyProject_ToClone

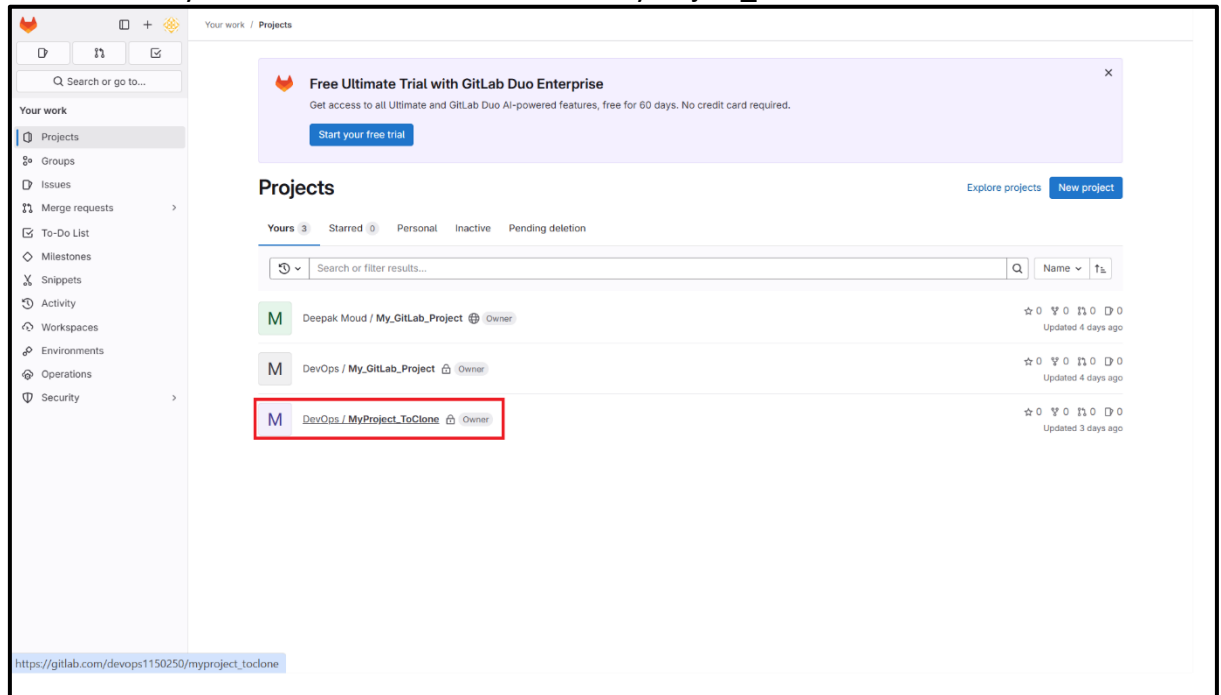

2

- Go to your project page on GitLab.
- Copy the HTTPS URL of your GitLab repository

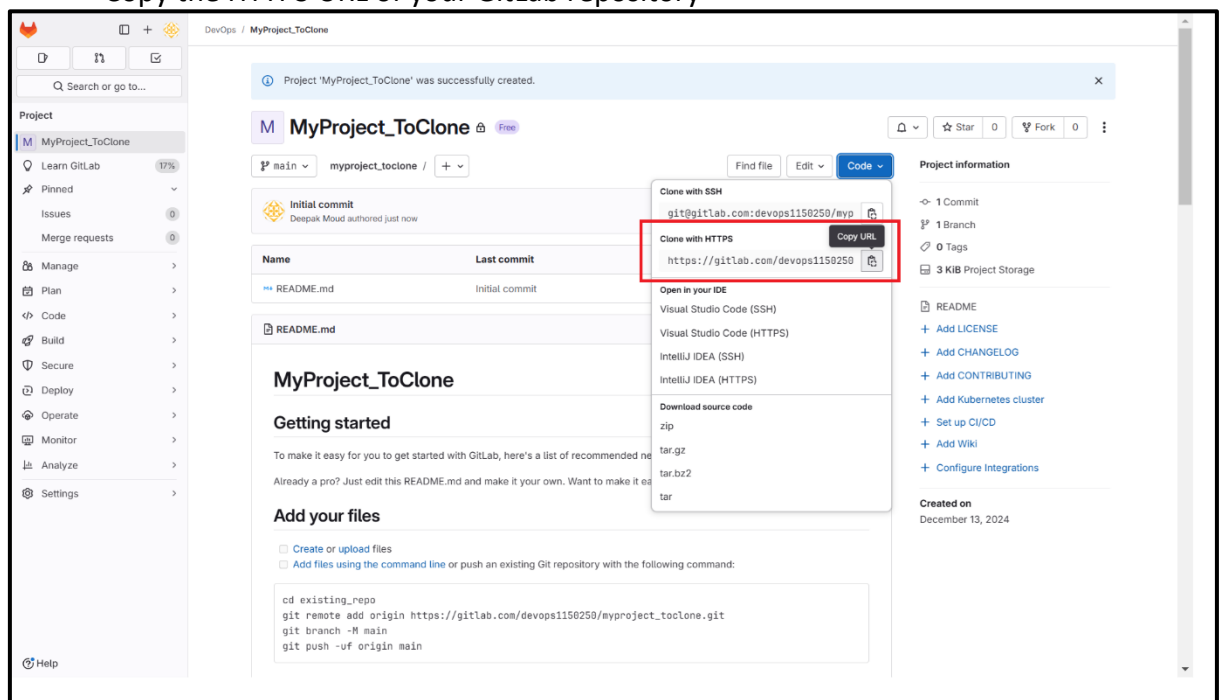

- Open your terminal (or Git Bash) and run the following command to clone the repository:
- `git clone https://gitlab.com/username/repository.git`

- After cloning, change the directory using command: `cd repository`
- To verify the remote repository URL, use the command: `git remote -v`

```


Welcome to Cloud Shell! Type "help" to get started.
Your Cloud Platform project in this session is set to bold-flash-443906-f4.
Use "gcloud config set project [PROJECT_ID]" to change to a different project.
deepakmouddevops@cloudshell:~ (bold-flash-443906-f4) $ git clone https://gitlab.com/devops1150250/myproject_toclone.git
fatal: destination path 'myproject_toclone' already exists and is not an empty directory.
deepakmouddevops@cloudshell:~ (bold-flash-443906-f4) $ cd myproject_toclone
deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4) $ git remote -v
origin https://gitlab.com/devops1150250/myproject_toclone.git (fetch)
origin https://gitlab.com/devops1150250/myproject_toclone.git (push)
deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4) $

```


7 Create new file in remote repository.

The screenshot shows the GitLab web interface for a repository named 'MyProject_ToClone'. The 'main' branch is selected. A dropdown menu is open, showing options: 'New file', 'Upload file', 'New directory', 'This repository', 'New branch', and 'New tag'. The 'New file' option is highlighted. Below the dropdown, the repository page is visible, showing the README.md file and the 'Getting started' section.



New file is created in main branch

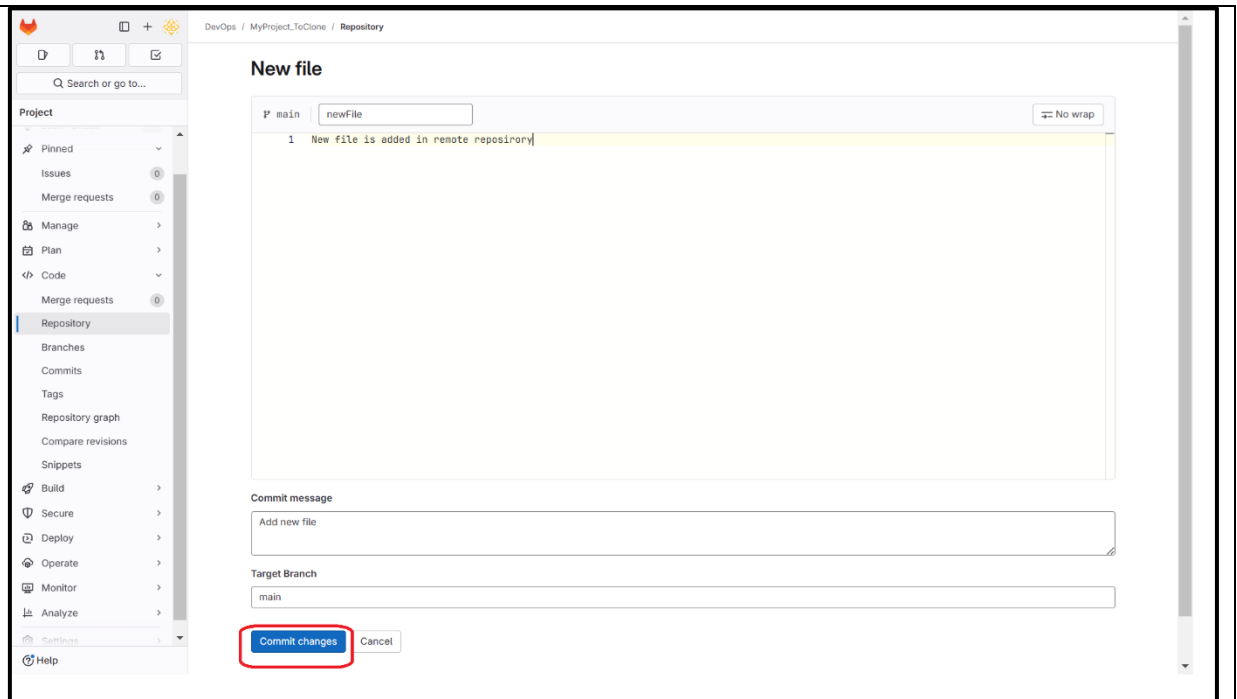

New File is created in main branch remote repository

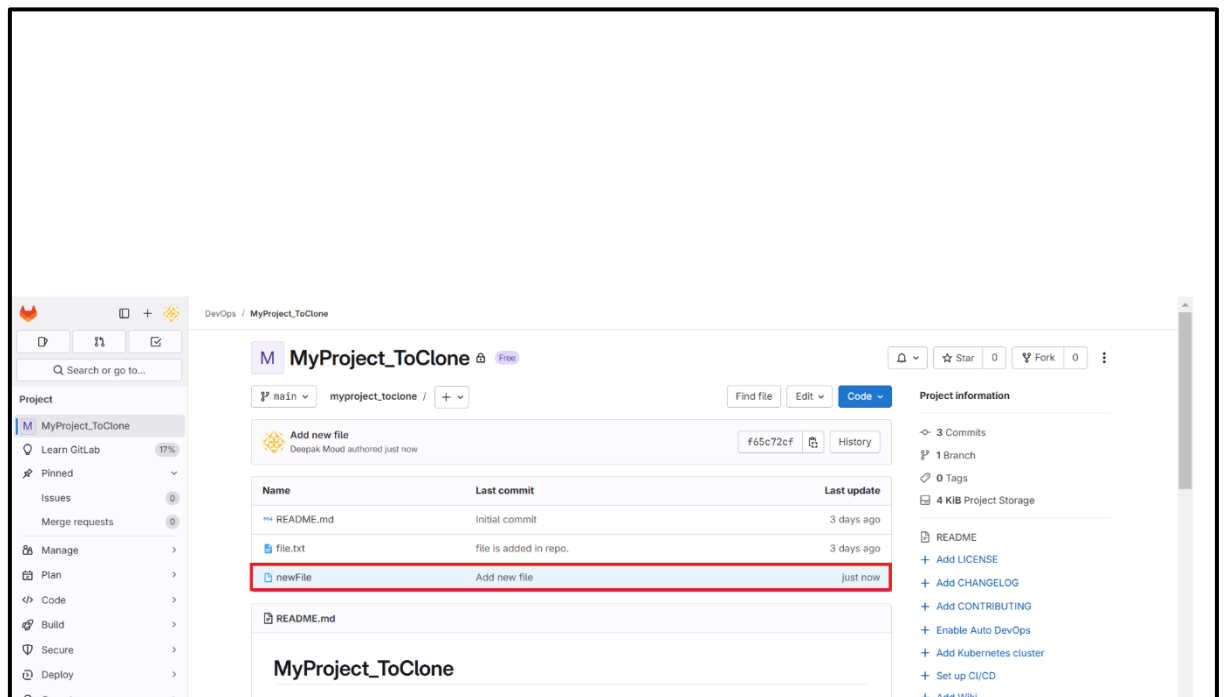

- Fetch and Merge Remote Changes (To Sync with Remote Repository)
- downloads objects and refs from the remote repository without modifying your working directory.using command: *git fetch origin*
- After fetching, you can see the new commits with command: *git log origin/main*

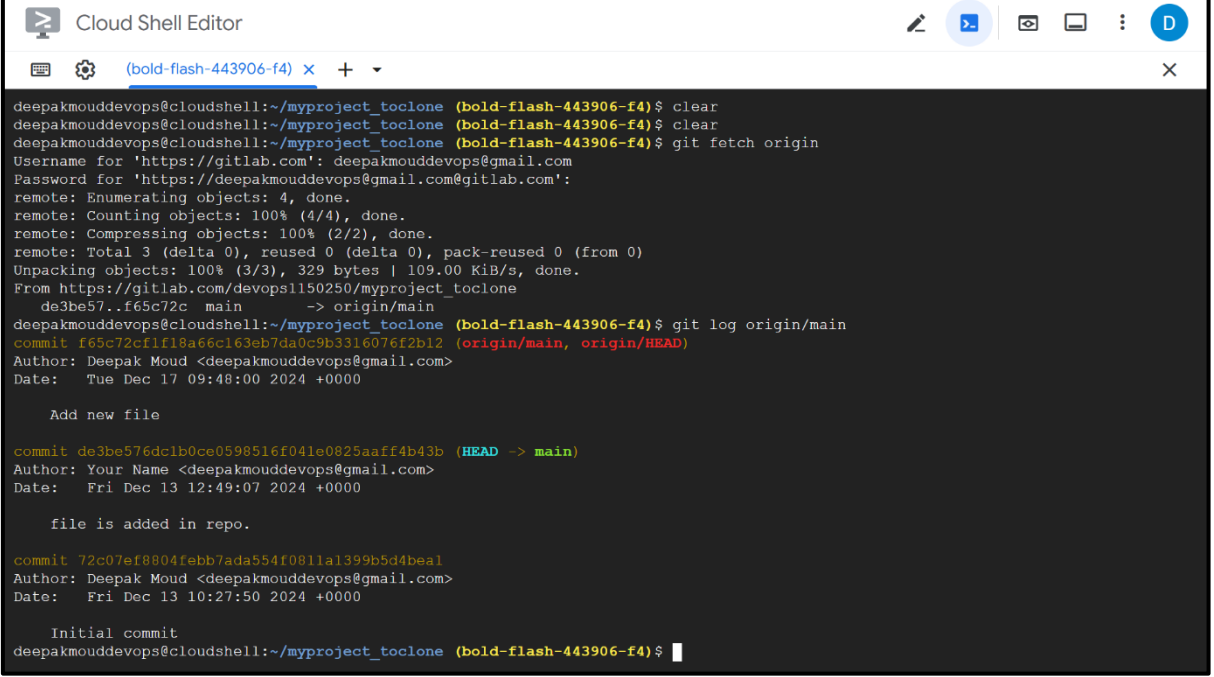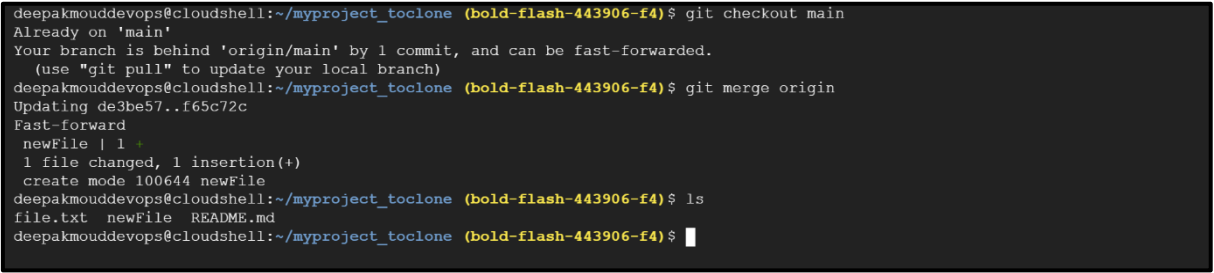	 <pre> Cloud Shell Editor (bold-flash-443906-f4) x + deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4)\$ clear deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4)\$ clear deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4)\$ git fetch origin Username for 'https://gitlab.com': deepakmouddevops@gmail.com Password for 'https://deepakmouddevops@gmail.com@gitlab.com': remote: Enumerating objects: 4, done. remote: Counting objects: 100% (4/4), done. remote: Compressing objects: 100% (2/2), done. remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0) Unpacking objects: 100% (3/3), 329 bytes 109.00 KiB/s, done. From https://gitlab.com/devops1150250/myproject_toclone de3be57..f65c72c main -> origin/main deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4)\$ git log origin/main commit f65c72cf1f18a66c163eb7da0c9b3316076f2b12 (origin/main, origin/HEAD) Author: Deepak Moud <deepakmouddevops@gmail.com> Date: Tue Dec 17 09:48:00 2024 +0000 Add new file commit de3be576dc1b0ce0598516f041e0825aaff4b43b (HEAD -> main) Author: Your Name <deepakmouddevops@gmail.com> Date: Fri Dec 13 12:49:07 2024 +0000 file is added in repo. commit 72c07ef8804febb7ada554f0811a1399b5d4bea1 Author: Deepak Moud <deepakmouddevops@gmail.com> Date: Fri Dec 13 10:27:50 2024 +0000 Initial commit deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4)\$ </pre>
	• Change branch to main using command: <i>git checkout main</i> • merge the remote changes into local branch, use command: <i>git merge origin/main</i> • newFile is added in local repository.  <pre> deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4)\$ git checkout main Already on 'main' Your branch is behind 'origin/main' by 1 commit, and can be fast-forwarded. (use "git pull" to update your local branch) deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4)\$ git merge origin Updating de3be57..f65c72c Fast-forward newFile 1 + 1 file changed, 1 insertion(+) create mode 100644 newFile deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4)\$ ls file.txt newFile README.md deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4)\$ </pre>
	• Alternatively, instead of git fetch and <i>git merge</i>. The git pull command is a combination of git fetch and git merge. It fetches the changes from the remote repository and directly merges them into current branch.  <pre> Cloud Shell Editor (bold-flash-443906-f4) x + deepakmouddevops@cloudshell:~/myproject_toclone (bold-flash-443906-f4)\$ git pull origin main </pre>

Activity 9: Pull Request

9.1 Prerequisite

Git lab account is created, Google Cloud Shell Editor is used on GCP


9.2 Scenario

Working on feature branch. Wants to create a **pull request** to propose merging changes into main branch

9.3 Steps


1

- Log in to your GitLab account.
- Go to your dashboard and click on the **"New project"** button.

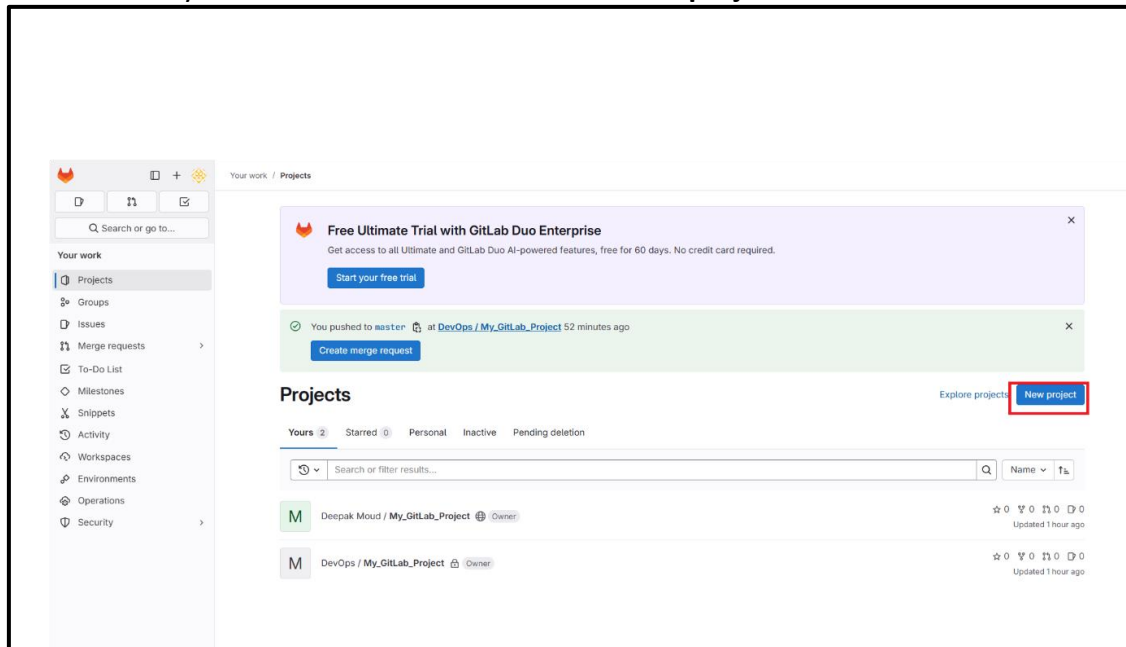


2


Click on Create New Project

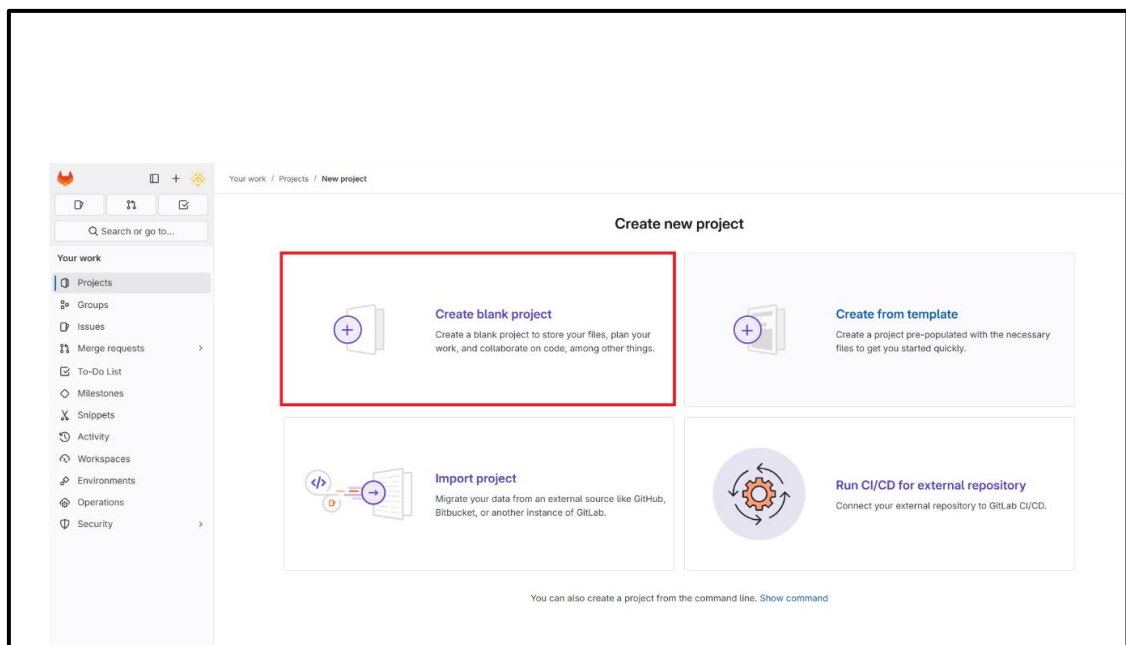

My_PullRequest_Project is created

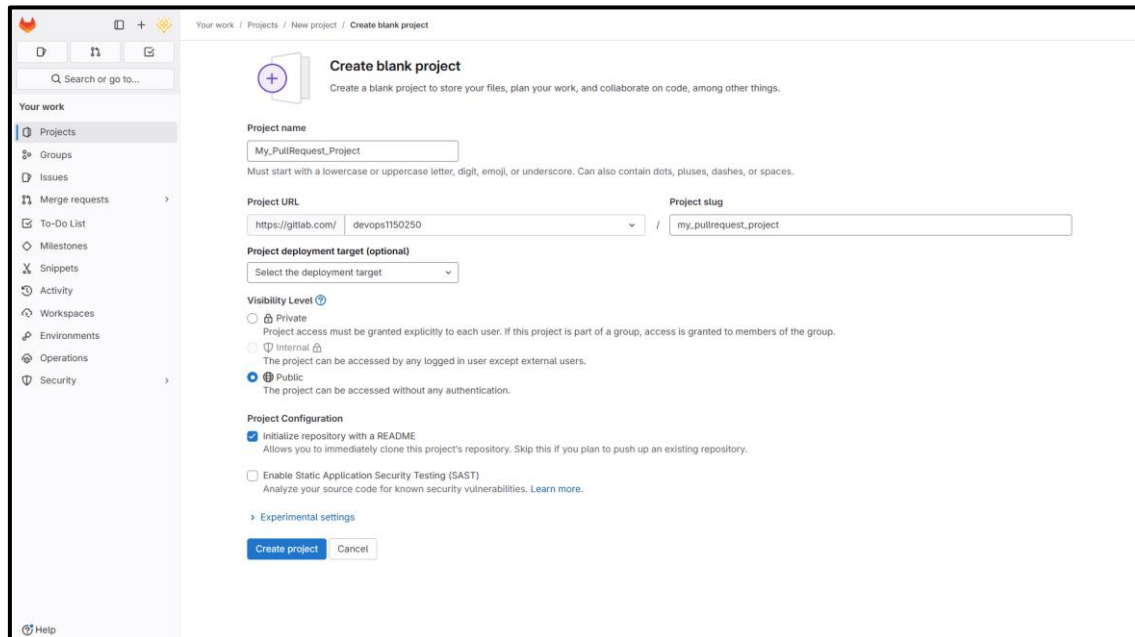

Go to your project page on GitLab.
Copy the HTTPS URL of your GitLab repository

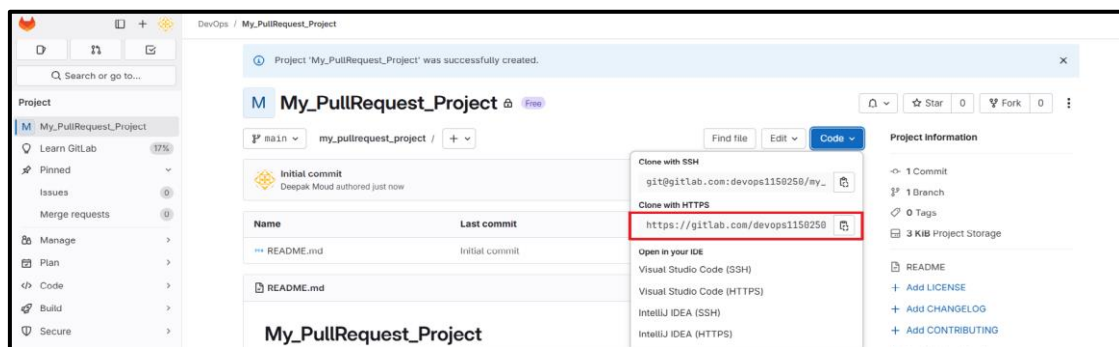


- Open your terminal (or Git Bash) and run the following command to clone the repository:
git clone https://gitlab.com/yourusername/your-repository.git cd your-repository
- Change into the project directory using command:
cd repository
- Create new branch and locate it.
git checkout -b feature-branch
- create new file and add content init.
touch file.txt
echo "file is added in feature-branch"> file.txt
- Add the file to the staging using command:
git add file.txt
- commit the file using message:
git commit -m "file is added in feature-branch"
- push it to remote repository in newly created branch:
git push origin feature-branch

Cloud Shell Editor


cloudshell x +

Welcome to Cloud Shell! Type "help" to get started.
To set your Cloud Platform project in this session use "gcloud config set project [PROJECT_ID]"
deepakmouddevops@cloudshell:~\$ git clone https://gitlab.com/devops1150250/my_pullrequest_project.git
Cloning into 'my_pullrequest_project'...
Username for 'https://gitlab.com': deepakmouddevops@gmail.com
Password for 'https://deepakmouddevops@gmail.com@gitlab.com':
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.
deepakmouddevops@cloudshell:~\$ cd my_pullrequest_project
deepakmouddevops@cloudshell:~/my_pullrequest_project\$ git checkout -b feature-branch
Switched to a new branch 'feature-branch'
deepakmouddevops@cloudshell:~/my_pullrequest_project\$ touch file.txt
deepakmouddevops@cloudshell:~/my_pullrequest_project\$ echo "it is file in feature-branch" > file.txt
it is file in feature-branch
deepakmouddevops@cloudshell:~/my_pullrequest_project\$ git add file.txt
deepakmouddevops@cloudshell:~/my_pullrequest_project\$ git commit -m "file is added in feature-branch"
[feature-branch bff7ab3] file is added in feature-branch
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 file.txt
deepakmouddevops@cloudshell:~/my_pullrequest_project\$ git push origin feature-branch
Username for 'https://gitlab.com': deepakmouddevops@gmail.com
Password for 'https://deepakmouddevops@gmail.com@gitlab.com':
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 4 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 295 bytes | 295.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0


- Go to your GitLab repository in a web browser.
- Create Merge Request after pushing a new branch is visible. Click on it.

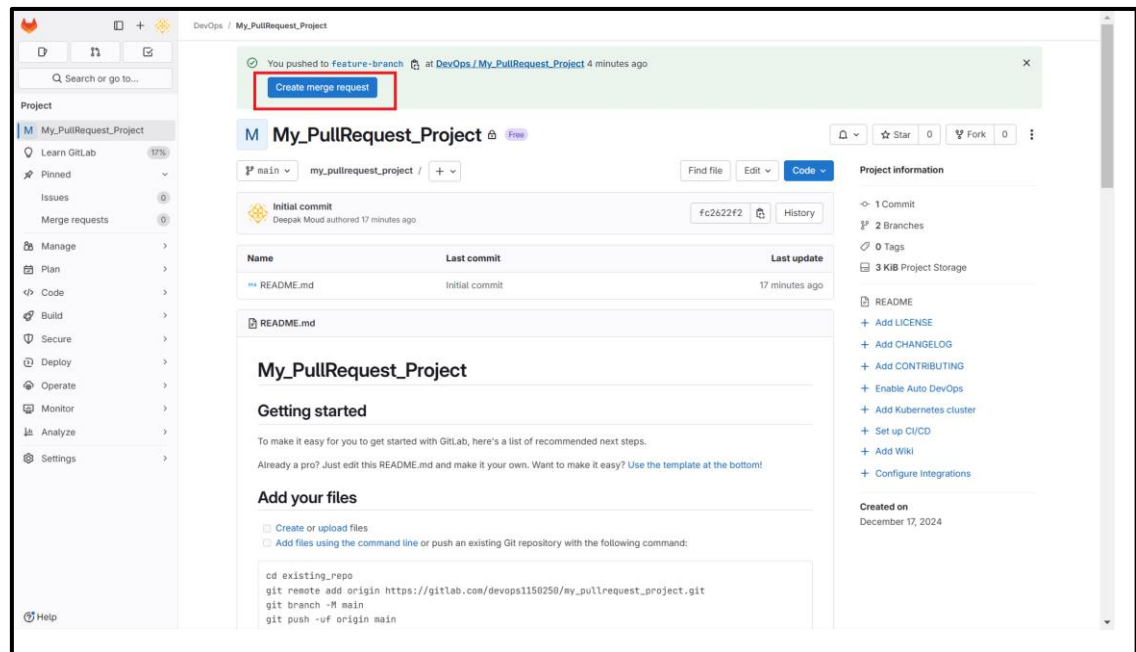


- Fill in the **title** and **description** of the Merge Request. Provide clear details about what changes you've made.
- **Submit** the Merge Request by clicking **Create Merge Request**.

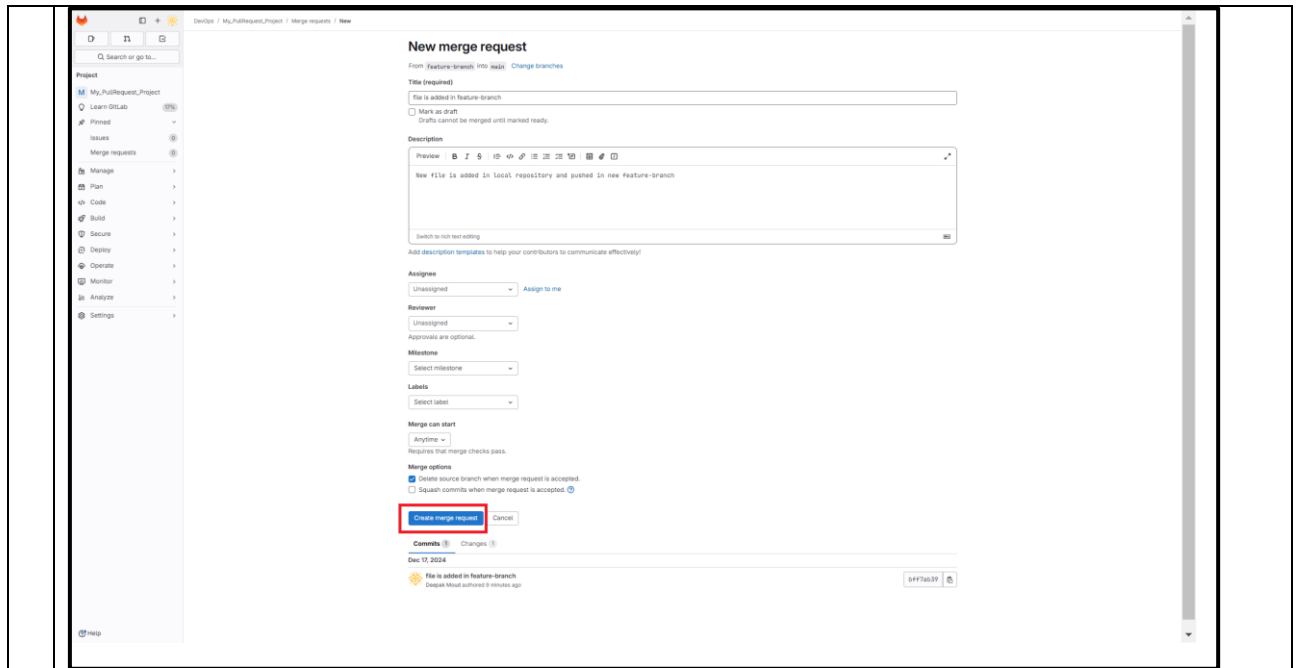

Click on merge

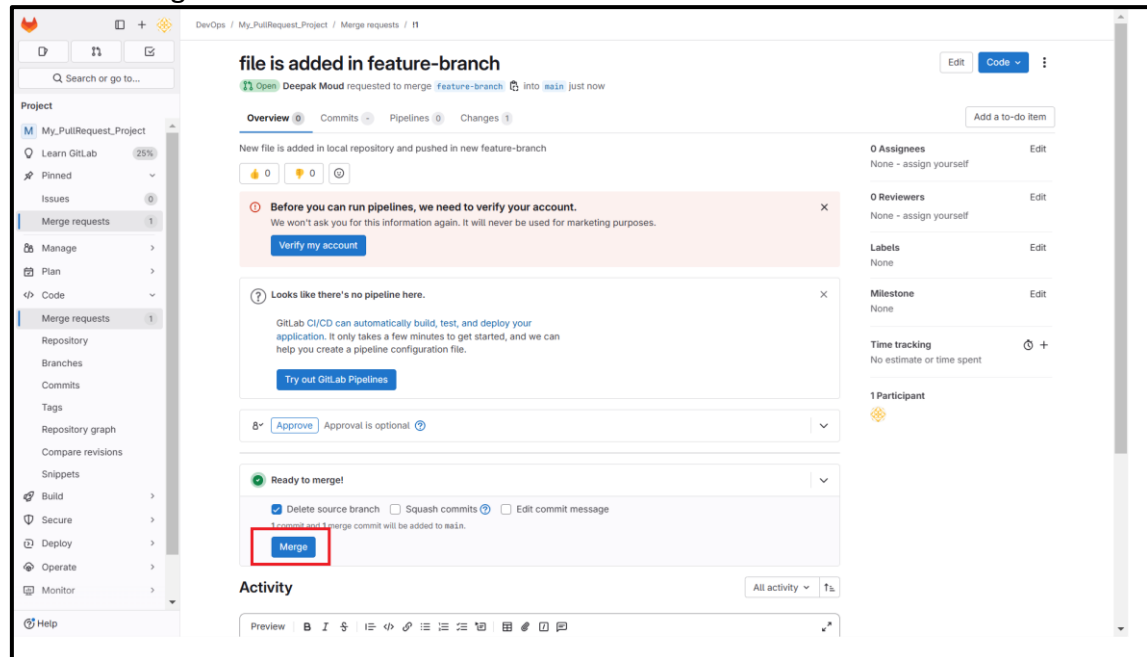

file.txt file is merged in main branch and feature branch is deleted

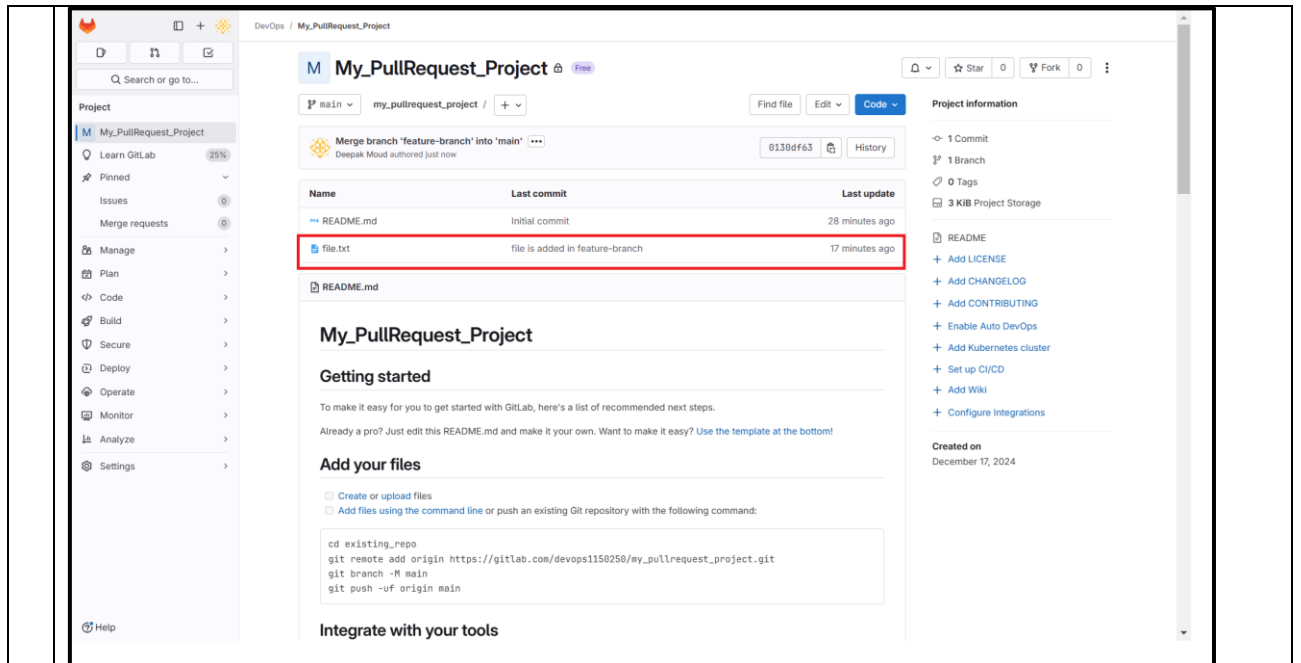

Activity 10: Git Tags

10.1 Prerequisite

Git lab account is created, Google Cloud Shell Editor is used on GCP


10.2 Scenario

Application is ready to release. Can mark release using git tag

10.3 Steps

1	- Log in to your GitLab account. - Click on project easily
---	---

- Copy the clone URL (HTTPS) from the GitLab repository page`

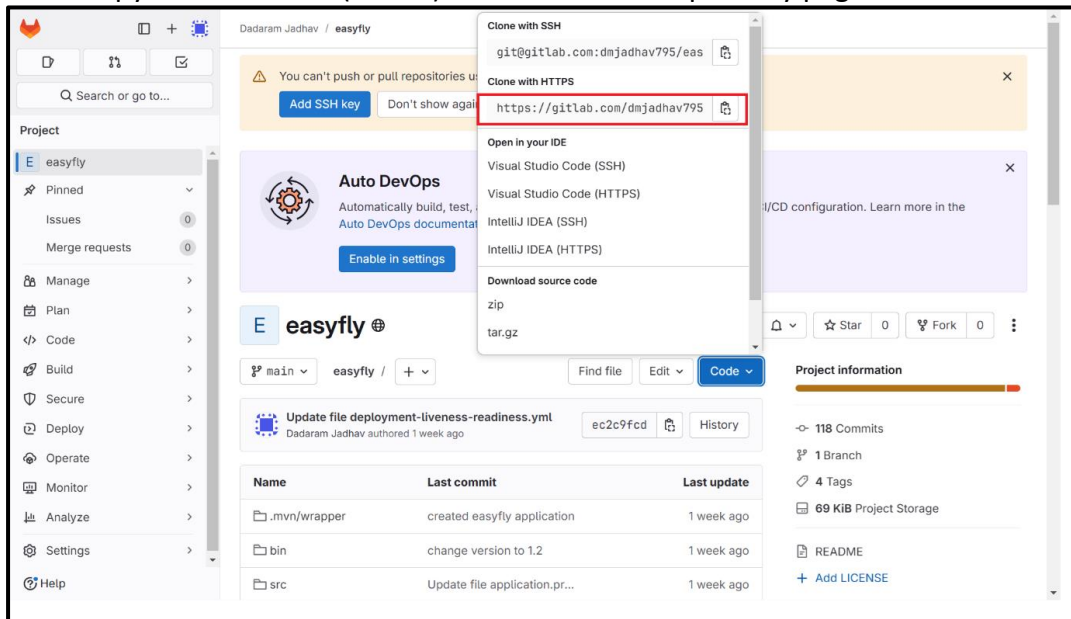

- 2 run the command to clone the repository: `git clone https://gitlab.com/dmjadhav795/easyfly.git`

```
Cloud Shell Editor
(bold-flash-443906-f4) X +
dmgcp125@cloudshell:~/easyfly (bold-flash-443906-f4) $ clear
dmgcp125@cloudshell:~/easyfly (bold-flash-443906-f4) $ git clone https://gitlab.com/dmjadhav795/easyfly.git
Cloning into 'easyfly'...
remote: Enumerating objects: 537, done.
remote: Counting objects: 100% (450/450), done.
remote: Compressing objects: 100% (426/426), done.
remote: Total 537 (delta 227), reused 0 (delta 0), pack-reused 87 (from 1)
Receiving objects: 100% (537/537), 72.50 KiB | 9.06 MiB/s, done.
Resolving deltas: 100% (245/245), done.
```

- Change into project directory using command:
`cd easyfly`
- list all the tags that are associated with the project using the following command:
`git tag`
- If you do not see any tags wants to ensure that you have latest tags from remote, can run this command:
`git fetch --tags`

```
dmgcp125@cloudshell:~/easyfly (bold-flash-443906-f4) $ cd easyfly
dmgcp125@cloudshell:~/easyfly/easyfly (bold-flash-443906-f4) $ git tag
v1.1
v1.2
v1.3
v1.4
dmgcp125@cloudshell:~/easyfly/easyfly (bold-flash-443906-f4) $ git fetch --tags
dmgcp125@cloudshell:~/easyfly/easyfly (bold-flash-443906-f4) $ git tag v1.5
```

Push repository to remote with tag using command: `git push origin tag v1.5`

```
dmgcp125@cloudshell:~/easyfly/easyfly (bold-flash-443906-f4) $ git push origin tag v1.5
Username for 'https://gitlab.com': dmjadhav795
Password for 'https://dmjadhav795@gitlab.com':
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0
To https://gitlab.com/dmjadhav795/easyfly.git
 * [new tag]          v1.5 -> v1.5
dmgcp125@cloudshell:~/easyfly/easyfly (bold-flash-443906-f4) $
```

New tag is created

Search or go to...

Project

easyfly

Pinned

Issues

Merge requests

Manage

Plan

Code

Build

Secure

Deploy

Operate

Monitor

Analyze

Settings

Help

Auto DevOps

Automatically build, test, and deploy your application based on a predefined CI/CD configuration. Learn more in the [Auto DevOps documentation](#).

Enable in settings

E

easyfly

main

easyfly

+

Find file

Edit

Code

Update file deployment-liveness-readiness.yml

ec2c9fcd

History

Dadaram Jadhav authored 1 week ago

Name	Last commit	Last update
.mvn/wrapper	created easyfly application	1 week ago
bin	change version to 1.2	1 week ago
src	Update file application.pr...	1 week ago
.gitattributes	created easyfly application	1 week ago
.gitignore	created easyfly application	1 week ago

Project information

118 Commits

1 Branch

5 Tags

69 KiB Project Storage

README

Add LICENSE

Add CHANGELOG

Add CONTRIBUTING

Add Kubernetes cluster

New tag is visible in Tags

Search or go to...

Project

Code

Merge requests

Repository

Branches

Commits

Tags

Repository graph

Compare revisions

Snippets

Build

Secure

Deploy

Operate

Monitor

Analyze

Help

Tags

New tag

Tags give the ability to mark specific points in history as being important

Filter by tag name

Updated date

v1.3

ec2c9fcd · Update file deployment-liveness-readiness.yml · 1 week ago

Create release

v1.4

ec2c9fcd · Update file deployment-liveness-readiness.yml · 1 week ago

Create release

v1.5

ec2c9fcd · Update file deployment-liveness-readiness.yml · 1 week ago

Create release

v1.2

0f9bb1e9 · change version to 1.2 · 1 week ago

Create release

v1.1

3491e471 · added unit and integration test · 1 week ago

Create release