



MCP


Connect with Jira MCP server and do some action on Jira MCP server

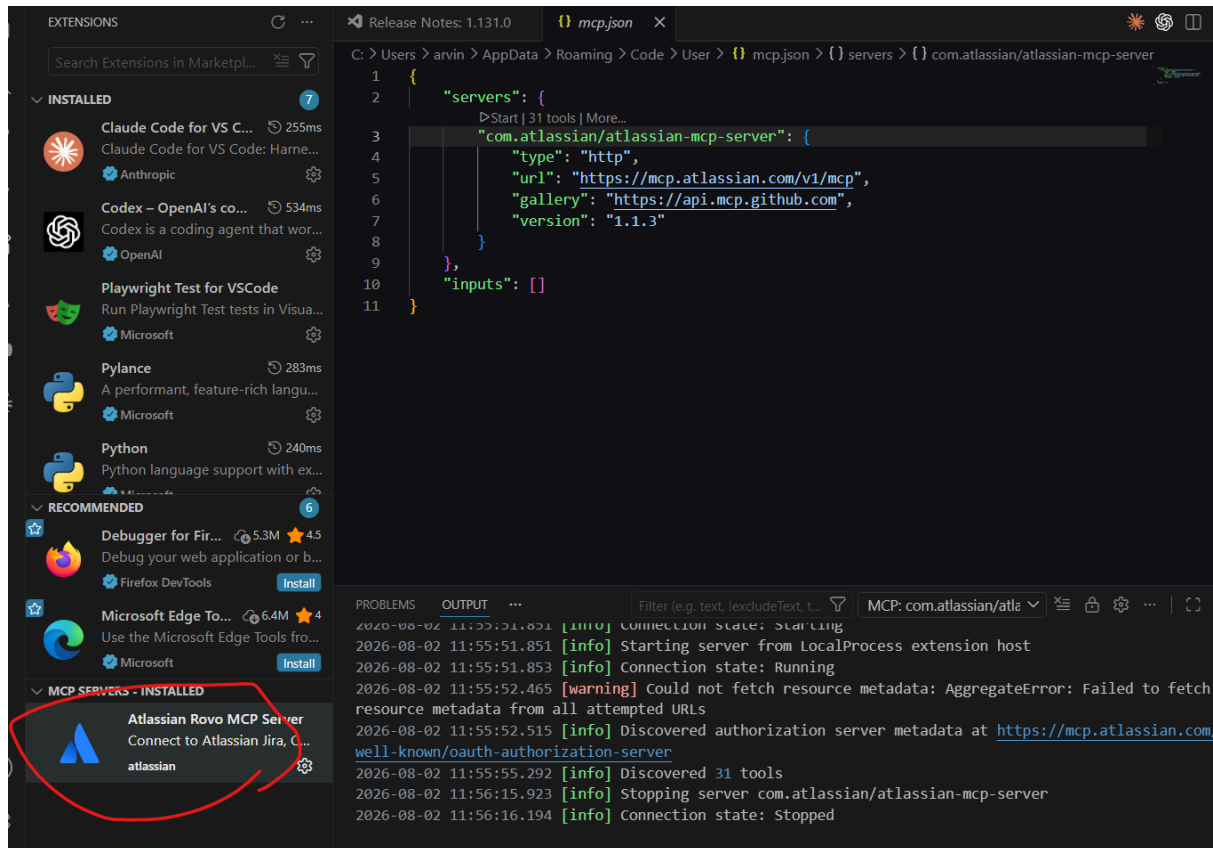

Prompt: List all Jira projects available through the Atlassian MCP server.

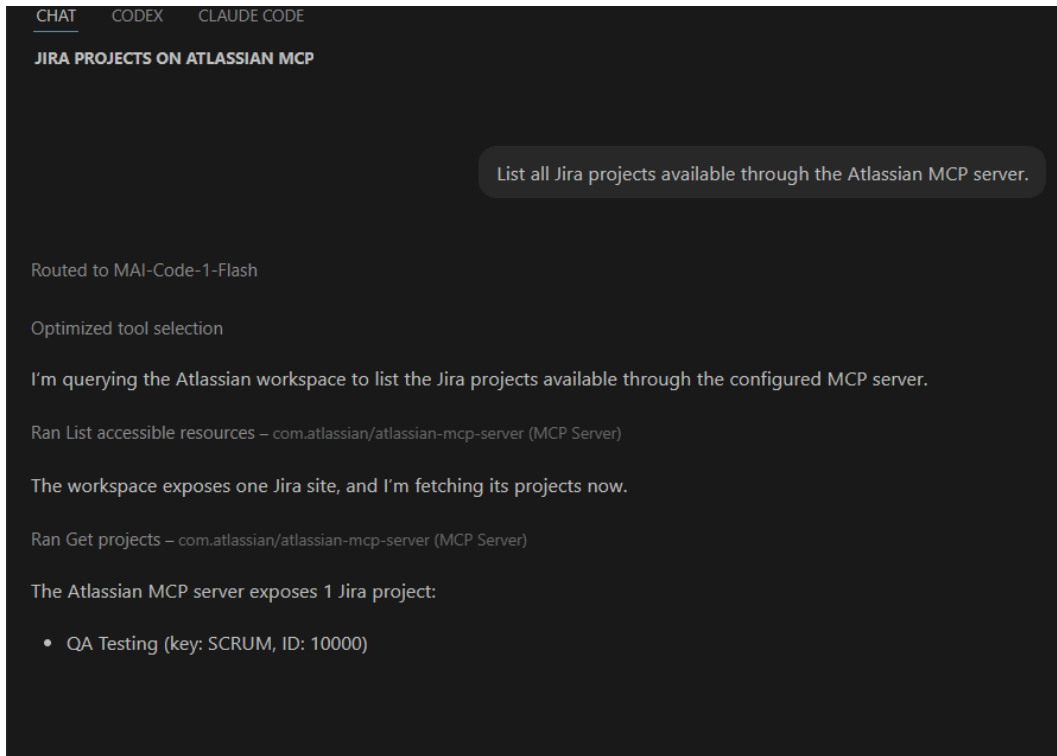

Prompt: Search for the issue SCRUM-1 using the Atlassian MCP server.

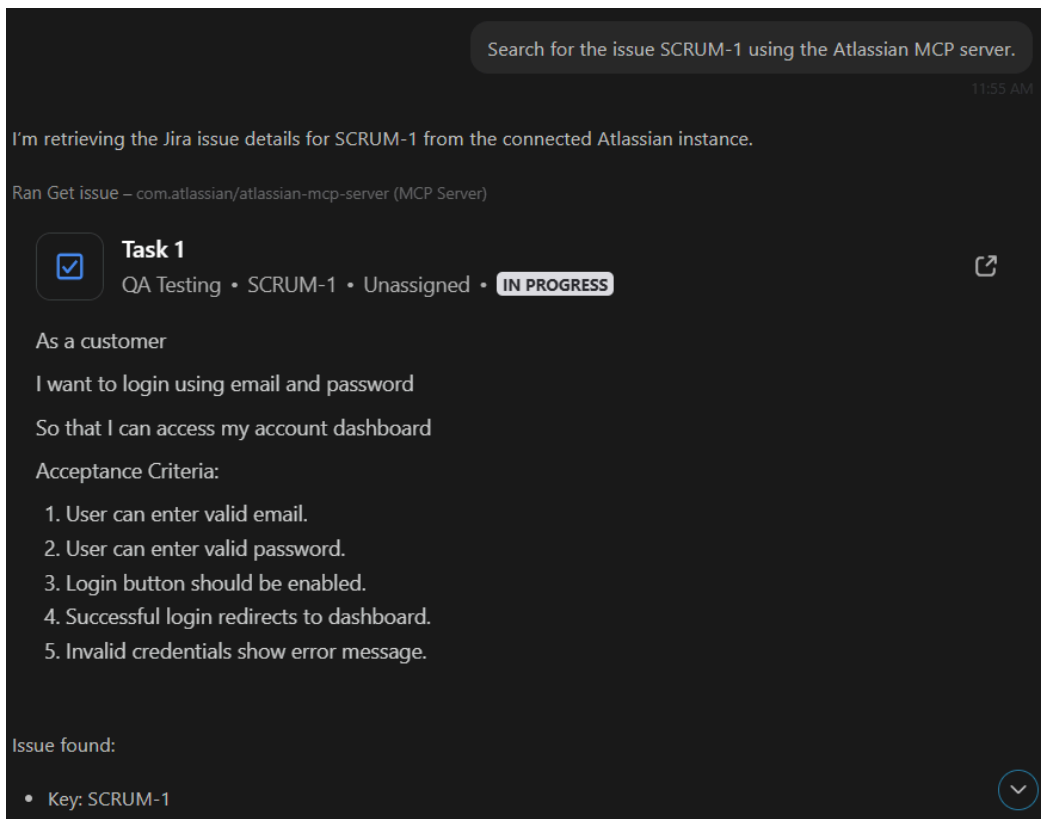

As a customer:

I want to login using email and password

So that I can access my account dashboard

Acceptance Criteria:


1. User can enter valid email.
2. User can enter valid password.
3. Login button should be enabled.
4. Successful login redirects to dashboard.
5. Invalid credentials show error message.

Issue found:

- Key: SCRUM-1
- Summary: Task 1
- Type: Task
- Status: In Progress
- Project: QA Testing (SCRUM)
- Reporter: Arvind Muraleetharan
- Assignee: Unassigned

Description:

- "As a customer ... login using email and password ..."



Prompt: List the last 5 issues from my QA Testing project.

JIRA PROJECTS ON ATlassian MCP

List the last 5 issues from my QA Testing project.

12:02 PM

I'm pulling the most recent issues from the QA Testing project so I can list the latest five.

Ran Search with JQL – com.atlassian/atlassian-mcp-server (MCP Server)

-  **New**
QA Testing • SCRUM-8 • Unassigned • **IN PROGRESS** 
-  **Customer Account Management**
QA Testing • SCRUM-7 • Unassigned • **IN PROGRESS** 
-  **MCP Sample Sprint 1**
QA Testing • SCRUM-6 • Unassigned • **IN PROGRESS** 
-  **User Registration**
QA Testing • SCRUM-5 • Unassigned • **IN PROGRESS** 
-  **Subtask 2.1**
QA Testing • SCRUM-4 • Unassigned • **IN PROGRESS** 

The results are available, and I'm reading them to summarize the latest issues clearly.



JIRA PROJECTS ON ATLIASSIAN MCP

The results are available, and I'm reading them to summarize the latest issues clearly.

Read `content.json`, lines 1 to 250

Here are the last 5 issues from the QA Testing project:

1. SCRUM-8 — New
 - Type: Task
 - Status: In Progress
 - Created: 2026-08-02
2. SCRUM-7 — Customer Account Management
 - Type: Epic
 - Status: In Progress
 - Created: 2026-08-02
3. SCRUM-6 — MCP Sample Sprint 1
 - Type: Task
 - Status: In Progress
 - Created: 2026-08-02
4. SCRUM-5 — User Registration
 - Type: Task
 - Status: In Progress
 - Created: 2026-06-05
5. SCRUM-4 — Subtask 2.1
 - Type: Subtask
 - Status: In Progress

Prompt: Fetch userstories and give 2 testcases for user stories

JIRA PROJECTS ON ATlassian MCP

Fetch userstories and give 2 testcases for user stories

I'm pulling the user-story issues from the Jira project and will turn them into concise test cases.

Ran Search with JQL – com.atlassian/atlassian-mcp-server (MCP Server)



Task 2

QA Testing • SCRUM-2 • Unassigned • **IN REVIEW**



As a customer
I want to search products
So that I can find products quickly

Acceptance Criteria:


1. Search box should be visible.
2. Search should return matching products.
3. No results message should be displayed when no products match.

User stories found


I found 1 user story in the QA Testing project:

- SCRUM-2 — Task 2
 - As a customer, I want to search products, so that I can find products quickly.




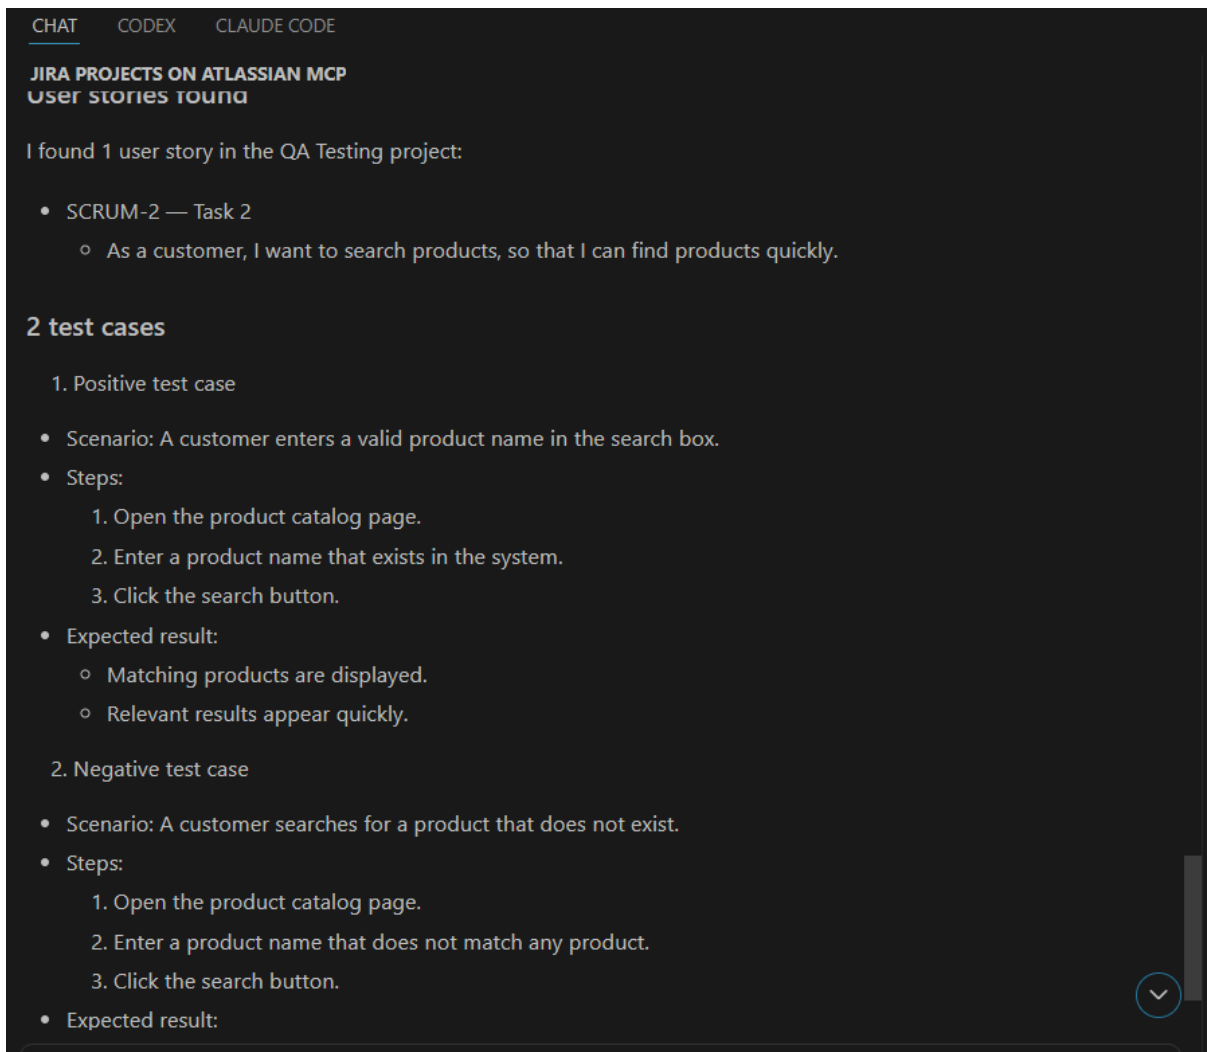


Connect with Postman MCP server and do some action on Postman MCP server

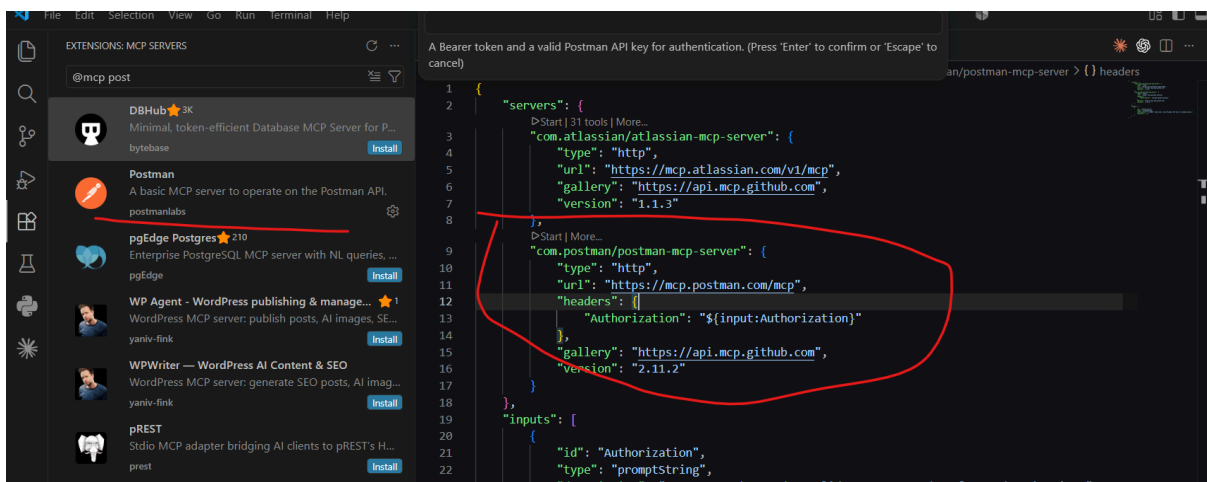

Local PostMan Configuration: taken from file given and pasted it in MCp.json

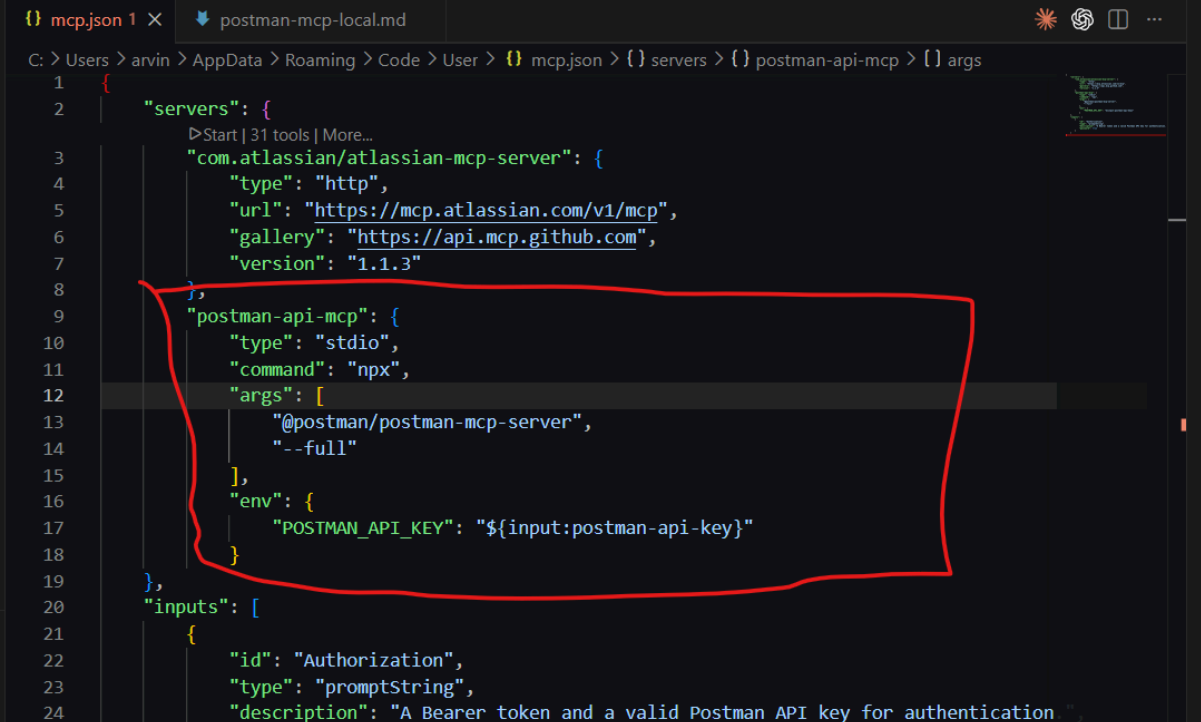


```
1 {
2   "servers": {
3     "com.atlassian/atlassian-mcp-server": {
4       "type": "http",
5       "url": "https://mcp.atlassian.com/v1/mcp",
6       "gallery": "https://api.mcp.github.com",
7       "version": "1.1.3"
8     },
9     "postman-api-mcp": {
10      "type": "stdio",
11      "command": "npx",
12      "args": [
13        "@postman/postman-mcp-server",
14        "--full"
15      ],
16      "env": {
17        "POSTMAN_API_KEY": "${input:postman-api-key}"
18      }
19    },
20    "inputs": [
21      {
22        "id": "Authorization",
23        "type": "promptString",
24        "description": "A Bearer token and a valid Postman API key for authentication "
```

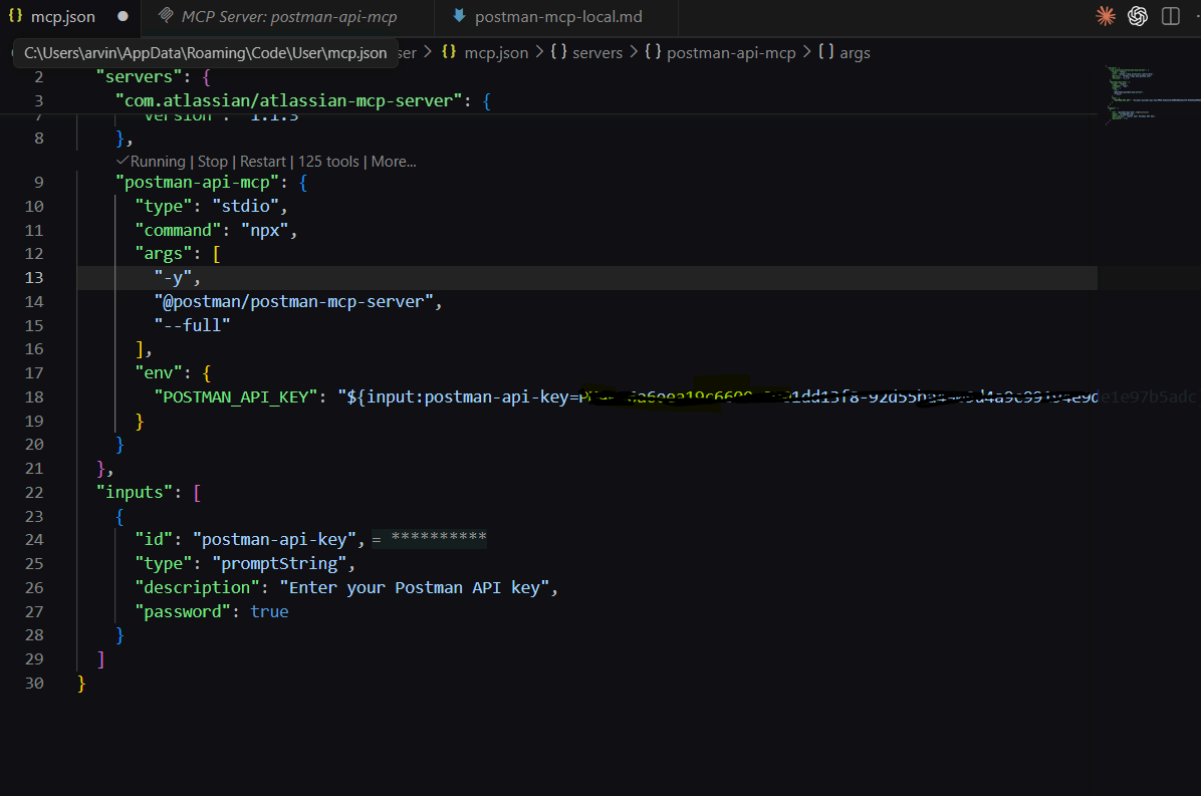


```
1 mcp.json MCP Server: postman-api-mcp postman-mcp-local.md
2 "servers": {
3   "com.atlassian/atlassian-mcp-server": {
4     "type": "http",
5     "url": "https://mcp.atlassian.com/v1/mcp",
6     "gallery": "https://api.mcp.github.com",
7     "version": "1.1.3"
8   },
9   "postman-api-mcp": {
10    "type": "stdio",
11    "command": "npx",
12    "args": [
13      "-y",
14      "@postman/postman-mcp-server",
15      "--full"
16    ],
17    "env": {
18      "POSTMAN_API_KEY": "${input:postman-api-key=APIKey: 0a560ea19c66007701dd13f6-92d55b3a-4e3d4a3c391b4e9c01e97b5ade}"
19    }
20  },
21  "inputs": [
22    {
23      "id": "postman-api-key", = *****
24      "type": "promptString",
25      "description": "Enter your Postman API key",
26      "password": true
27    }
28  ]
29 }
30 }
```

Server Started:

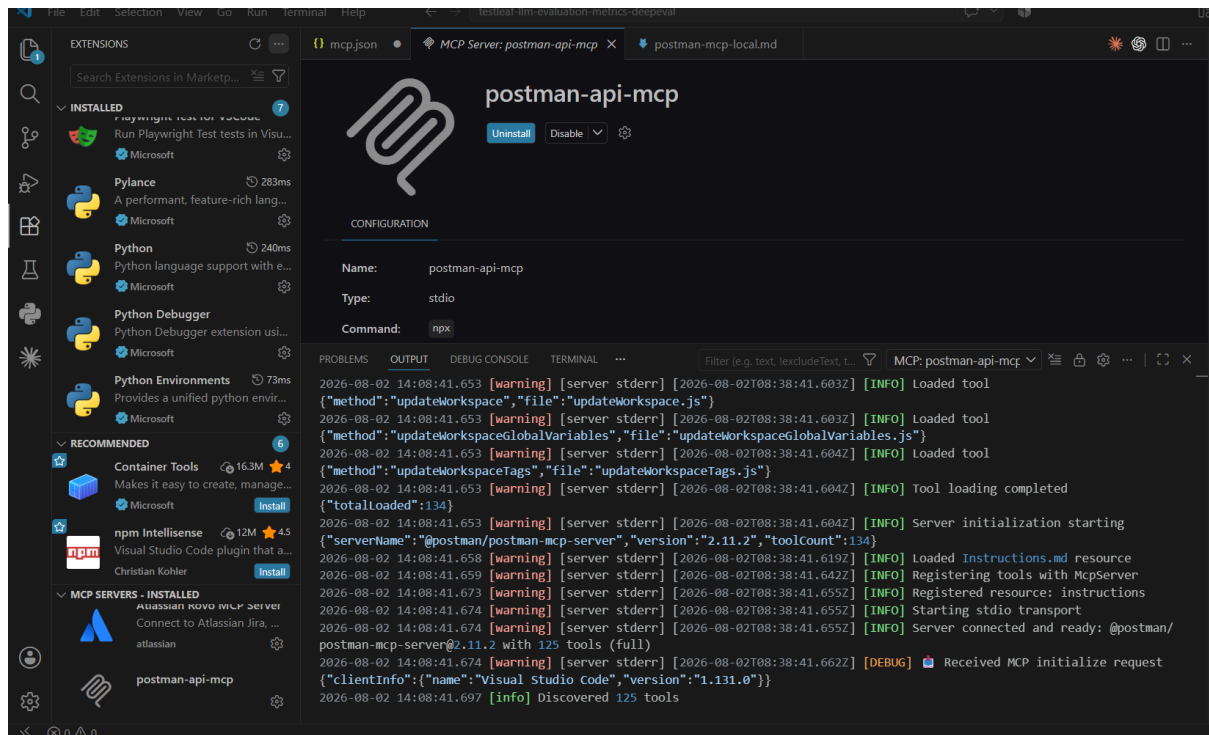

Fetching by prompt:

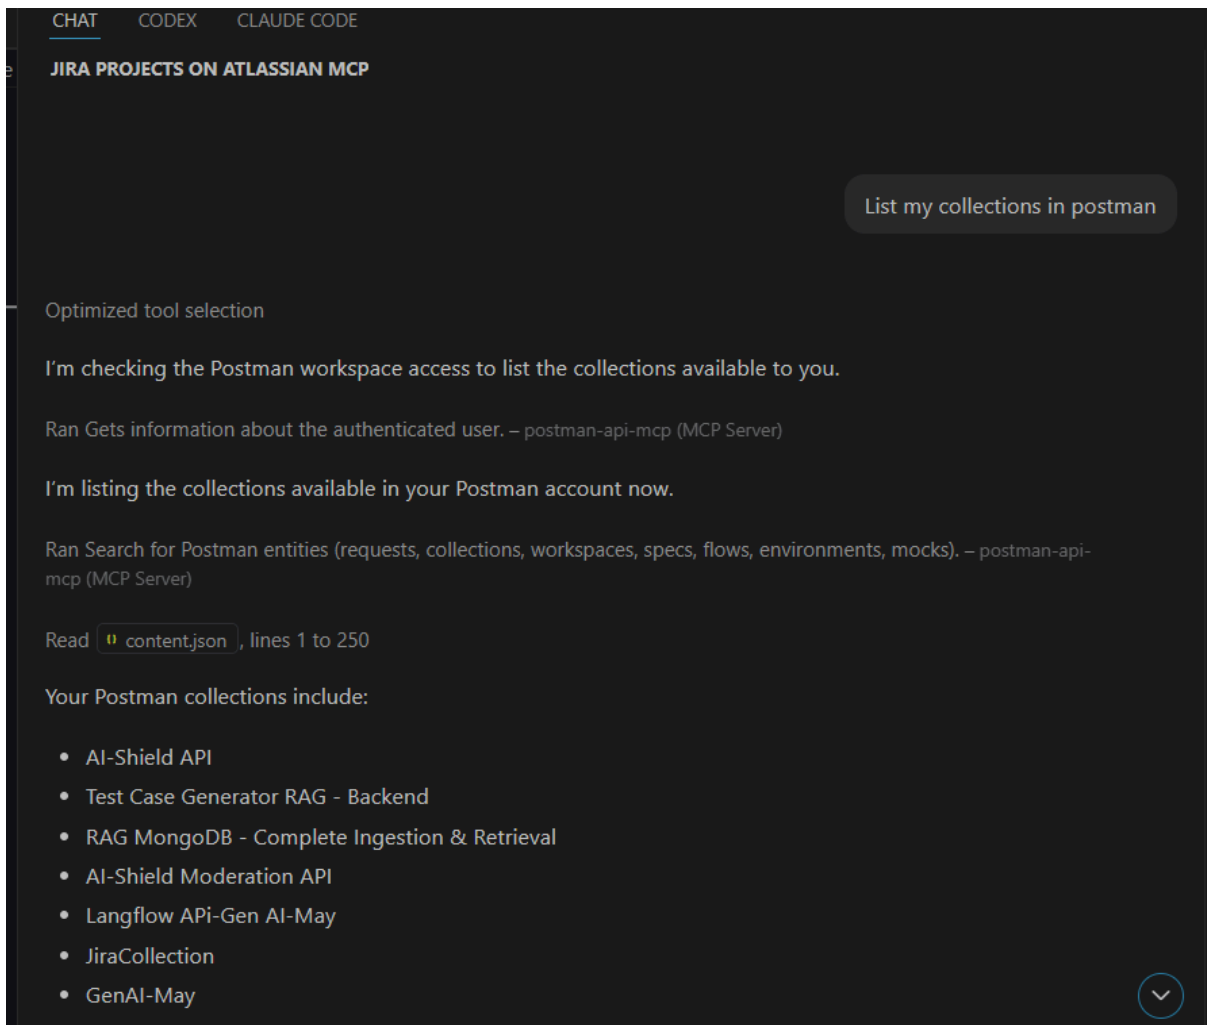

Request and response query

JIRA PROJECTS ON ATlassian MCP

How requests and responses are seen under AI-Shield API?

I'm opening the Postman collection details for AI-Shield API so I can summarize how its requests and responses are organized.

Ran Get Collection (map by default) – postman-api-mcp (MCP Server)

The collection structure is loaded; I'm summarizing the request and response layout from it.

Read `content.json`, lines 1 to 260

In the Postman collection named AI-Shield API, requests are organized by feature phase rather than by a single flat list:

- Phase 5 - PII Detector
- Phase 6 - CII Detector
- Phase 7 - Secret Detector

Each request shows:

- HTTP method, usually POST
- Endpoint such as `/api/detect/pii` or `/api/detect/cii`
- Headers like `Content-Type: application/json`
- Request body with sample JSON input



JIRA PROJECTS ON ATlassian MCP

Read `content.json`, lines 1 to 260

In the Postman collection named AI-Shield API, requests are organized by feature phase rather than by a single flat list:

- Phase 5 - PII Detector
- Phase 6 - CII Detector
- Phase 7 - Secret Detector

Each request shows:

- HTTP method, usually POST
- Endpoint such as `/api/detect/pii` or `/api/detect/cii`
- Headers like `Content-Type: application/json`
- Request body with sample JSON input

For example, a request like "Detect PII - email + aadhaar (MASK)" sends a POST request to `{{baseUrl}}/api/detect/pii` with a text payload.

As for responses:

- In this collection, the requests currently have no saved example responses attached, so the response section is empty.
- Once you run the request in Postman, you can view the actual response body, status code, headers, and save it as a sample response for that request.

So, in short: requests are seen as grouped API examples under each phase, and responses are viewed per request after execution.