US Silica ParTracker Application

Table of Contents

1 Executive Summary 3

1.1 Purpose 3

1.2 Server Details 3

1.2.1 Production 3

1.2.2 Staging (Test) 3

1.3 Bitbucket Repository 3

2 Databases 3

2.1 Production 3

2.2 Test 3

3 Environment / Application SetUp 4

3.1 Java 4

3.2 Jruby 4

3.3 Sublime(text editor) & Git 4

3.4 Clone application 4

3.5 JBoss 5

4 Deployment & start/stop server 5

4.1 Deployment Steps: 5

4.2 Start / Stop Server 8

5 SSL Installation 9

1 Executive Summary

1.1 Purpose

US Silica PAR Tracker is a ROR support project. The application tracks multiple projects for different customers, their approval work-flows for each project.

It also maintains documents, attachments for the individual projects.

1.2 Server Details

Application has deployed on windows server. We have two environments: Production and Staging.

1.2.1 Production

Server Name : Monsoon(windows server 2016)

Server IP : 10.8.1.49

URL : https://partracker.ussilica.com/

Application Location: C:\torquebox\par_tracker

1.2.2 Staging (Test)

Server Name : Queen(Windows server 2016)

Server IP : 10.8.1.51

URL : https://tmptstpar.ussilica.com/

Application Location: C:\torquebox\par_tracker

1.3 Bitbucket Repository

Dev can access the project from the below given repository with partracker_master as the main branch.

https://bitbucket.org/ussilica/par-tracker

2 Databases

Here using SQL server 2014 as a database management system. We are connecting the application to the database through database.yml file. There both production and test details are given.

2.1 Production

Here PRDSQLDBX01 is the instance and partracker is the database.

Database : partracker

Host : 10.8.4.36 #PRDSQLDBX01\USSILICA

2.2 Test

Here TSTSQLDBX01 is the test instance and partracker is the database.

Database : partracker
Host : TSTSQLDBX01

3 Environment / Application SetUp

Now we can clone the application from bitbucket. Before that, download java & jruby

3.1 Java

Download and Install both jdk and jre, depends on the windows machine. Set Environment variable for java and give the java jdk path.

3.2 Jruby

Make sure you installed java before installing jruby.
Download and Install latest Jruby. Set env variable for JRuby and give the jruby home path

3.3 Sublime(text editor) & Git

Install Sublime and Git on windows server.

3.4 Clone application

1. Create a folder and Clone the project to that folder: and then cd folder

   git clone https://UserName@bitbucket.org/ussilica/par-tracker.git

2. bundle install

3. Create database.yml file(already given a copy of database.yml file in config folder)

4. Create torquebox.yml file (already given a copy of torquebox.yml file in config folder)

Both database.yml and torquebox.yml files will generate while creating the application. But as it depends on environment, kept in .gitignore file for not pushing to bitbucket.

Step 5 & 6 are not required. Just for checking everything works well in local env.

5. Then do '*torquebox deploy*' for deploying and *'torquebox undeploy'* for undeploying.

While doing this, yml file will generate in C:/torquebox/jruby-9.1.15.0/lib/ruby/gems/shared/gems/torquebox-server-3.2.0-java/jboss/standalone/deployments/par_tracker-knob.yml. You can check the status here or run the command *torquebox list*.

6. *torquebox run* for running it in localhost:8080

3.5 JBoss

TorqueBox provides an all-in-one environment, so we don't need to download jboss. By installing torquebox gem, it will provide JBoss by default. We can check by going this path *C:/torquebox/jruby-9.1.15.0/lib/ruby/gems/shared/gems/torquebox-server-3.2.0-java/jboss*

Set up the environment variables on the server.

We are using JBoss as our webserver. And run JBoss as a windows service for starting and stopping server.

4 Deployment & start/stop server

The Ruby on Rails application is deployed using Torquebox(http://torquebox.org/). For checking the deployed applications in your remote machine-

a. **torquebox list** - which will show the deployed applications along with their status.

b. **torquebox deploy** - which will deploy the application. Some yml files has been created after we run torquebox deploy command.

c. **torquebox undeploy** – which will undeploy the application.

Before deploying something, Kindly check whether the same application is already deployed or not in C:\torquebox\jruby-9.1.15.0\lib\ruby\gems\shared\gems\torquebox-server-3.2.0-java\jboss\standalone\deployments or the place where you installed torquebox.

If you are deploying any application, you need to go that path or project path(C:\torquebox\par_tracker) in the command prompt and do the deployment.

4.1 Deployment Steps:

1. Open services from windows. It will list all the services on that machine.

2. Select **PAR Tracker Application Server** from the list.

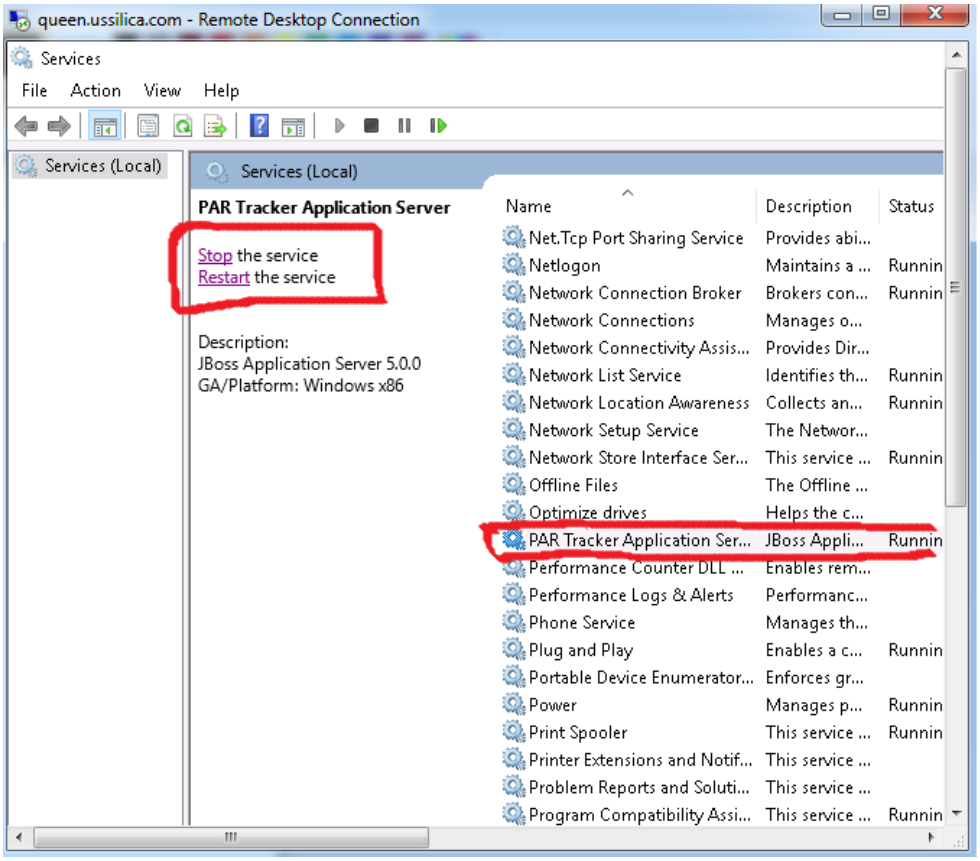

3. Click on **'stop'** for stopping the server from services.

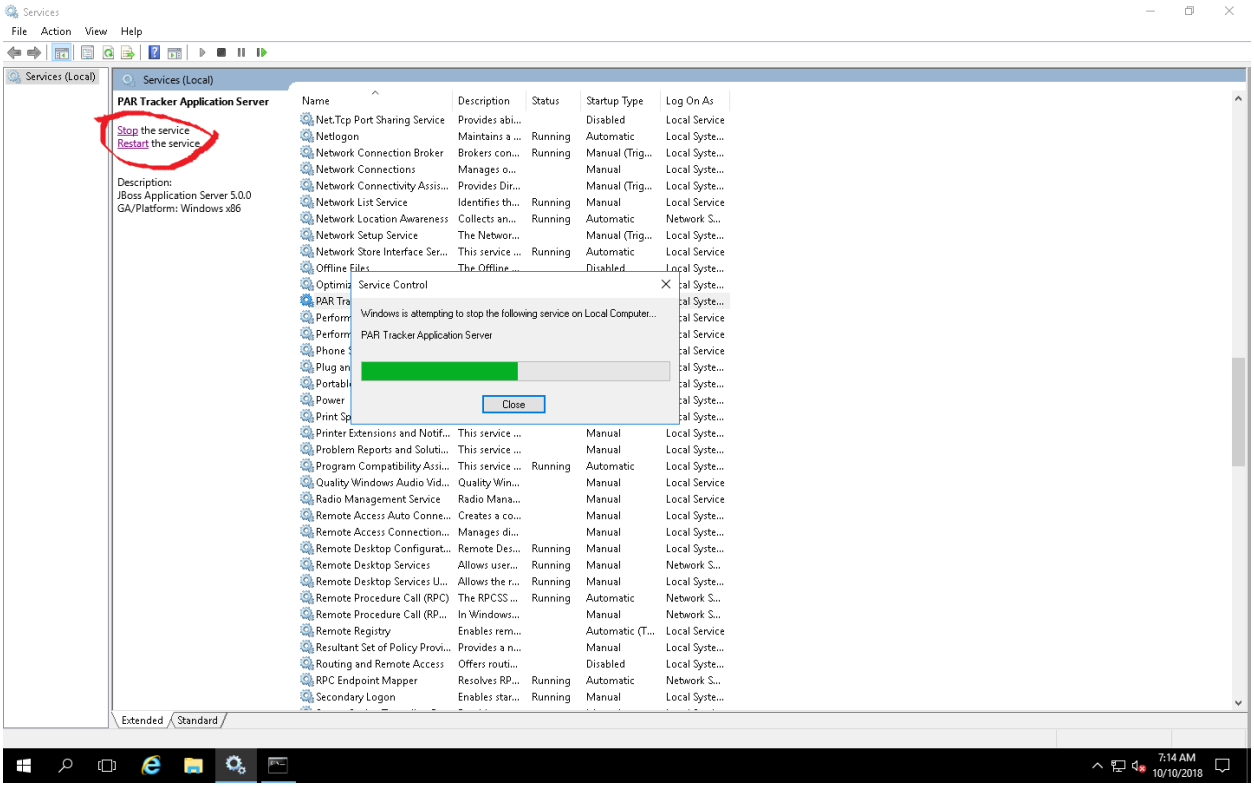

4. Then go to command prompt run as administrartor, do **'torquebox undeploy'** for undeploying the application

5. From the same terminal(administrator): do **'torquebox deploy'** for deploying the changes

6. Then go to services. Click on **'start'** for starting the server.

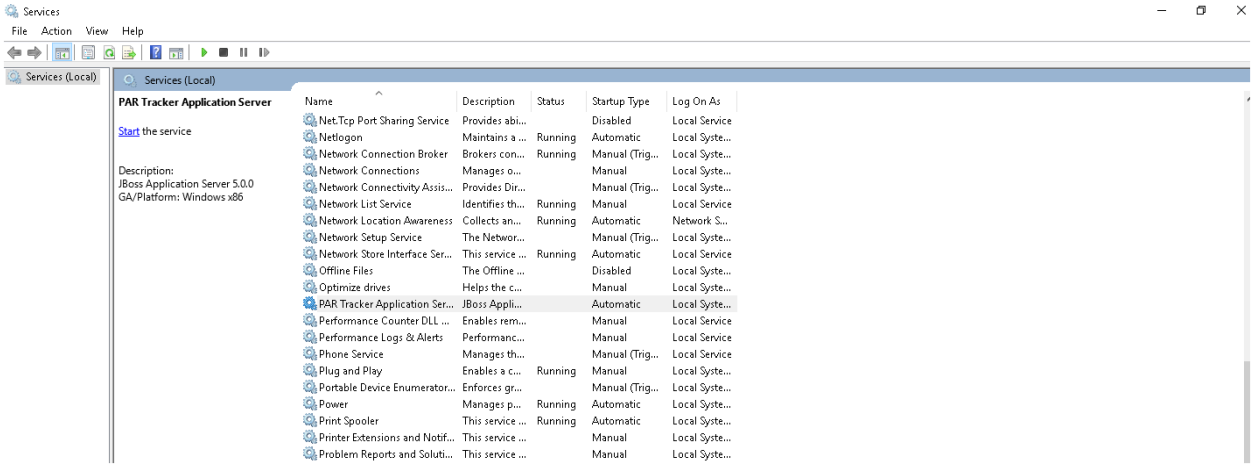

4.2 Start / Stop Server

If there are no changes on code level and you just want to restart the server, then

Click on 'restart' for restarting the server or do stop and then start the server.

5 SSL Installation

Client will send a pxf file and source password. The file then convert to JKS formart(.jks or .keystore) and change the standalone.xml file accordingly.