

Task 3 — Cloud Storage & File Management on Amazon S3

Arya Yaligar | CodeOrbit Tech — Cloud Computing Internship (Batch 8) | October 2026

1. Objective

Set up a cloud storage bucket on the AWS Free Plan, practice uploading, organizing and managing files and folders, configure access permissions, and document the setup with screenshots.

2. Setup summary


Item	Value
Bucket name	codeorbit-arya-2026 (globally unique)
Region	eu-north-1 (Stockholm)
Object ownership	ACLs disabled (recommended default)
Block Public Access	ON — bucket and objects not public (secure default)
Folders created	documents/ , images/
Files uploaded	documents/hello.txt (28 B), images/Screenshot 2026-10-05 171116.png (102.6 KB)
Access demo	Presigned URL for hello.txt , 10-minute expiry

3. Steps performed


- Created the bucket** codeorbit-arya-2026 in eu-north-1 via the S3 console, keeping all defaults — including **Block all public access ON**.
- Organized storage:** created two folders, documents/ and images/ ; uploaded hello.txt ("Hello from my cloud storage!") into documents/ and a photo into images/ .
- Managed files:** verified uploads in the Objects listing (name, type, size, storage class all shown correctly).
- Configured permissions:** confirmed on the Permissions tab that Block Public Access is ON — the bucket is private by default.
- Demonstrated controlled sharing:** generated a **presigned URL** for hello.txt with a 10-minute expiry — a time-limited link that grants access to one private file without making anything public.

Why a presigned URL instead of "make public"? Real teams keep buckets private and share individual files through expiring signed links (or bucket policies). It proves the same access-control concept the task asks for, without ever exposing the bucket.


4. Screenshots

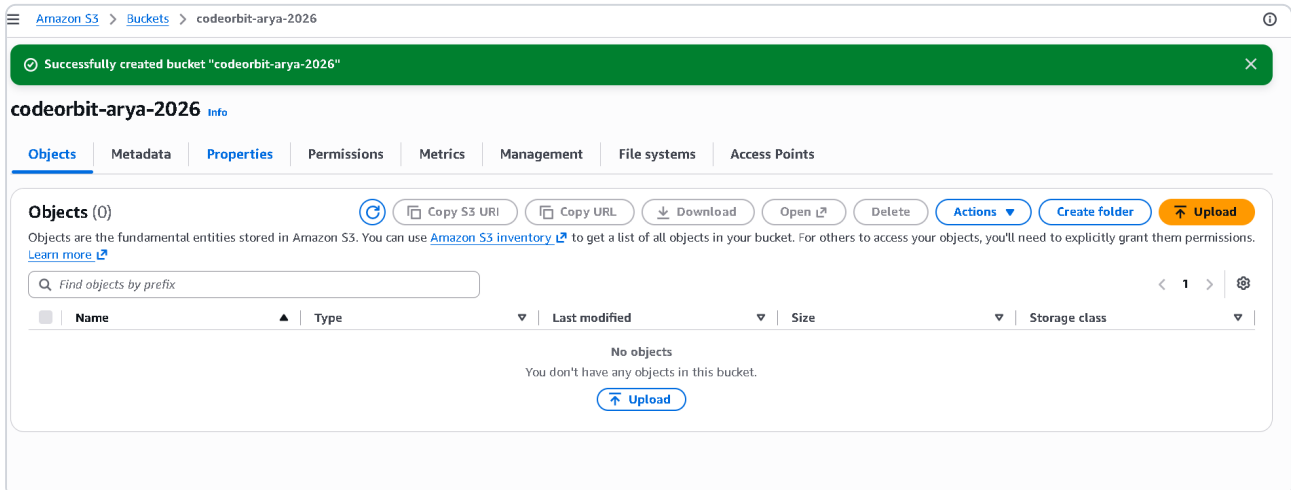


Screenshot 1 — Bucket codeorbit-arya-2026 created successfully.

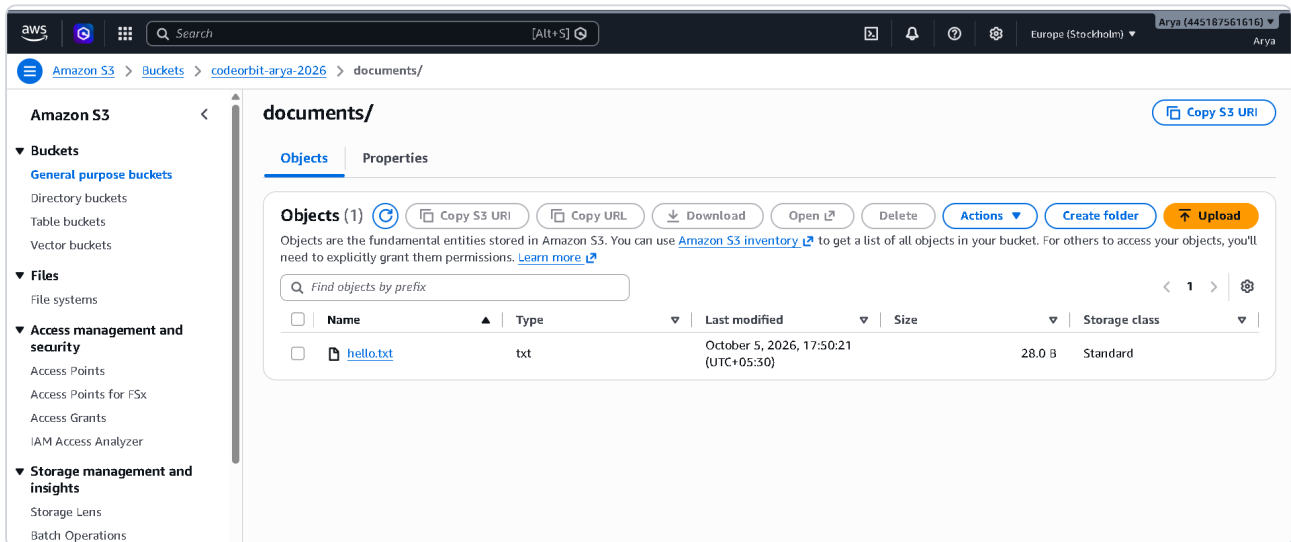

Screenshot 2 — documents/ folder open showing the uploaded hello.txt (28 B).

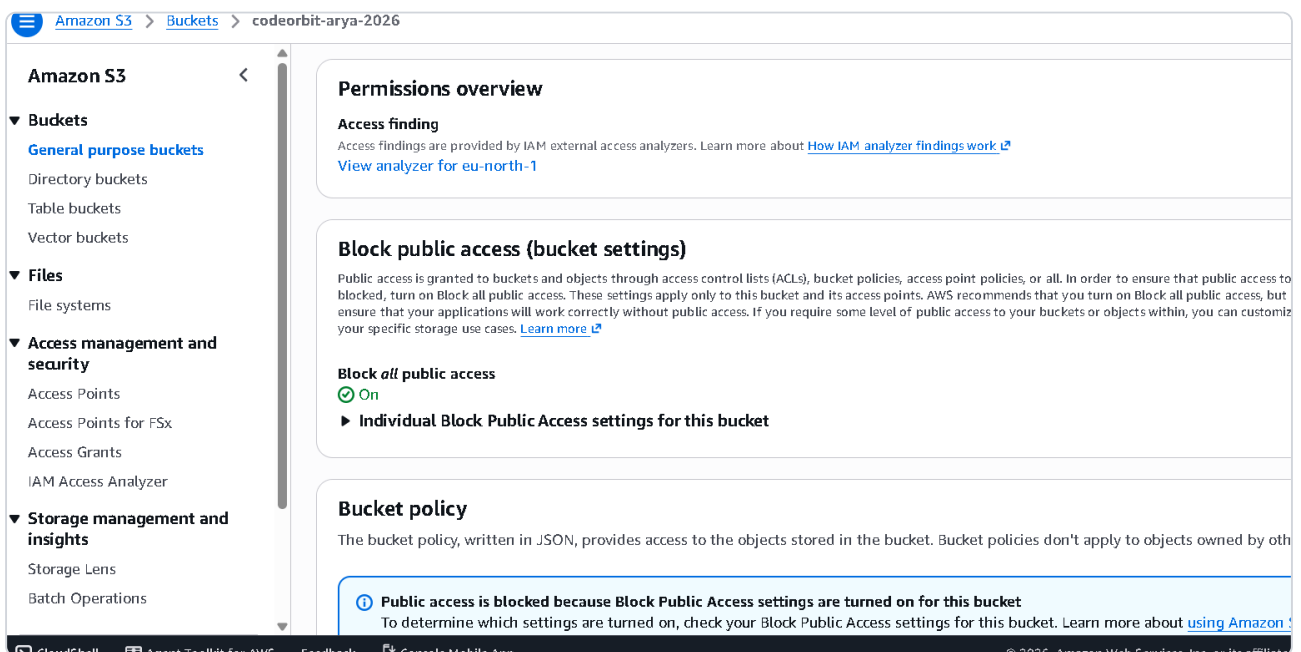

Screenshot 3 — Permissions tab: Block all public access is ON.

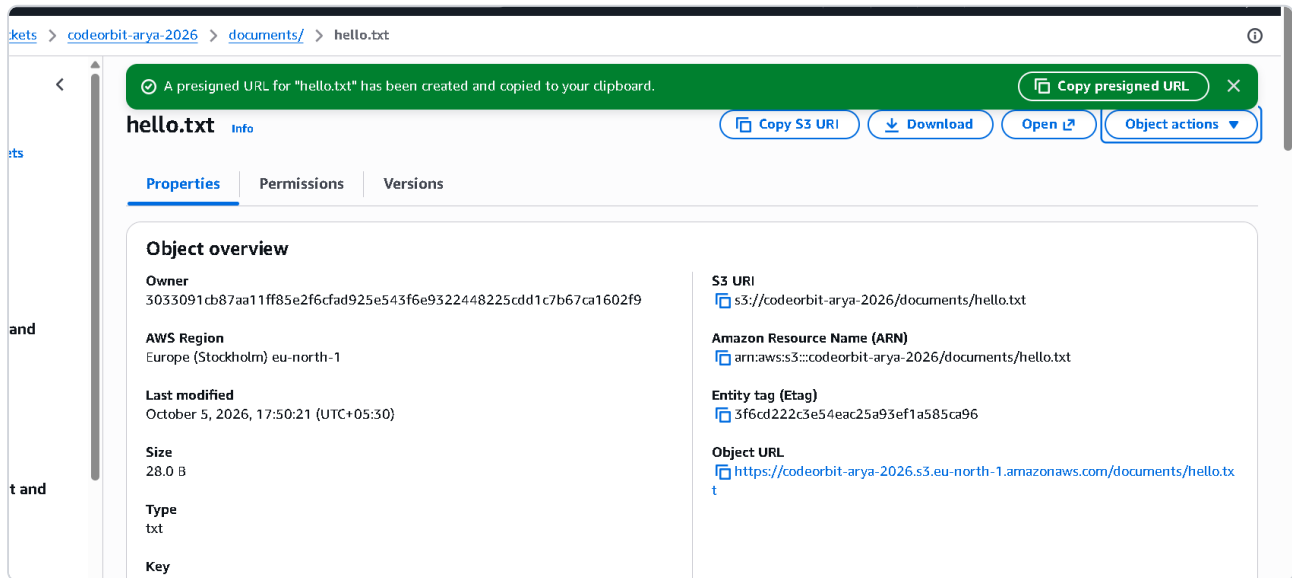

Screenshot 4 — Presigned URL created for hello.txt (10-minute expiry).

5. Cost note

S3's 5 GB of standard storage is always-free, and this task used a few kilobytes. The bucket sits inside the AWS Free Plan (\$100 in credits at signup, up to \$200 total) — effective cost: zero.

6. Conclusion

The bucket was created, organized into folders, filled with files, locked down with Block Public Access, and shared safely through a presigned URL. The exercise covered the core object-storage workflow — create, organize, manage, permission — that underpins nearly every cloud application, from static website hosting to data lakes.