


Nama: Ramadhani Arya Himandoko

Nim : G.211.23.0078

Kelas: TI B

UJI ENDPOINT

Login

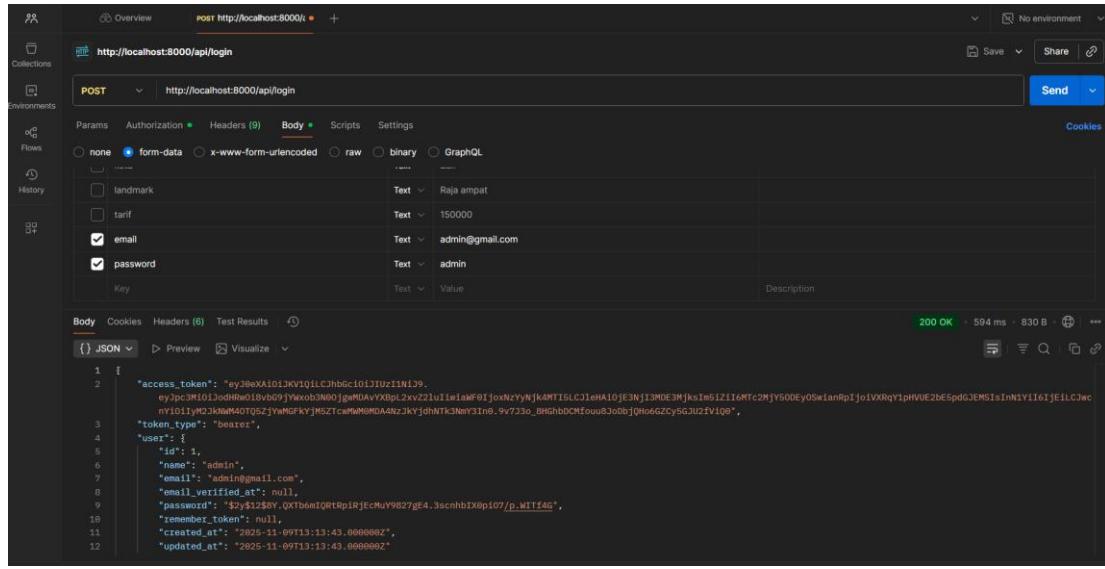

POST http://localhost:8000/api/login


Body

```
{} JSON
```

200 OK

```
{ "access_token": "eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJpc3MiUlJodHRwOi8vbG9hYkobN0QjgMa0AVX0pL2xvZ2luLiIaWF0IjoaNzYyNjk4MTISLCJleHAiOjE3NjI3MDE3MjksIm51Ii6MtC2MjY500Ey0SwianRpIjoiVXRqYiphVUE2bE5pdGJEMSIisInN1YiI6IjEiLCJwcnyIiIyZkNmAM40tQ5ZjYmNGFkYjMSZTceMwMGDA4NzJkYjdHNTk3Ny3In0.9v733o_6GhbDChfoua8J0bJQHo6GZCy5GJu2FvI09", "token_type": "bearer", "user": { "id": 1, "name": "admin", "email": "admin@gmail.com", "email_verified_at": null, "password": "$2y$12$8Y.QXTb6mIQRtRpIRjEcMuY9827gE4.3scnhbIX@pI07/p.WITf4G", "remember_token": null, "created_at": "2025-11-09T13:13:43.000000Z", "updated_at": "2025-11-09T13:13:43.000000Z" }}
```

User-profile

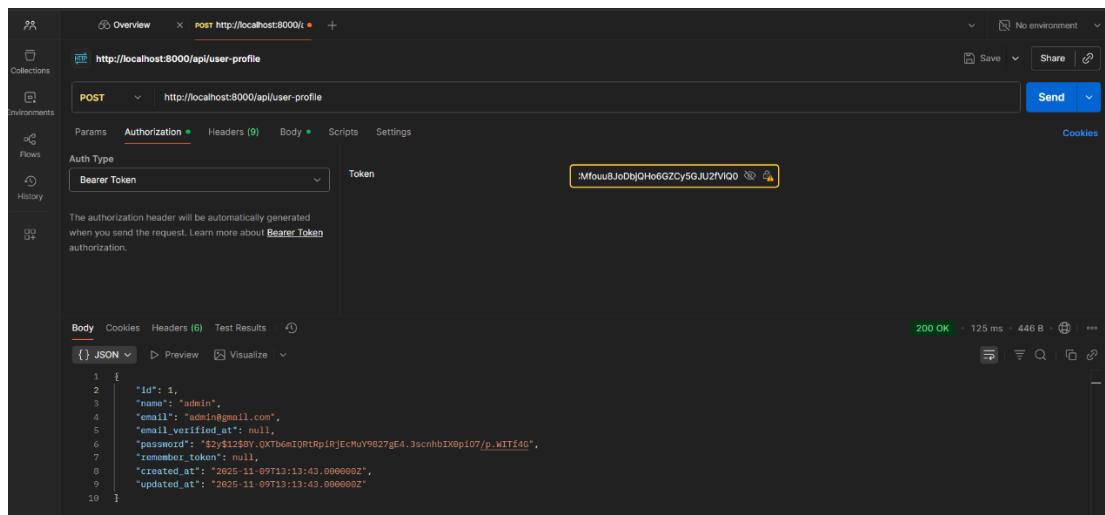

POST http://localhost:8000/api/user-profile

Auth Type

Bearer Token

Body

```
{} JSON
```

200 OK

```
{ "id": 1, "name": "admin", "email": "admin@gmail.com", "email_verified_at": null, "password": "$2y$12$8Y.QXTb6mIQRtRpIRjEcMuY9827gE4.3scnhbIX@pI07/p.WITf4G", "remember_token": null, "created_at": "2025-11-09T13:13:43.000000Z", "updated_at": "2025-11-09T13:13:43.000000Z" }
```

Refresh

The screenshot shows the Postman interface with a successful POST request to `http://localhost:8000/api/refresh`. The response status is `200 OK` with a duration of `134 ms` and a size of `580 B`. The response body is a JSON object containing an access token and other metadata.

```
[{"access_token": "eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJpc3MiOiIjZjdhdW01Bgb9jYXob3N0ojgM0AvYXBl3jLznJlc2giCjpxQ10jE3NjI2OTgxMjksImV4cI6MtC2MjcmTg20Cw1bmJmIjoxNzYyNj4MjY4LcJqdGk10Ij4UDB0V2RQ05ZZenSe0N4Iiwiic3ViIjoiMSIsInBydiI6IjIzYmQ1Yzg5NDlmNjAwYWRim2llNzAxYzQwMdg3MmRin2E10tC2ZjciF0.9lifcjhOEf_PpqRoYs5ty49VKnuo7ohy44EPk3UE0", "token_type": "bearer", "user": null, "expires_in": 86490}
```

Tanpa auth

The screenshot shows the Postman interface with a GET request to `http://localhost:8000/api/wisata`. The response status is `401 Unauthorized` with a duration of `106 ms` and a size of `220 B`. The response body indicates an unauthorized access.

```
1 Unauthorized.
```

Get 'id' wisata

The screenshot shows the Postman interface with a GET request to `http://localhost:8000/api/wisata/5`. The response status is `200 OK` with a duration of `124 ms` and a size of `258 B`. The response body is a JSON object containing details about a specific wisata.

```
{ "id_wisata": 5, "kota": "semarang", "landmark": "pagoda", "teifix": "25000" }
```

Logout

The screenshot shows the Postman interface with a successful POST request to `http://localhost:8000/api/logout`. The response status is `200 OK` with a response time of `6.87 s` and a body size of `226 B`. The response JSON is:

```
{ "message": "Successfully logged out" }
```

Post wisata

The screenshot shows the Postman interface with a successful POST request to `http://localhost:8000/api/wisata`. The response status is `201 Created` with a response time of `188 ms` and a body size of `267 B`. The request body is:


```
{ "kota": "Bandung", "landmark": "Kawah Putih", "tarif": "25000", "email": "admin@gmail.com", "password": "admin" }
```

Put wisata

The screenshot shows the Postman interface with a successful PUT request to `http://localhost:8000/api/wisata/7`. The response status is `200 OK` with a response time of `150 ms` and a body size of `259 B`. The request body is:

```
{ "id_wisata": 7, "kota": "Bali", "landmark": "Pantai kuta", "tarif": "40000" }
```

Delete wisata

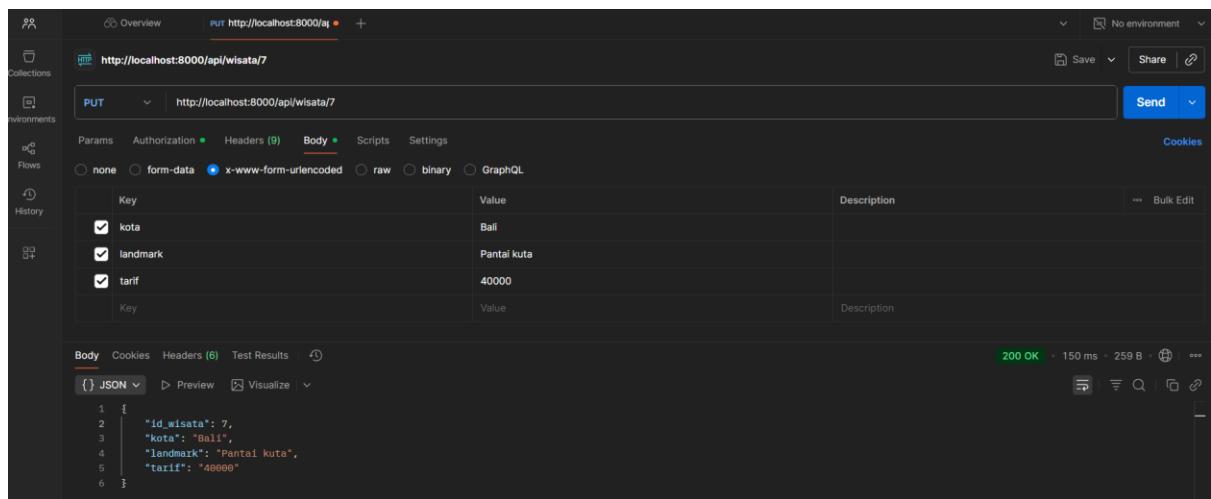

The screenshot shows the Postman interface for a PUT request to `http://localhost:8000/api/wisata/7`. The request body is set to `x-www-form-urlencoded` and contains the following parameters:

Key	Value	Description
kota	Bali	
landmark	Pantai kuta	
tarif	40000	

The response status is `200 OK` with a duration of `150 ms` and a size of `259 B`.

```
1 {
2   "id_wisata": 7,
3   "kota": "Bali",
4   "landmark": "Pantai kuta",
5   "tarif": "40000"
6 }
```